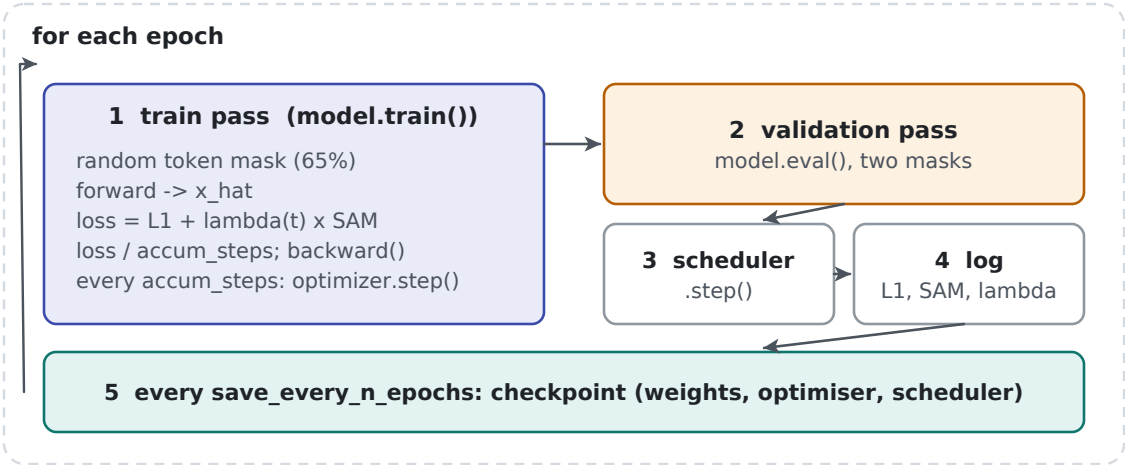

Gradient accumulation

backward() adds into .grad, so 4 small batches then one step act like one batch 4 times larger.

Dividing each loss by accum_steps keeps the learning rate's meaning.

Validation hides every valid token once across two complementary masks (part 25).