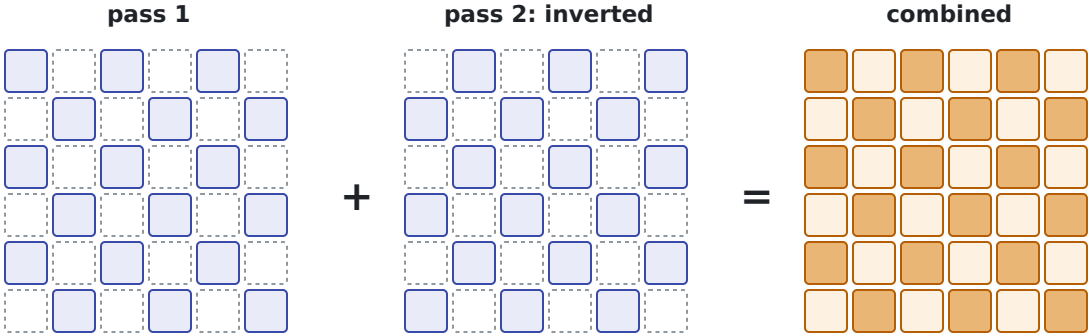

Each token's final value comes from the pass that hid it:

- from pass 1
- from pass 2

every pixel is predicted without the model having seen it

grid = (row + col) % 2; invert=True flips it for pass 2. cell_size = 2 groups tokens into 2 x 2 blocks.

visible hidden, predicted