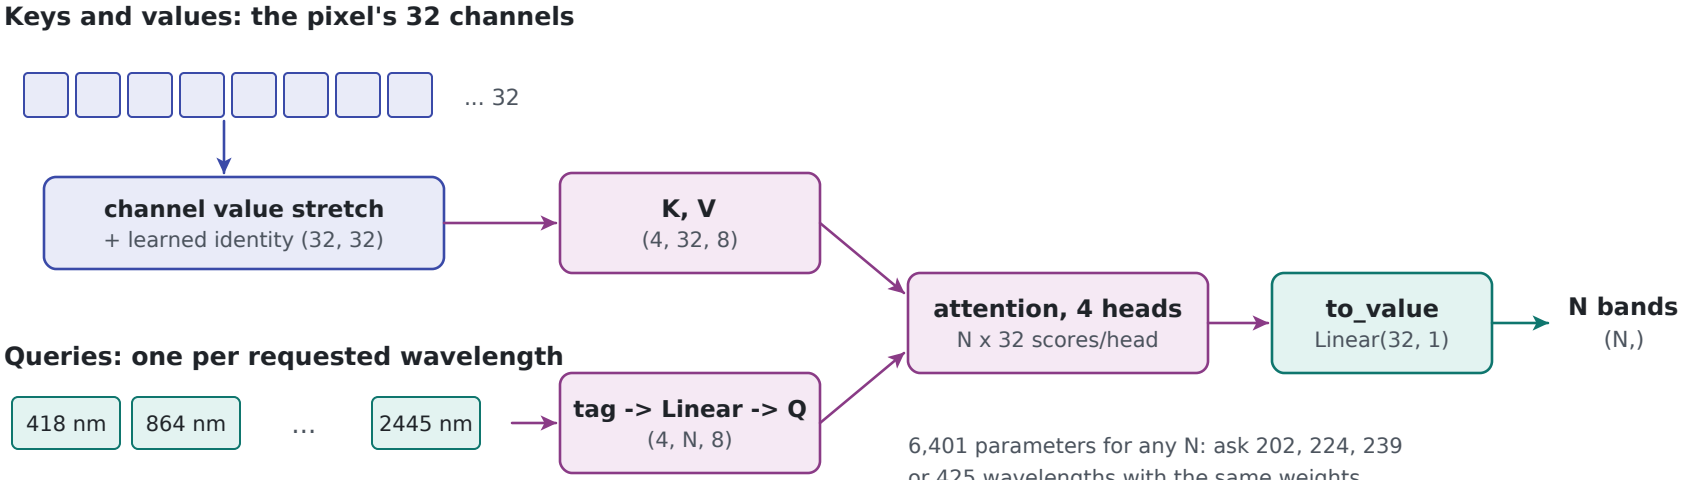
Keys and values: the pixel's 32 channels
... 32
channel value stretch
+ learned identity (32, 32)
K, V
(4, 32, 8)
Queries: one per requested wavelength
418 nm
864 nm
...
2445 nm
tag -> Linear -> Q
(4, N, 8)
attention, 4 heads
N x 32 scores/head
to_value
Linear(32, 1)
N bands
(N,)
6,401 parameters for any N: ask 202, 224, 239
or 425 wavelengths with the same weights.
Part 40 replaces this with a linear per-band readout.