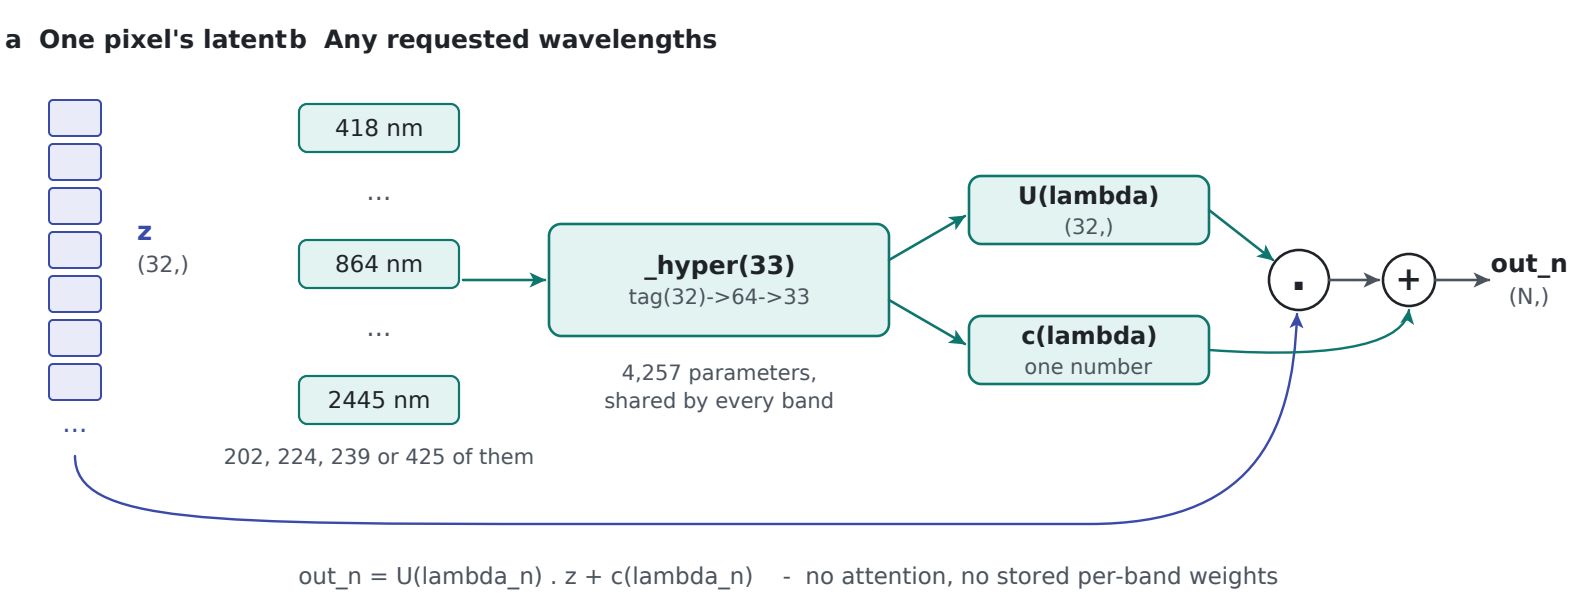
a One pixel's latent
b Any requested wavelengths
z
(32,)
...
418 nm
...
864 nm
...
2445 nm
202, 224, 239 or 425 of them
_hyper(33)
tag(32)->64->33
4,257 parameters,
shared by every band
U(lambda)
(32,)
c(lambda)
one number
·
+
out_n
(N,)
out_n = U(lambda_n) . z + c(lambda_n) - no attention, no stored per-band weights