

Kaniko

1. Create directory and change

```
# mkdir kaniko  
# cd kaniko
```

```
[root@rhel9 ~]# mkdir mkdir kaniko  
[root@rhel9 ~]# cd kaniko/  
[root@rhel9 kaniko]#
```

2. Create simple Dockerfile

```
# vim Dockerfile
```

```
FROM alpine:latest
```


```
RUN echo "Hello from Kaniko" > /hello.txt
```

```
CMD ["cat", "/hello.txt"]
```

```
FROM alpine:latest  
RUN echo "Hello from Kaniko" > /hello.txt  
CMD ["cat", "/hello.txt"]
```

3. Create directory, login docker hub and check

Create a new token

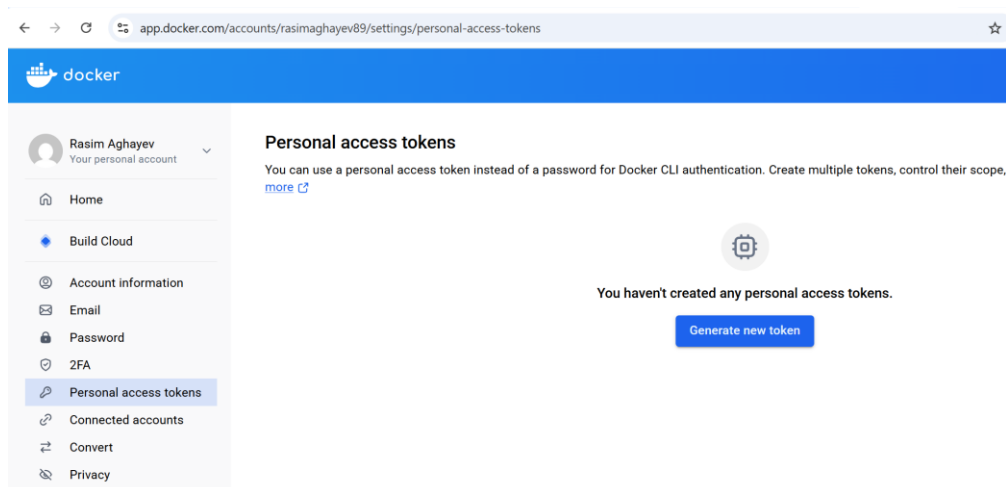

← → ↻ app.docker.com/accounts/rasimaghayev89/settings/personal-access-tokens/create



Rasim Aghayev
Your personal account

- Home
- Build Cloud
- Account information
- Email
- Password
- 2FA
- Personal access tokens
- Connected accounts
- Convert
- Privacy
- Deactivate
- Billing

Personal access tokens / New access token

Create access token

A personal access token is similar to a password except you can have many tokens and revoke access to each one at any time. [Learn more](#)

Access token description

token

Expiration date

None

Optional

Access permissions

Read, Write, Delete

Read, Write, Delete tokens allow you to manage your repositories.

Cancel

Generate

← → ↻ app.docker.com/accounts/rasimaghayev89/settings/personal-access-tokens/copy?description=token&scope=repo%3Aadmin&expiration=



Rasim Aghayev
Your personal account

- Home
- Build Cloud
- Account information
- Email
- Password
- 2FA
- Personal access tokens
- Connected accounts
- Convert
- Privacy
- Deactivate
- Billing

Personal access tokens / New access token

Copy access token

Use this token as a password when you sign in from the Docker CLI client. [Learn more](#)

Make sure you copy your personal access token now. Your personal access token is only displayed once. It isn't stored and can't be retrieved later.

Access token description

token

Expires on

Never

Access permissions

Read, Write, Delete

To use the access token from your Docker CLI client:

- Run

\$ docker login -u rasimaghayev89

Copy

- At the password prompt, enter the personal access token.

dckr_p[REDACTED]dehd[REDACTED]15Q7QFEHU

Copy

Back to access tokens

```
# docker login -u rasimaghayev89
```

```
# cat ~/.docker/config.json
```

```
[root@rhel9 kaniko]# docker login -u rasimaghayev89

Info → A Personal Access Token (PAT) can be used instead.
To create a PAT, visit https://app.docker.com/settings

Password:

WARNING! Your credentials are stored unencrypted in '/root/.docker/config.json'.
Configure a credential helper to remove this warning. See
https://docs.docker.com/go/credential-store/

Login Succeeded
[root@rhel9 kaniko]#
```

```
[root@rhel9 kaniko]# cat ~/.docker/config.json
{
  "auths": {
    "https://index.docker.io/v1/": {
      "auth": "cmFzaW1hZ2hhZWV2ODk6ZGNrc19wYXRfandvM21lcXFGdnpEQ1prYk1XUTF2d3FVam44"
    }
  }
}
[root@rhel9 kaniko]#
```

4. Create and push

docker images

docker tag gcr.io/kaniko-project/executor:latest docker.io/rasimaghayev89/kaniko:latest

docker images

```
[root@rhel9 kaniko]# docker images
INFO → U In Use


| IMAGE                                  | ID           | DISK USAGE | CONTENT SIZE | EXTRA |
|----------------------------------------|--------------|------------|--------------|-------|
| gcr.io/kaniko-project/executor:latest  | 4e7a52dd1f14 | 127MB      | 36.4MB       |       |
| docker.io/rasimaghayev89/kaniko:latest | 4e7a52dd1f14 | 127MB      | 36.4MB       |       |


INFO → U In Use


| IMAGE                                 | ID           | DISK USAGE | CONTENT SIZE | EXTRA |
|---------------------------------------|--------------|------------|--------------|-------|
| gcr.io/kaniko-project/executor:latest | 4e7a52dd1f14 | 127MB      | 36.4MB       |       |
| rasimaghayev89/kaniko:latest          | 4e7a52dd1f14 | 127MB      | 36.4MB       |       |


[root@rhel9 kaniko]#
```

docker run --rm \

-v /root/.docker/config.json:/kaniko/.docker/config.json:ro \

-v /root/kaniko:/workspace \


gcr.io/kaniko-project/executor:latest \

--dockerfile=/workspace/Dockerfile \

--context=dir:///workspace \

--destination=docker.io/rasimaghayev89/kaniko:latest

```
[root@rhel9 kaniko]# docker run --rm \
-v /root/.docker/config.json:/kaniko/.docker/config.json:ro \
-v /root/kaniko:/workspace \
gcr.io/kaniko-project/executor:latest \
--dockerfile=/workspace/Dockerfile \
--context=dir:///workspace \
--destination=docker.io/rasimaghayev89/kaniko:latest
INFO[0002] Retrieving image manifest alpine:latest
INFO[0002] Retrieving image alpine:latest from registry index.docker.io
INFO[0006] Built cross stage deps: map[]
INFO[0006] Retrieving image manifest alpine:latest
INFO[0006] Returning cached image manifest
INFO[0006] Executing 0 build triggers
INFO[0006] Building stage 'alpine:latest' [idx: '0', base-idx: '-1']
INFO[0006] Unpacking rootfs as cmd RUN echo "Hello from Kaniko" > /hello.txt requires it.
INFO[0007] RUN echo "Hello from Kaniko" > /hello.txt
INFO[0007] Initializing snapshotter ...
INFO[0007] Taking snapshot of full filesystem...
INFO[0007] Cmd: /bin/sh
INFO[0007] Args: [-c echo "Hello from Kaniko" > /hello.txt]
INFO[0007] Running: [/bin/sh -c echo "Hello from Kaniko" > /hello.txt]
INFO[0007] Taking snapshot of full filesystem...
INFO[0007] CMD ["cat","/hello.txt"]
INFO[0007] Pushing image to docker.io/rasimaghayev89/kaniko:latest
INFO[0016] Pushed index.docker.io/rasimaghayev89/kaniko@sha256:25af152f823b644d3fac5137e7e85f6b91567a7518f09e587a19aa38c662a64b
[root@rhel9 kaniko]#
```

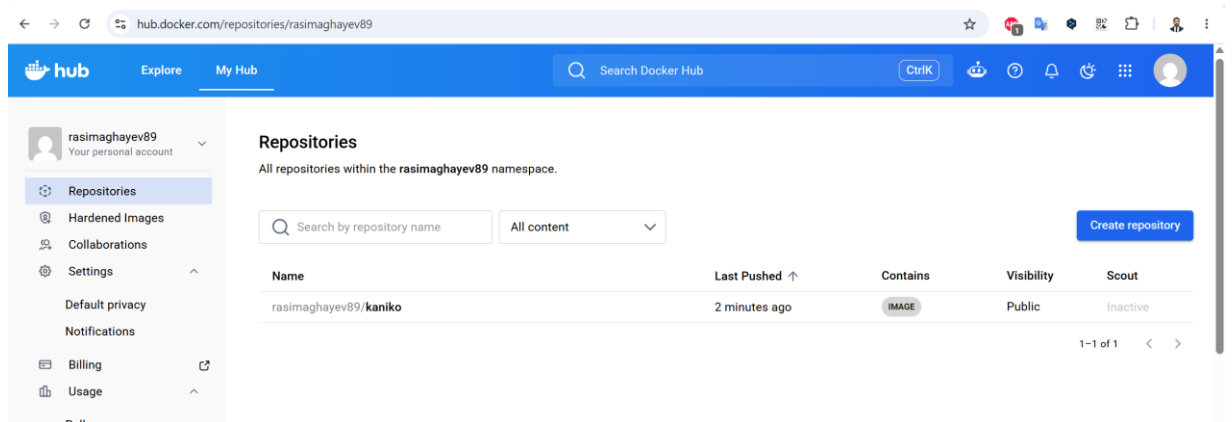

5. Pull and run kaniko

I'll delete the image and run `docker pull` so it can get the image from Docker Hub.

docker rmi rasimaghayev89/kaniko:latest

```
[root@rhel9 kaniko]# docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
gcr.io/kaniko-project/executor:latest 4e7a52dd1f14 127MB 36.4MB
rasimaghayev89/kaniko:latest 25af152f823b 12.6MB 3.85MB
[root@rhel9 kaniko]# docker rmi rasimaghayev89/kaniko:latest
Untagged: rasimaghayev89/kaniko:latest
Deleted: sha256:25af152f823b644d3fac5137e7e85f6b91567a7518f09e587a19aa38c662a64b
[root@rhel9 kaniko]# docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
gcr.io/kaniko-project/executor:latest 4e7a52dd1f14 127MB 36.4MB
[root@rhel9 kaniko]#
```

docker pull rasimaghayev89/kaniko:latest

```
[root@rhel9 kaniko]# docker pull rasimaghayev89/kaniko:latest
latest: Pulling from rasimaghayev89/kaniko
344a5164bbaa: Pull complete
55afa1ecc21d: Pull complete
Digest: sha256:25af152f823b644d3fac5137e7e85f6b91567a7518f09e587a19aa38c662a64b
Status: Downloaded newer image for rasimaghayev89/kaniko:latest
docker.io/rasimaghayev89/kaniko:latest
[root@rhel9 kaniko]# docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
gcr.io/kaniko-project/executor:latest 4e7a52dd1f14 127MB 36.4MB
rasimaghayev89/kaniko:latest 25af152f823b 12.6MB 3.85MB
[root@rhel9 kaniko]#
```