


UTILISATION MYSQL sous CMD




Démarrer le serveur de MySQL

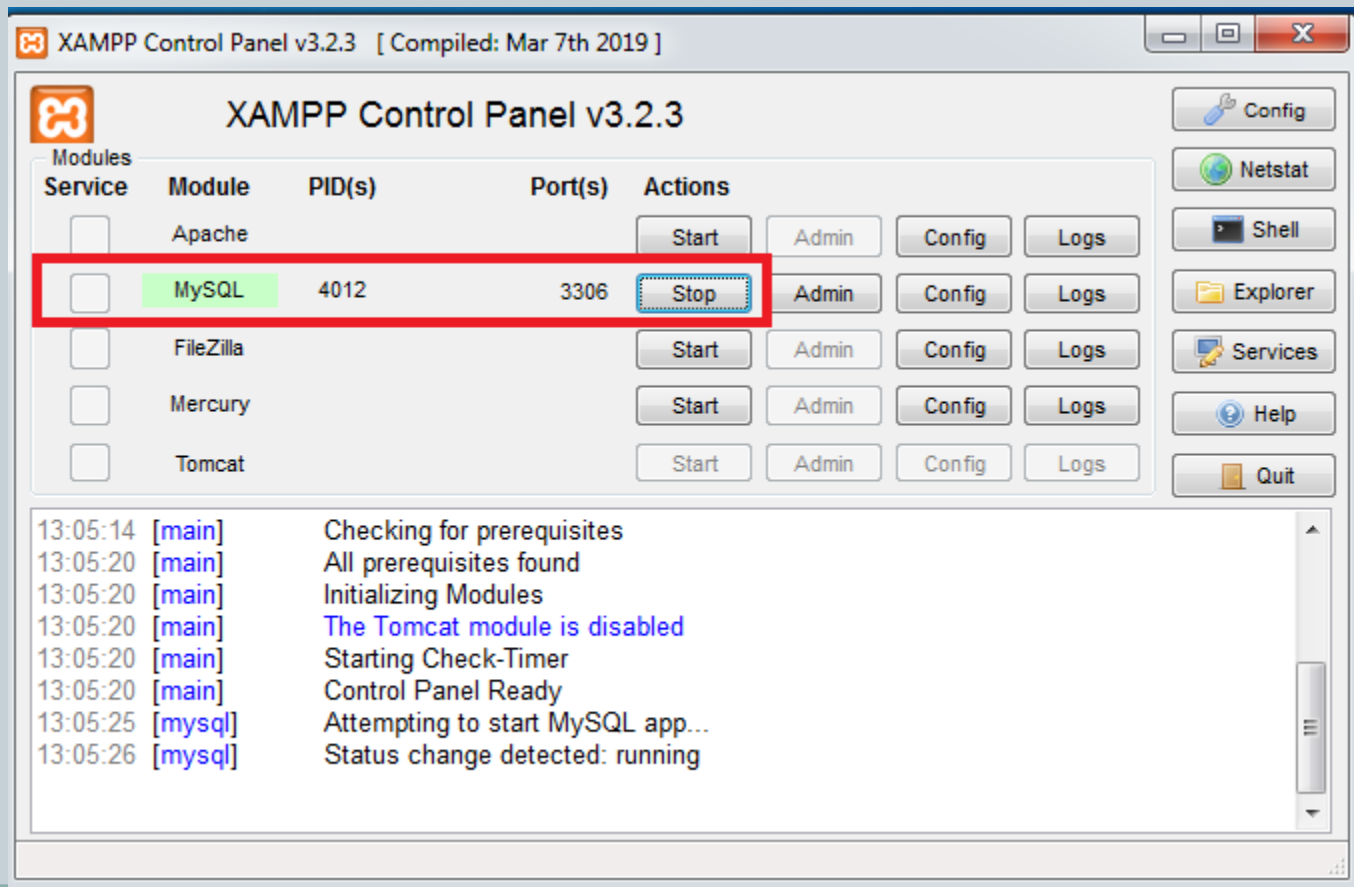

Démarrer le CMD



- Démarrer de windows->taper CMD

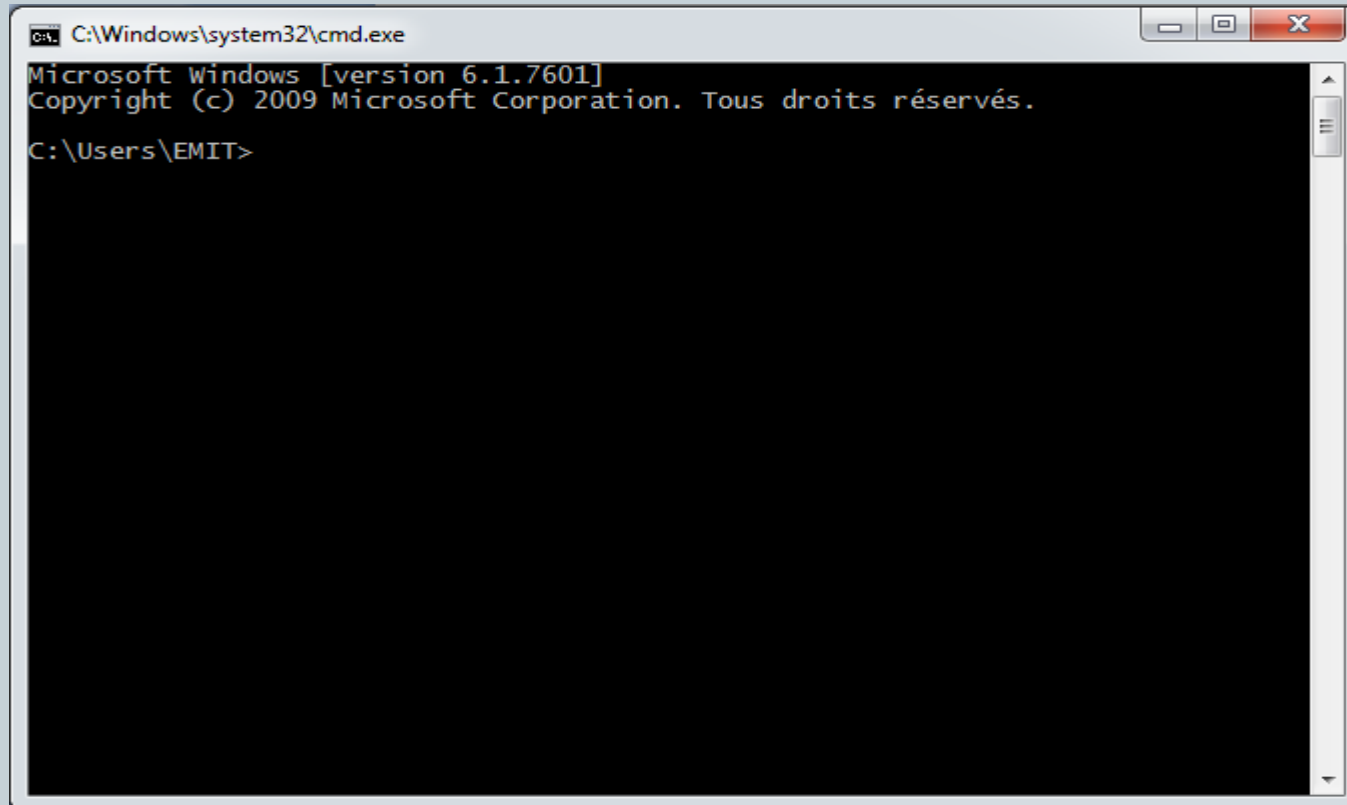

Accéder au MySQL



- taper la commande `cd C:\xampp\mysql\bin` si on travaille avec Xampp

A screenshot of a Windows command prompt window. The title bar shows the path `C:\Windows\system32\cmd.exe`. The window content displays the following text:

```
Microsoft Windows [version 6.1.7601]  
Copyright (c) 2009 Microsoft Corporation. Tous droits réservés.  
  
C:\Users\EMIT>cd C:\xampp\mysql\bin_
```

The cursor is positioned at the end of the command line.

Se connecter à l'aide de l'utilisateur root



▪ `mysql -u root`

A screenshot of a Windows command prompt window titled "Administrateur : C:\Windows\System32\cmd.exe". The window shows the following text:

```
Microsoft Windows [version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Tous droits réservés.

C:\Windows\system32>cd C:\xampp\mysql\bin
C:\xampp\mysql\bin>mysql -u root
```

Commencer à utiliser le sql



- Afficher toutes les BD à l'aide de: show databases;

A screenshot of a Windows command prompt window. The title bar reads "Administrateur : C:\Windows\System32\cmd.exe - mysql -u root". The window contains the following text:

```
Microsoft Windows [version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Tous droits réservés.

C:\Windows\system32>cd C:\xampp\mysql\bin

C:\xampp\mysql\bin>mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 3
Server version: 10.1.38-MariaDB mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
```

Créer une nouvelle BD



- Créer une BD: create database gestnote;

A screenshot of a Windows command prompt window. The title bar reads "Administrateur : C:\Windows\System32\cmd.exe - mysql -u root". The window has a black background with white text. The user has navigated to the MySQL bin directory and entered the MySQL command-line client. The client shows the MariaDB monitor welcome message and the server version (10.1.38-MariaDB). The user has entered the command "show databases;" and the output shows a list of databases: information_schema, mysql, performance_schema, phpmyadmin, and test. The user has then entered the command "create database gestnote;".

```
Administrateur : C:\Windows\System32\cmd.exe - mysql -u root
Microsoft Windows [version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Tous droits réservés.

C:\Windows\system32>cd C:\xampp\mysql\bin

C:\xampp\mysql\bin>mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 3
Server version: 10.1.38-MariaDB mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql       |
| performance_schema |
| phpmyadmin  |
| test       |
+-----+
5 rows in set (0.07 sec)

MariaDB [(none)]> create database gestnote;
```

Verifier la nouvelle BD



- Afficher les BD: show databases;

```
MariaDB [(none)]> create database gestnote;  
Query OK, 1 row affected (0.00 sec)  
  
MariaDB [(none)]> show databases;  
+-----+  
| Database |  
+-----+  
| gestnote |  
+-----+  
| information_schema |  
| mysql |  
| performance_schema |  
| phpmyadmin |  
| test |  
+-----+  
6 rows in set (0.00 sec)  
  
MariaDB [(none)]> _
```


Utiliser une BD



Utiliser une base de données: use gestnote

```
+-----+
| Database |
+-----+
| gestnote |
| information_schema |
| mysql    |
| performance_schema |
| phpmyadmin |
| test     |
+-----+
6 rows in set (0.00 sec)

MariaDB [(none)]> use gestionnote
ERROR 1049 (42000): Unknown database 'gestionnote'
MariaDB [(none)]> use gestnote
Database changed
MariaDB [gestnote]> _
```

Créer une table



Créer une table à partir de `create table prof(.....);`

```
MariaDB [(none)]> use gestnote;  
Database changed  
MariaDB [gestnote]> create table prof(id_prof int(2) not null,nom_prof varchar(30) not null,prenom_prof varchar(40),primary key(id_prof));
```

Décrire une table



- Décrire une table pour vérifier sa structure: describe prof;

```
MariaDB [gestnote]> describe prof;
```

Field	Type	Null	Key	Default	Extra
id_prof	int(2)	NO	PRI	NULL	
nom_prof	varchar(30)	NO		NULL	
prenom_prof	varchar(40)	YES		NULL	

```
3 rows in set (0.01 sec)
```

```
MariaDB [gestnote]> _
```

Afficher toutes les tables



show tables;

```
MariaDB [gestnote]> show tables;  
+-----+  
| Tables_in_gestnote |  
+-----+  
| prof                |  
+-----+  
1 row in set (0.00 sec)  
  
MariaDB [gestnote]>
```