

Inter-modality Augmentation for Semantic Segmentation of MRI Images

Anonymized Authors, Paper ID 5781

Anonymized Affiliations
email@anonymized.com

Abstract. While deep learning approaches have shown strong performance on medical imaging tasks such as semantic segmentation, a gap remains between their performance and that of a trained radiologist. Data augmentation has been shown to greatly improve the performance of deep learning architectures across a wide variety of applications, with augmentation techniques improving performance on even very large datasets containing tens or hundreds of thousands of training samples. Medical imaging datasets, being generally much smaller and more expensive to create than other image datasets, stand to particularly benefit from augmentations; however, the unique nature of medical imaging data precludes many of the approaches used in other image datasets. Based on the success of 2D and 3D random erasing augmentation approaches, we propose a series of novel augmentation approaches for multi-modality 3D semantic segmentation: specifically, the swapping and combination of randomly selected regions from input image channels with those of other input image modalities to more fully leverage the unique information each provides. These approaches are evaluated on the 4-modality (T1, T1Gd, T2, and T2-Flair MRI) Brain Tumour Segmentation Challenge (BraTS) 2023 dataset, using a 3D U-Net based architecture similar to that of recent high-performing BraTS leaderboard entries. Their performance is shown both in conjunction with and contrasted against more standard data augmentation approaches from recent literature. These approaches offer compelling performance, and build upon a growing number of augmentation methods that utilize sample information in ways that are counter-intuitive to a human, yet highly useful for network training.

Keywords: Data augmentation · Semantic segmentation · Multi-modality imaging

1 Introduction

From the earliest ImageNet-trained deep learning architectures to the latest large language models trained on a formidable range of internet data, it has long been understood that the size of an AI model’s training dataset is a crucial part of its performance. In some cases, increasing the depth and breadth of the training set is the easiest way to improve a model’s performance: there is no need to change

the specifics of the architecture or fine-tune parameters when there are still new forum posts, videos, or news articles to trawl for more useful information.

Unfortunately, increasing the size of the training dataset is not so easy in every domain. Medical image datasets present a number of challenges: they are expensive to acquire, in terms of the specialized equipment and personnel, require the participation of very specific patient populations, and are subject to inter-site variability. Therefore, the emphasis when working with these datasets is to use the limited number of samples to maximal effect.

Data augmentation methods, which artificially expand a training dataset to allow for improved learning and robustness, have long been a standard part of deep learning pipelines. Even where dataset sizes are comparatively quite large, they have been shown to substantially improve performance.

While many augmentation methods exist for image datasets in general, an opportunity is presented in medical imaging in particular. Although unique information is commonly present in each individual channel of any multi-dimensional image – for instance, in a photograph of a tree, the green leaves might appear almost black in the red and blue colour channels – this is particularly the case for certain medical image based tasks. Frequently, a doctor will order scans with different modalities precisely because important information will not be present in some modalities, but present in others.

In this work, we propose three novel methods for what we call *inter-modality augmentation*. With these methods, information is shared between the different modalities for randomly selected patches during the training process. We evaluate these methods on the 2023 Brain Tumour Segmentation (BraTS) Adult Glioma dataset, where segmentation models trained with these methods demonstrate higher training performance across a number of metrics.

2 Related Work

There exist a wide variety of data augmentation approaches used in image-based deep learning tasks. These range from simple techniques, like adding additive white Gaussian noise to an image, to the complex, like using a Generative Adversarial Network (GAN) to create synthetic data samples that another network cannot distinguish from real data [11].

Random erasing, which replaces a region of input images with zero values or random noise during training, has become a popular, domain-agnostic approach to augmentation for image-based deep learning tasks [12]. Originally used for 2-dimensional natural images such as ImageNet, it has more recently been applied to multidimensional medical image domains as well, such as MRI-based anomaly detection [5].

Data augmentation strategies have also been shown to significantly improve the performance of BraTS methods specifically. For instance, the 2023 winners largely credit their success to the use of a GAN to fill in randomly selected input image patches [7]. However, such an approach involves significant computational complexity far beyond that of replacing patches with random noise.

3 Our Approach

In random erasing, one or more patches of an input image are erased prior to being used for training. Usually, this means that they are replaced with either a zero value (equivalent to black in a monochromatic or color image) or some sort of random noise (with Gaussian white noise being a popular default choice). This method has two main advantages. Firstly, it prevents over-reliance of the network on a particular set of features, as the network will be trained on images with the most salient areas erased, and therefore more subtle patterns may be learned. Secondly, it improves robustness, as the network must learn to tolerate noisy inputs.

Our novel approach offers these same benefits, with the addition of another: rather than being trained on images with erased sections, we use these areas to feed additional feature information to the network. Specifically, we borrow the corresponding values from the same region of other channels, and use these to replace our selected patch. This crossover of information between input channels allows for faster network convergence and improved training performance.

This general idea can be applied in a number of different ways. In this work, we evaluate three different approaches, which we call *Shift*, *Permute*, and *Average*. Each method is explained in further detail below.

3.1 Shift

Consider a single training image consisting of N channels, $C_1..C_{N-1}$. We randomly select coordinates for a cubic patch within the image, and for each channel we extract the patch at these coordinates: $P_{C_1}..P_{C_{N-1}}$. Then, these extracted patches are *shifted* into the coordinates of the adjacent channel, so that P_{C_2} is placed into C_1 where P_{C_1} was extracted, P_{C_3} is placed into C_2 where P_{C_2} was extracted, and so forth, ending with $P_{C_{N-1}}$ being placed into C_1 .

3.2 Permute

In this approach, we *permute* the channel order of each random patch; that is, we select at random the destination channel for each patch for each training iteration, such that each patch appears only once in the augmented image.

This method is, at first glance, quite similar to *Shift*, except that the network will be exposed to values from each of the other channels for a given channel at random. This is potentially both a benefit and a challenge. Each channel will therefore have access to a greater variety of data than in *Shift*, and will not “miss out” on the chance to access information from another channel that has particularly salient information. However, this greater variety also means less consistency, and the resulting network may prove more difficult to train.

3.3 Average

In this method, rather than directly replacing a patch in one channel with a patch from another channel, we combine the information from the adjacent channel’s

patch with that of the current patch by *averaging* them. That is, the pixels of patch P_{C_i} in C_i will be replaced by the voxelwise average of $P_{C_{i+1}}$ and P_{C_i} , and so forth. The *Shift* method may be thought of as a special case of the *Average* method, where each voxel value in $P_{C_{i+1}}$ is given a 100% weighting and each voxel value in P_{C_i} is given a 0% weighting. In our *Average* experiments, we give each of the two channels an equal weighting of 50%.

4 Experiments

4.1 Dataset and Preprocessing

For our experiments, we use the Adult Glioma dataset from the 2023 Brain Tumor Segmentation (BraTS) challenge [3][9][4], which is comprised of T1, contrast-weighted T1 (T1Gd), T2-weighted, and T2 Fluid Attenuated Inversion Recovery (T2-Flair) MRI images collected by several different hospitals as part of the Cancer Image Archive [1][2]. This dataset includes 1251 patients for training and validation, along with 219 test patients. All images are preprocessed, co-registered, and the glioma regions annotated by radiologists. Segmentation is evaluated based on three sub-regions, the ‘enhancing tumour’ (ET), ‘tumour core’ (TC), and ‘whole tumour’ (WT). Sample images from one patient, along with the radiologist-annotated segmentation labels, are shown in Figure 1.

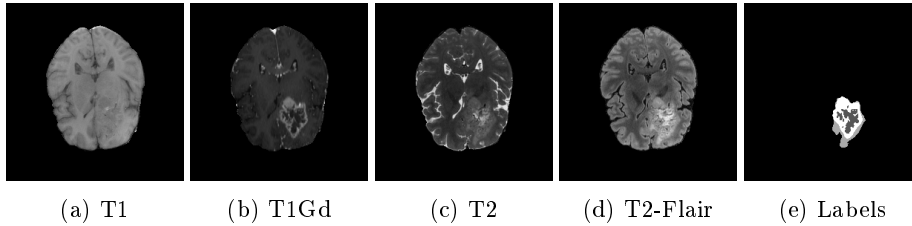


Fig. 1: Cross-sections of the data images and segmentation labels from patient BraTS-GLI-00000-000 in the BraTS dataset.

One important consideration is normalization: we do not want our random blocks to be filled with values so far outside the range of the rest of the image as to create convergence issues when training. However, normalizing on a block-by-block basis for each swap would be quite computationally expensive. We do, however, choose to perform these augmentations on-the-fly for each training batch, rather than computing them in advance, as this allows for much greater input image variety without requiring a prohibitively large amount of disk space. The optimal tradeoff in terms of normalization will depend on the specific characteristics of the input data involved. For these experiments, we assume that the normalization performed in preprocessing is sufficient, and we do not make additional adjustments based on the distribution of each channel or region.

4.2 Architecture and Implementation

The UNet architecture, originally proposed by Ronneberger et al. in 2015, has become a popular choice for medical imaging segmentation tasks [10]; the BraTS challenge is no exception, with the majority of winning teams using a UNet-based method. As the basis for our experiments, we use a UNet architecture implemented using the `nnUNet` framework by Isensee et al. [8].

All of our models use `nnUNet`’s 3D full-resolution “`3d_fullres`” configuration, with 5-fold cross-validation and a Dice-based loss function, and trained for a maximum of 1000 epochs per fold.

For data loading and augmentation, we use a version of the `batchgenerators` package [6] that has been custom modified to include our novel methods. All models are trained using a baseline of standard augmentation methods. These methods comprise the “`moreDA`” data augmentation protocol that is included in the `nnUNet` package, and include elastic deformation, image rotation, scaling, cropping, contrast and brightness adjustment, and Gaussian noise and blurring.

We use 3 different patch sizes, $20 \times 20 \times 20$, $40 \times 40 \times 40$, and $80 \times 80 \times 80$ voxels. As our input images are $240 \times 240 \times 155$ voxels, this is equivalent to 0.09%, 0.72%, and 5.73% of each image, respectively. Our augmentations are applied to each training image with 100% probability in a single, randomly-selected patch.

4.3 Postprocessing

In the BraTS challenge, as with many other segmentation tasks, the postprocessing of model outputs is also a critical component of an approach’s performance. Postprocessing is a final opportunity to adjust the output to better reflect any relevant domain knowledge – for instance, by removing tumour areas that are outside the skull area, or other such biological impossibilities. More generally, statistically unlikely outputs can be tuned towards more plausible ones. To this effect, we use a simple post-processing approach to remove obvious outliers, ensuring our model performance is not disproportionately affected by mistakes that could be easily corrected.

Firstly, we create a median filtered version of our output segmentation mask, where a $9 \times 9 \times 9$ structuring element is used (that is, directly and diagonally adjacent voxels are considered). For image edges, voxel duplication is used.

Next, the connected regions of the original output image are found. We then assume that any regions smaller than size N voxels must be an outlier; these are then replaced with the value from the same voxel location in the median filtered image. For these experiments, we use a conservative cut-off size of $N = 2$.

In doing so, outliers are corrected to a simple approximation of a more likely value. Naturally, other approaches can be employed instead for higher task-specific performance; however, we prefer here a simpler and more domain-agnostic approach, which allows overall performance to better reflect the performance of the network itself rather than biasing it towards outputs with artifacts that are correctable with domain knowledge.

4.4 Performance Metrics

We evaluate each method based on two sets of metrics, the mean Lesionwise Hausdorff95 distances and the mean Lesionwise Dice scores for all patients in the test set. The Dice score is defined as

$$Dice(P, T) = \frac{|P_1 \wedge T_1|}{(|P_1| + |T_1|)/2}$$

where P is the binary map of predictions, T is the ground truth, P_1 and T_1 represent the number of voxels where P and T are equal to 1, respectively. That is, the Dice score is the number of true positive voxels divided by the average number of voxels equal to 1 in the prediction and ground truth maps.

Hausdorff distance measures the surface distance between segmentation boundaries. If $D_{p,t}$ is defined as the shortest least-squares distance of all points on the surface of the ground truth map T to points on the surface of prediction map P , and $D_{t,p}$ is the shortest least-squares distance of all points on the surface of T to all points on the surface of P (that is, $D_{p,t} = \sup_{p \in P} d(p, T)$ and $D_{t,p} = \sup_{t \in T} d(t, P)$), then

$$\text{Hausdorff}(T, P) = \max\{D_{p,t}, D_{t,p}\}.$$

To avoid extreme outliers, Hausdorff95 is then defined as the 95th percentile of these distances rather than the maximum.

These metrics are computed separately for the Enhancing Tumor (ET), Tumor Core (TC) and Whole Tumor (WT). The BraTS challenge is formally evaluated based on a composite of these metrics.

5 Results

We evaluate our novel augmentation methods against three different baselines. First, we consider an nnUNet trained using only the more standard augmentation methods from the “moreDA” protocol (**Baseline**). Additionally, we use an nnUNet trained using these standard data augmentation methods with the addition of random erasing, using a single zero-filled patch of size $40 \times 40 \times 40$ (**Baseline+RE40**) or $80 \times 80 \times 80$ (**Baseline+RE80**), based off the experimental results from [5].

Our novel methods are also used in conjunction with the standard augmentation methods from “moreDA”, and are indicated by the method name (**Shift**, and **Average**) combined with the patch size used (ex. **Permute40** indicates a patch size of $40 \times 40 \times 40$ is used with the *Permute* method). We also consider each method both with the post-processing method described in Section 4.3, indicated with a **-post**, and without any post-processing performed.

The results of each of our experiments are shown in Table 1.

Table 1: Mean Lesionwise Hausdorff95 Distances and Dice Scores for all patients. A lower Hausdorff95 distance or higher Dice indicates better performance. The best scores are bolded, the second-best marked by parentheses {}.

Algorithm	Mean Hausdorff95			Mean Dice		
	ET	TC	WT	ET	TC	WT
Baseline	47.875	84.225	35.850	0.7710	0.3096	0.8457
Baseline-post	40.454	80.562	35.855	0.7884	0.3127	0.8457
Baseline+RE40	50.177	78.439	34.877	0.7652	0.3138	0.8455
Baseline+RE40-post	46.001	74.929	31.970	0.7738	0.3172	0.8529
Baseline+RE80	52.681	82.854	39.068	0.7577	0.3114	0.8360
Baseline+RE80-post	49.247	81.509	38.849	0.7672	0.3129	0.8366
Shift20	47.782	76.488	30.527	0.7743	0.3171	0.8581
Shift20-post	43.571	74.638	29.694	0.7833	0.3187	0.8602
Shift40	53.987	71.479	29.327	0.7563	0.3174	0.8587
Shift40-post	49.300	69.286	27.628	0.7657	0.3198	0.8629
Shift80	53.362	71.335	29.003	0.7510	0.3183	0.8587
Shift80-post	44.662	{69.831}	{28.443}	0.7689	{0.3196}	0.8601
Permute40	54.212	79.716	32.361	0.7583	0.3143	0.8534
Permute40-post	46.894	77.765	31.536	0.7755	0.3157	0.8556
Permute80	52.383	80.511	37.619	0.7602	0.3126	0.8382
Permute80-post	50.848	75.024	34.785	0.7659	0.3189	0.8455
Average20	49.982	77.176	32.994	0.7651	0.3138	0.8530
Average20-post	{41.912}	77.567	29.270	{0.7845}	0.3174	{0.8612}
Average40	49.982	77.176	32.994	0.7651	0.3138	0.8530
Average40-post	44.814	74.599	32.713	0.7767	0.3164	0.8536

6 Discussion

As can be seen in Table 1, the majority of our *Shift* and *Average* methods outperform the baseline methods for the TC and WT Hausdorff95 and TC and WT Dice metrics. Our strongest-performing novel method, *Shift40-post*, significantly outperforms the strongest-performing baselines, *Baseline-post* and *Baseline40-post* on these metrics, with a Mean Hausdorff95 of 69.286 for TC, vs. 80.562 (+16.3%) and 74.929 (+8.1%), and for WT, with 27.628 vs. 35.855 (+29.8%) and 31.970 (+15.7%). In contrast, while *Baseline-post* slightly outperforms our models in the Mean Hausdorff95 of ET, the difference between this model and our best-performing on this metric is much smaller, at 40.454 vs 41.912 (+3.6%). This difference is clearly shown in Figure 2, where the upper quartile value of the TC Hausdorff95 can be seen to be significantly lower for our method. For the Dice scores, while *Baseline-post* again slightly outperforms our models for ET at 0.7884 vs. 0.7845 (-5.0%), our best-performing models surpass the baseline models for TC at 0.3198 vs 0.3172 (-8.2%) and WT at 0.8629 vs 0.8529 (-1.2%).

For both the Hausdorff95 and Dice metrics, we note that our *Shift* and *Average* methods score better than *Permute* methods. This is likely due to the fact that both *Shift* and *Average* incorporate only one other channel’s information into each channel’s dataset. *Permute*, on the other hand, incorporates information from each other channel at random, and it seems that this decreased consistency also equates to greater difficulty with training.

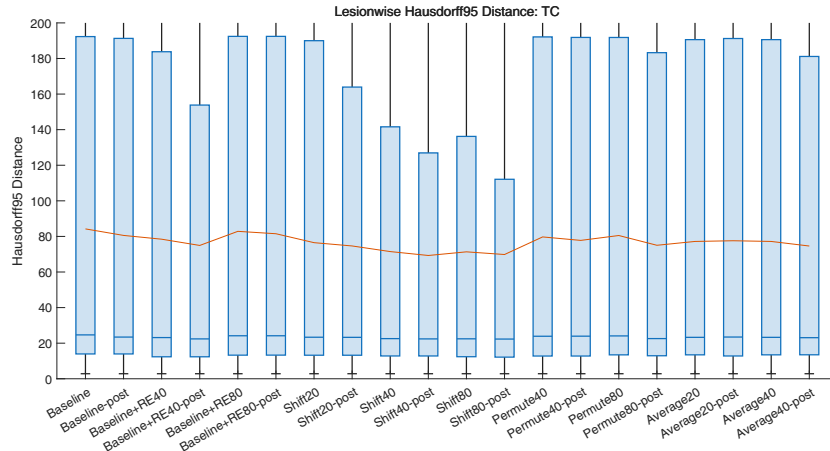


Fig. 2: A visualization of the median, upper and lower quartiles for the TC Hausdorff95 Distance for each method. The mean value is shown with a red line. Outliers beyond the maximum y-axis limits are not shown.

The optimal patch size appears to vary based on the algorithm used. A patch size of $40 \times 40 \times 40$ seems to perform best for the *Shift* and *Permute* methods, while a smaller patch size of $20 \times 20 \times 20$ shows higher performance for *Average*. For this reason, we would recommend treating the patch size as a tuning parameter to be optimized when computational resources allow.

We also note that each method appears to have its own strengths, with *Average* performing better for ET, and *Shift* performing better for TC and WT. This suggests that an optimal method for this particular task might prove to be a hybrid of these two methods, where rather than a 50-50 weighting between channels for our augmentation patches as in *Average*, or a weighting of 0-100 as in *Shift*, an ideal weighting might lie somewhere in between. Additionally, a different set ordering of channels for our augmentation might further improve performance. We plan to investigate these variants in future work.

7 Conclusion

In this work, we introduced the concept of inter-modality augmentation, where information is shared between modality channels of a multi-modality image in randomly selected patches during the training process for deep learning tasks. We also detailed three unique approaches to this concept, *Shift*, *Permute*, and *Average*, and demonstrated their performance during a semantic segmentation task using the BraTS Adult Glioma dataset. In our experiments, these methods, and most notably *Shift* and *Average*, showed improved segmentation performance for most regions and metrics, and show strong promise for improving performance on other multi-channel image-based deep learning tasks as well.

References

1. Akbari, H., Sotiras, A., Bilello, M., Rozycki, M., Kirby, J., Freymann, J., Farahani, K., Davatzikos, C.: Segmentation labels and radiomic features for the pre-operative scans of the TCGA-GBM collection (2017)
2. Akbari, H., Sotiras, A., Bilello, M., Rozycki, M., Kirby, J., Freymann, J., Farahani, K., Davatzikos, C.: Segmentation labels and radiomic features for the pre-operative scans of the TCGA-LGG collection. *The Cancer Imaging Archive* **7** (2017)
3. Baid, U., Ghodasara, S., Mohan, S., Bilello, M., Calabrese, E., Colak, E., Farahani, K., Kalpathy-Cramer, J., Kitamura, F.C., Pati, S., et al.: The RSNA-ASNR-MICCAI BraTS 2021 benchmark on brain tumor segmentation and radiogenomic classification. *arXiv preprint* (2021)
4. Bakas, S., Akbari, H., Sotiras, A., Bilello, M., Rozycki, M., Kirby, J.S., Freymann, J.B., Farahani, K., Davatzikos, C.: Advancing the Cancer Genome Atlas glioma MRI collections with expert segmentation labels and radiomic features (2017)
5. Bengs, M., Behrendt, F., Krüger, J., Opfer, R., Schlaefer, A.: Three-dimensional deep learning with spatial erasing for unsupervised anomaly segmentation in brain MRI. *International Journal of Computer Assisted Radiology and Surgery* **16**(9), 1413–1423 (2021)
6. Fabian, I., Paul, J., Jakob, W., David, Z., Jens, P., Simon, K., Justus, S., Andre, K., Tobias, R., Sebastian, W., Peter, N., Stefan, D., Gregor, K., Klaus, M.H.: batchgenerators - a python framework for data augmentation.
7. Ferreira, A., Solak, N., Li, J., Dammann, P., Kleesiek, J., Alves, V., Egger, J.: How we won BraTS 2023 Adult Glioma challenge? Just faking it! Enhanced synthetic data augmentation and model ensemble for brain tumour segmentation. *arXiv preprint* (2024)
8. Isensee, F., Jaeger, P.F., Kohl, S.A., Petersen, J., Maier-Hein, K.H.: nnU-Net: a self-configuring method for deep learning-based biomedical image segmentation. *Nature Methods* **18**(2), 203–211 (2021)
9. Menze, B.H., Jakab, A., Bauer, S., Kalpathy-Cramer, J., Farahani, K., Kirby, J., Burren, Y., Porz, N., Slotboom, J., Wiest, R., et al.: The multimodal brain tumor image segmentation benchmark (BraTS). *IEEE Transactions on Medical Imaging* **34**(10), 1993–2024 (2014)
10. Ronneberger, O., Fischer, P., Brox, T.: U-net: Convolutional networks for biomedical image segmentation. In: *International Conference on Medical image computing and computer-assisted intervention*. pp. 234–241. Springer (2015)
11. Shorten, C., Khoshgoftaar, T.M.: A survey on image data augmentation for deep learning. *Journal of big data* **6**(1), 1–48 (2019)
12. Zhong, Z., Zheng, L., Kang, G., Li, S., Yang, Y.: Random erasing data augmentation. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. vol. 34, pp. 13001–13008 (2020)