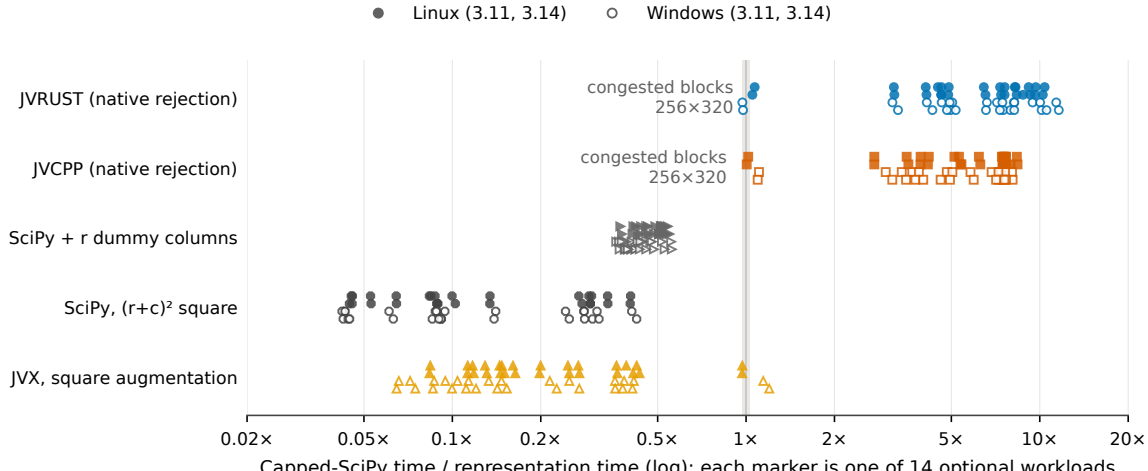
Linux (3.11, 3.14)
Windows (3.11, 3.14)
JVRUST (native rejection)
JVCPP (native rejection)
SciPy + r dummy columns
SciPy, (r+c)² square
JVX, square augmentation
congested blocks 256×320
congested blocks 256×320
0.02×
0.05×
0.1×
0.2×
0.5×
1×
2×
5×
10×
20×
Capped-SciPy time / representation time (log); each marker is one of 14 optional workloads