
Java spring boot

Case study –4

Employee Salary Calculator

1 project structure

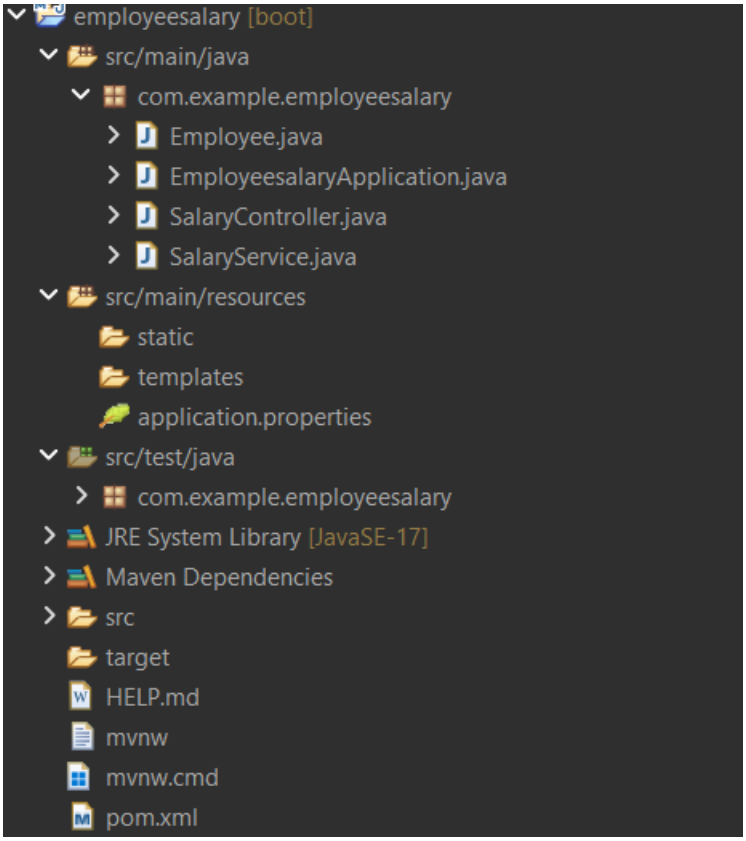

2 Employee.java

```java

package com.example.employeesalary;

public class Employee {

    private String name;
    private double basicSalary;

    public Employee() {
    }

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }

    public double getBasicSalary() {
        return basicSalary;
    }

    public void setBasicSalary(double basicSalary) {
        this.basicSalary = basicSalary;
    }
}

```

3 SalaryController.java

```java

package com.example.employeesalary;

import java.util.LinkedHashMap;

@RestController
public class SalaryController {

    private final SalaryService salaryService;

    public SalaryController(SalaryService salaryService) {
        this.salaryService = salaryService;
    }

    @PostMapping("/calculate-salary")
    public Map<String, Object> calculateSalary(
            @RequestBody Employee employee) {

        double basicSalary = employee.getBasicSalary();

        double allowances =
                salaryService.calculateAllowances(basicSalary);

        double deductions =
                salaryService.calculateDeductions(basicSalary);

        double netSalary =
                salaryService.calculateNetSalary(basicSalary);

        Map<String, Object> result = new LinkedHashMap<>();

        result.put("employeeName", employee.getName());
        result.put("basicSalary", basicSalary);
        result.put("allowances", allowances);
        result.put("deductions", deductions);
        result.put("netSalary", netSalary);

        return result;
    }
}

```

4 SalaryService.java

```java

package com.example.employeesalary;

import org.springframework.stereotype.Service;

@Service
public class SalaryService {

    public double calculateAllowances(double basicSalary) {
        return basicSalary * 0.20;
    }

    public double calculateDeductions(double basicSalary) {
        return basicSalary * 0.10;
    }

    public double calculateNetSalary(double basicSalary) {
        double allowances = calculateAllowances(basicSalary);
        double deductions = calculateDeductions(basicSalary);

        return basicSalary + allowances - deductions;
    }
}

```

5 EmployeeSalaryApplication.java

```java
package com.example.employeesalary;

import org.springframework.boot.SpringApplication;


@SpringBootApplication
public class EmployeesalaryApplication {

    public static void main(String[] args) {
        SpringApplication.run(EmployeesalaryApplication.class, args);
    }

}

```

6 post

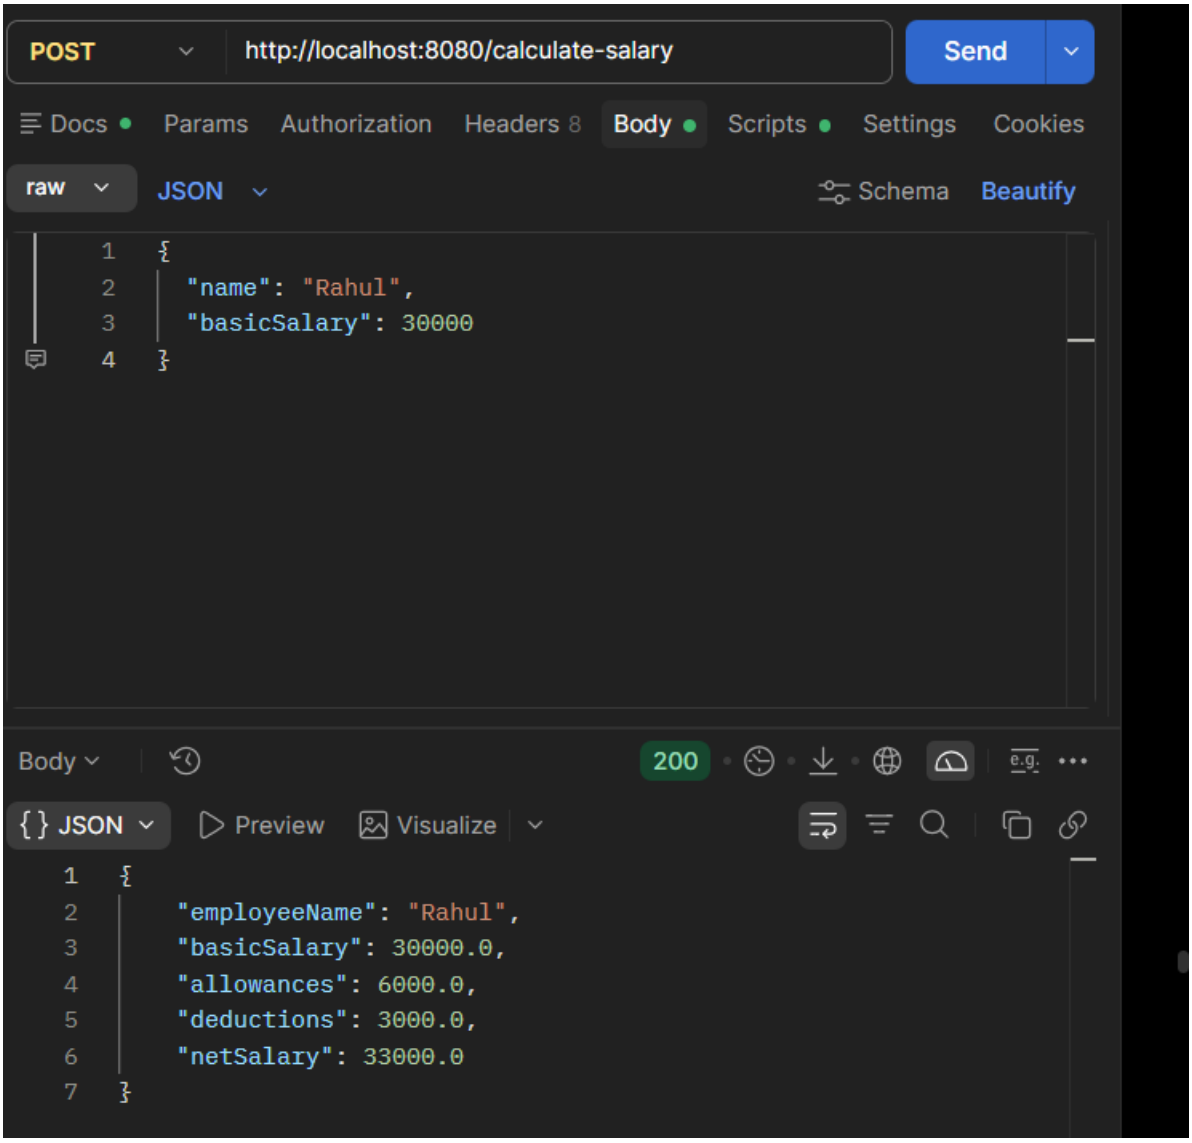
POST
http://localhost:8080/calculate-salary
Send
Docs
Params
Authorization
Headers 8
Body
Scripts
Settings
Cookies
raw
JSON
Schema
Beautify
{
"name": "Rahul",
"basicSalary": 30000
}
Body
200
JSON
Preview
Visualize
{
"employeeName": "Rahul",
"basicSalary": 30000.0,
"allowances": 6000.0,
"deductions": 3000.0,
"netSalary": 33000.0
}

7 GET (it was not necessary in this case-study)

