

Assignment:

Enhance the existing application by implementing a feature that automatically categorizes the generated test cases into standard testing types such as Smoke, Sanity, Regression, Functional.

Once the test cases are generated, the application should classify each test case into the most appropriate category and display the categorized results in a structured and user-friendly format

The new functionality should seamlessly integrate with the existing test case generation workflow without impacting current features



Before changes

The screenshot displays the Testleaf API Testcase Generator interface. At the top, the Testleaf logo and 'API Testcase Generator' title are visible. A 'Clear' button is in the top right. Below the title, a progress indicator shows 'STEP 3'. A dropdown menu indicates the model used: 'Grog LLM - Openai/gpt-oss-120b'. A 'Clear' button is next to it. The main heading is 'Generated API testcases', followed by the text 'Grounded in the validated OpenAPI operations and schemas.' Below this, four colored boxes show the counts: 'Total Testcases: 3' (green), 'Positive: 1' (blue), 'Negative: 1' (orange), and 'Boundary: 1' (purple). A search bar is present with the placeholder 'Search ID, endpoint, method, or title' and a dropdown for 'All categories'. A table lists the generated test cases:

ID	METHOD	ENDPOINT	CATEGORY	TITLE	PRIORITY	STATUS
TC-API-001	GET	/booking/{id}	positive	Retrieve existing booking with valid ID	High	View
TC-API-002	GET	/booking/{id}	negative	Request non-existent booking ID returns 404	High	View
TC-API-003	GET	/booking/{id}	boundary	Retrieve booking using minimum integer ID value	Medium	View

At the bottom, a 'Download results' section includes buttons for 'JSON', 'Excel', 'Swagger', and 'Generate Postman'.

After changes

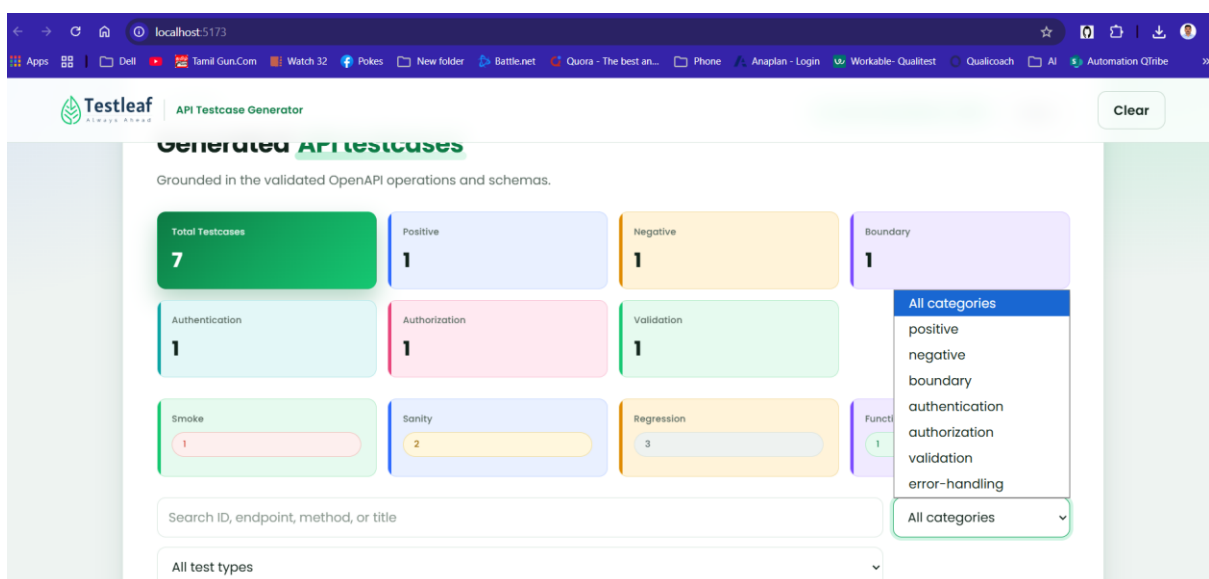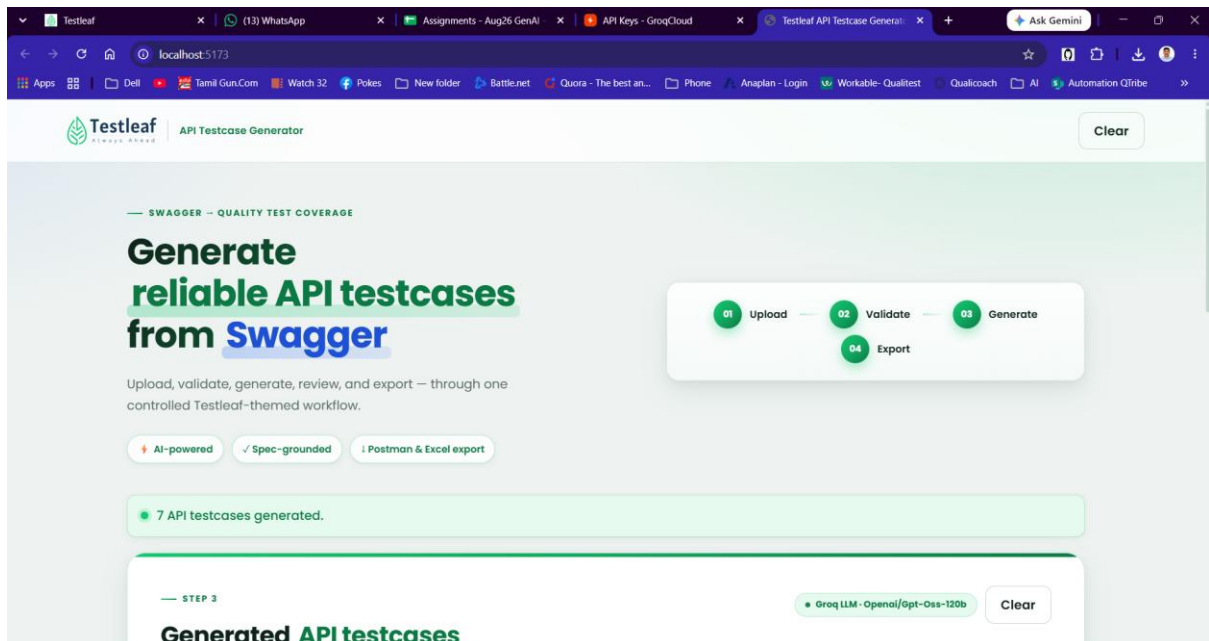

Testleaf
ALWAYS AHEAD

API Testcase Generator

Clear

All test types

ID	METHOD	ENDPOINT	CATEGORY	TEST TYPE	TITLE	PRIORITY	STATUS
TC-API-001	GET	/booking/{id}	positive	Smoke	Retrieve existing booking with valid ID	High	View
TC-API-002	GET	/booking/{id}	negative	Regression	Request non-existent booking ID	High	View
TC-API-003	GET	/booking/{id}	boundary	Regression	Retrieve booking with boundary ID value 0	Medium	View
TC-API-004	GET	/booking/{id}	authentication	Sanity	Access endpoint without authentication headers	Low	View
TC-API-005	GET	/booking/{id}	authorization	Sanity	Attempt unauthorized access with insufficient permissions	Low	View
TC-API-006	GET	/booking/{id}	validation	Functional	Provide non-integer ID value	High	View
TC-API-007	GET	/booking/{id}	error-handling	Regression	Simulate server error response	Medium	View

Testleaf
ALWAYS AHEAD

API Testcase Generator

Clear

All test types

ID	METHOD	ENDPOINT	CATEGORY	TEST TYPE	TITLE	PRIORITY	STATUS
TC-API-001	GET	/booking/{id}	positive	Smoke	Retrieve existing booking with valid ID	High	View
TC-API-002	GET	/booking/{id}	negative	Regression	Request non-existent booking ID	High	View
TC-API-003	GET	/booking/{id}	boundary	Regression	Retrieve booking with boundary ID value 0	Medium	View
TC-API-004	GET	/booking/{id}	authentication	Sanity	Access endpoint without authentication headers	Low	View
TC-API-005	GET	/booking/{id}	authorization	Sanity	Attempt unauthorized access with insufficient permissions	Low	View
TC-API-006	GET	/booking/{id}	validation	Functional	Provide non-integer ID value	High	View
TC-API-007	GET	/booking/{id}	error-handling	Regression	Simulate server error response	Medium	View