

World Cup Soccer Database

Rebecca Thomas, Dmytry Berkout

April 14, 2016

Contents

1 Purpose	2
1.1 Purpose of the Document	2
1.2 Purpose of the Project	2
1.3 Purpose of Phase 1	2
2 Problems and Solutions	2
3 Assumptions	3
 I Phase 1 Documentation	 3
4 Environment and Requirements Analysis	3
4.1 Using MondialDB	3
4.2 Extract Transform Load Tool	4
4.3 Top-Level Information Flow Diagram	4
5 List of Tasks and Task Flow Diagram	6
5.1 Extract, Transform, and Load Task	7
5.2 Web Query Processor	9
5.3 Webpage SQL Query Processor Task	10
5.4 Output Results Task	11
6 List of Documents	12
6.1 Query	13
6.2 Formatted Results	13
 II Phase 2 Documentation	 15

1 Purpose

1.1 Purpose of the Document

This document is an introduction to the MondialDB project. It will provide details on the implementation and purpose of MondialDB. This document will provide a detailed design of MondialDB. It will include an information flow diagram and task forms that go into the inner workings of the project. It will also include the problems we encountered and the solutions we had for them.

1.2 Purpose of the Project

The purpose of the project is to create a database that can access various details about the World Cup. It will contain soccer team names and members and statistics such as player records, team records, penalty information, and the rank obtained. Another major part of this project is creating a tool to extract information about the World Cup from the Internet. It will be able to extract information from various websites and put them into a database readable format. The tool will be able to deal with data from European and American websites and transform it into a standard format. This project will allow for easy and readable queries.

1.3 Purpose of Phase 1

In this phase of the project we are to design the database and receive feedback on it. We will attempt to catch any significant errors in design at this stage and prevent a broken or severely flawed implementation from going through. If design errors are caught early it will require considerably less work to fix them.

2 Problems and Solutions

The following list is composed of problems we encountered with the conceptual design of the project.

- Problem: We lack database design experience. Without experience, it is difficult to design a database.
Solution: Follow project examples and study how databases are designed.
- Problem: We don't understand the World Cup and we don't know where to find data for it.
Solution: Find out how the World Cup works. Research various World Cup websites. Find several that are usable for our project.
- Problem: We don't know how to extract data from websites.
Solution: Research data extraction. Make a very basic test script. See what suites are available for use.

- Problem: We don't know how to create websites.
Solution: Research the creation of websites. Make a very basic website. See what suites are available for use.
- Problem: We don't live close together.
Solution: Use text messages, phone calls, and email to communicate. Use Google documents to share data.

3 Assumptions

The assumptions we made are the following:

- Our web server will not be overloaded despite not having restrictions on who can use it.
- Our web server software will not fail.
- The database software will be sufficient for the scope of this project.
- The data pulled from websites is accurate.
- We will not need multilingual support. We will support only English.
- We will not need handicap support for our website.
- We will not need a mobile accessible version for our website.
- Our users are average people who do not have a computer science background but are able to comfortably use the internet.

Part I

Phase 1 Documentation

4 Environment and Requirements Analysis

4.1 Using MondialDB

The user will interact with MondialDB through our website. The user will connect to the website using a web browser and a simple webpage will be displayed. The sole purpose of this website is to run specific queries from the web-server through MondialDB and send the results back to the user. The website will only contain a selection of the predefined queries. On selection, a website form will appear which will contain the necessary information to perform the specified query. Both the website and web-server will check the input for validity. Once the query is processed, a table of results will appear underneath the form.

4.2 Extract Transform Load Tool

For this project we will write a python script to pull data from selected websites. The ideal script will be as simple as possible while robust enough to work with a number of different websites. We will input a list of websites and the tool should automatically convert the data into database format and insert it, or provide a script to insert it into MondialDB.

4.3 Top-Level Information Flow Diagram

See Figure 1 on page 5 for the Top-Level Information Flow Diagram. The flow is generally as follows:

1. Data is input into MondialDB from Soccer Websites through Extract-Transform-Load.
2. The user asks for the website and is provided it through the Webpage Server.
3. The Web Query Processor decides what kind of query the user is asking for.
4. The Webpage SQL Query Processor translates the user query into SQL to be executed on MondialDB.
5. The query is executed and database results are returned from MondialDB
6. The results are outputted to the user with the format depending on the kind of query.

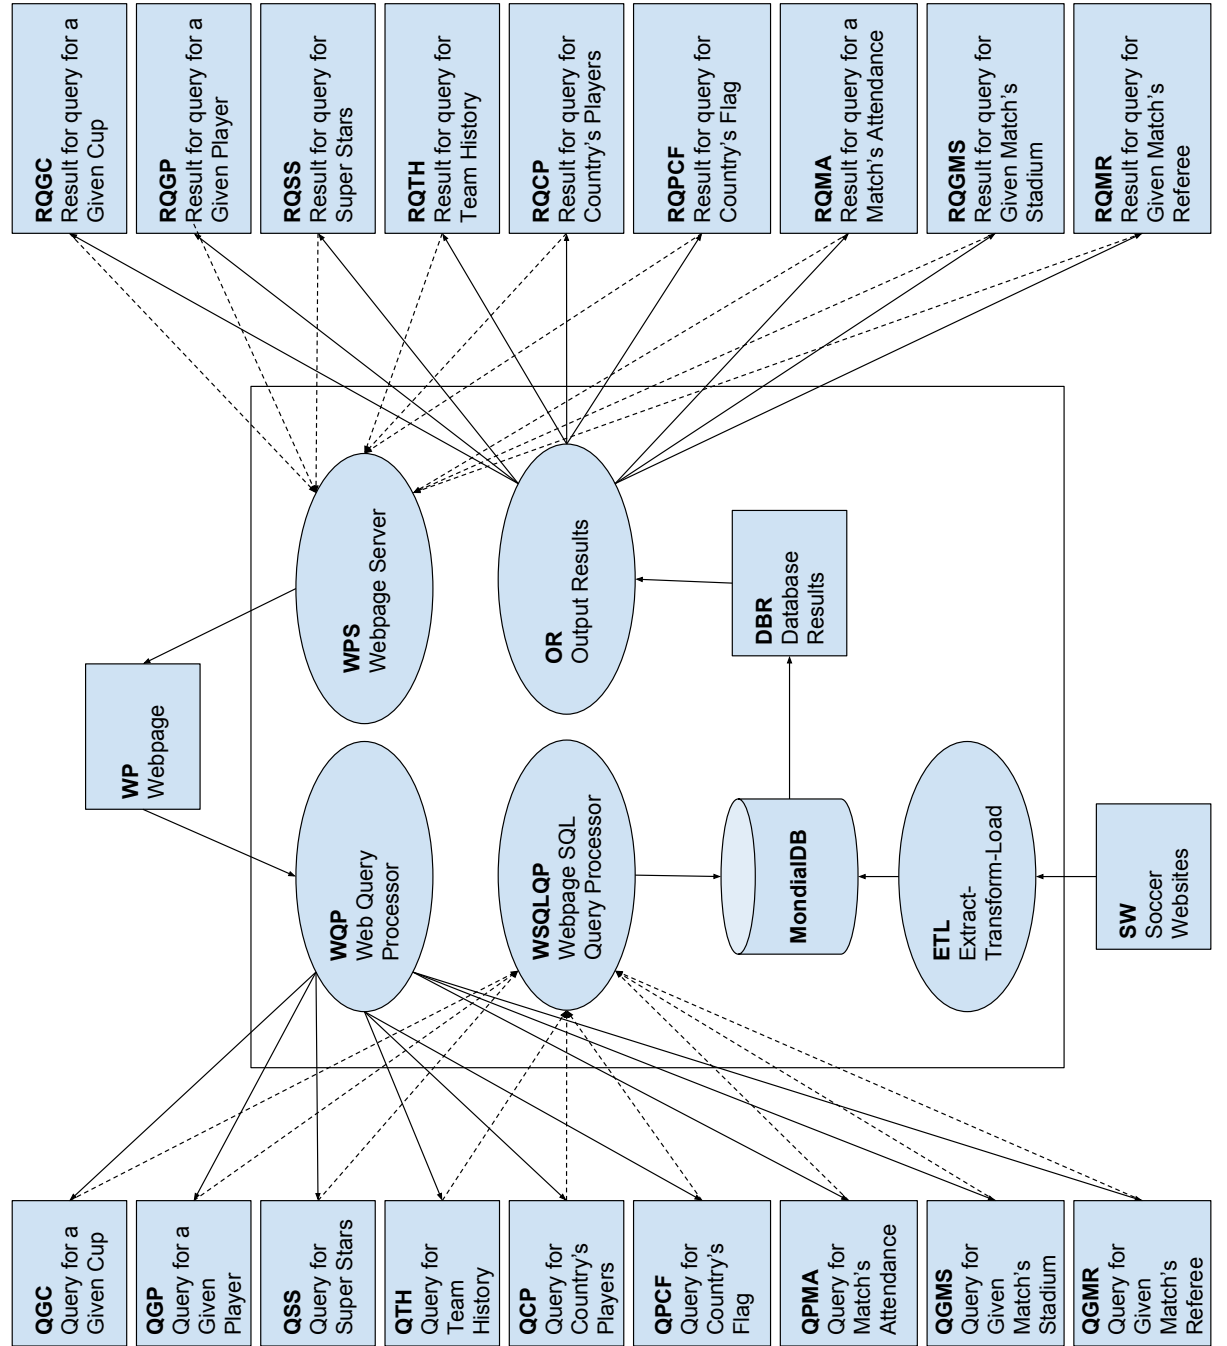


Figure 1: Information Flow Diagram

5 List of Tasks and Task Flow Diagram

We describe the tasks and subtasks necessary to make, populate, and query MondialDB. See Figure 2 on page 6 for the Task Flow Diagram. The tasks are the following:

- Extract, Transform, and Load Task
- Webpage Server Task
- Web Query Processor
- Webpage SQL Query Processor
- Output Results Task

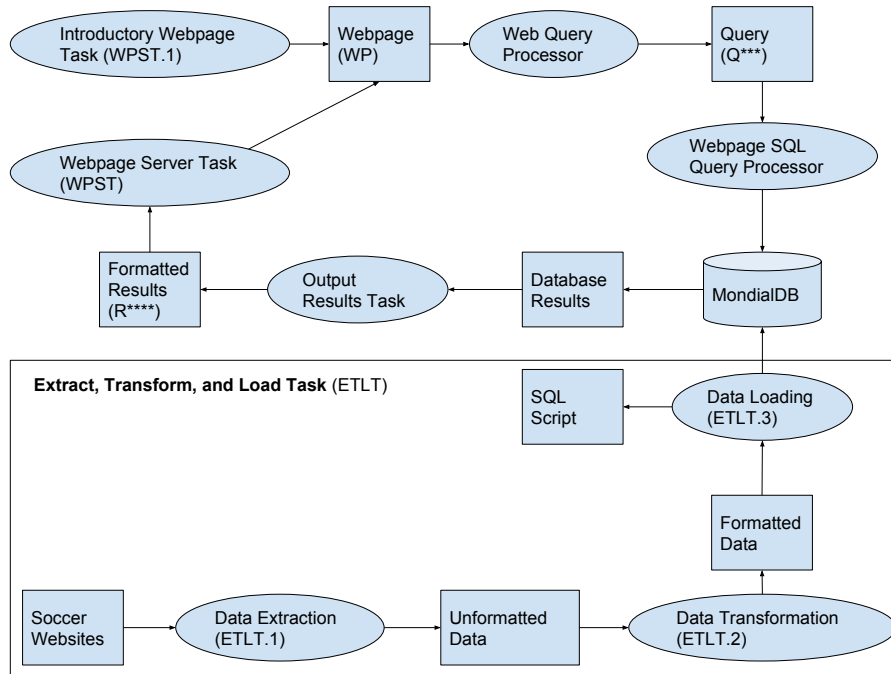


Figure 2: Task Flow Diagram

5.1 Extract, Transform, and Load Task

Task Label	ETLT
Task Name	Extract, Transform, and Load Task
Performer	Python script
Purpose	To extract data from Soccer Websites, transform it into a usable format, and send it to MondialDB
Enabling Condition	On database creation or database update
Description	It takes the information from Soccer Websites and puts the information into MondialDB.
Frequency	On database update
Duration	It will depend on the extraction, transformation, and load subtasks.
Importance	Most important
Maximum Delay	It depends on the subtasks.
Input	Soccer Websites
Output	Copy of the SQL script run by the python script as well as debugging information
Document Use	Soccer Websites, Unformatted Data, Formatted Data
Operations Performed	Data extraction, data transformation, and data loading
Subtasks	Data extraction (ETLT.1), data transformation (ETLT.2), data loading (ETLT.3)
Error Conditions	Errors from subtasks

5.1.1 Data Extraction

Task Label	ETLT.1
Task Name	Data Extraction
Performer	Python script
Purpose	To extract data from Soccer Websites
Enabling Condition	On database data insertion
Description	It pulls HTML from the Soccer Websites. It then parses the HTML for data to put into MondialDB.
Frequency	On database update
Duration	It depends on how quickly websites are scraped and extracted.
Importance	Most important
Maximum Delay	It depends on how many Soccer Websites are chosen.
Input	Soccer Websites
Output	Unformatted Data from the Soccer Websites
Document Use	Soccer Websites -> Unformatted Data
Operations Performed	Data extraction
Subtasks	None
Error Conditions	Soccer Websites are invalid. The format of the website is invalid or confusing.

5.1.2 Data Transformation

Task Label	ETLT.2
Task Name	Data Transformation
Performer	Python script
Purpose	To transform data from Soccer Websites into a standardized format
Enabling Condition	On database data insertion
Description	It standardizes the data produced by Data Extraction. For example, names that are formatted like "Last Name, First Name" and "First Name Last Name" shall be changed into a standard format.
Frequency	On database update
Duration	It depends on how quickly the data goes from being unformatted to being formatted.
Importance	Important
Maximum Delay	It depends on how badly the original data was formatted.
Input	Unformatted Data from Data Extraction
Output	Formatted Data
Document Use	Unformatted Data -> Formatted Data
Operations Performed	Data transformation
Subtasks	None
Error Conditions	The data are formatted badly.

5.1.3 Data Loading

Task Label	ETLT.3
Task Name	Data Loading
Performer	Python script
Purpose	To load formatted data into MondialDB
Enabling Condition	On database data insertion
Description	Makes an SQL script that inserts the standardized data from Data Transformation into MondialDB.
Frequency	On database update
Duration	It depends on how quickly the data is inserted into MondialDB
Importance	Most important
Maximum Delay	It depends on how slow the connection between the data collector and the database is.
Input	Formatted Data
Output	Log from inserting into MondialDB. Copy of the SQL script run by the python script.
Document Use	Formatted Data -> SQL Script
Operations Performed	Data Loading
Subtasks	None
Error Conditions	There is a faulty connection with the database.

5.2 Web Query Processor

Task Label	WQPT
Task Name	Web Query Processor
Performer	Web-server
Purpose	Processes queries from the web-server and sends the respective query to the Webpage SQL Query Processor Task.
Enabling Condition	After web-server runs
Description	It determines the user-specified query from the forms on the Webpage. Once this query is validated, it sends the query on to the Webpage SQL Query Processor.
Frequency	Always on
Duration	As long as the database is active
Importance	Important
Maximum Delay	Response delay to user requests should be short and less than 10 seconds.
Input	User-inputted form data from the Webpage
Output	Sends Query type to Webpage SQL Processor Task. See Query Types.
Document Use	Webpage -> Query
Operations Performed	Validates queries and determines query type.
Subtasks	None
Error Conditions	The query isn't valid.

5.3 Webpage SQL Query Processor Task

Task Label	WSQLQPT
Task Name	Webpage SQL Query Processor Task
Performer	Webpage server
Purpose	Sends the query from the user-specified query task to MondialDB
Enabling Condition	User submits valid query
Description	The WSQLQPT is the final step before the query reaches MondialDB. It will send a perform a raw SQL query in MondialDB
Frequency	Triggers on every received valid user query
Duration	The SQL shouldn't take longer than 15 seconds to run.
Importance	Important
Maximum Delay	The SQL shouldn't take at most longer than 45 seconds to run.
Input	User-specified query from the following list: QGC (Query for a given cup) QGP (Query for a given player) QSS(Query for Super Stars) QTH(Query for Team History) QCP(Query for Country's Players) QPCF(Query for Country's Flag) QPMA (Query for Match's Attendance) QGMS (Query for a Given Match's Stadium) QGMR (Query for a Given Match's Referee)
Output	Sends SQL query to MondialDB
Document Use	Query
Operations Performed	If the query is a valid query from the aforementioned list, then create the SQL command. If it is not a valid query, send an error message back.
Subtasks	None
Error Conditions	The user-specified query is not valid.

5.4 Output Results Task

Task Label	OR
Task Name	Output Results Task
Performer	Webpage Server
Purpose	Sends the query results to the user
Enabling Condition	MondialDB receives query and sends output to Output Results Task
Description	The WSQLQPT is the final step before the query reaches MondialDB. It will send a raw SQL query to MondialDB.
Frequency	Triggers on every received request
Duration	In ideal network conditions, it should be short and less than 10 seconds.
Importance	Most Important
Maximum Delay	Response delay to user requests should be short and less than 10 seconds.
Input	For a user-specified query, Database Results
Output	The Formatted Result from the results
Document Use	Database Results -> Formatted Results
Operations Performed	Sends query results to Webpage Server Task
Subtasks	None
Error Conditions	MondialDB gave back error conditions instead of valid results. Connection to user is disrupted. Web server becomes overloaded.

6 List of Documents

See page 12 for repeated Task Flow Diagram. The documents are the following:

- Webpage
- Query
- Database Results
- Formatted Results
- Soccer Websites
- Unformatted Data
- Formatted Data
- SQL Script

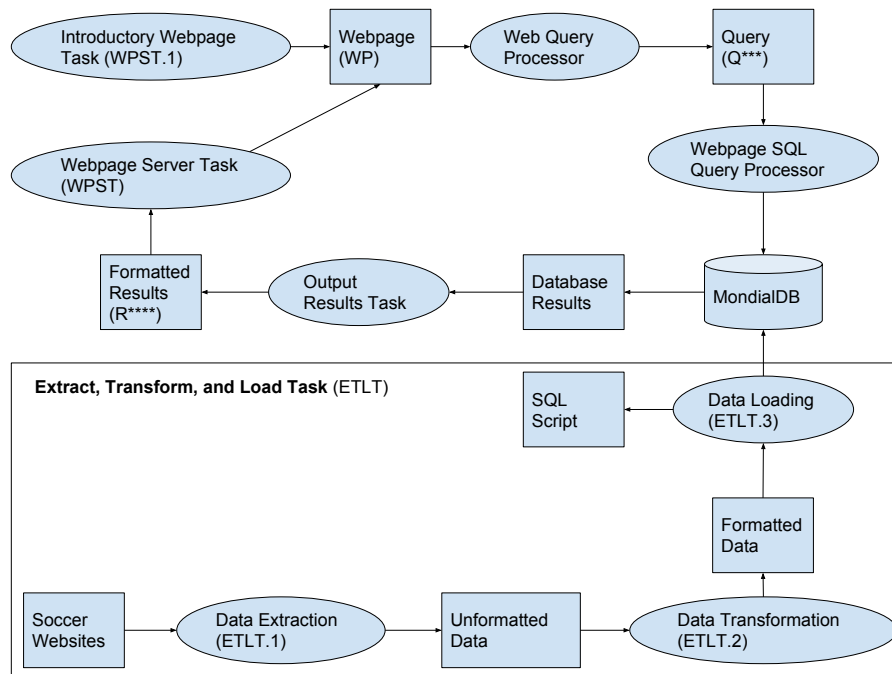


Figure 3: Task Flow Diagram

6.1 Query

The types of Queries:

- QGC (Query for a given cup)
- QGP (Query for a given player)
- QSS (Query for Super Stars)
- QTH (Query for Team History)
- QCP (Query for Country's Players)
- QPCF(Query for Country's Flag)
- QPMA (Query for Match's Attendance)
- QGMS (Query for a Given Match's Stadium)
- QGMR (Query for a Given Match's Referee)

Each query might not require all parts of the following general document form.

- Query-Type (See above)
- Cup-Year (All, 1930, 1934, 1938, ...)
- Team-Name (All, Brazil, Germany, Italy, ...)
- Player-Name (All, Carvajal, Lahm, Klose, ...)
- Want-Match-Info (True, False)
- Match-Query-Info
 - Winning-Team (Any, Brazil, Germany, Italy, ...)
 - Losing-Team (Any, Brazil, ...)
 - Get-Match-With-Most-Goals-For-Winning-Team (True, False)
- Want-Penalty-Cards (True, False)

6.2 Formatted Results

The types and document forms for Formatted Results:

- RQGC (Result for Query for a Given Cup)
 - Cup-Year
 - Number-Goals-Per-Team-List
 - Team-Name-List
 - Team-Position-List

- RQGP (Result for Query for a Given Player)
 - Player-Name
 - Cup-Name-List
 - Number-Goals-Per-Cup-List
 - Number-Penalties-Per-Cup-List
 - Team-Name-List
- RQSS (Result for Query for Super Stars)
 - Player-Name
 - Cup-Name-List
 - Number-Goals-Per-Cup-List
 - Number-Penalties-Per-Cup-List
 - Team-Name-List
- RQTH (Result for query for Team History)
 - Team-Name
 - Cup-Name-List
 - Number-Goals-Per-Cup-List
- RQCP (Result for query for Country's Players)
 - Team-Name
 - Player-List
 - Number-Goals-Per-Player-List
 - Number-Penalties-Per-Player-List

Part II

Phase 2 Documentation