

# Perhatikan program berikut

```
public void trickySwap(Point arg1, Point arg2) {  
    arg1.x = 100;  
    arg1.y = 100;  
    Point temp = arg1;  
    arg1 = arg2;  
    arg2 = temp;  
}  
  
public static void main(String [] args) {  
    Point p1 = new Point(1,1);  
    Point p2 = new Point(1,1);  
    System.out.println("P1: X=" + p1.x + " Y=" + p1.y);  
    System.out.println("P2: X=" + p2.x + " Y=" + p2.y);  
    trickySwap(p1, p2);  
    System.out.println("After tricky swap:");  
    System.out.println("P1: X=" + p1.x + " Y=" + p1.y);  
    System.out.println("P2: X=" + p2.x + " Y=" + p2.y);  
}
```

Output?

P1: X=1 Y:1  
P2: X=1 Y:1  
After tricky swap:  
P1: X=1 Y:1  
P2: X=100 Y=100



P1: X=1 Y:1  
P2: X=1 Y:1  
After tricky swap:  
P1: X=100 Y:100  
P2: X=1 Y=1




# Passing parameter di Java

- Passing parameter selalu **by value** (dibuat salinannya)
- Semua variable object adalah **reference to object**

di dalam pemanggil:

di dalam method yang dipanggil:

Tipe dasar:

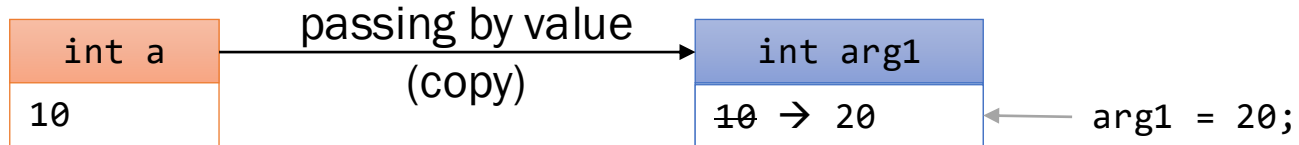

Object:

