


Análise Exploratória



Ossada R. e Hamaguchi L.



18 de julho de 2017



1 ANÁLISE EXPLORATÓRIA DOS DADOS



1.1 GRÁFICOS DAS VARIÁVEIS QUALITATIVAS


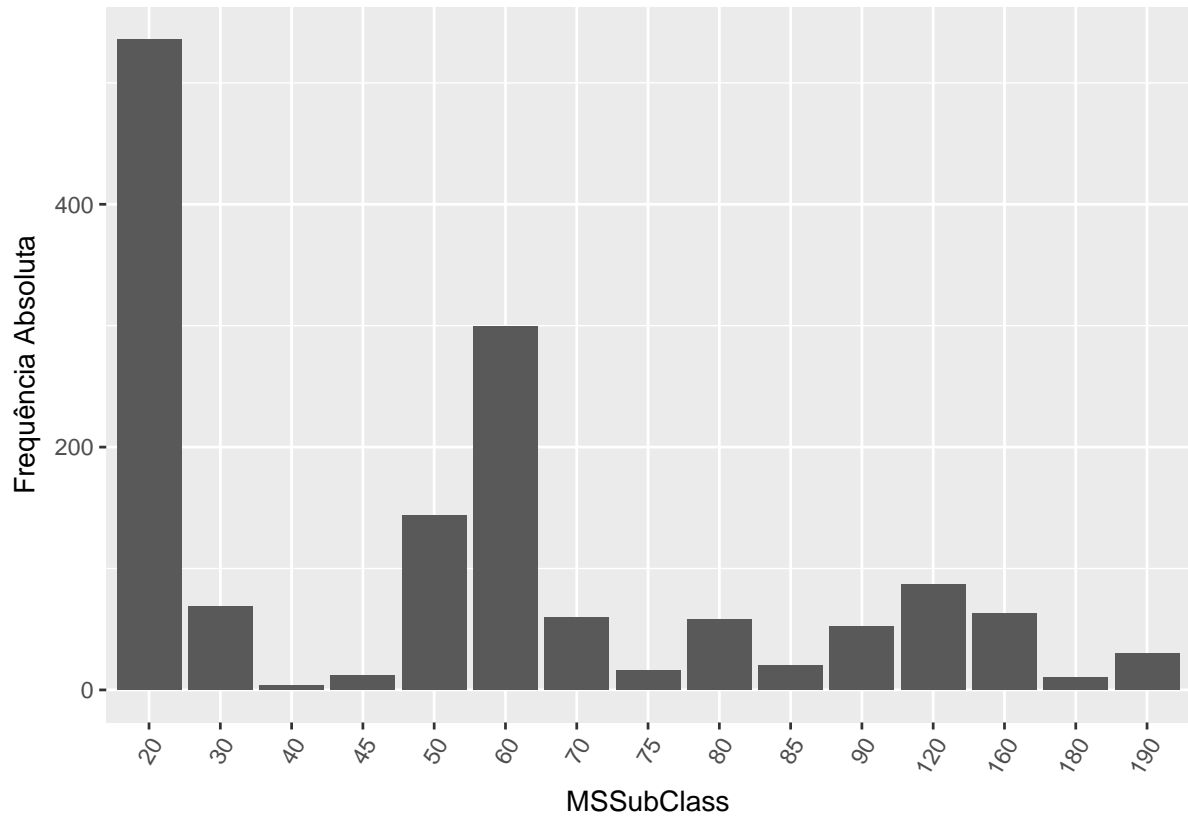


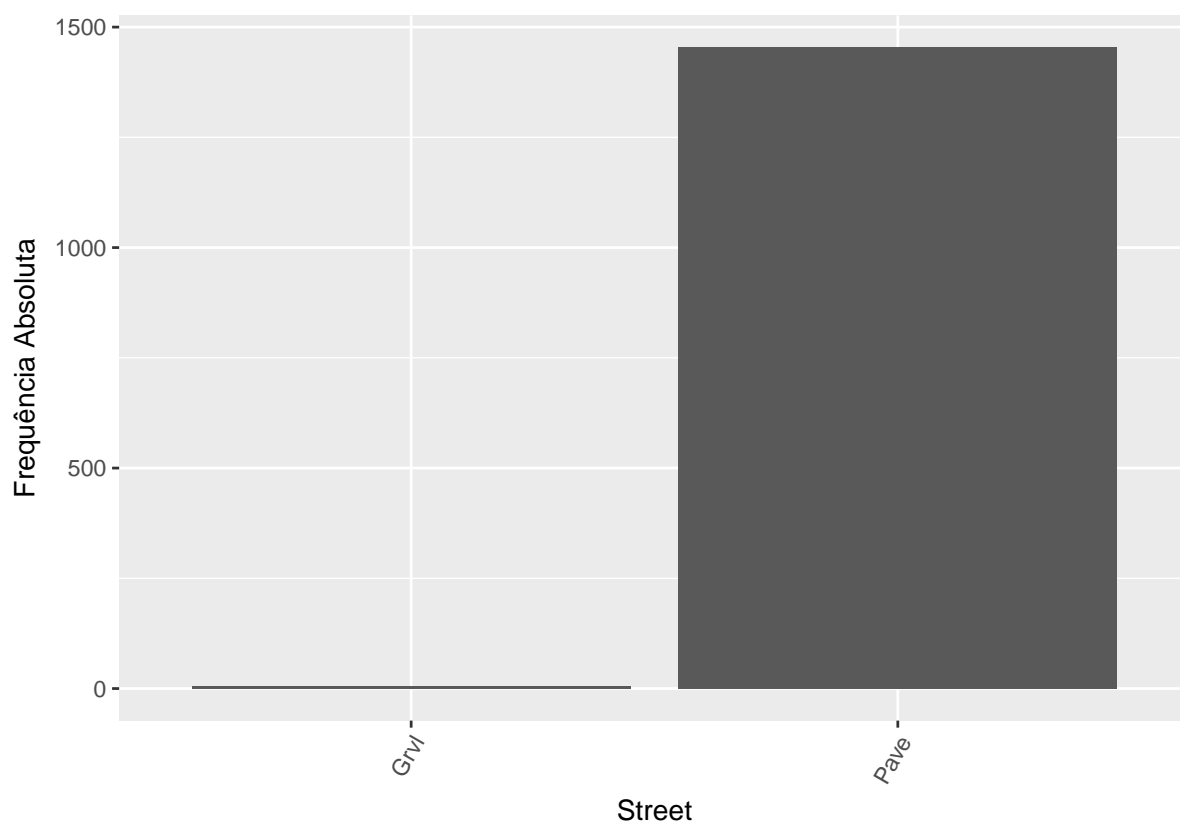
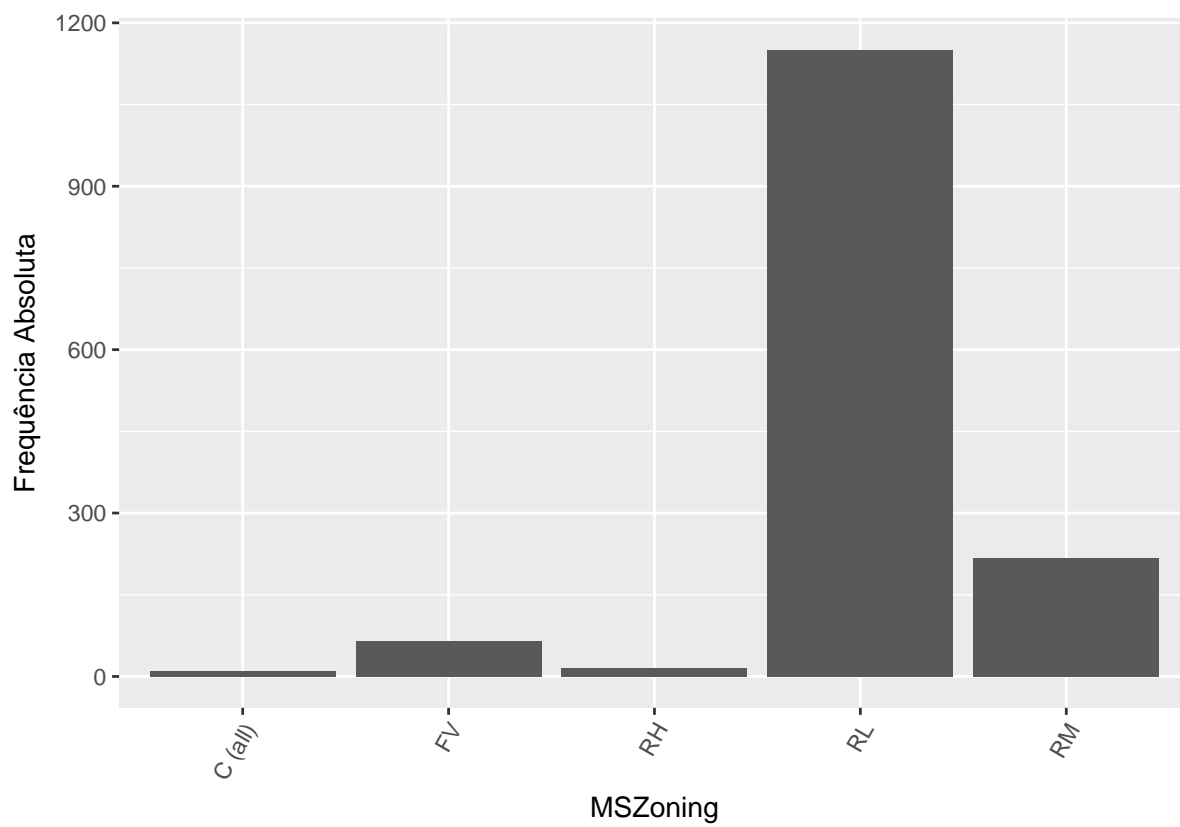


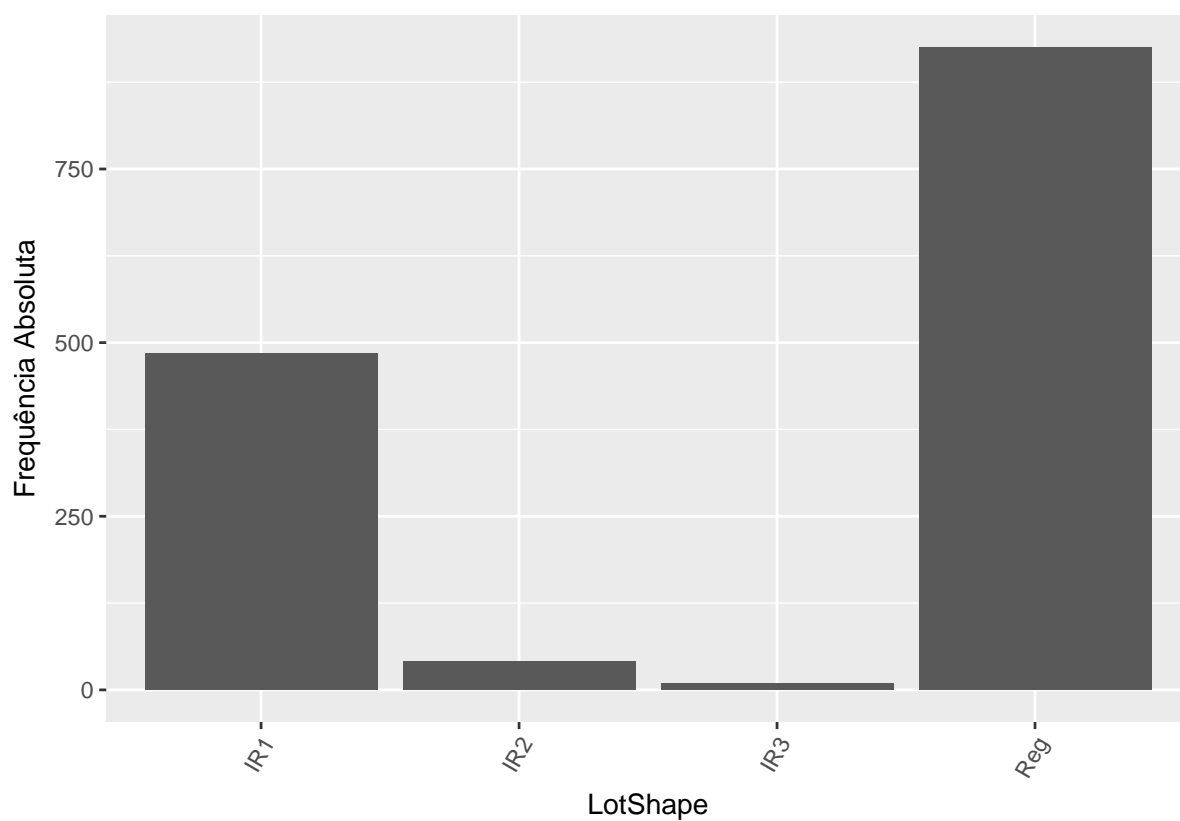
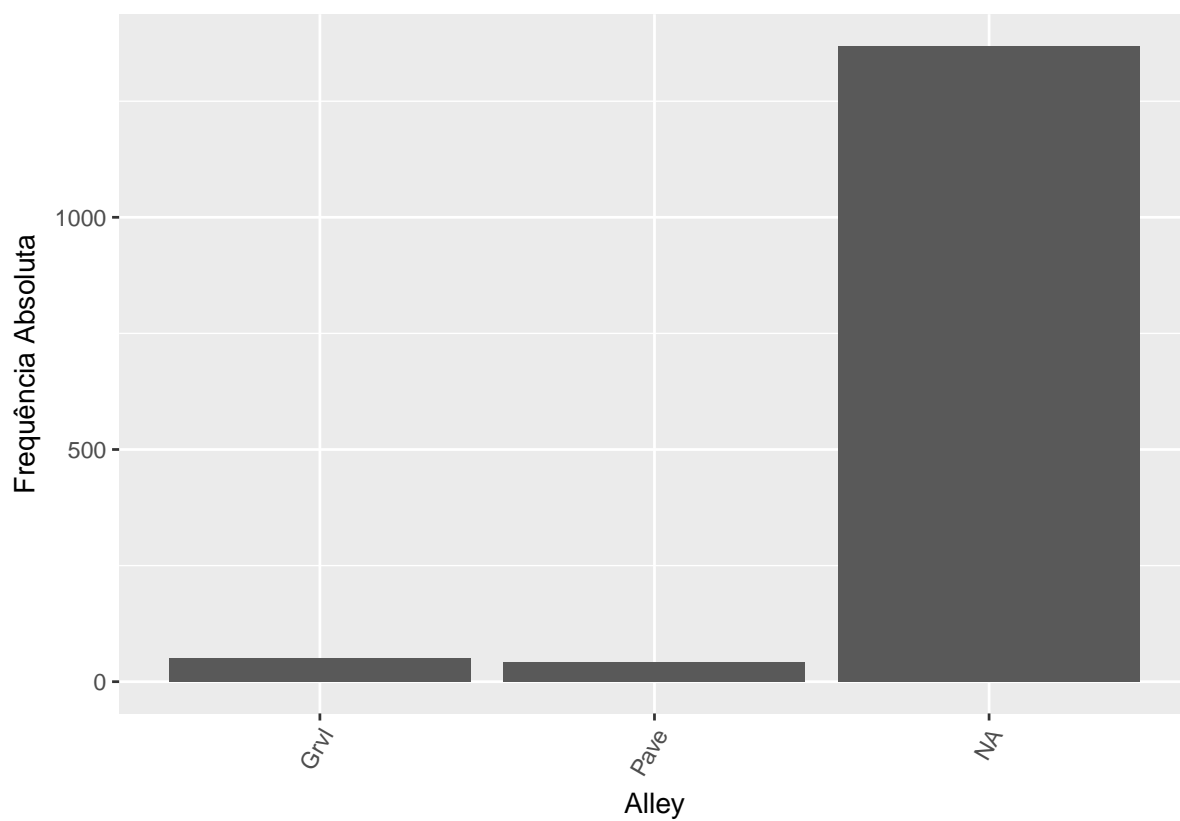


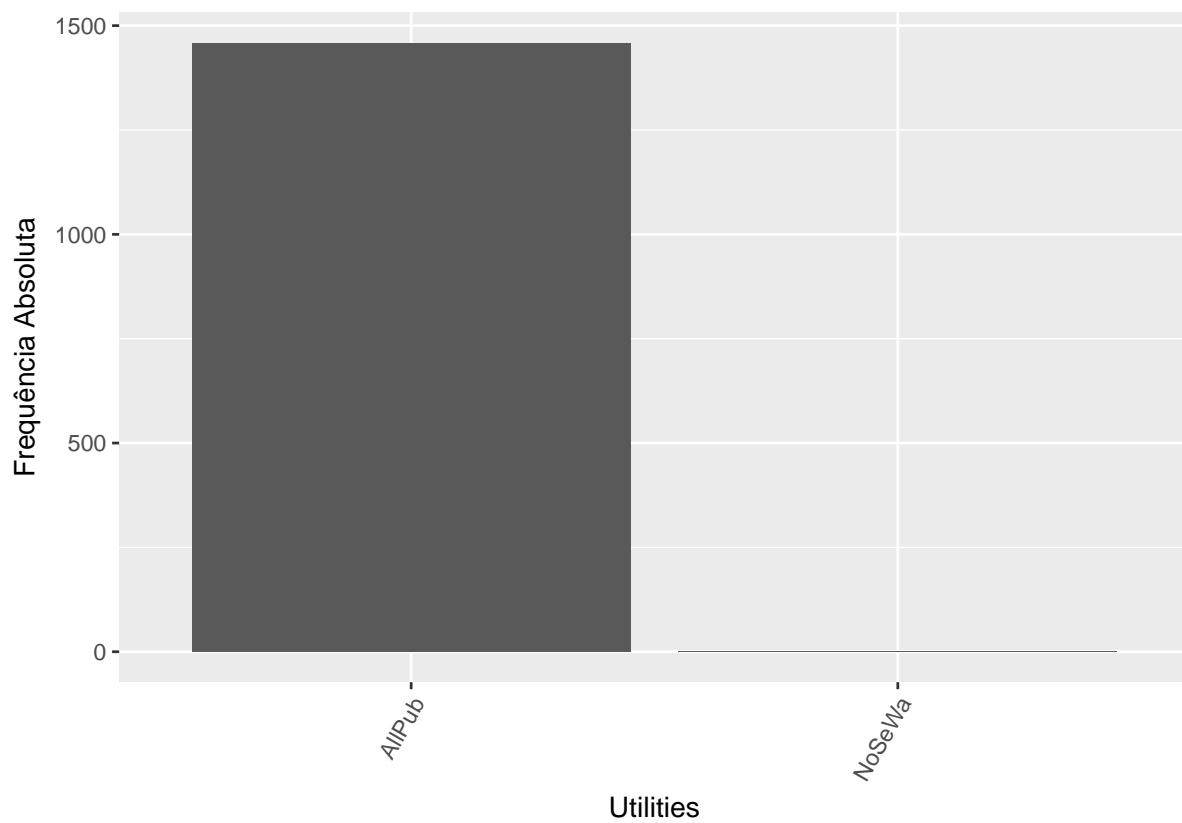
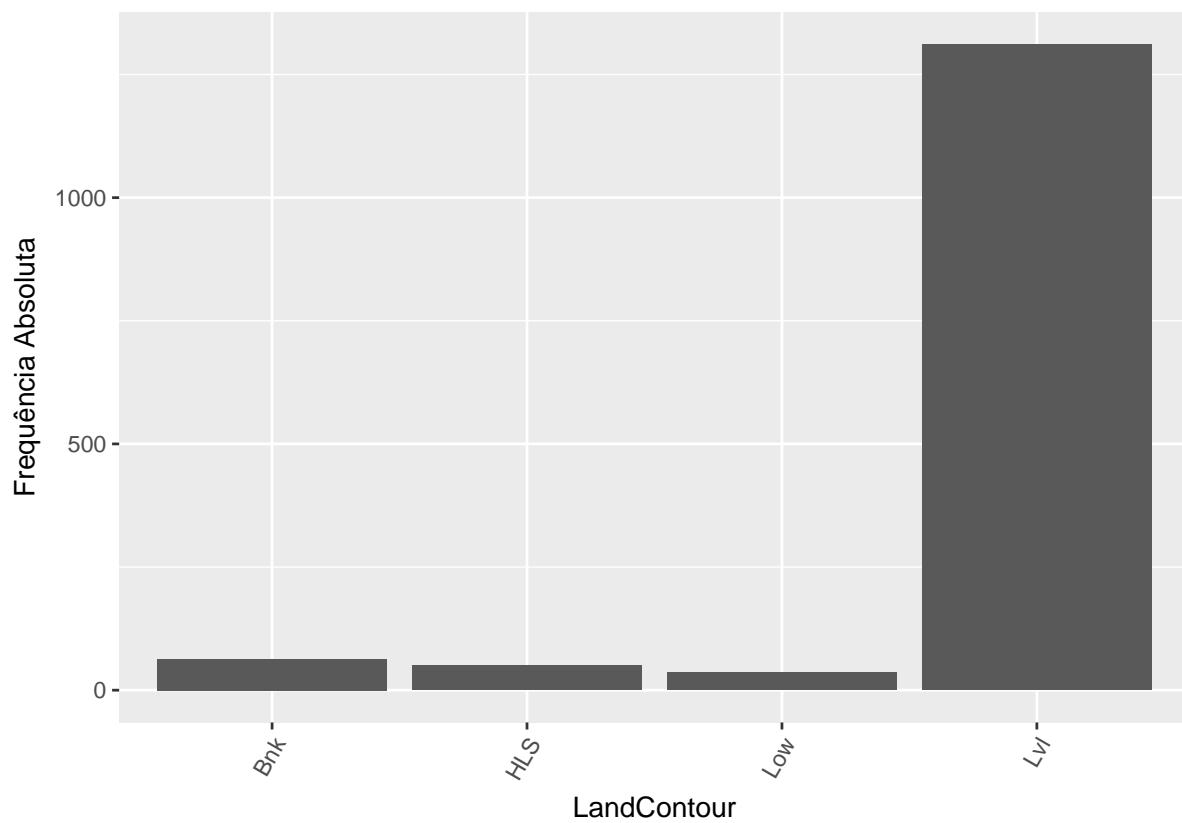


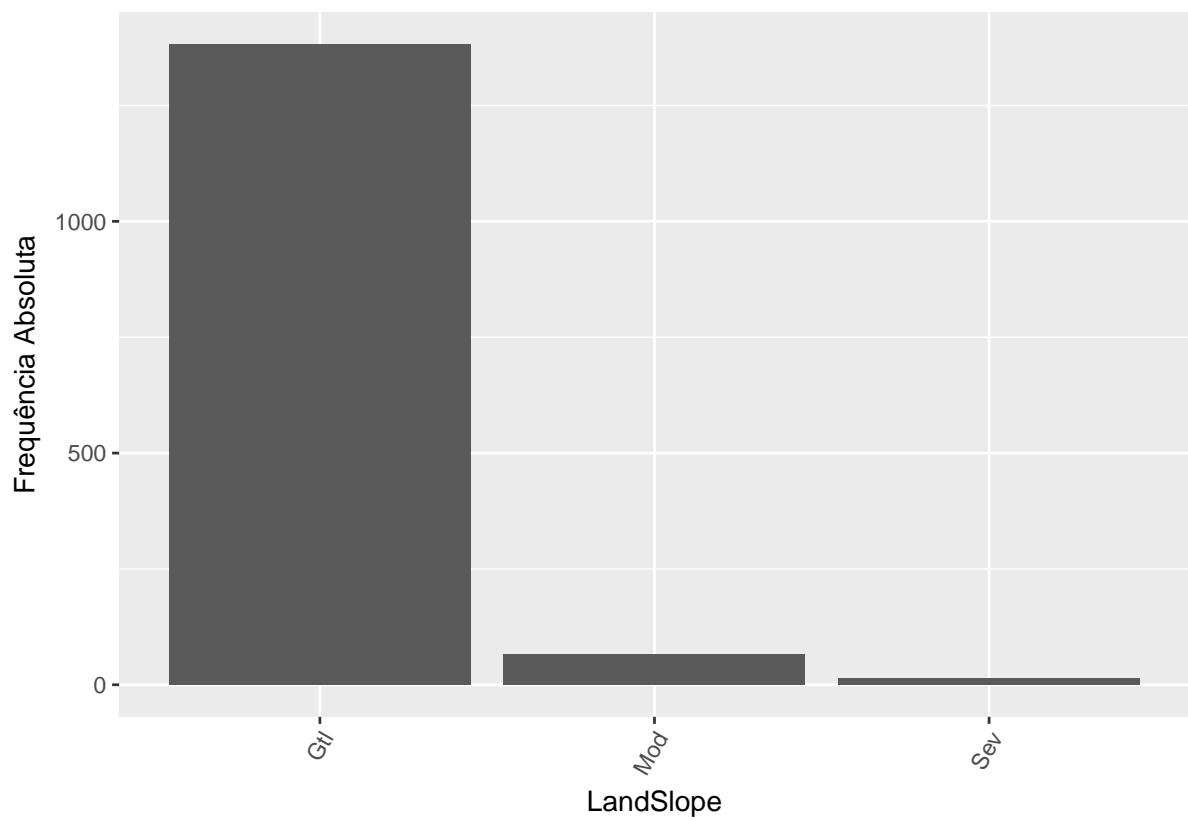
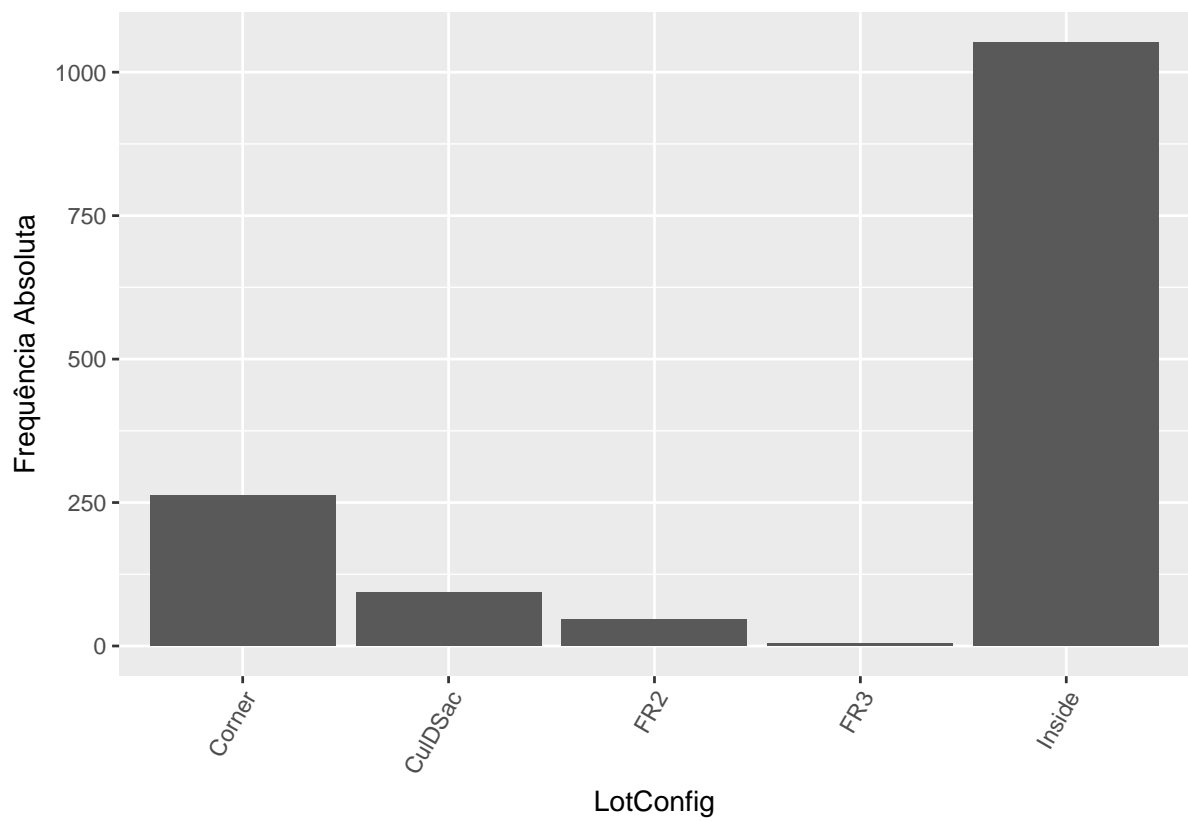


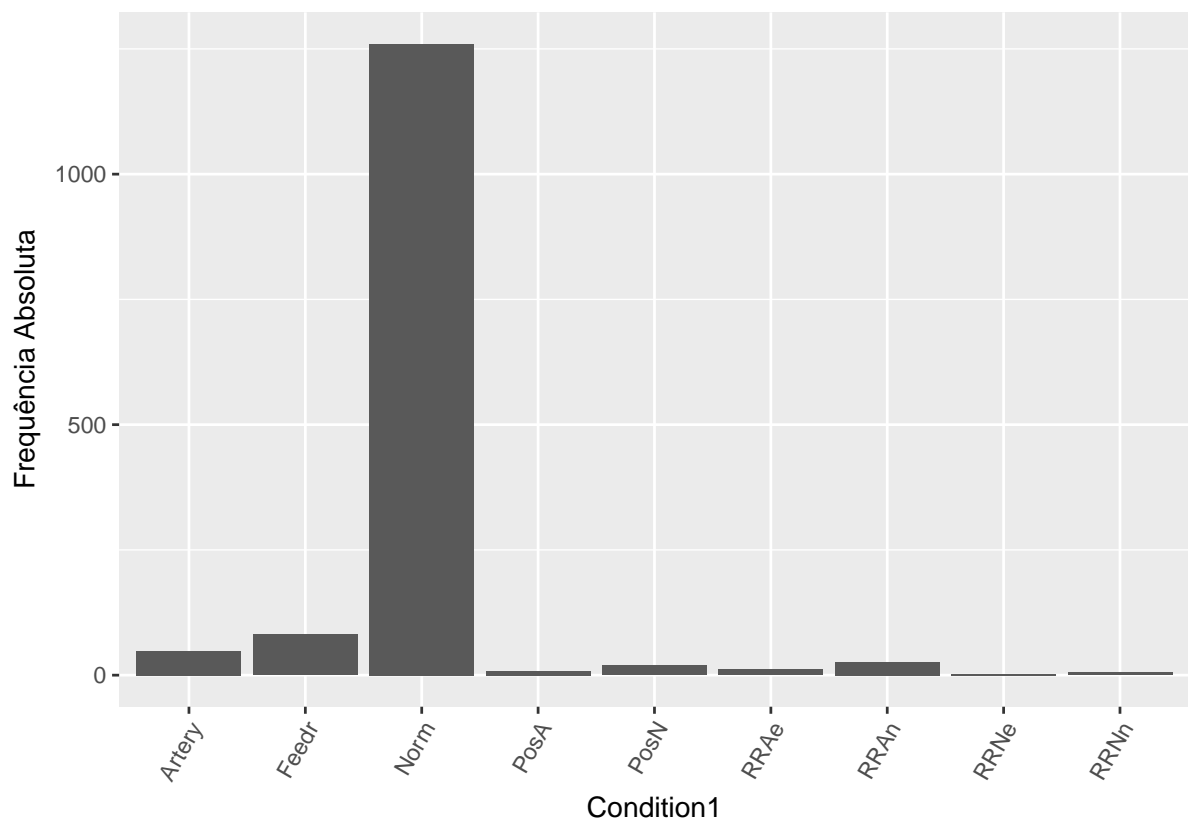
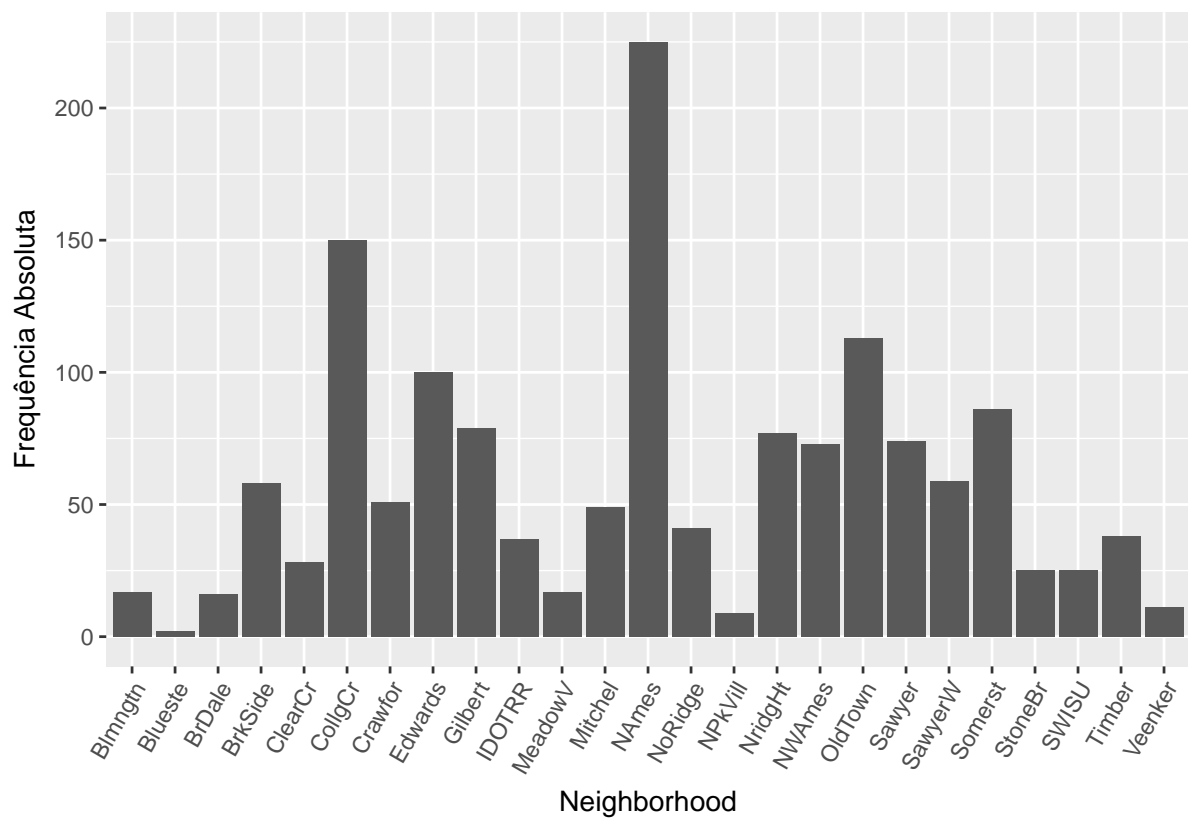


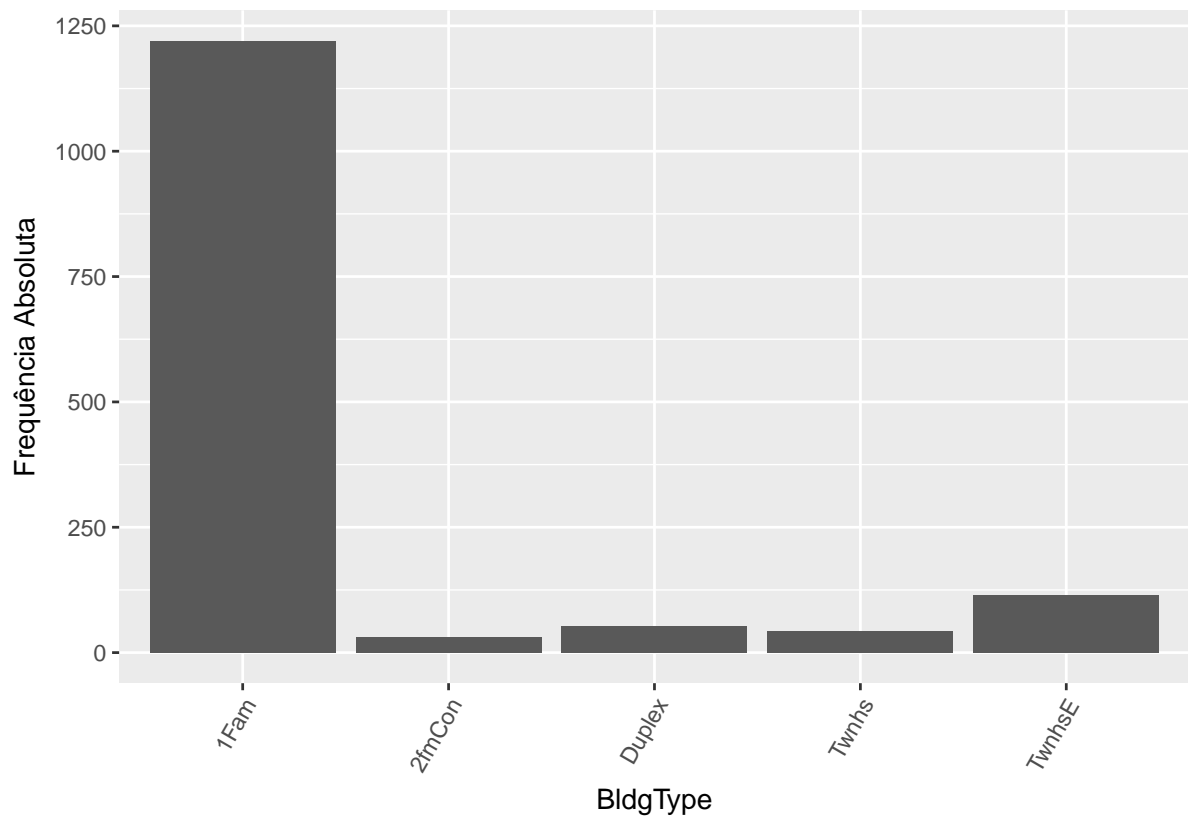
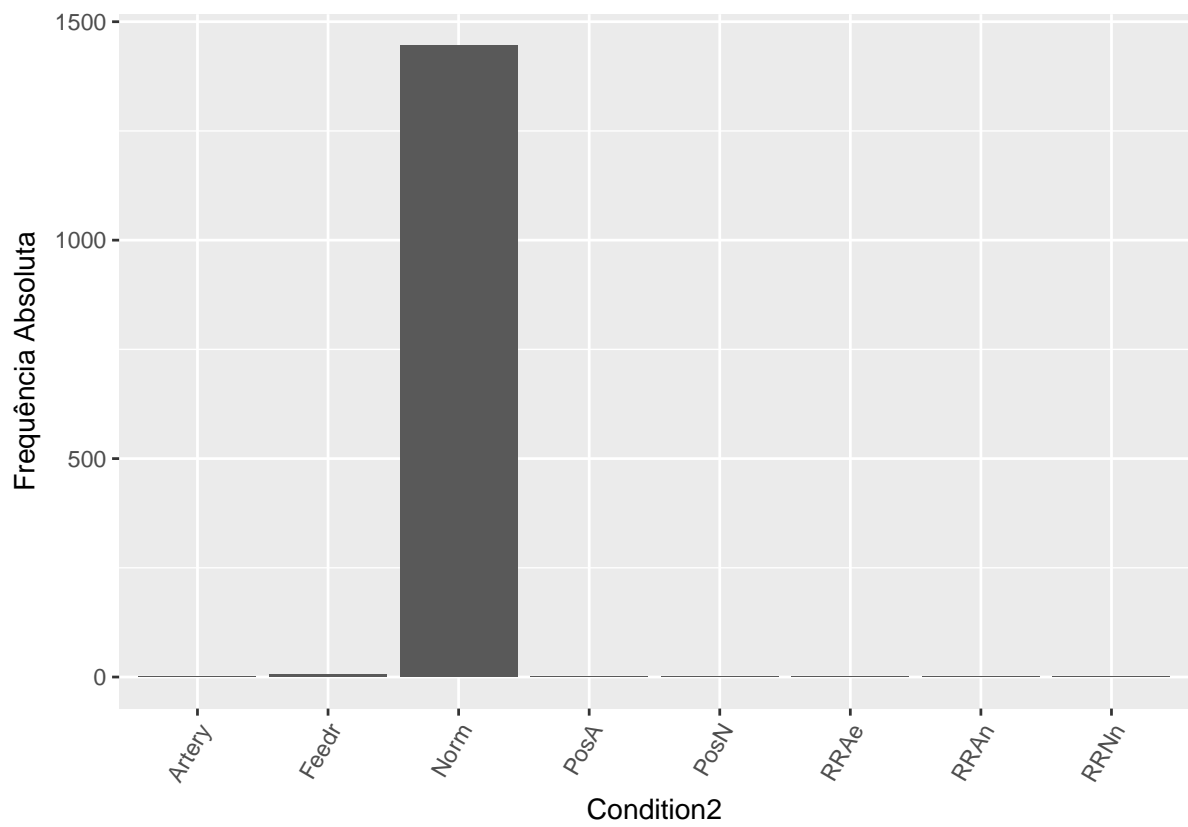


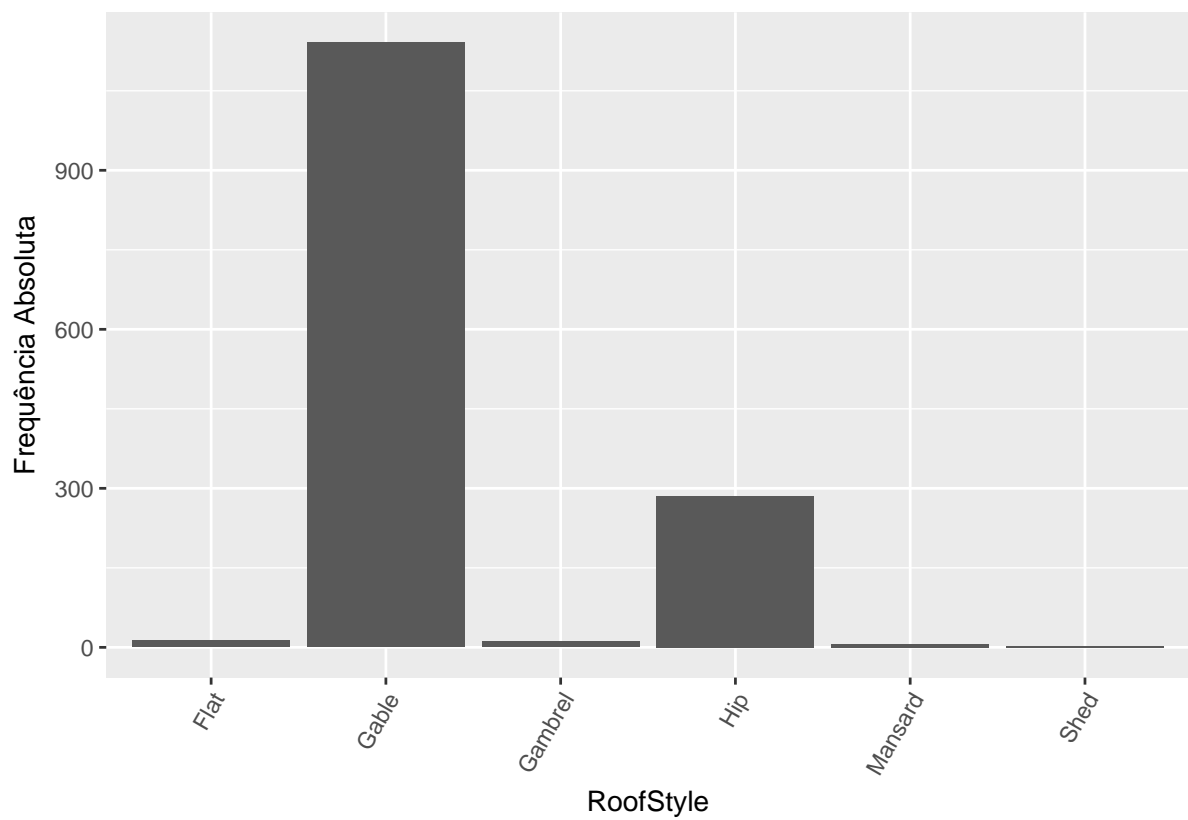
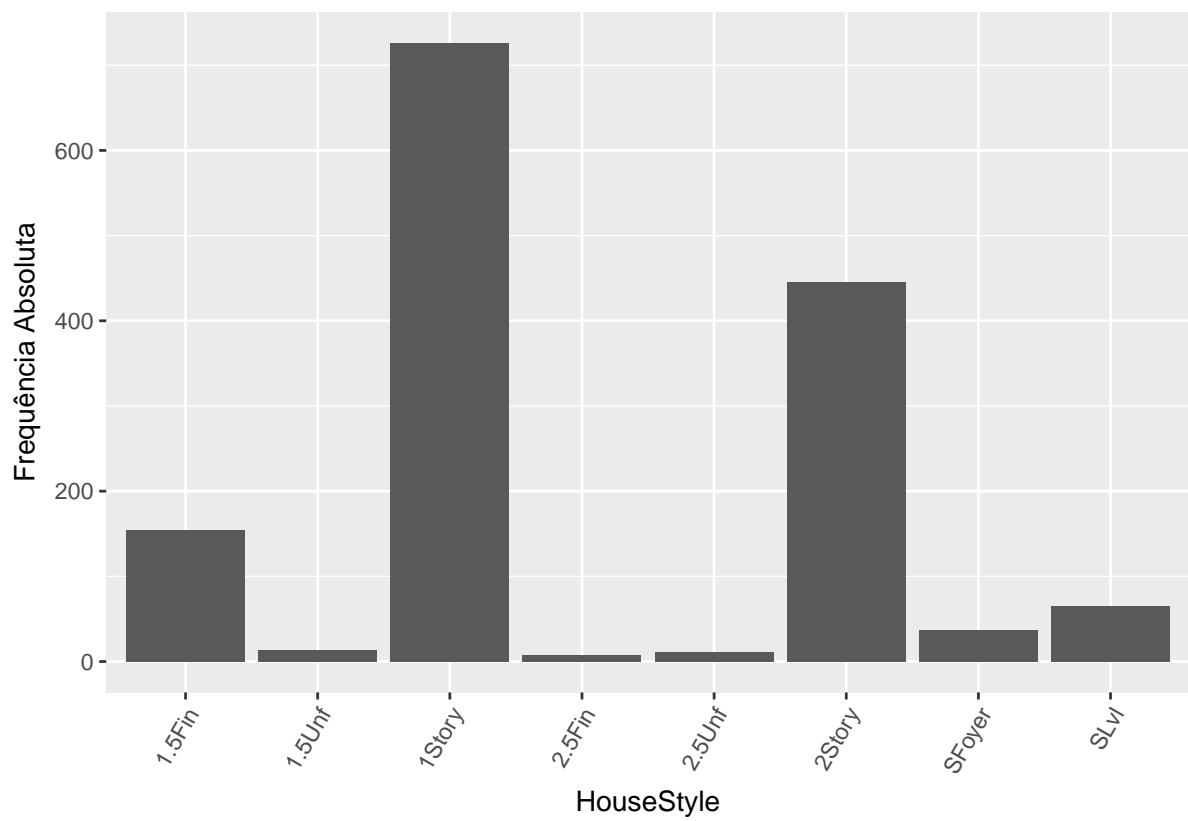


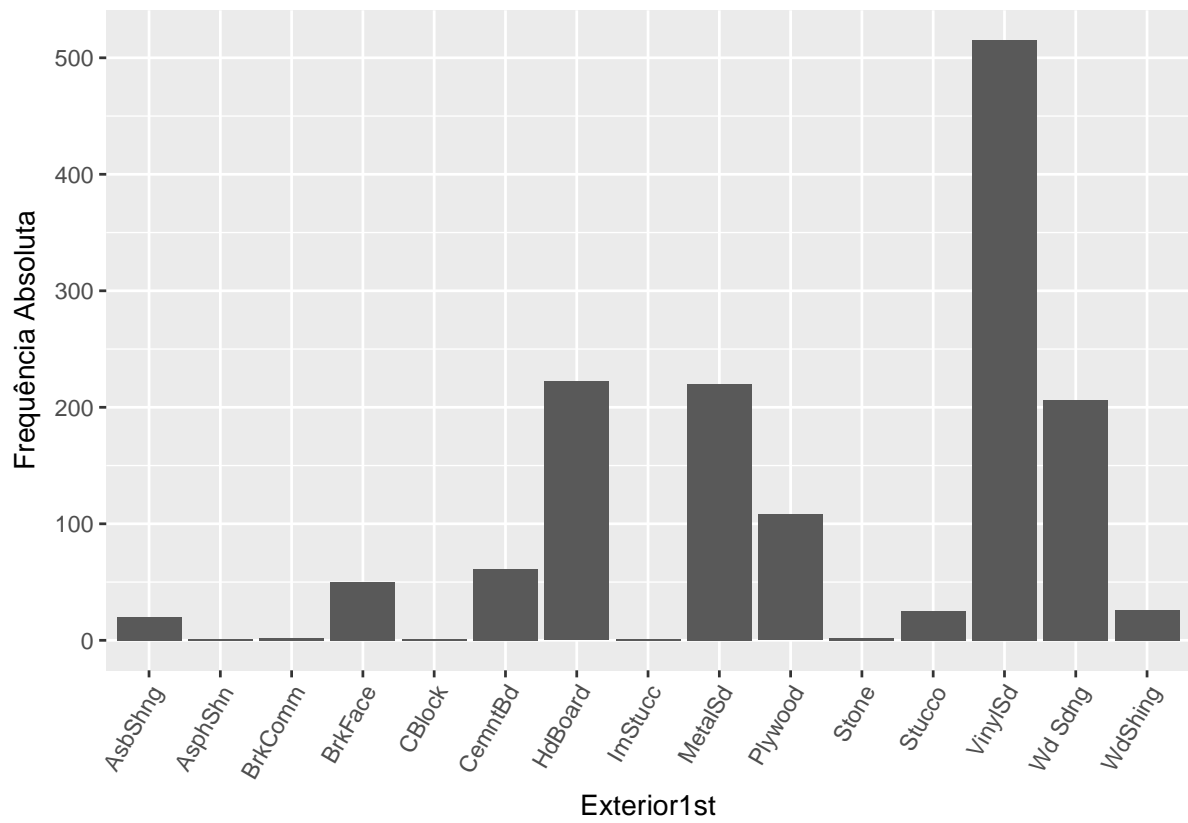
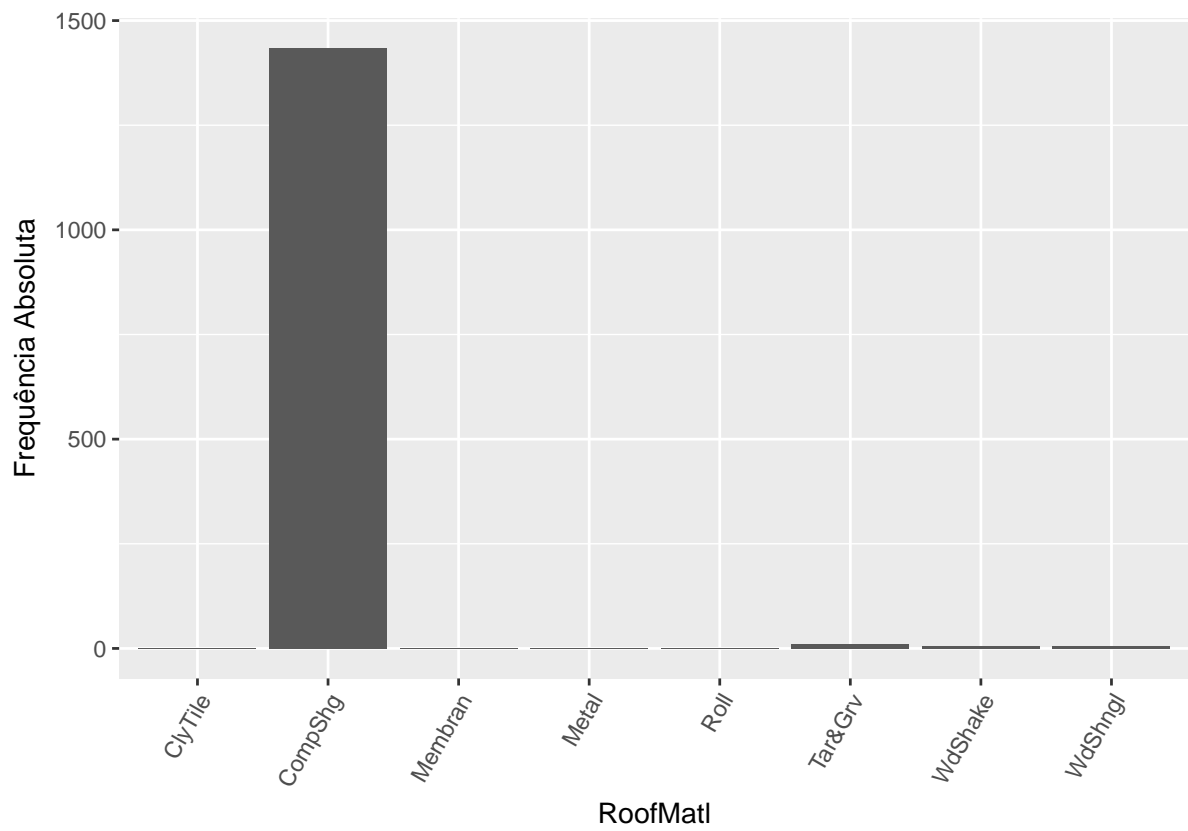


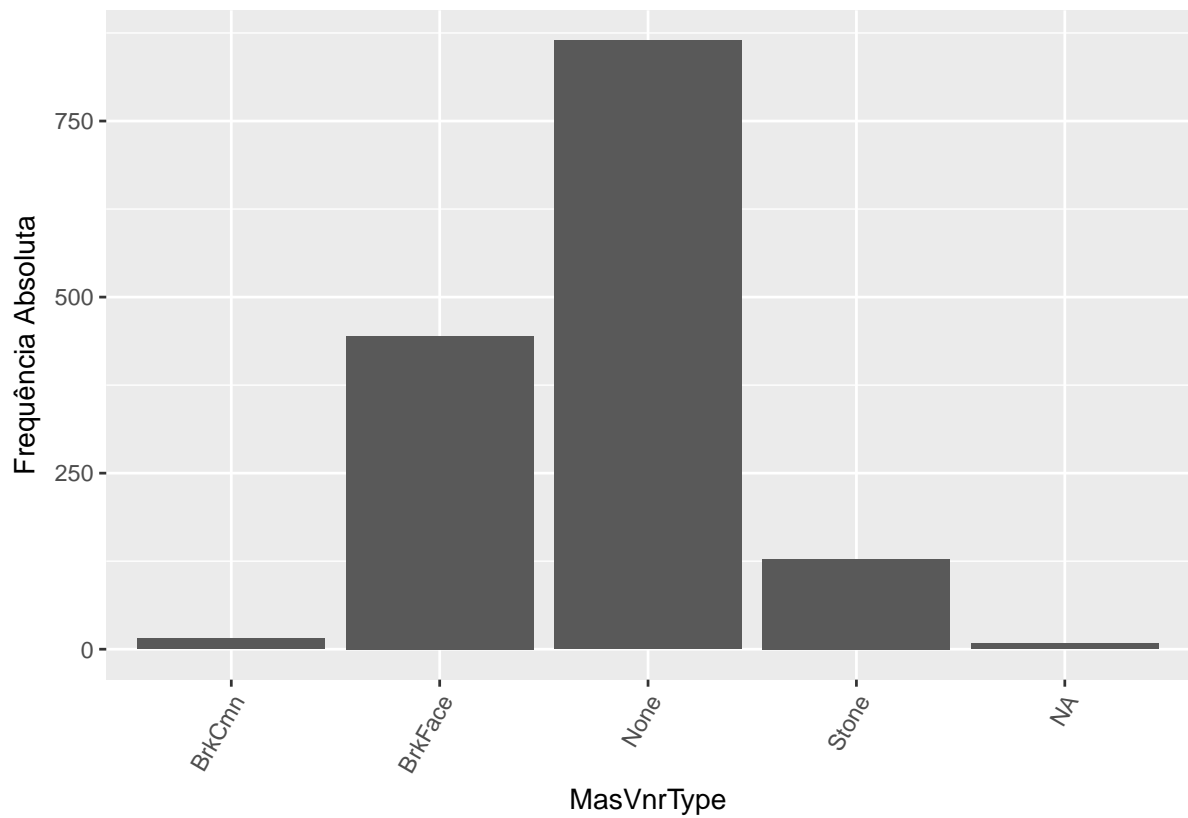
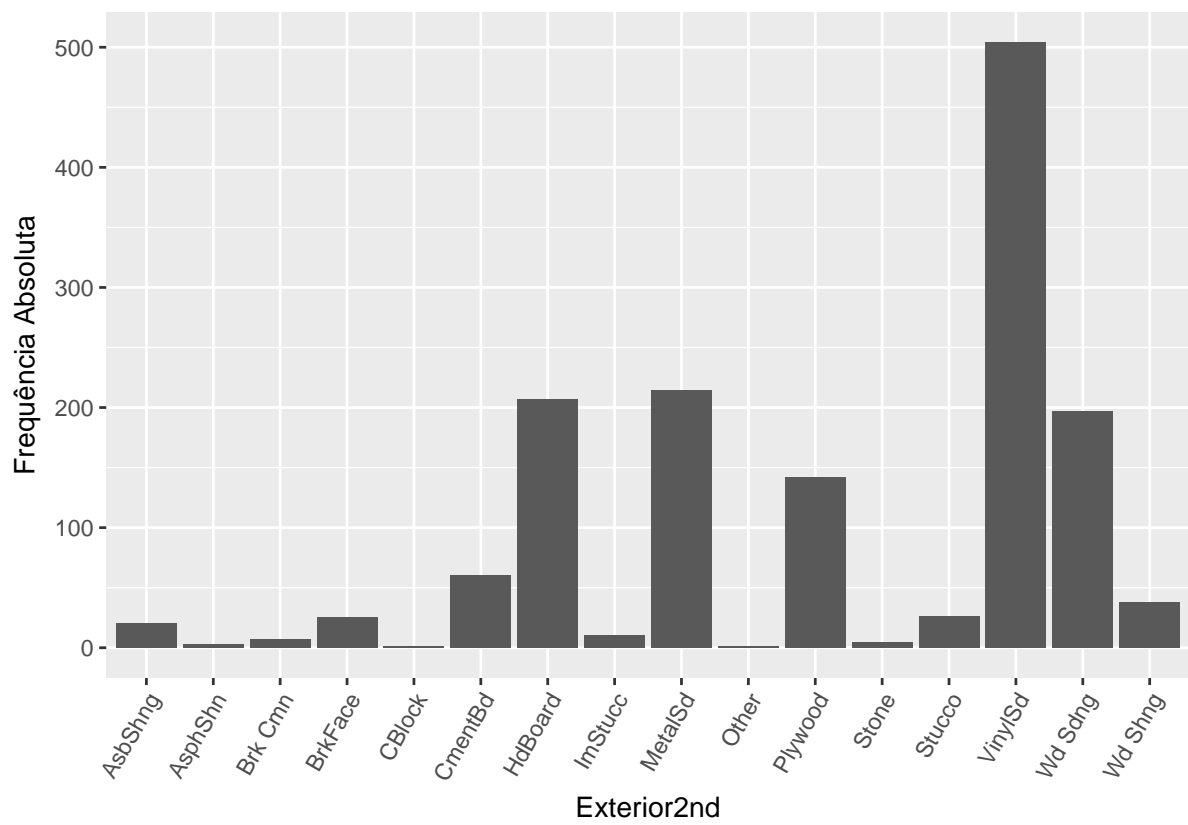


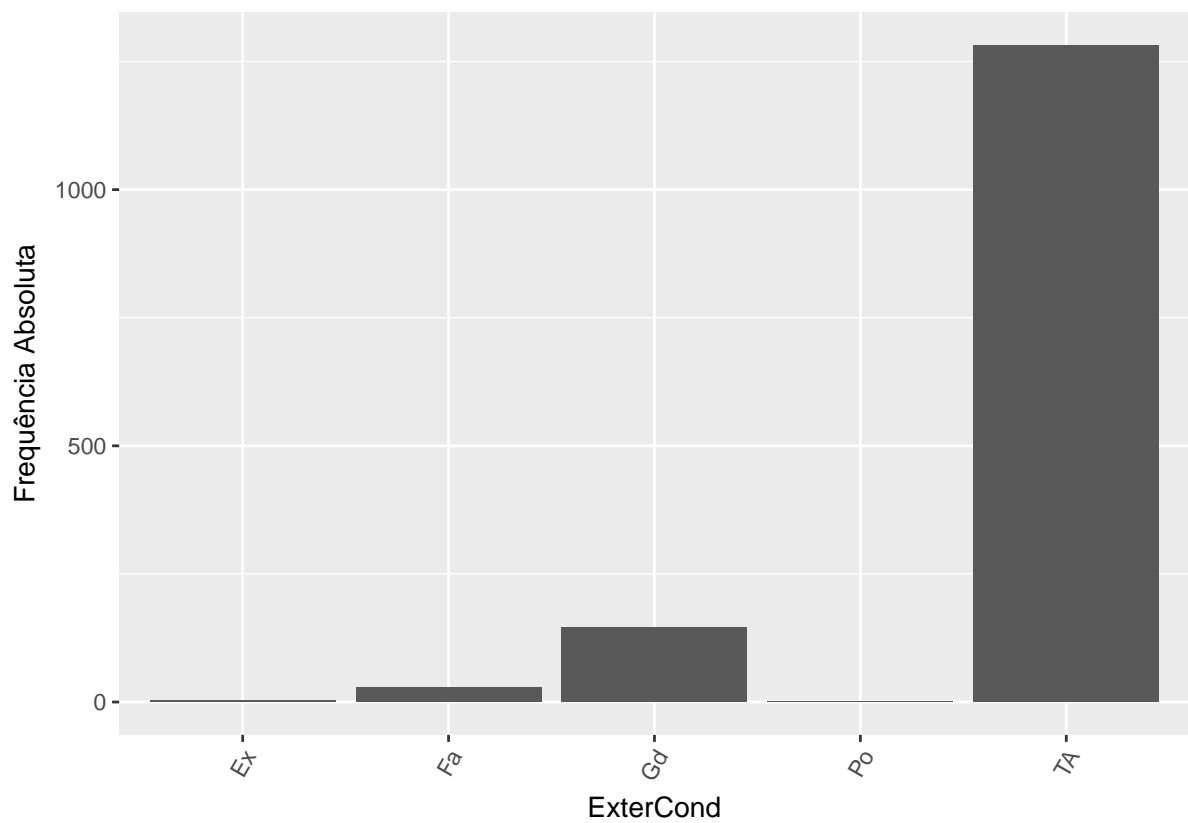
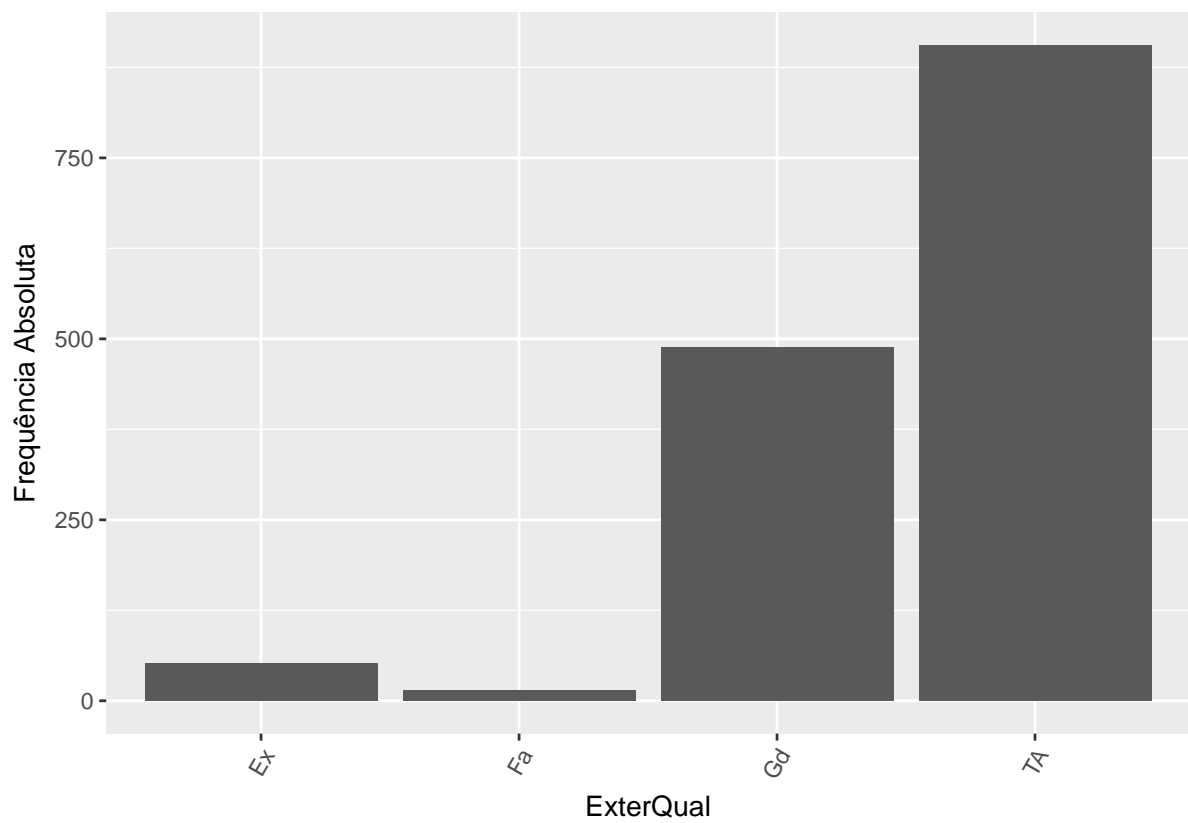


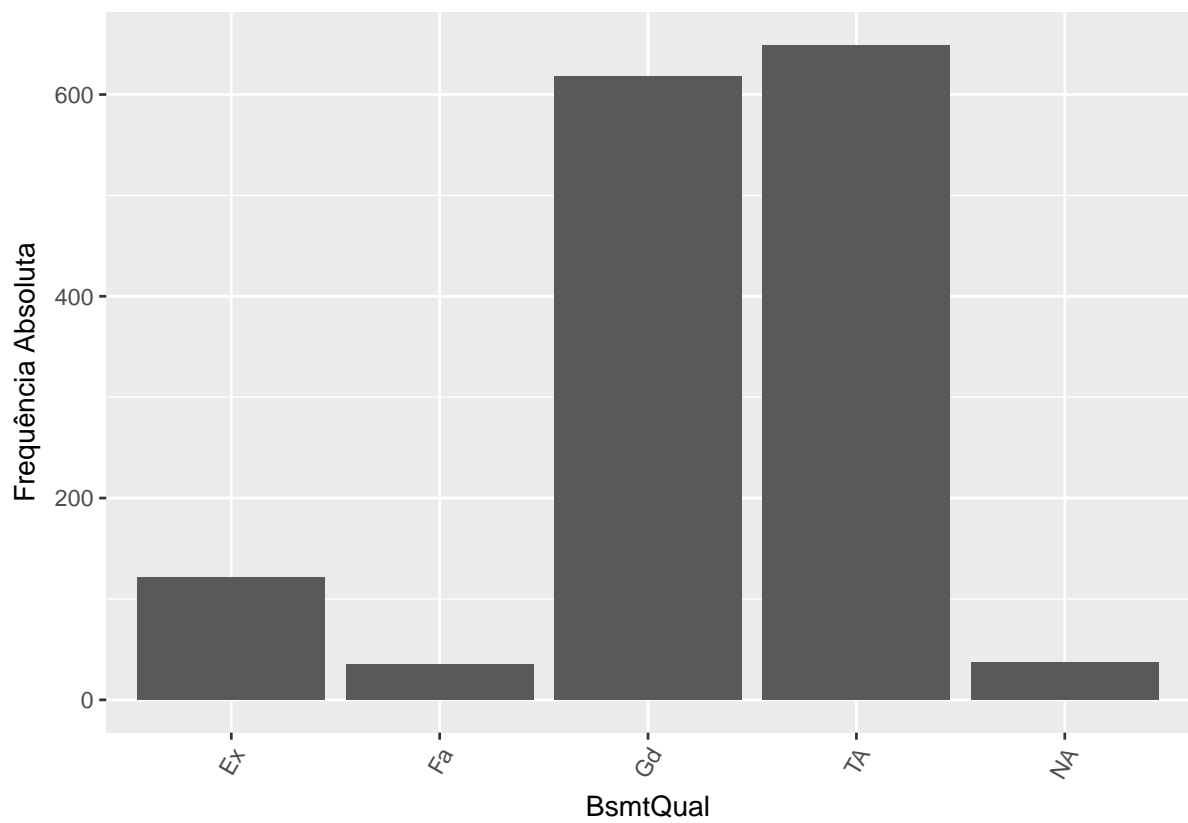
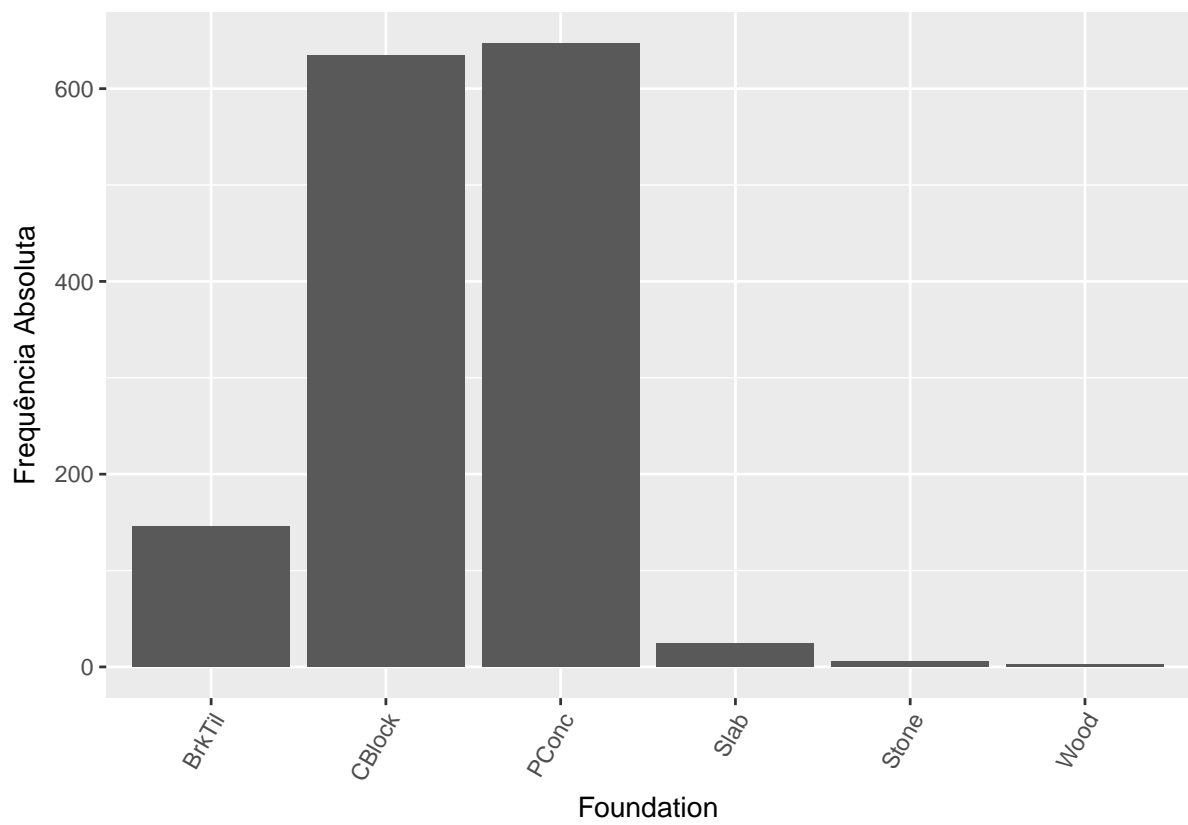


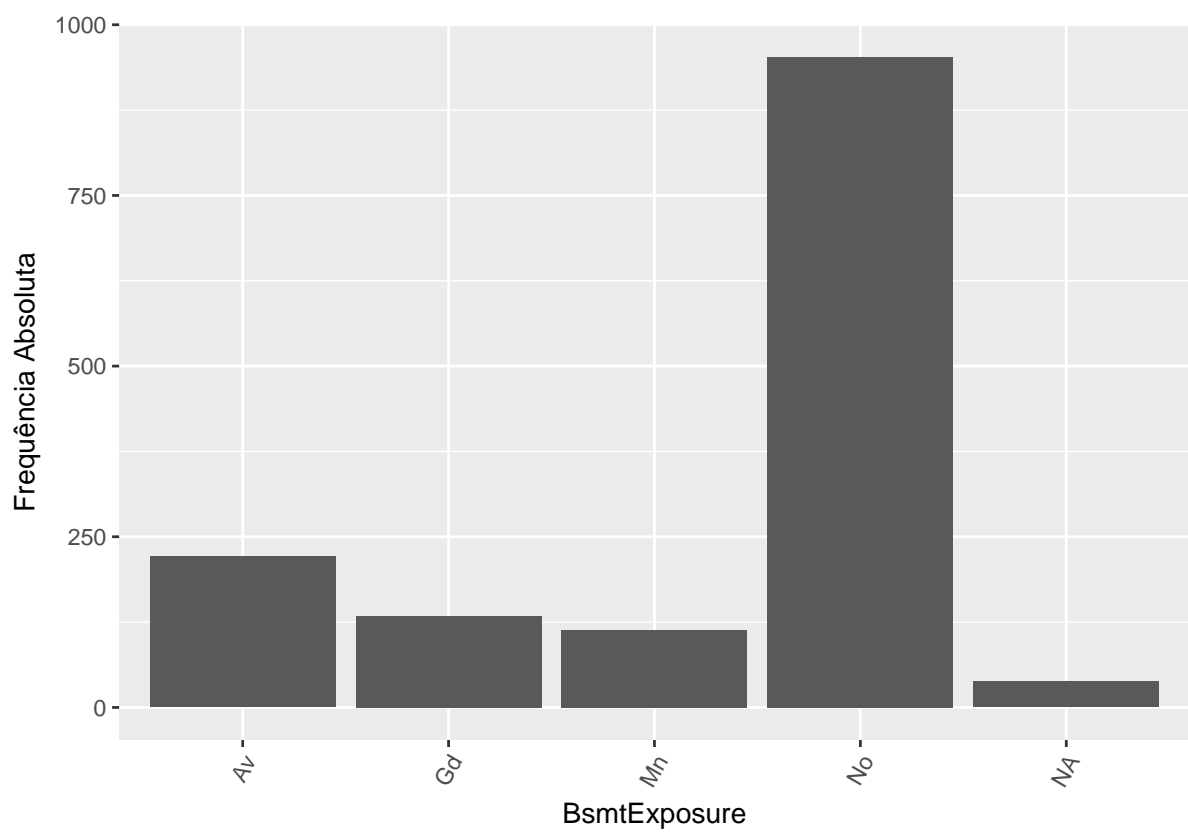
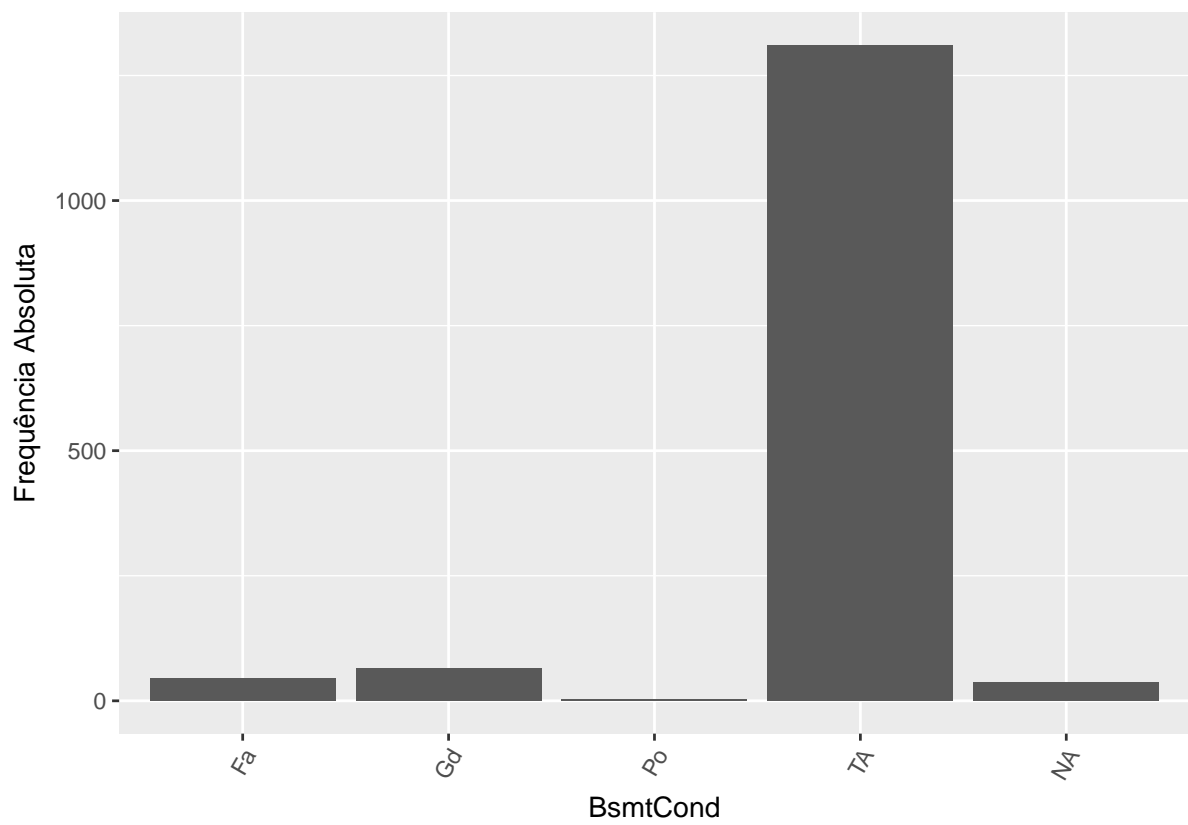


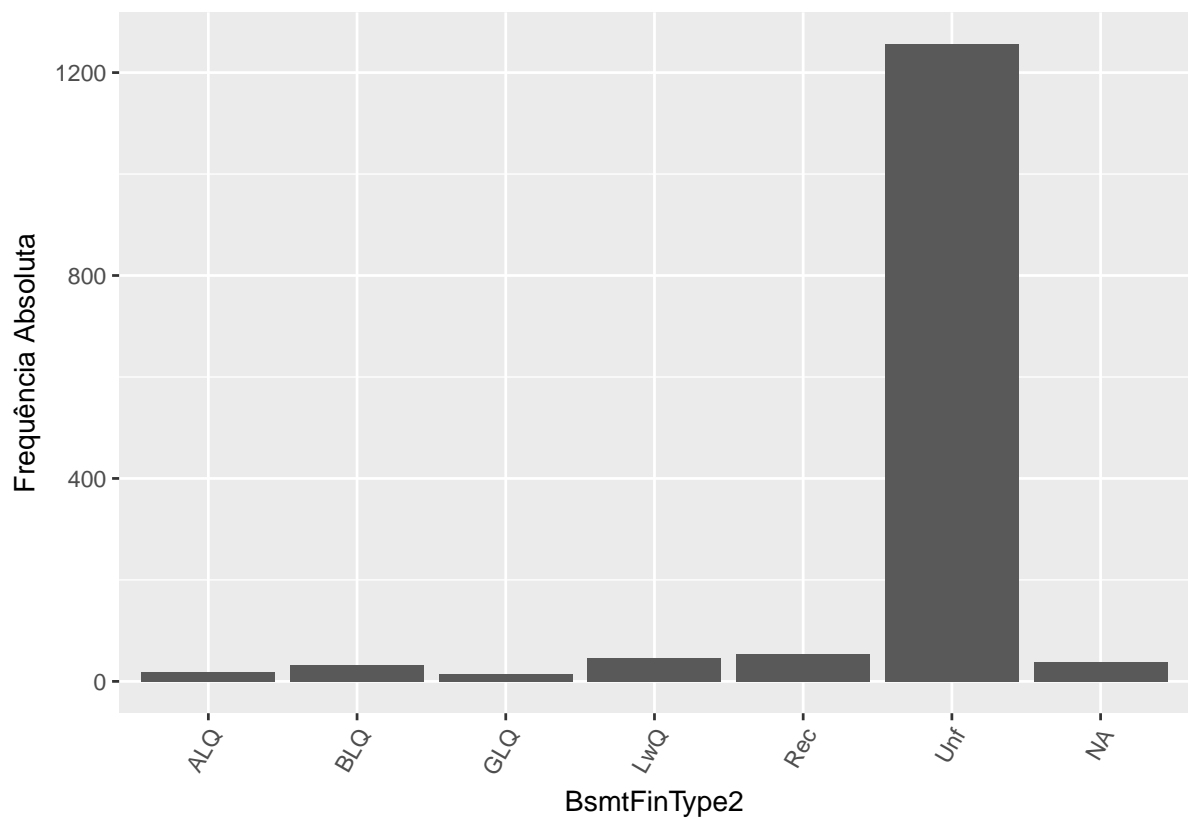
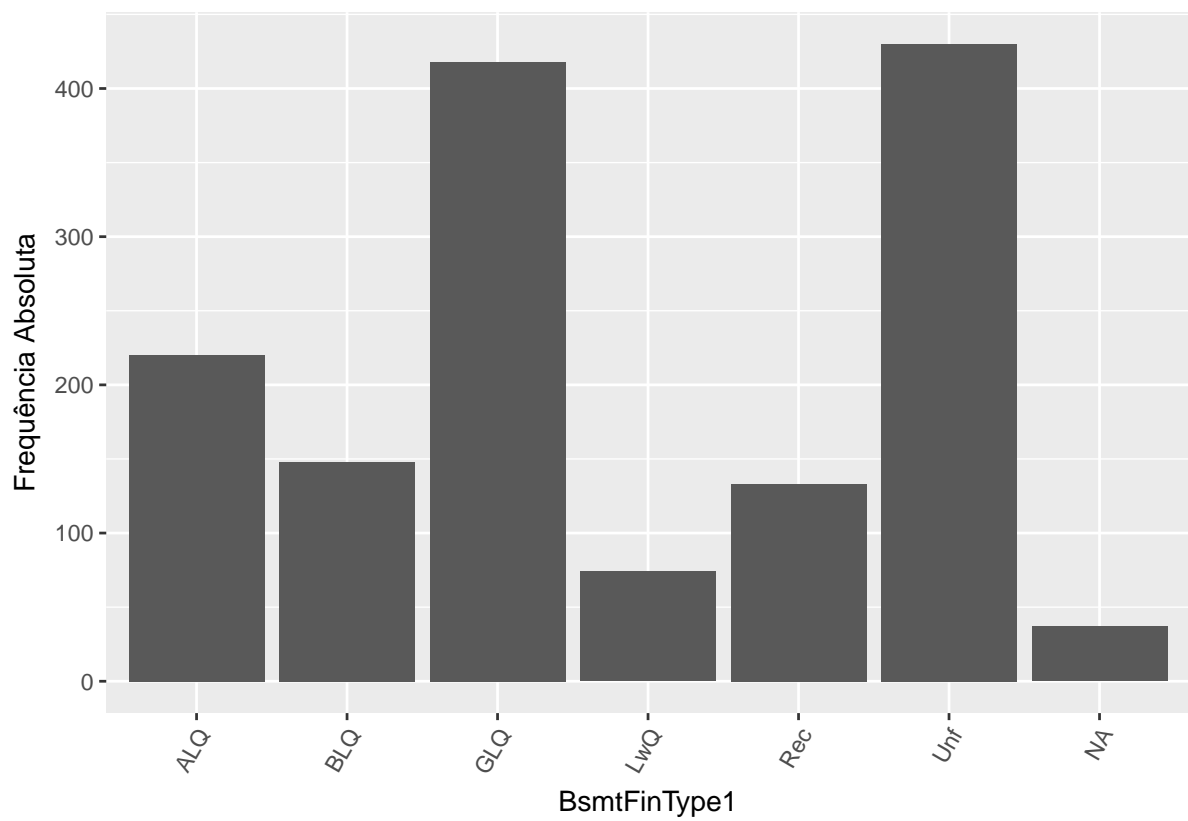


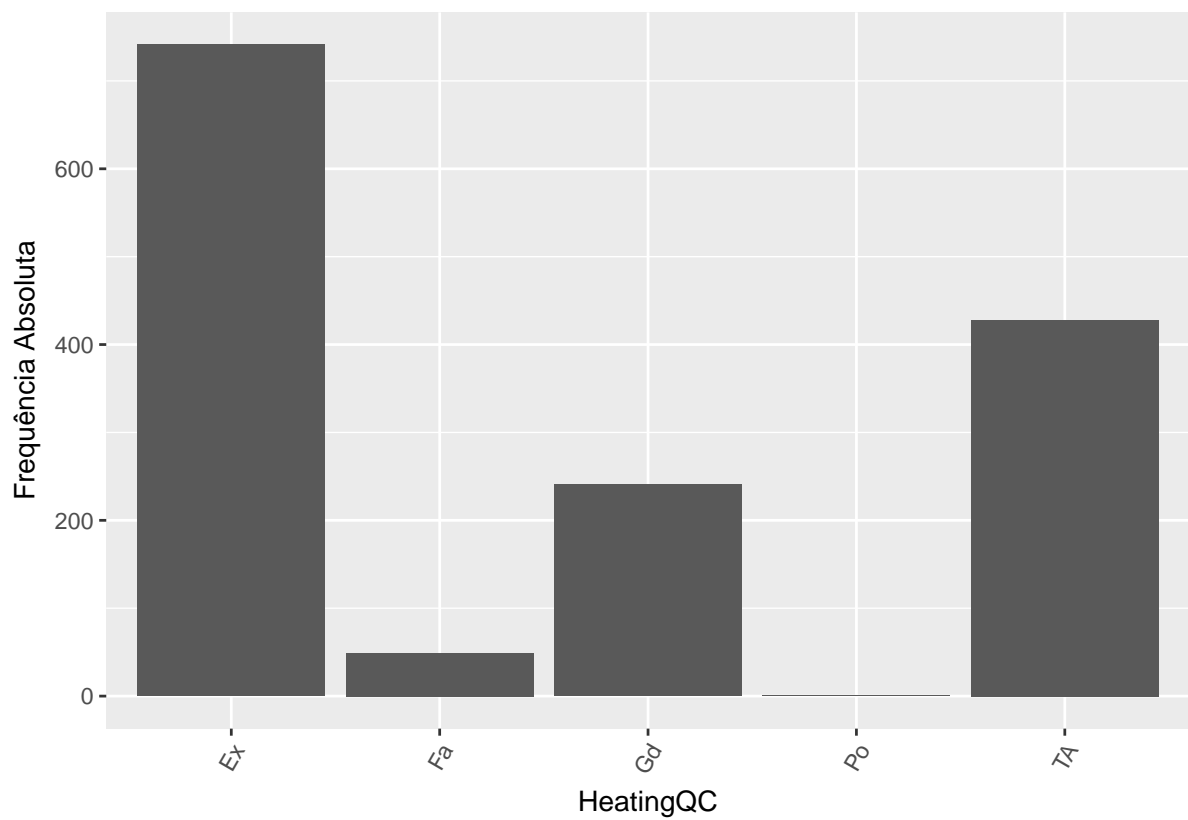
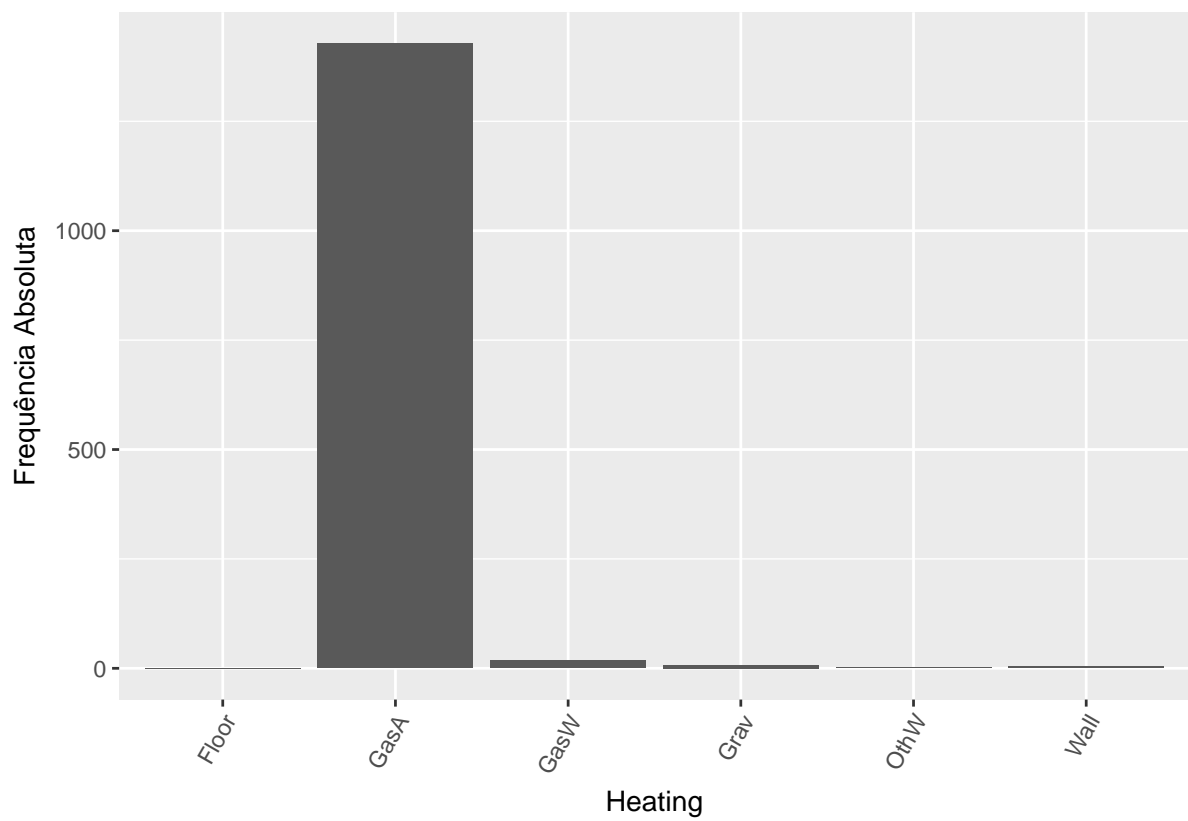


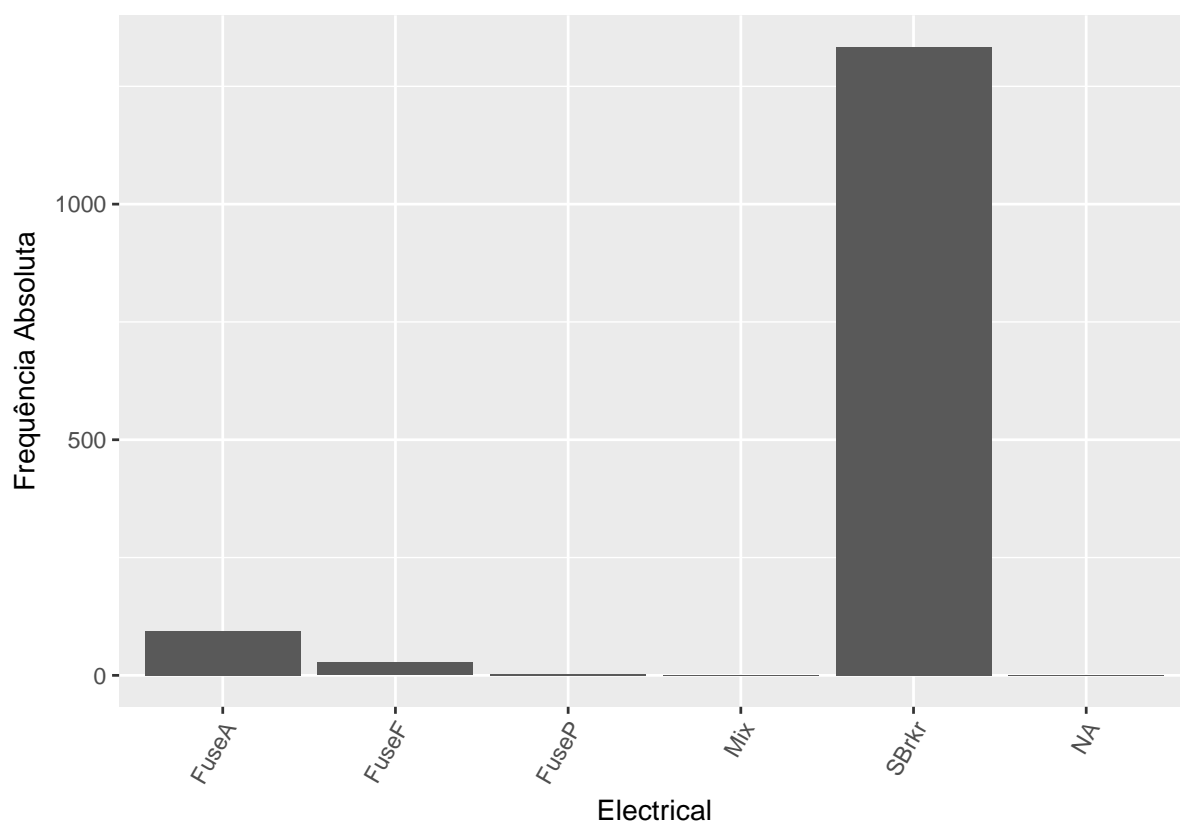
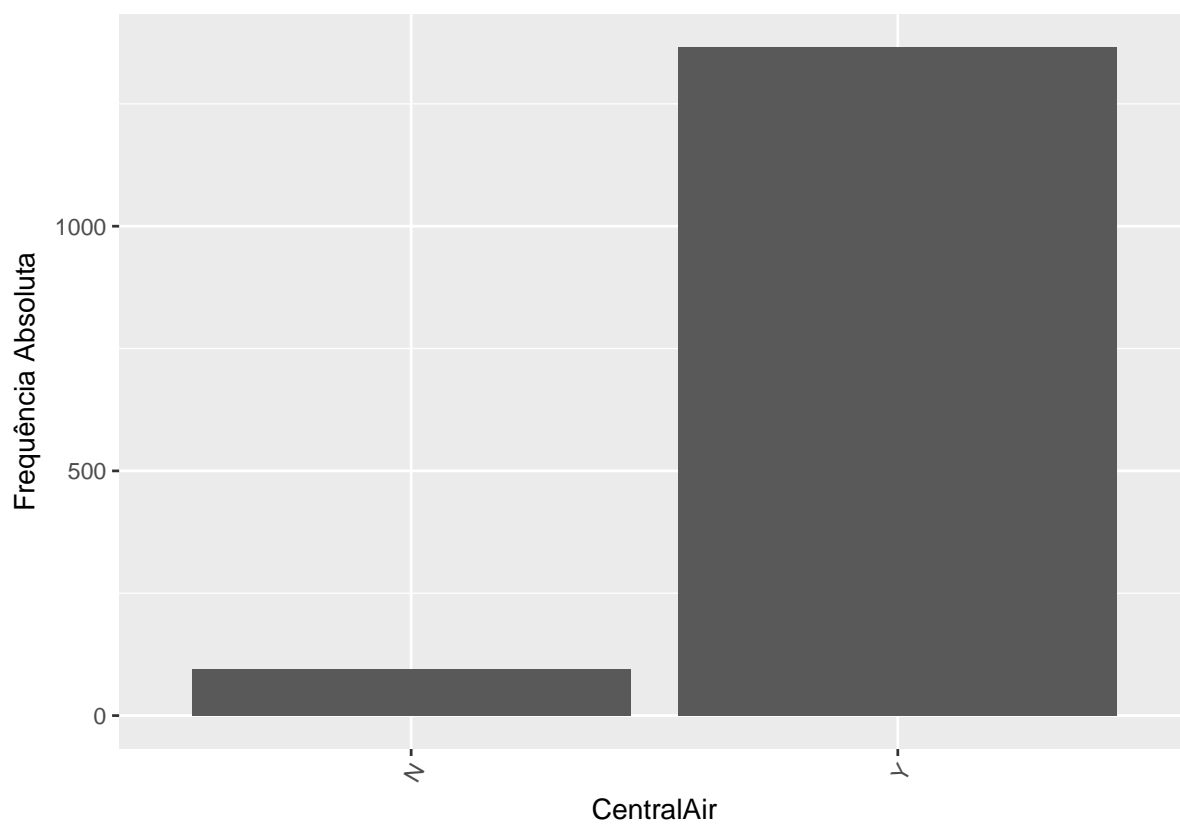


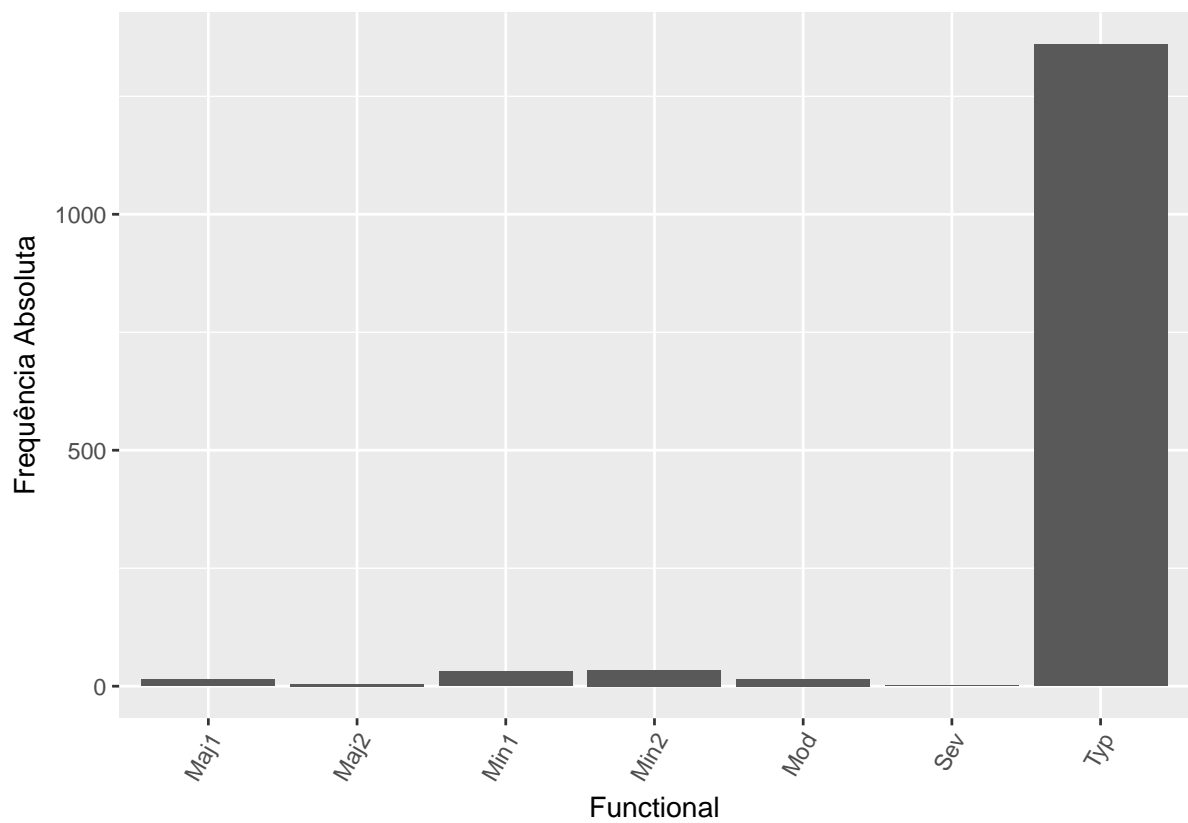
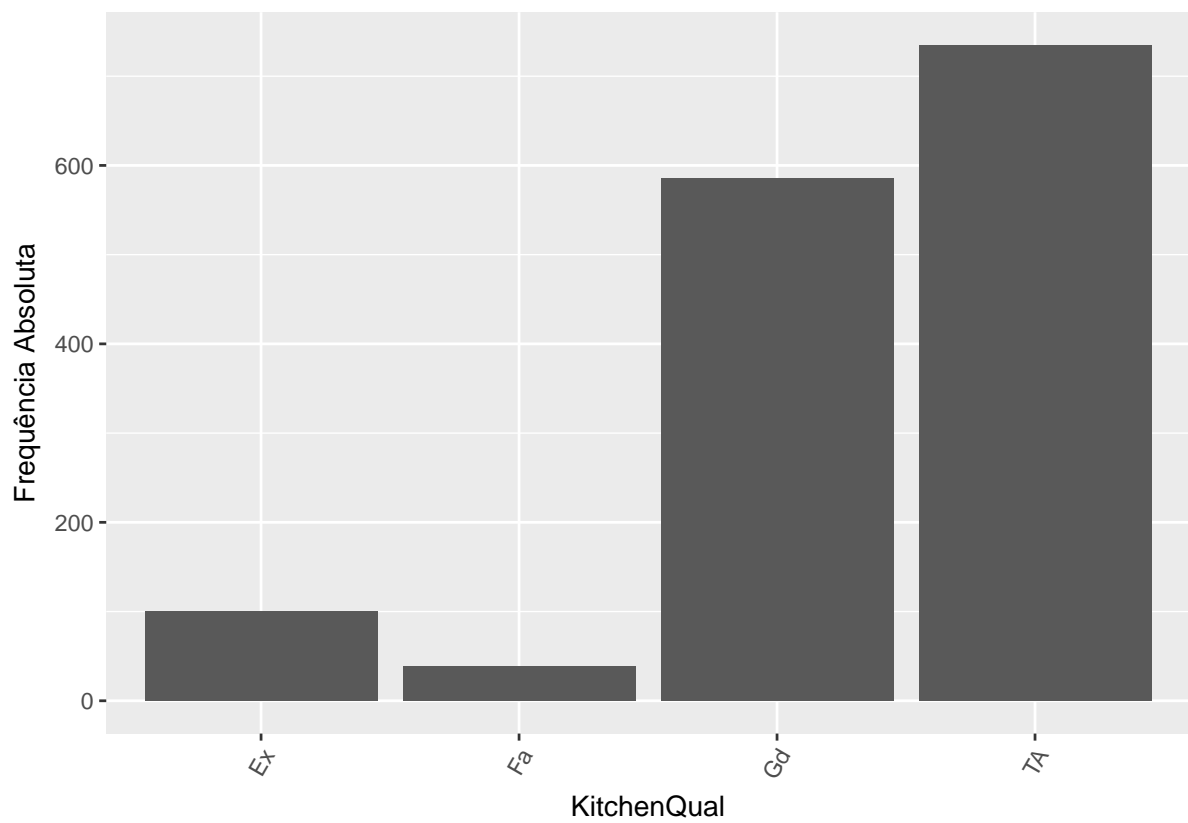


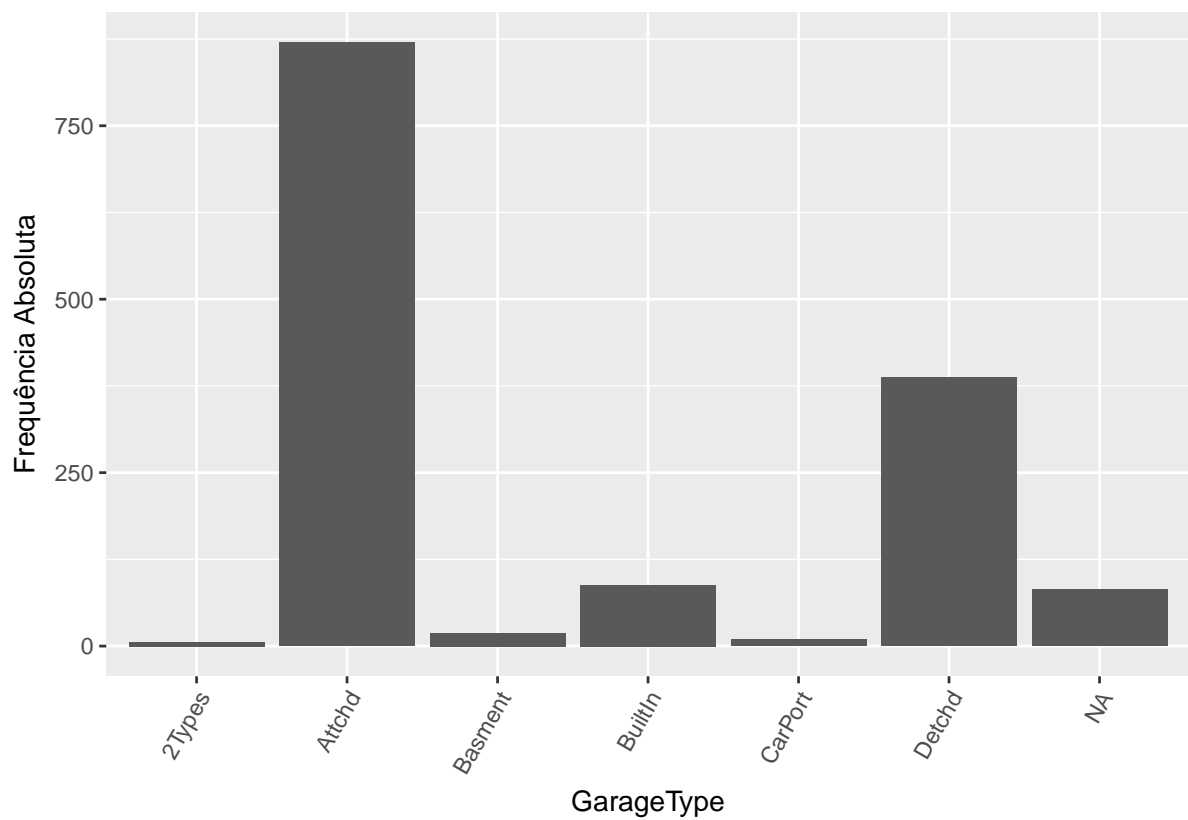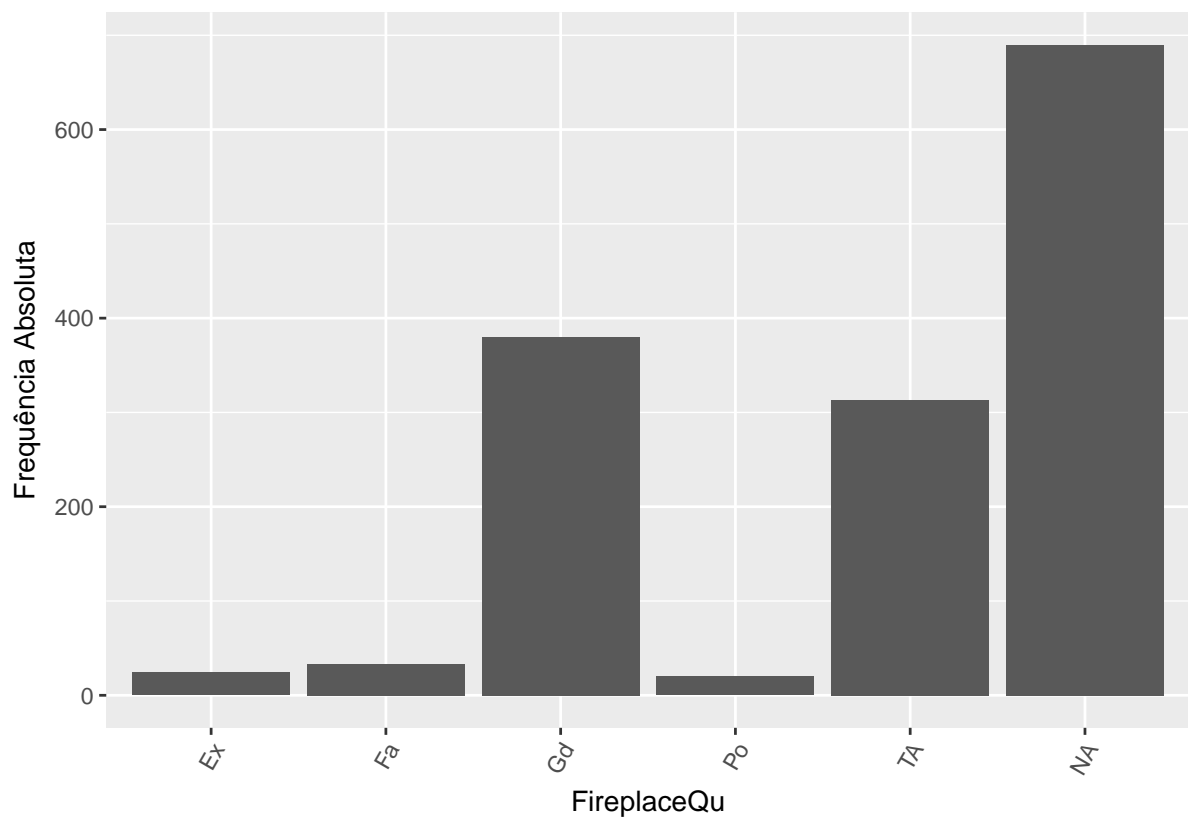


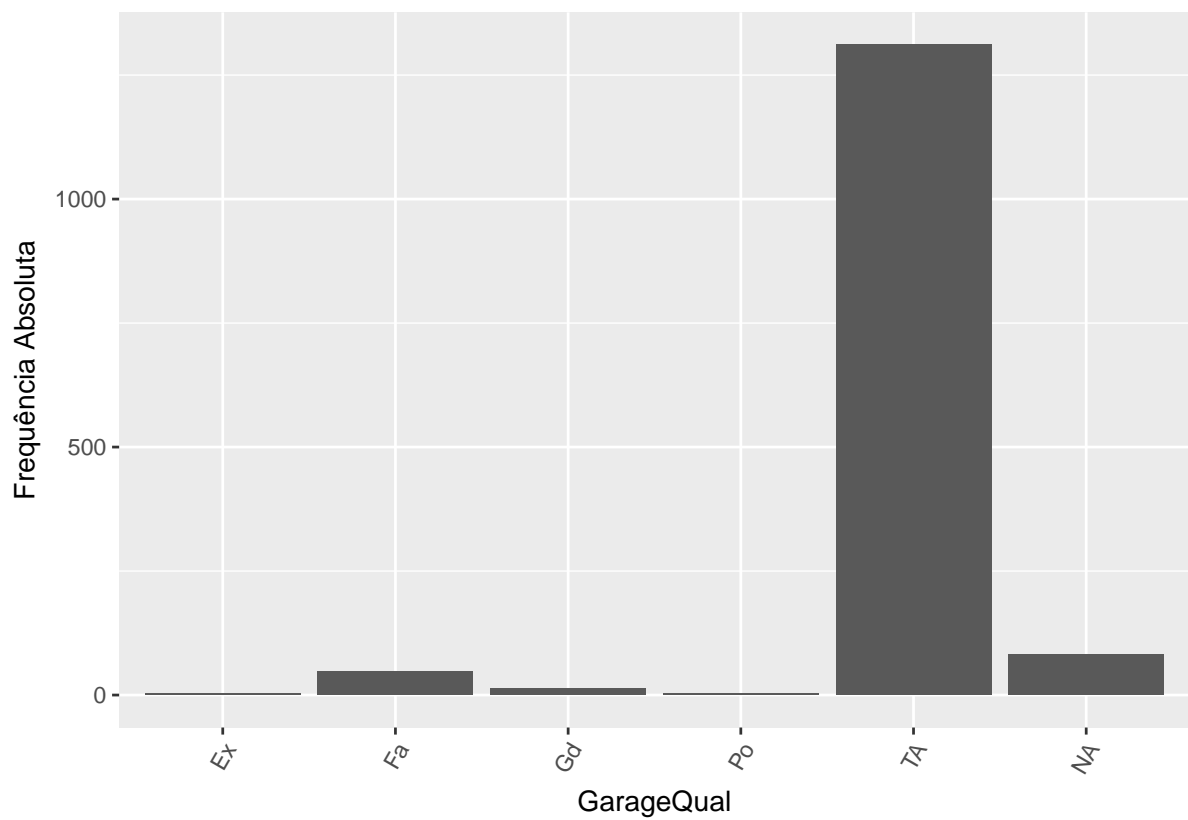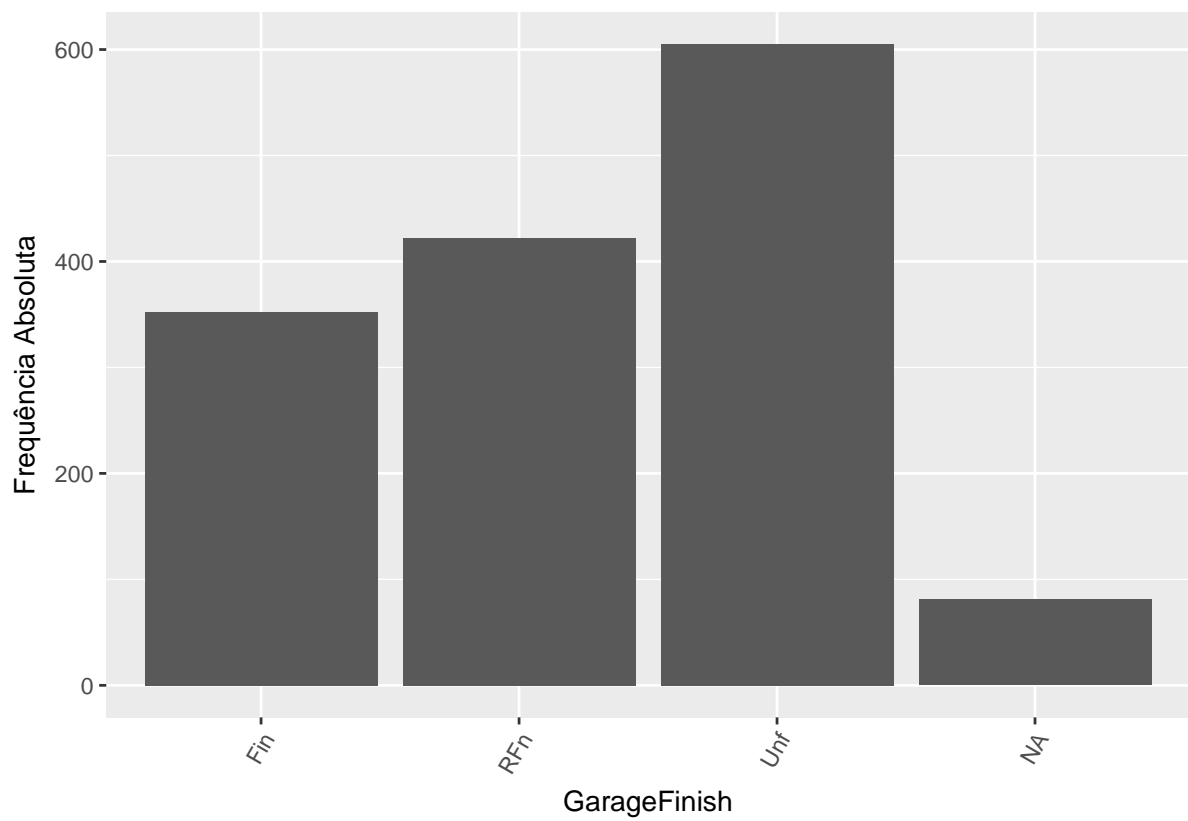

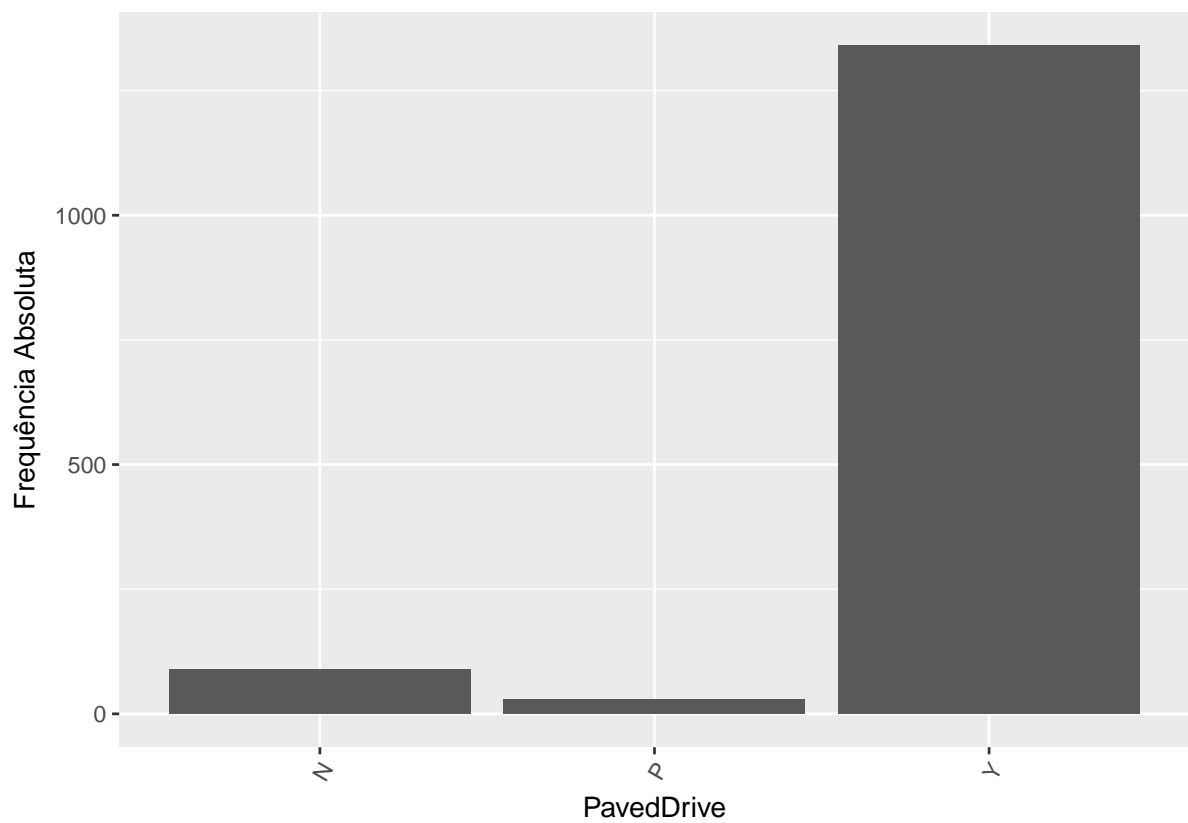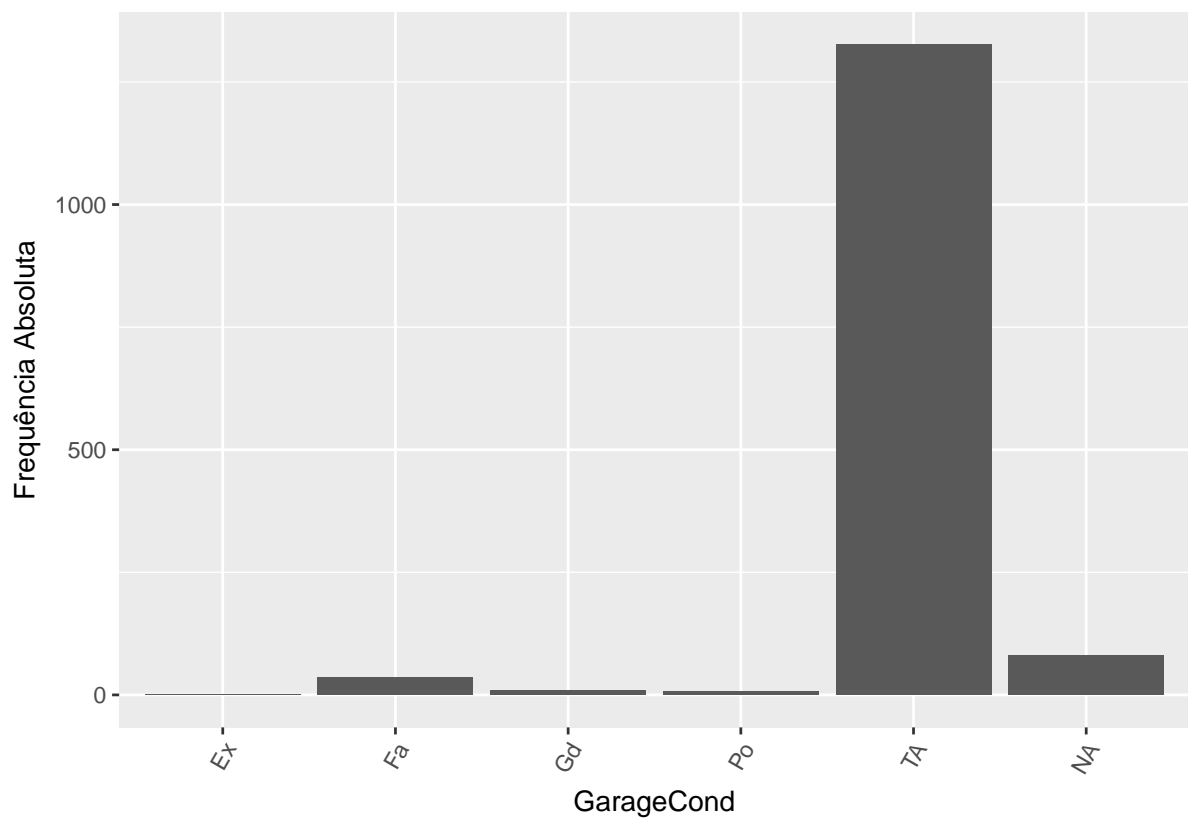

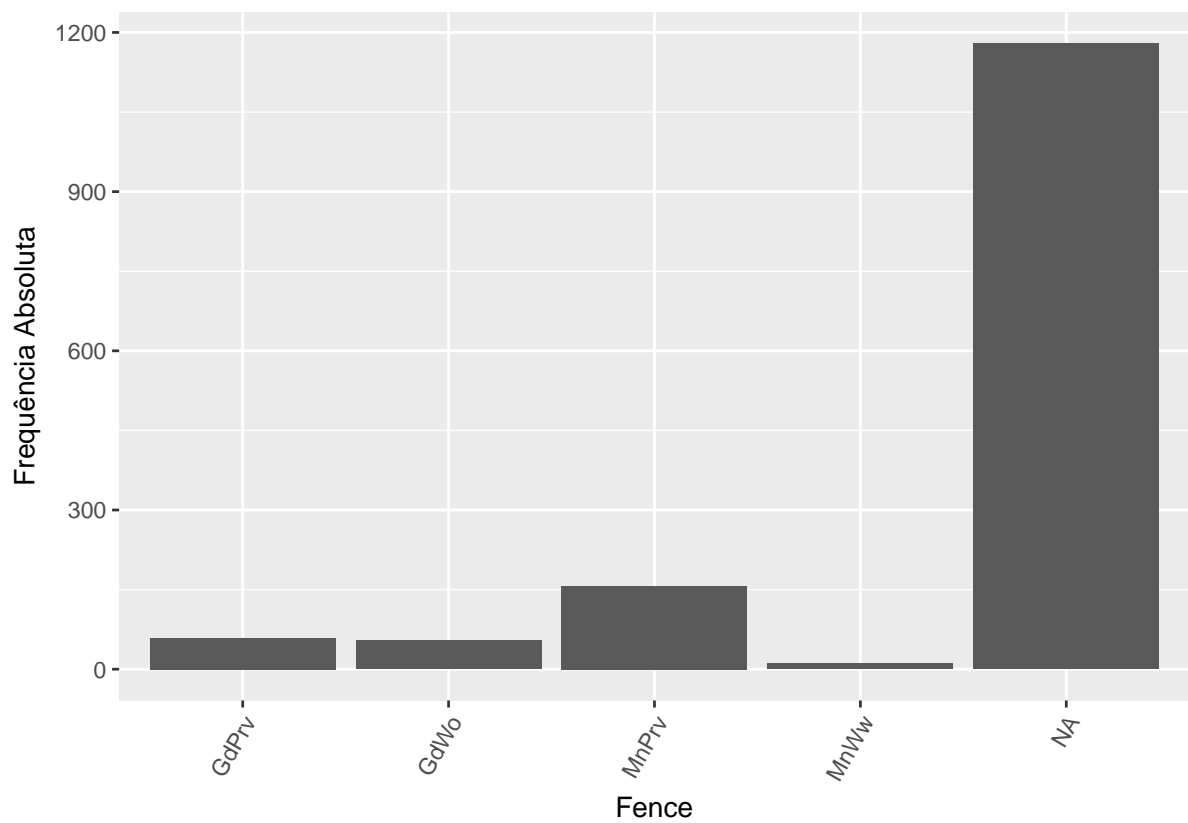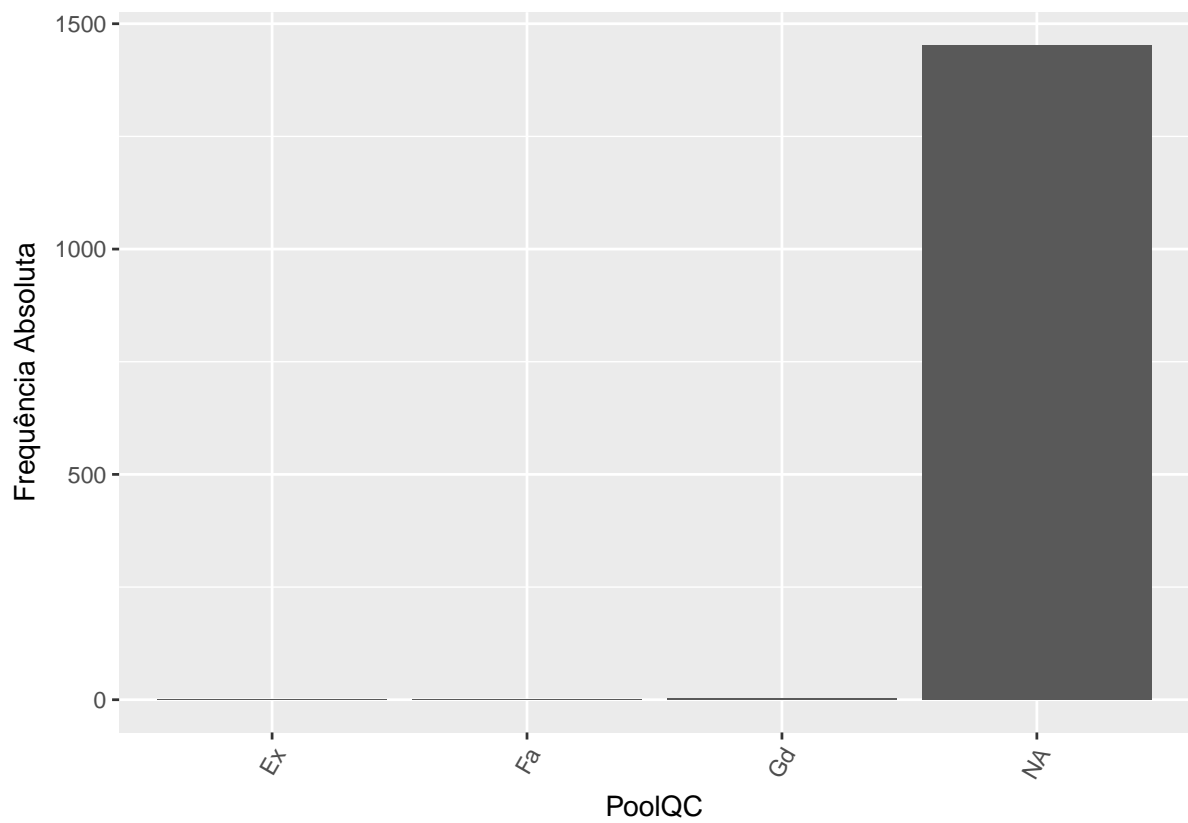


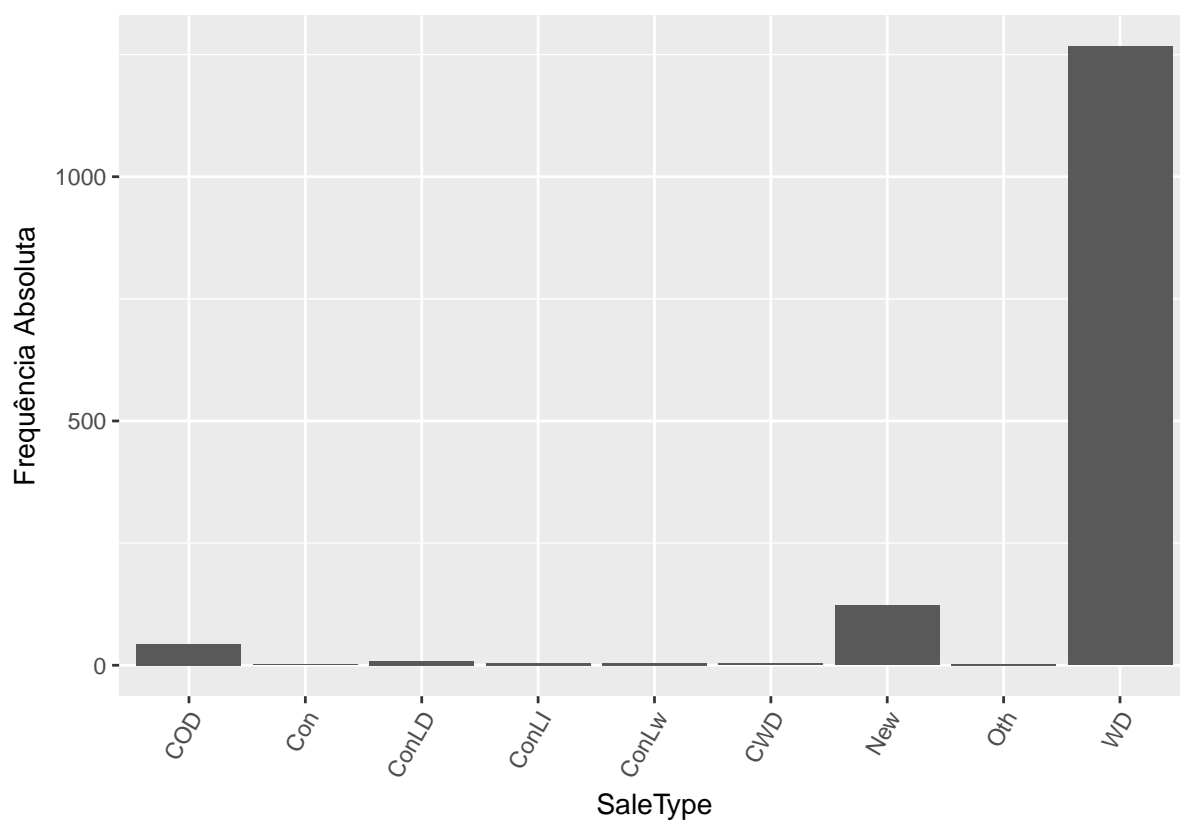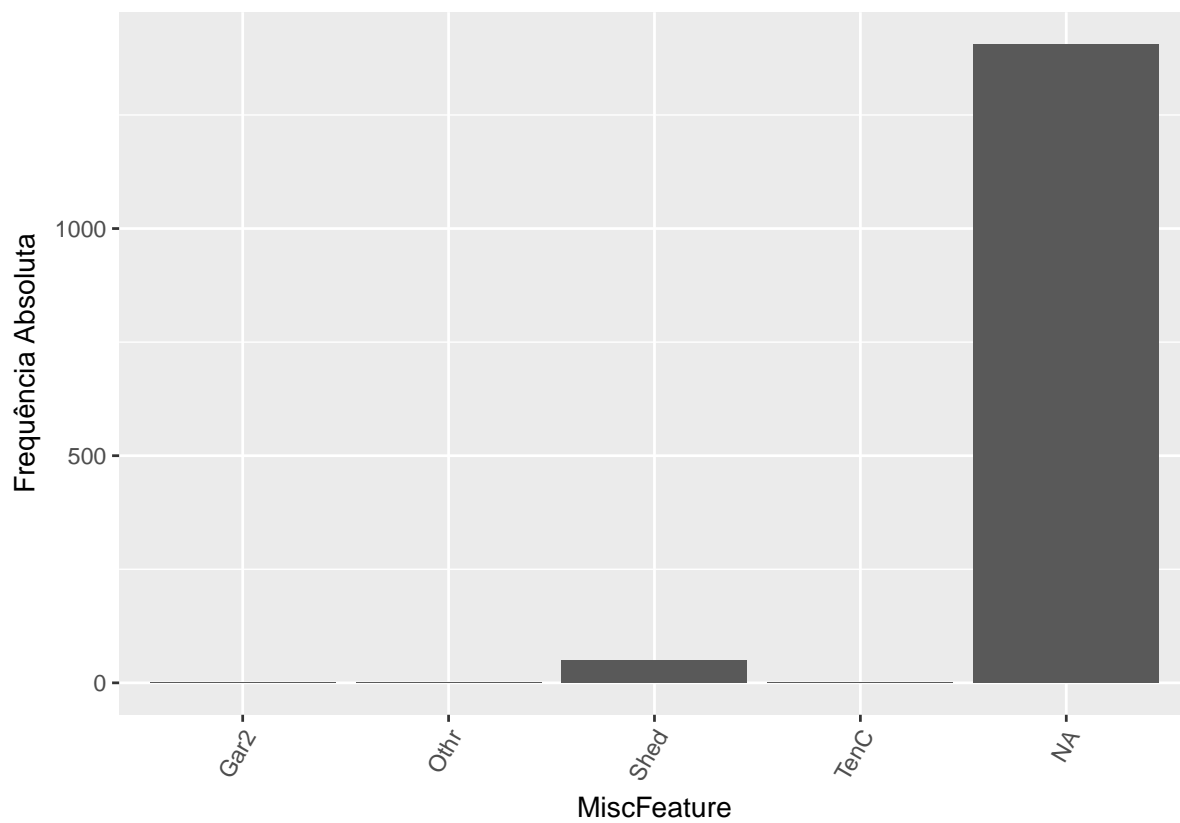

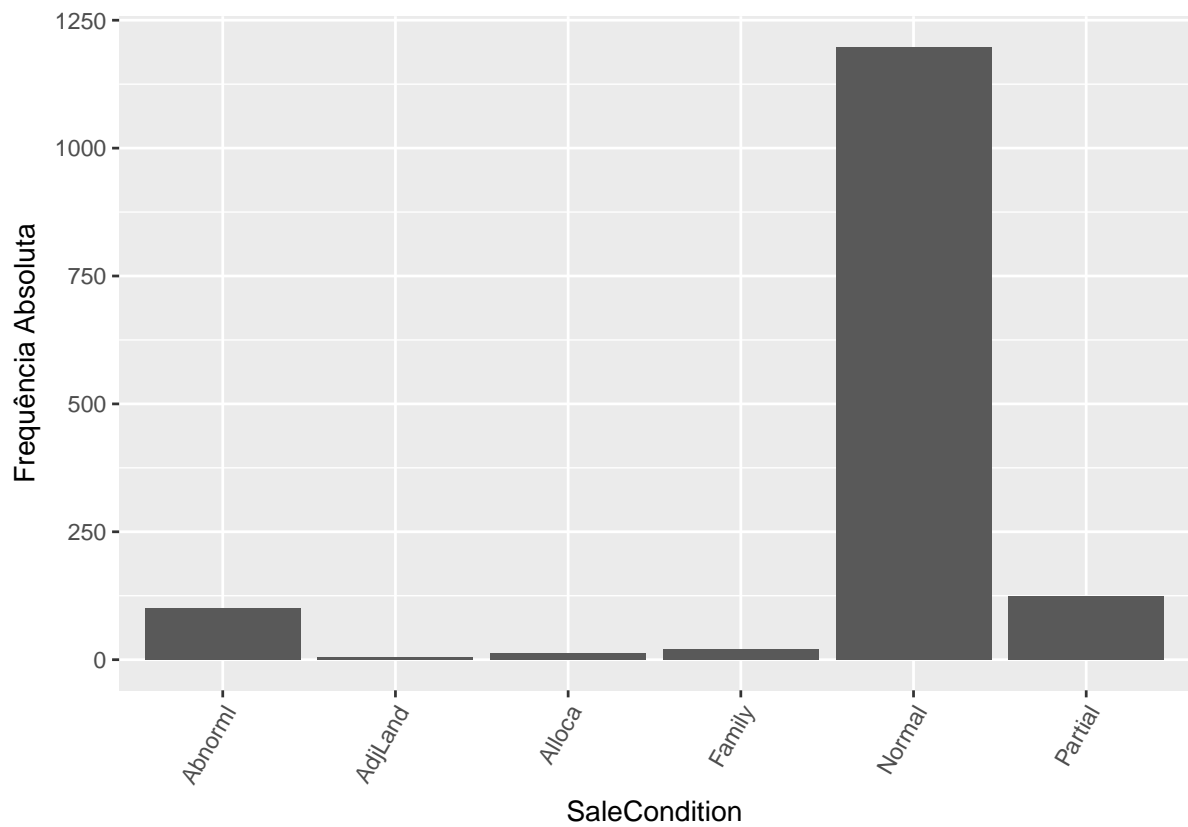


1.2 GRÁFICOS DAS VARIÁVEIS QUANTITATIVAS


`stat_bin()` using `bins = 30`. Pick better value with `binwidth`.

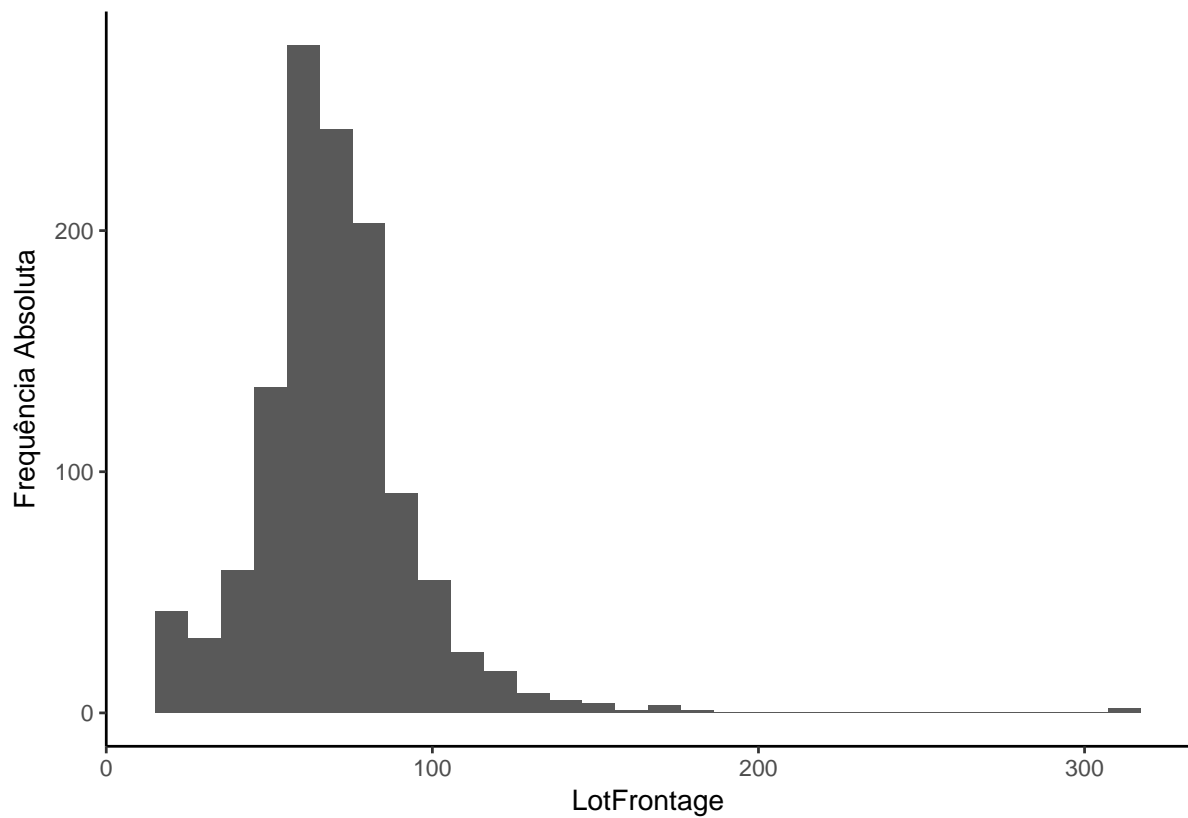


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

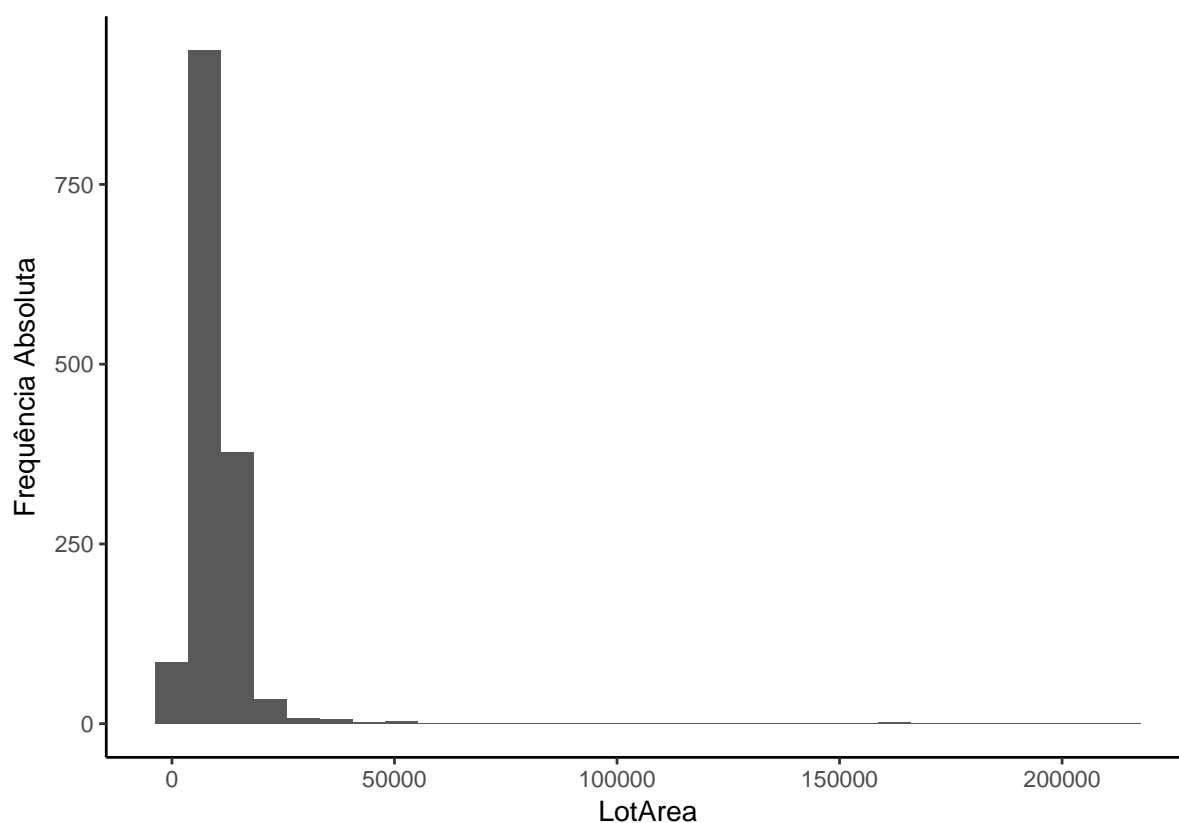


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

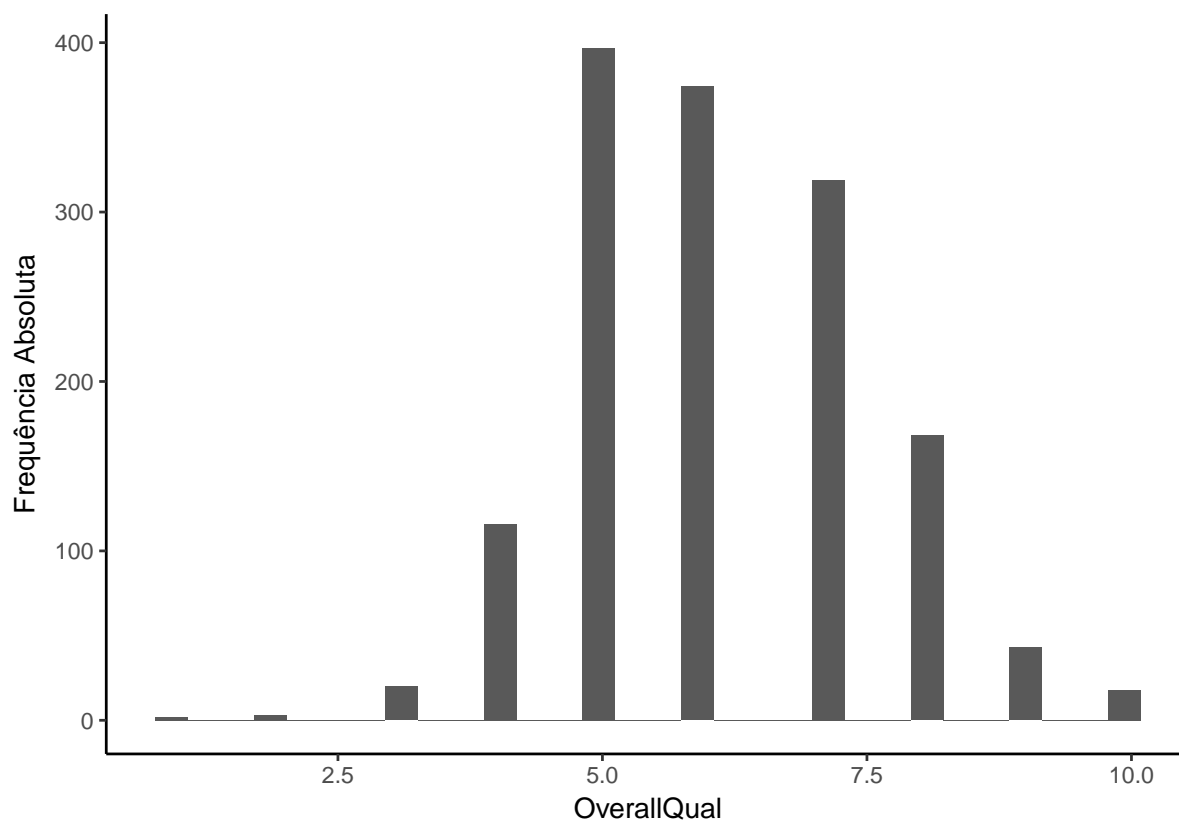


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

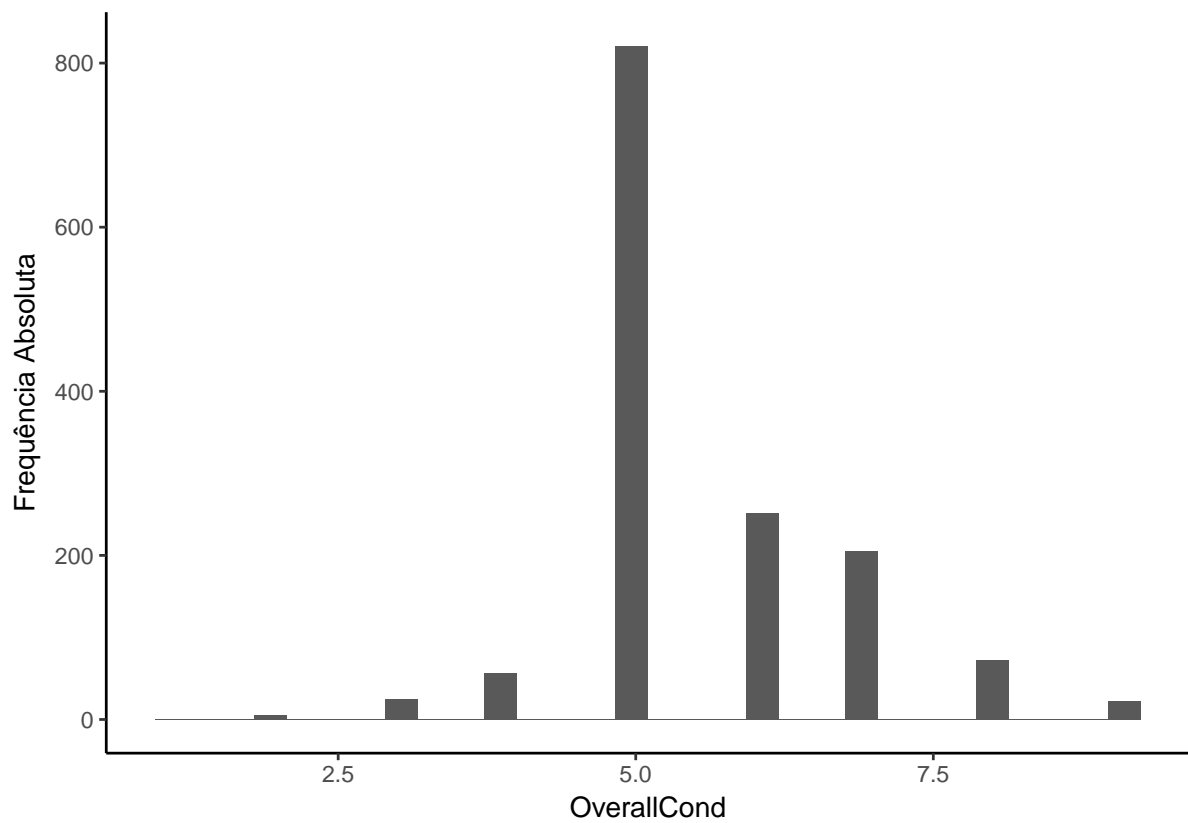
```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

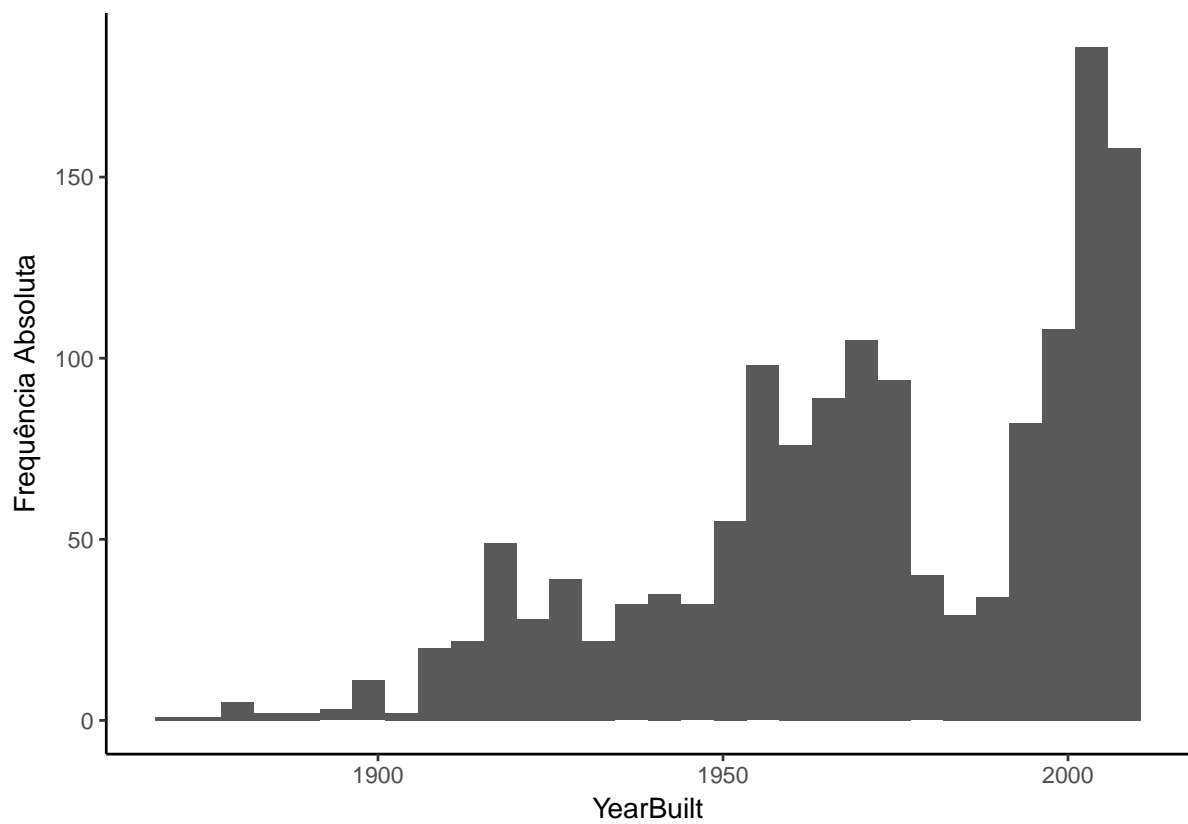


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

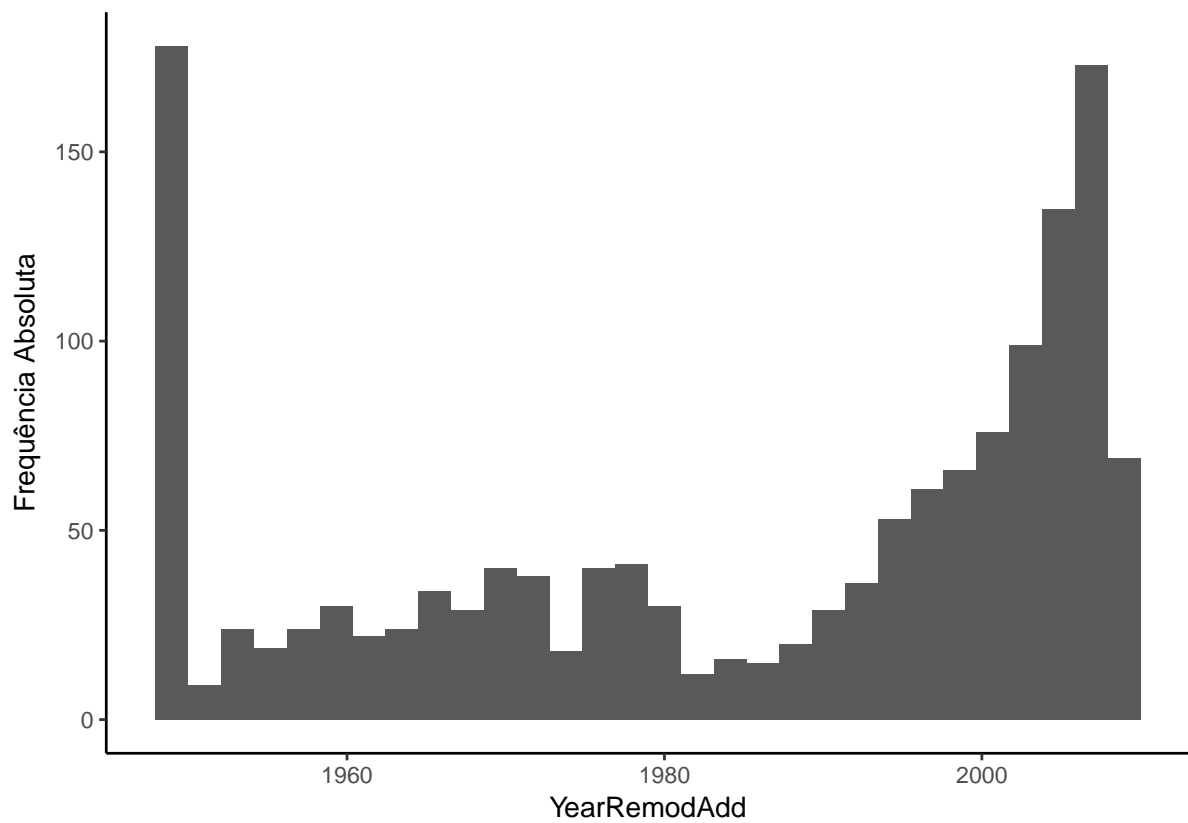


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

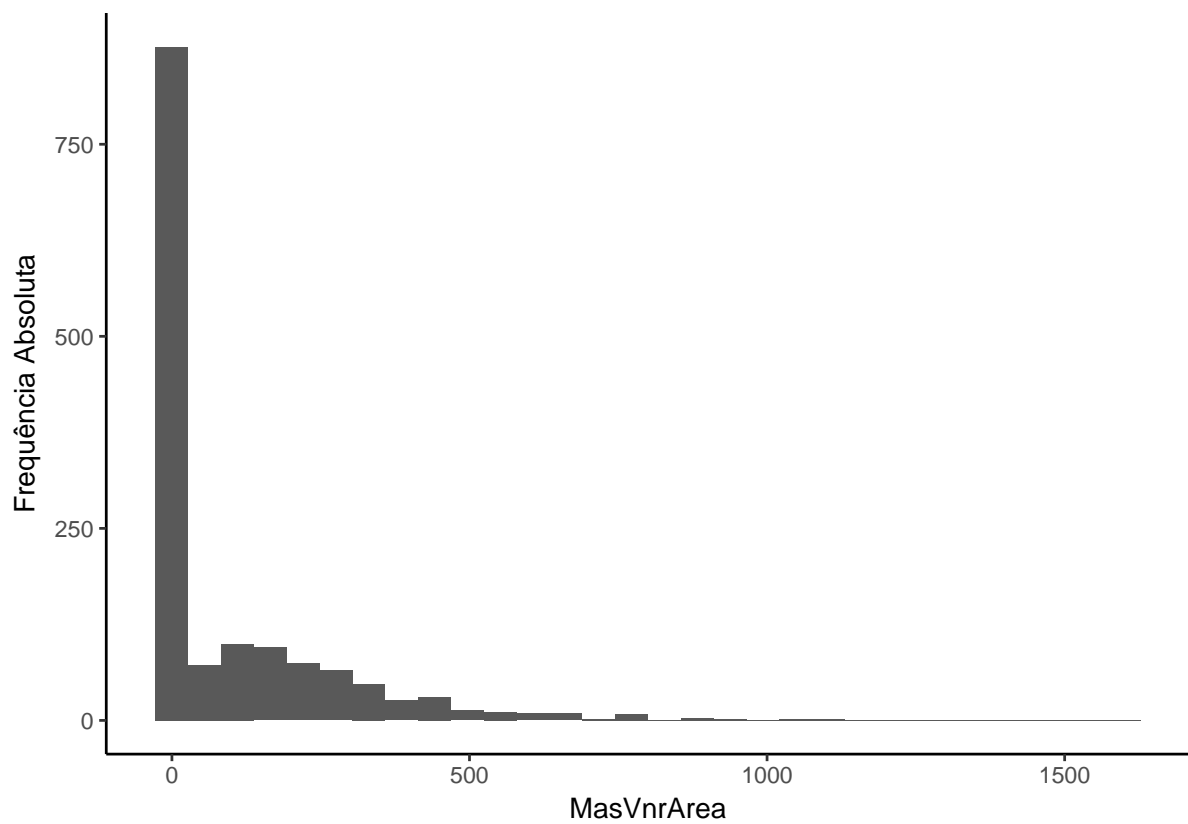


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

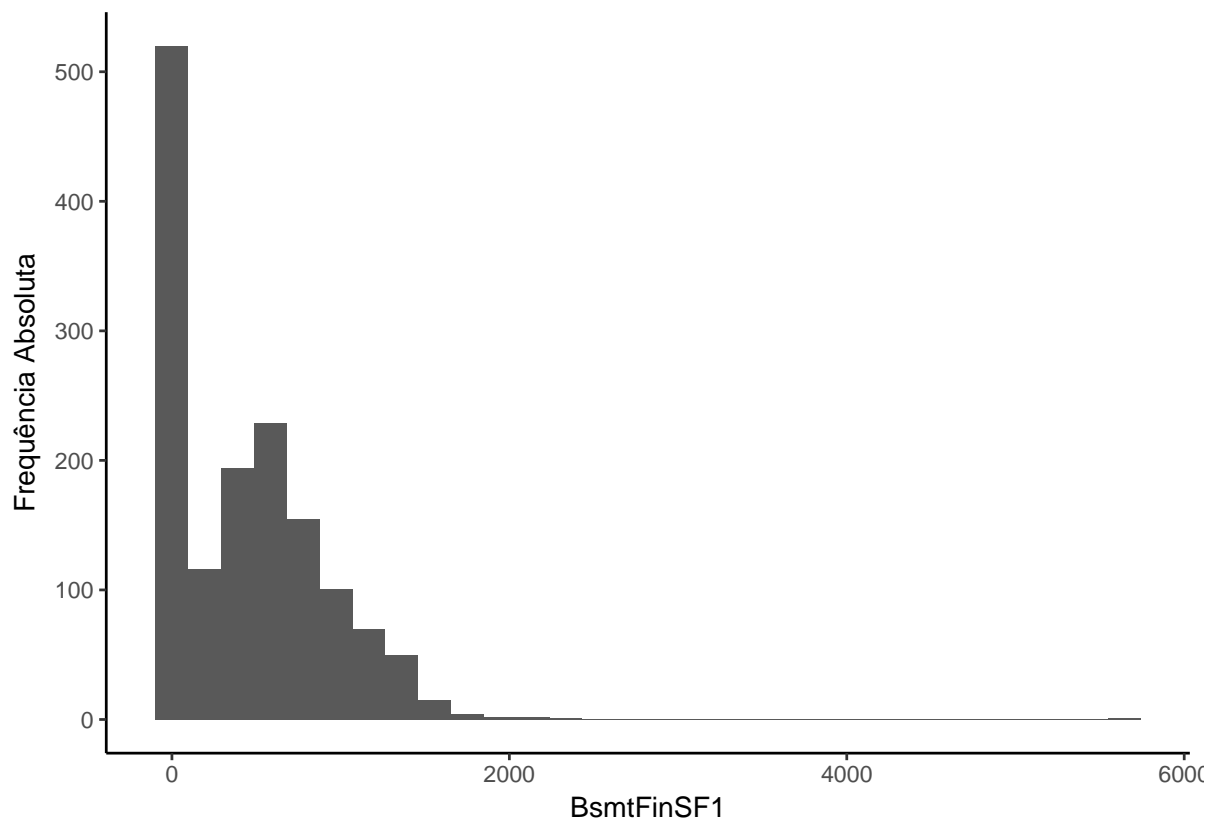


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

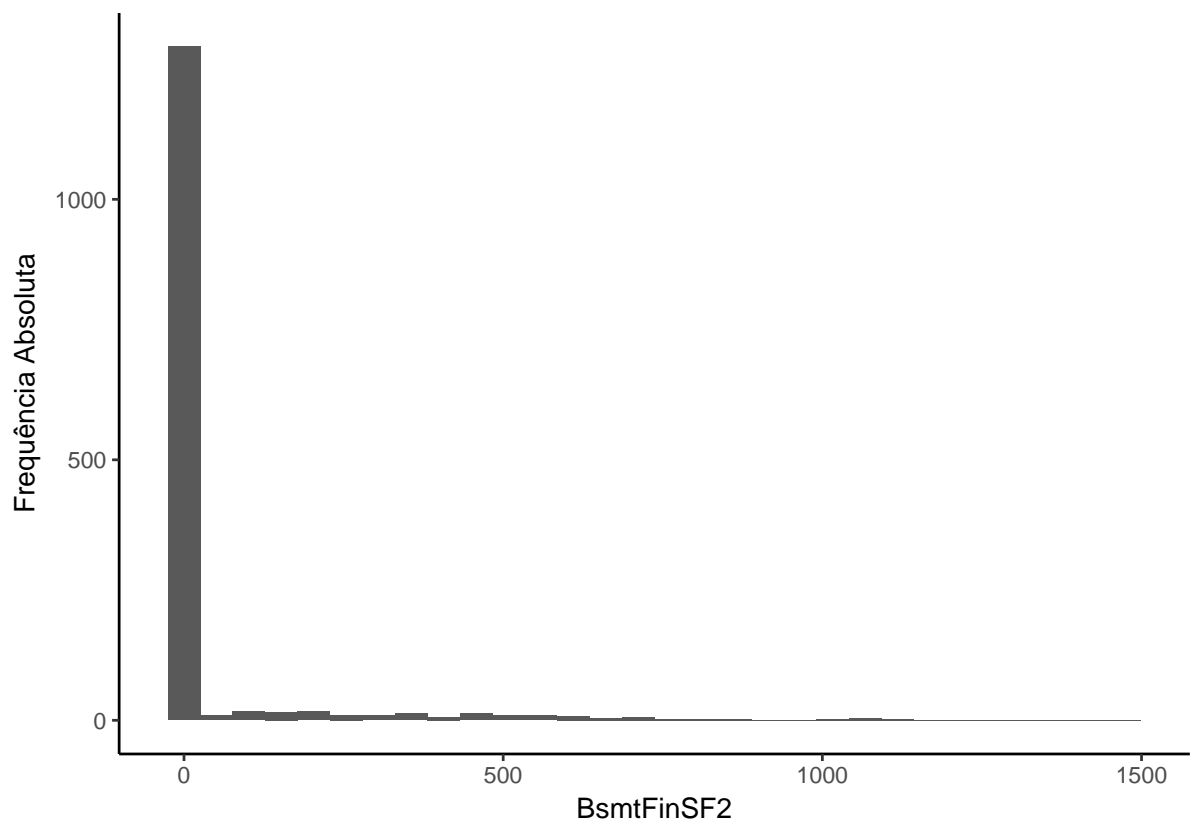


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

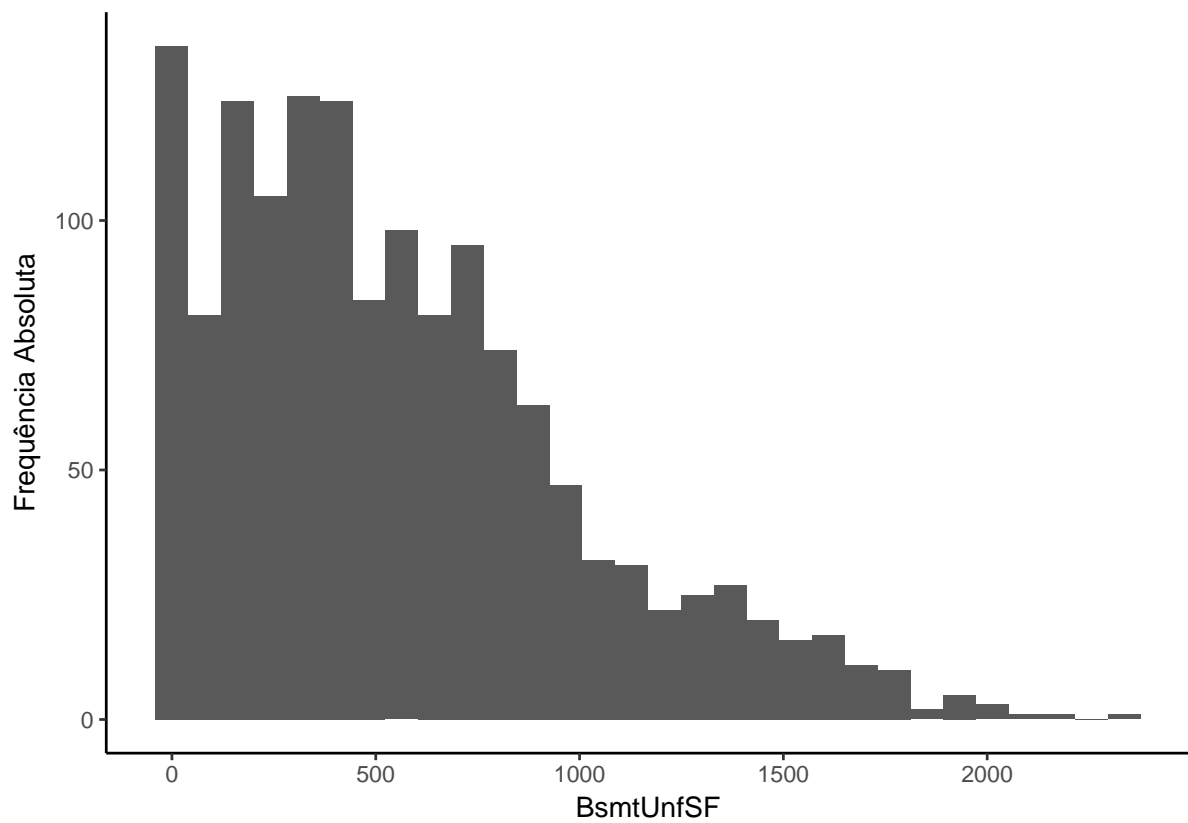


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

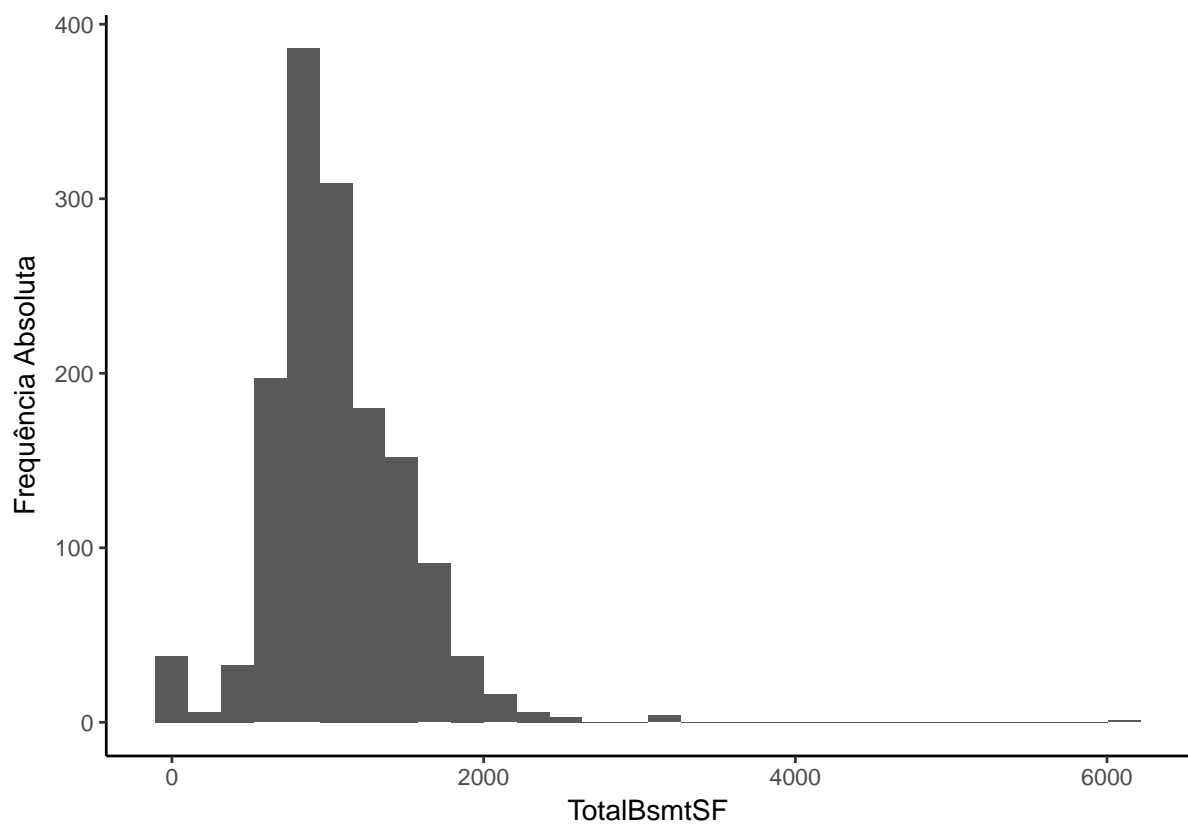


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

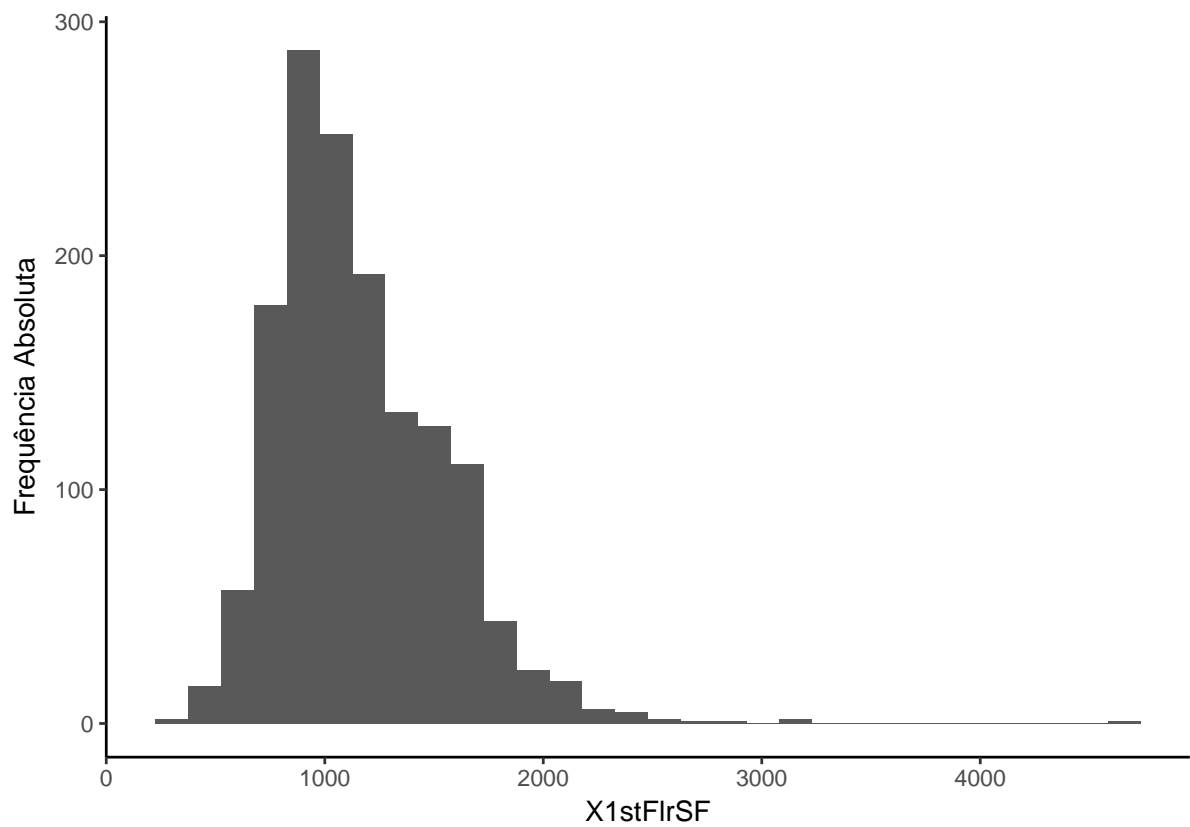


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

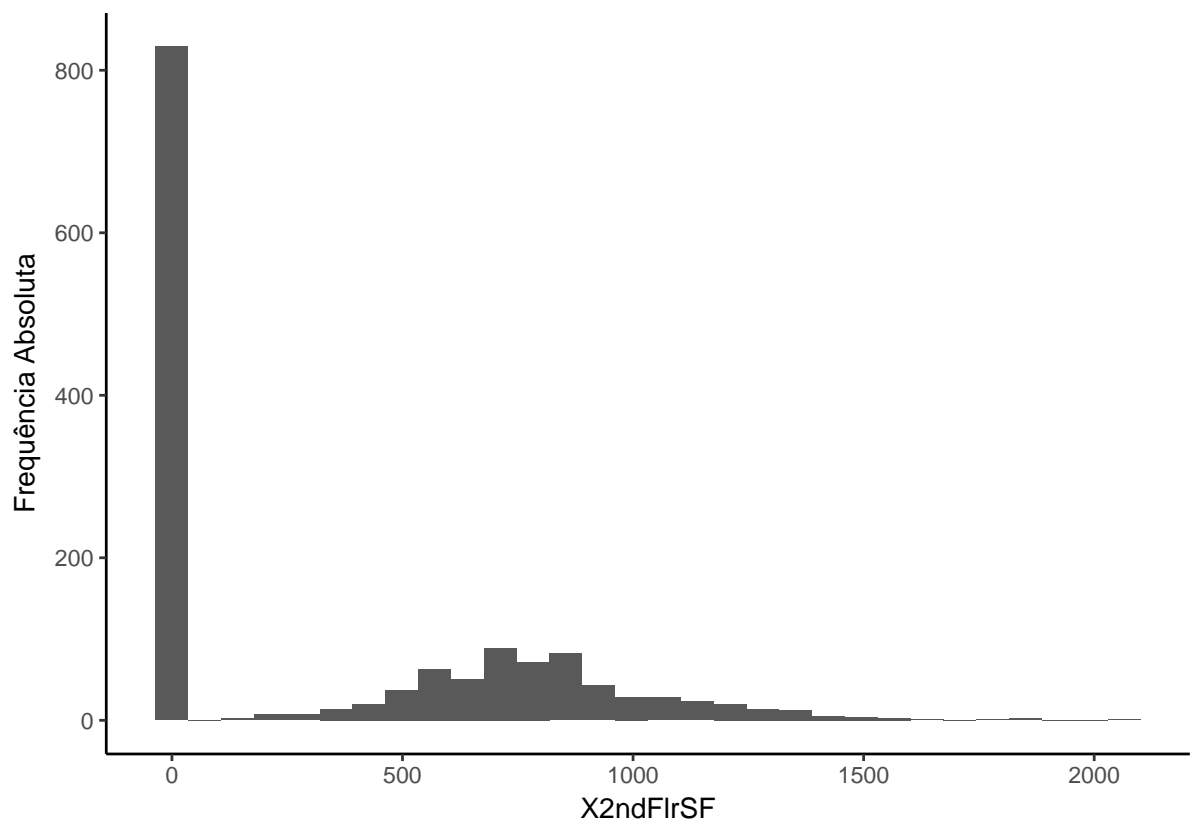


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

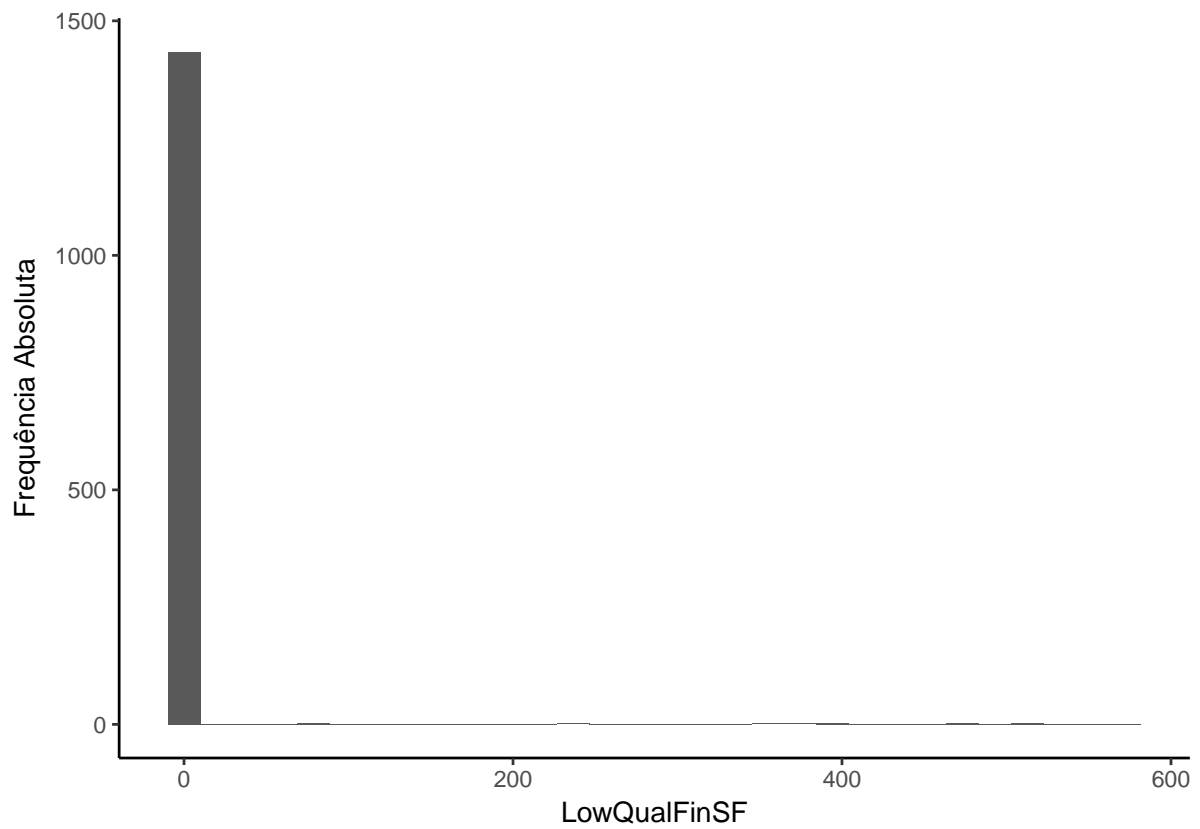


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

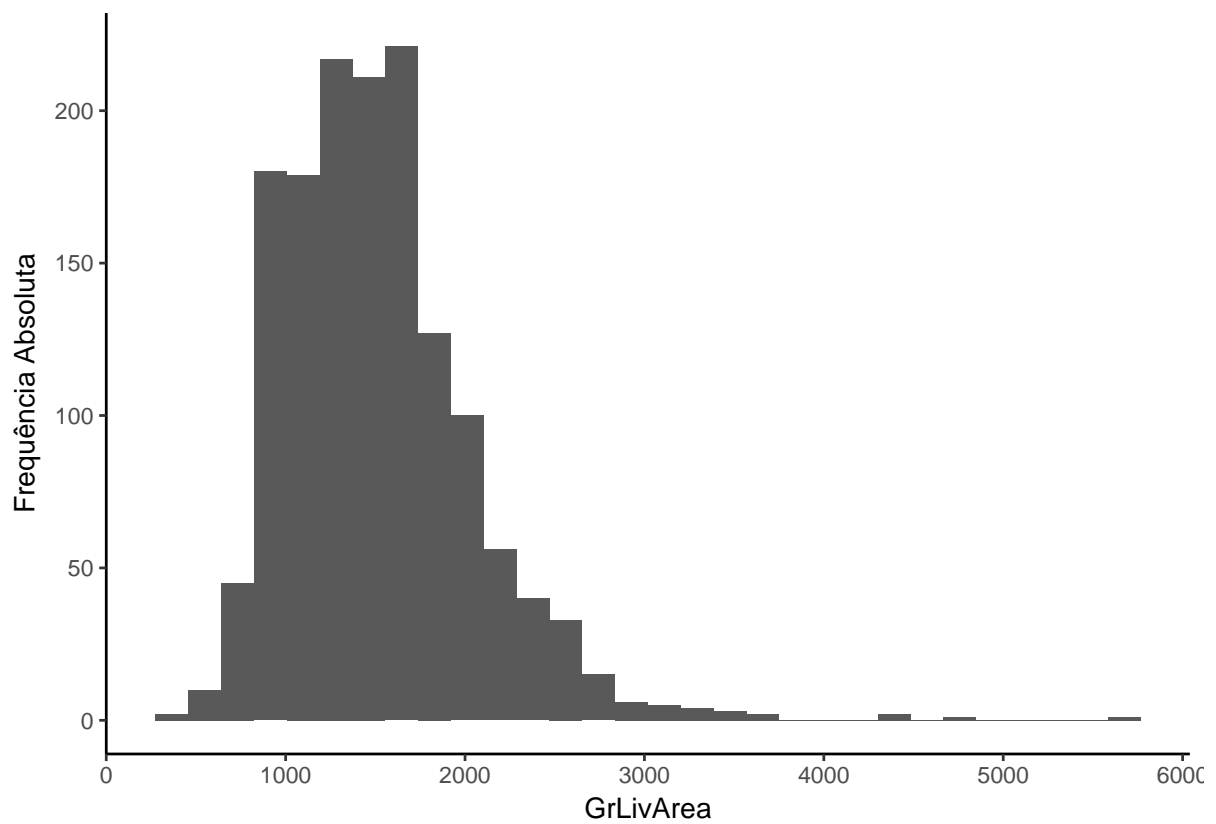


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

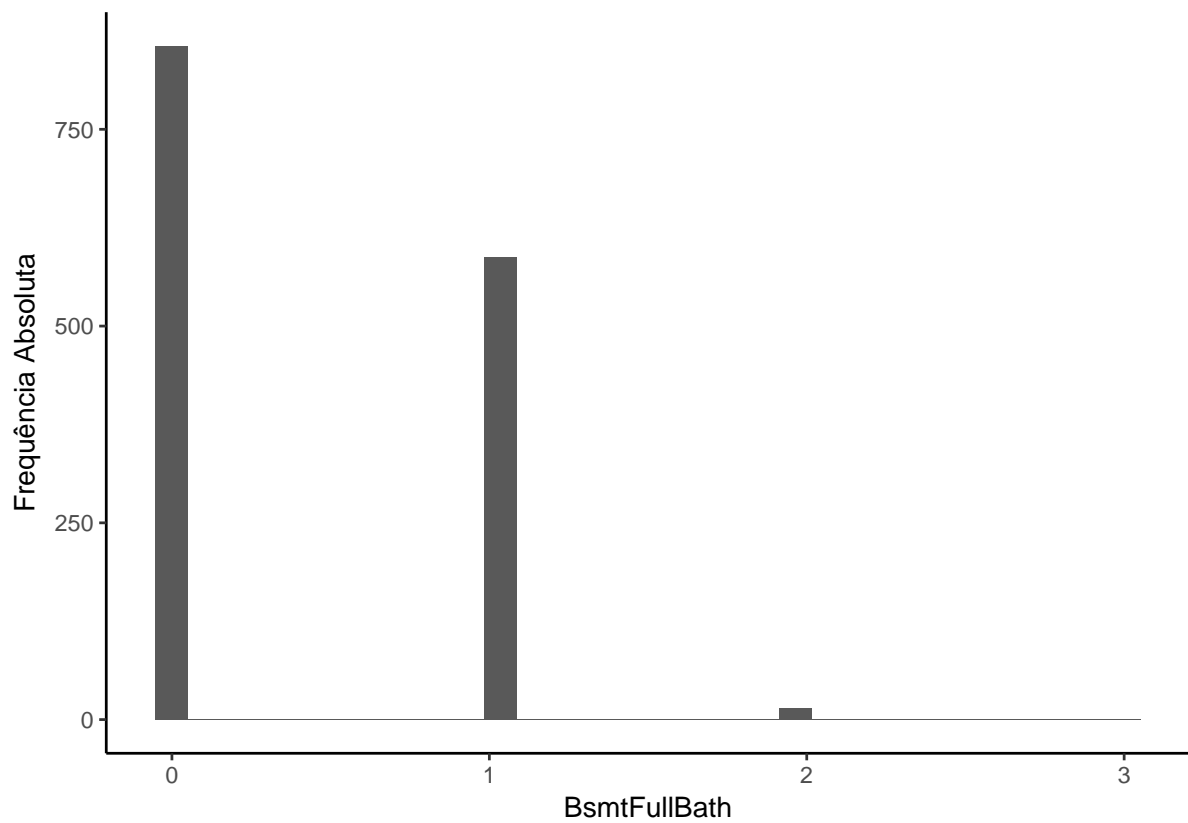


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

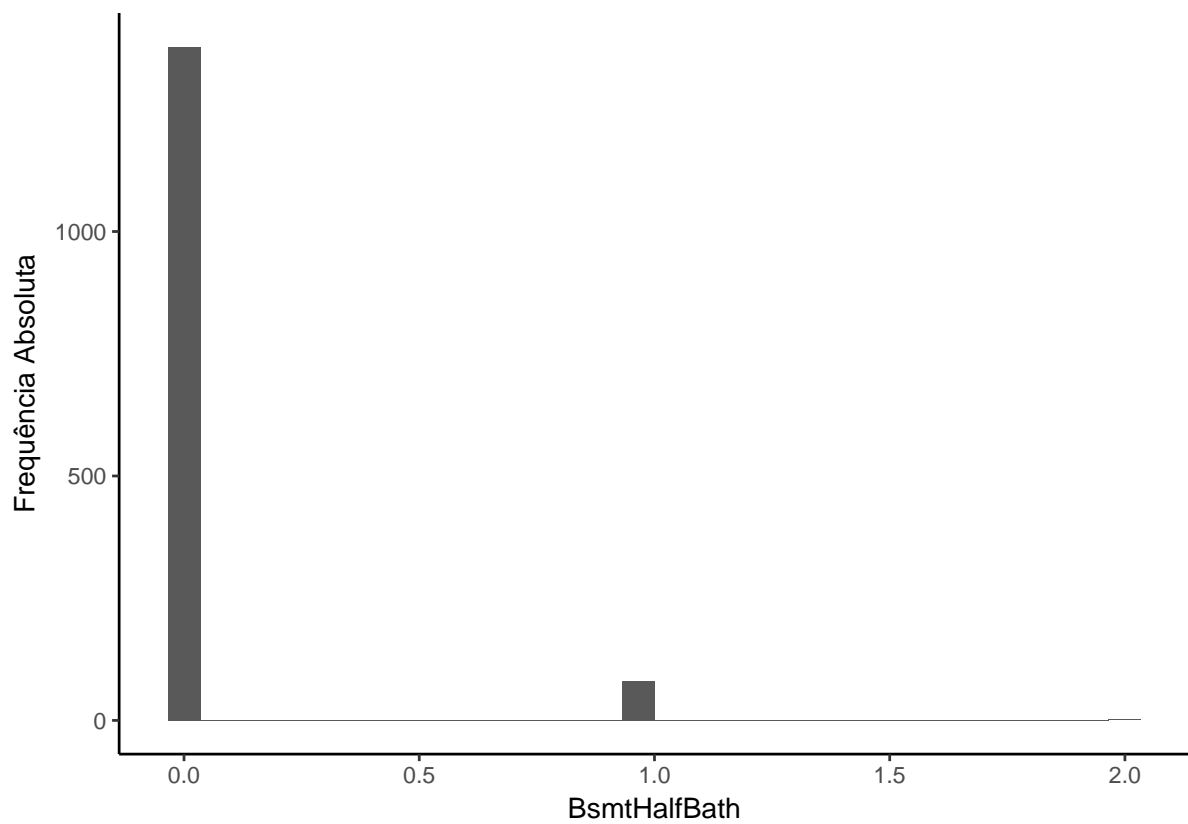


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

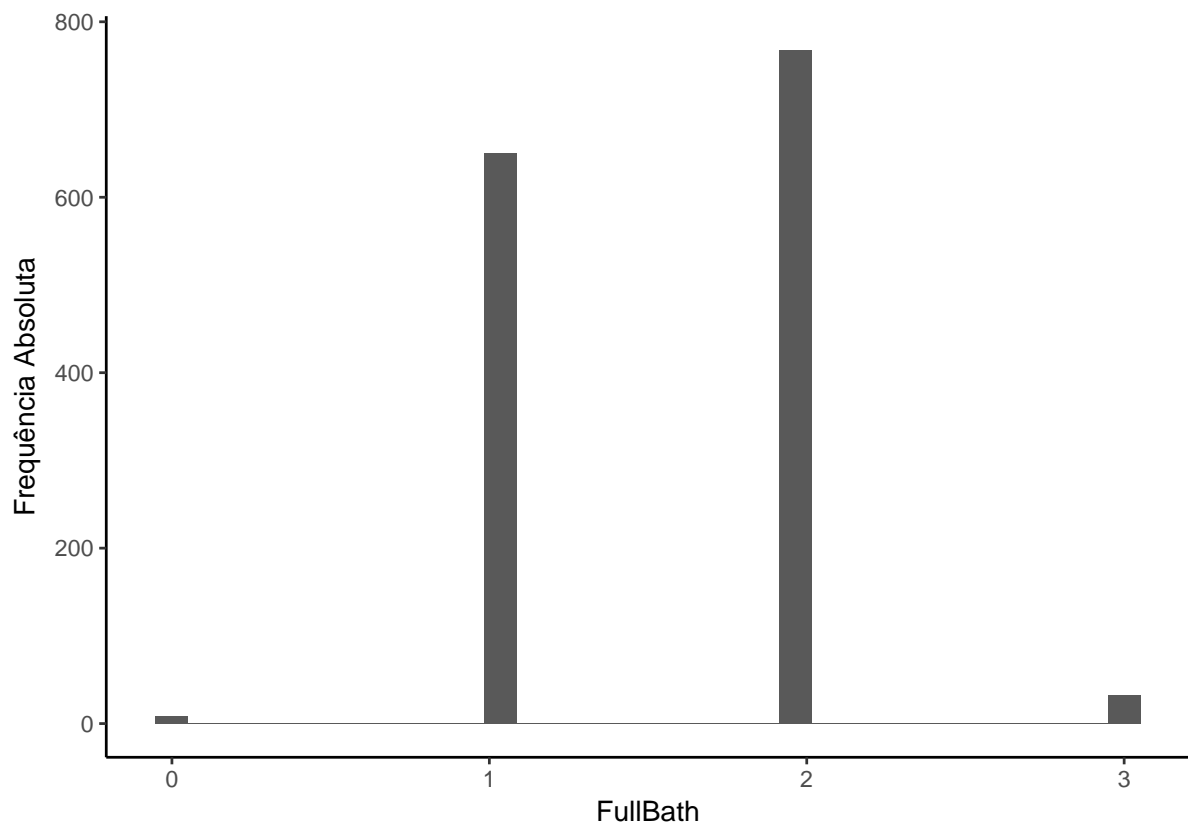


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

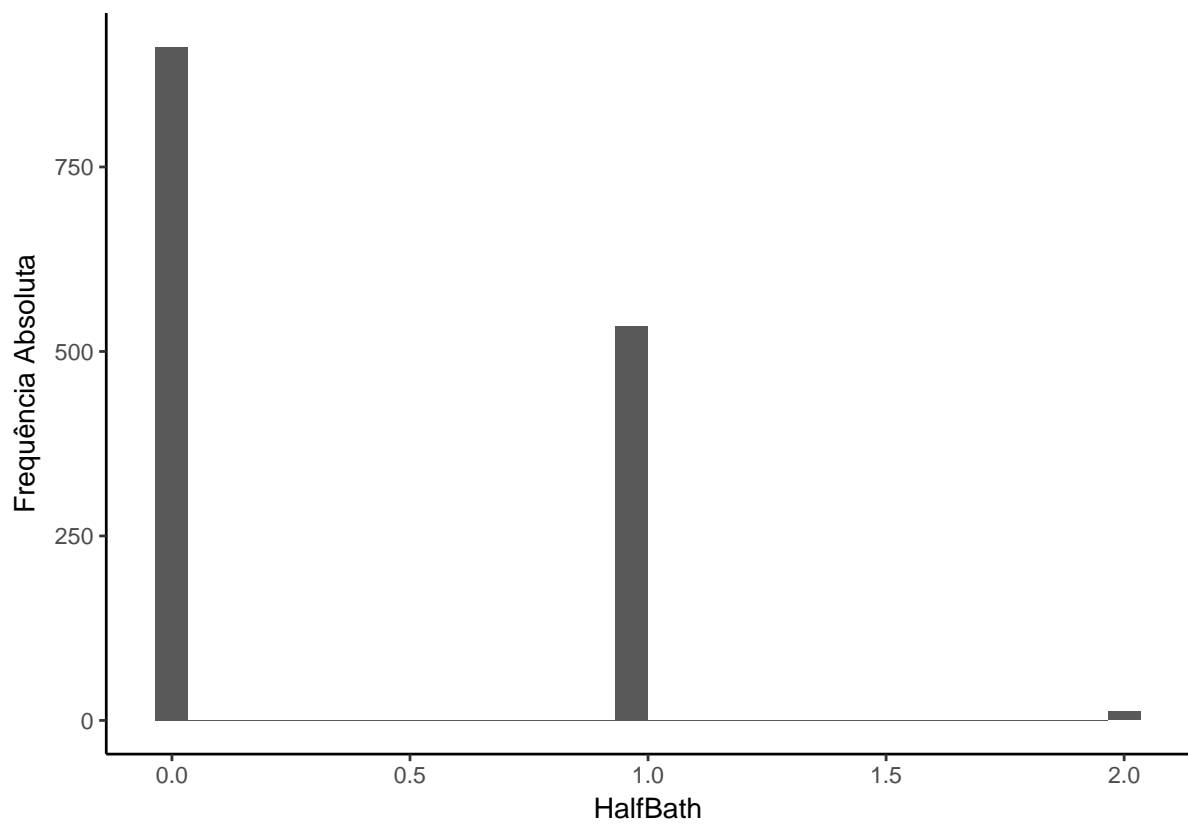


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

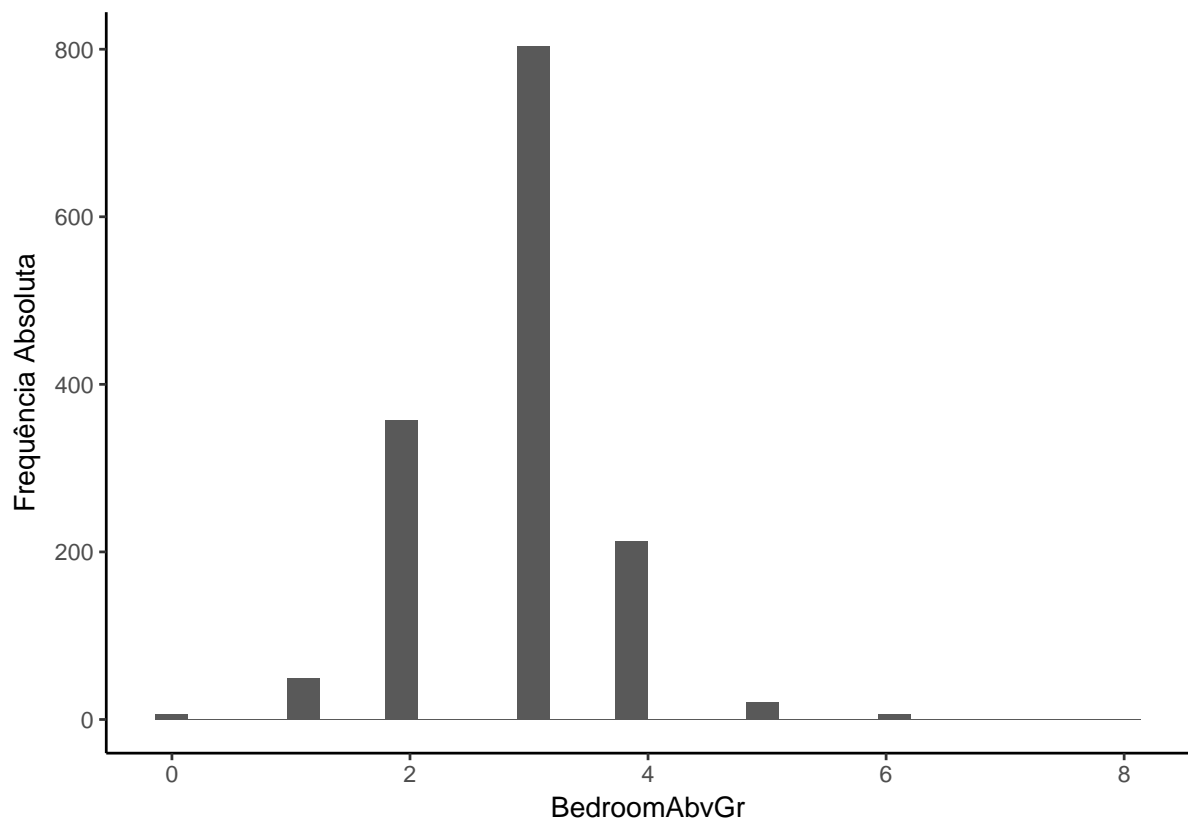
```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

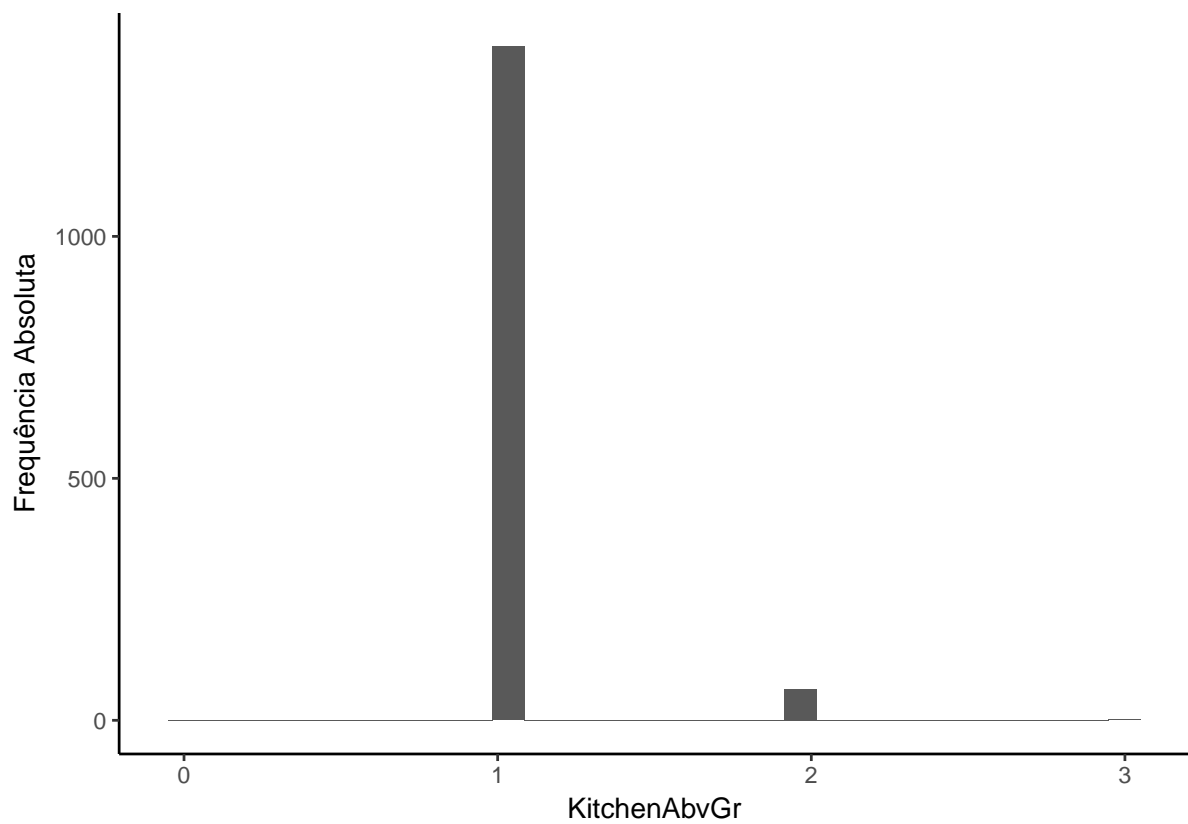


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

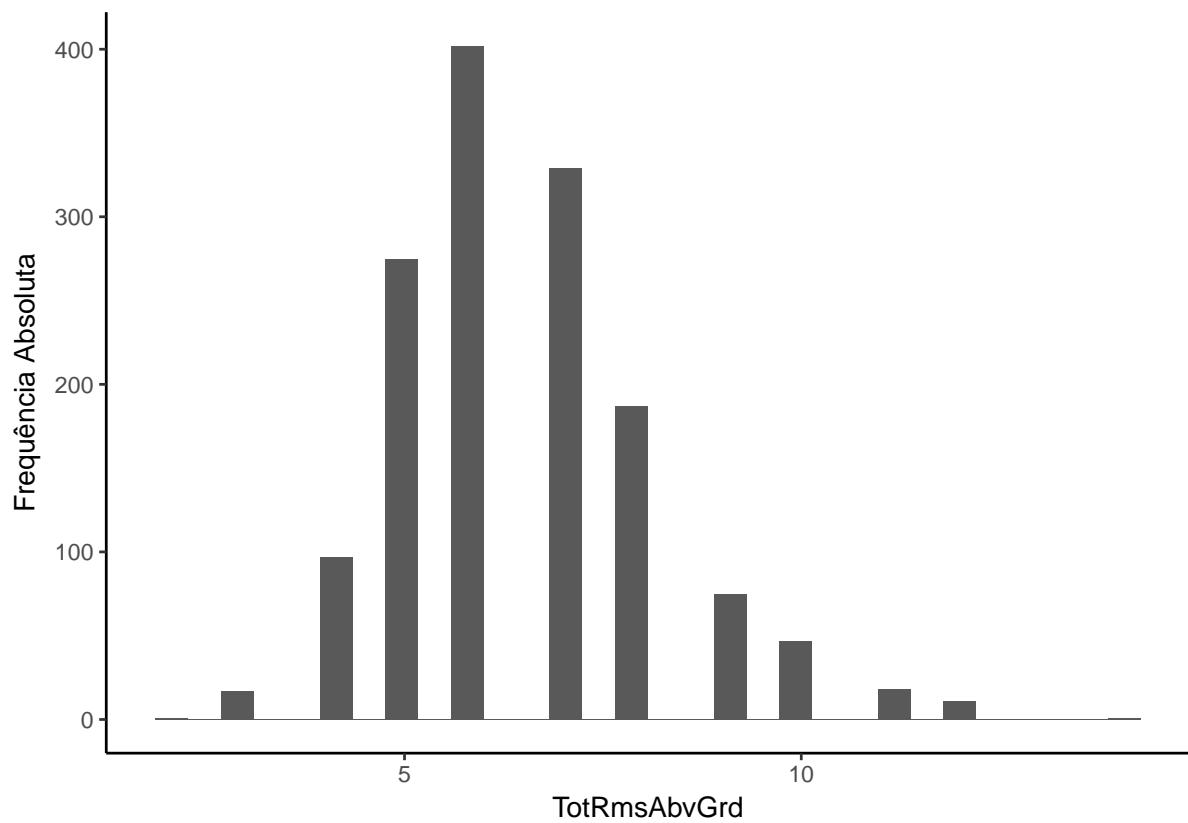


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

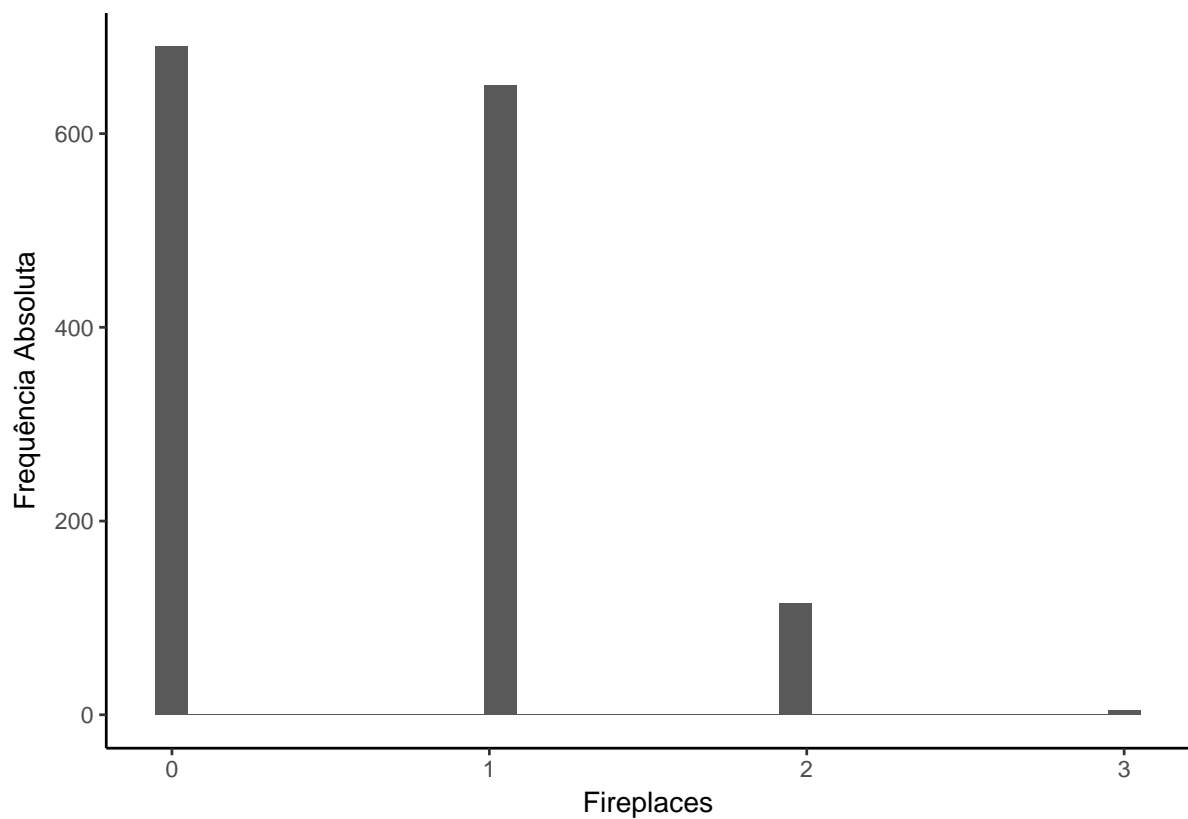


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

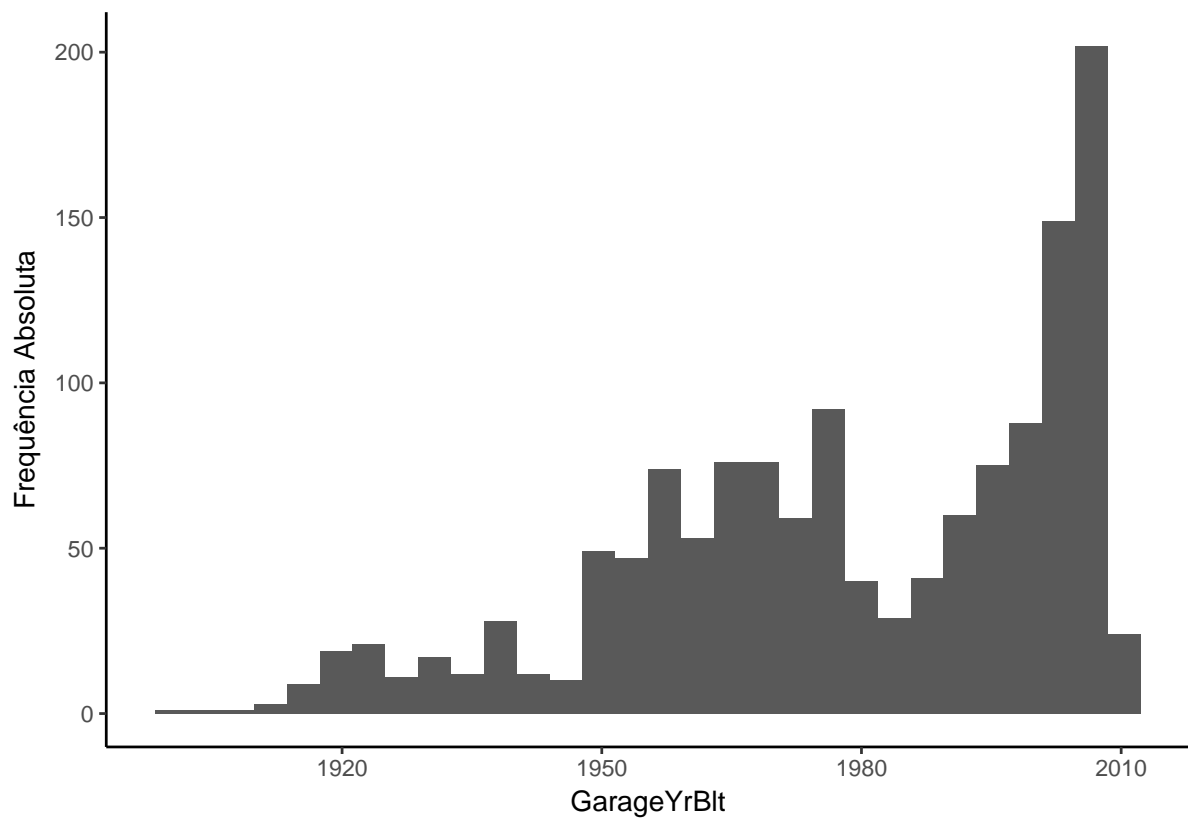


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

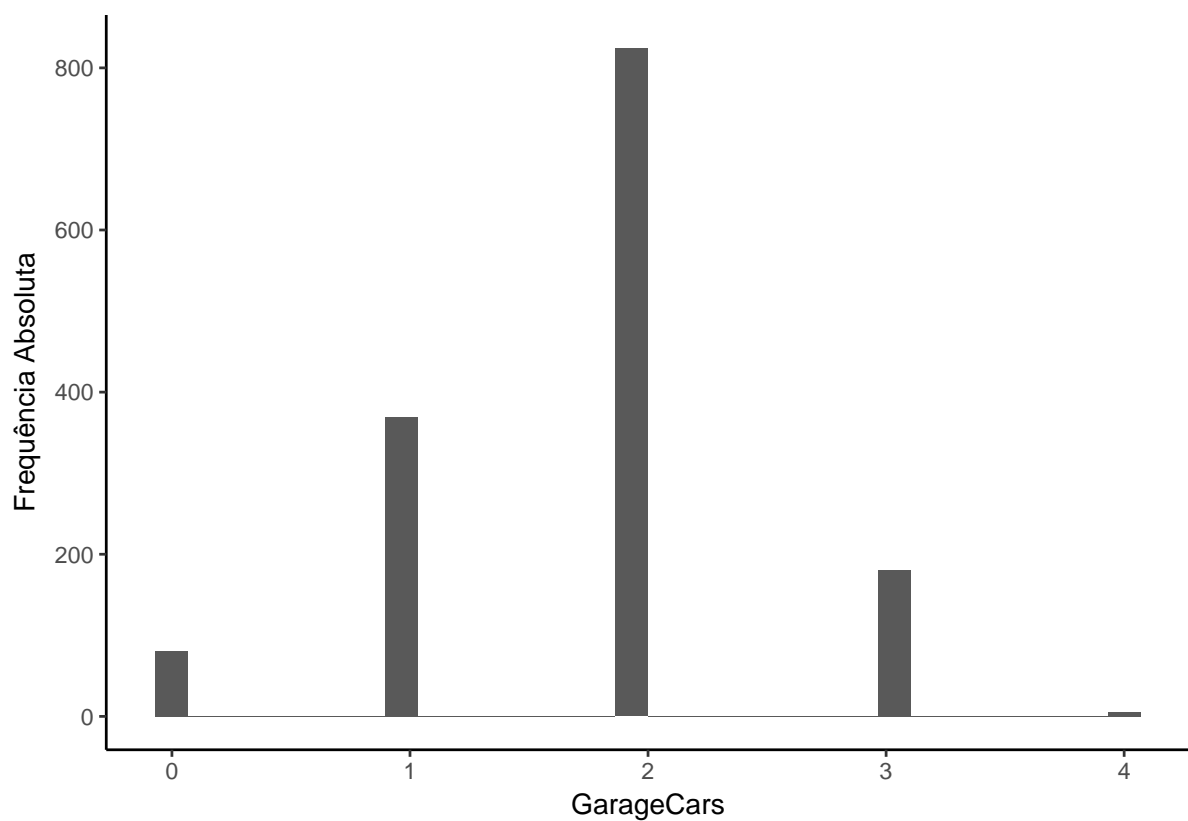


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

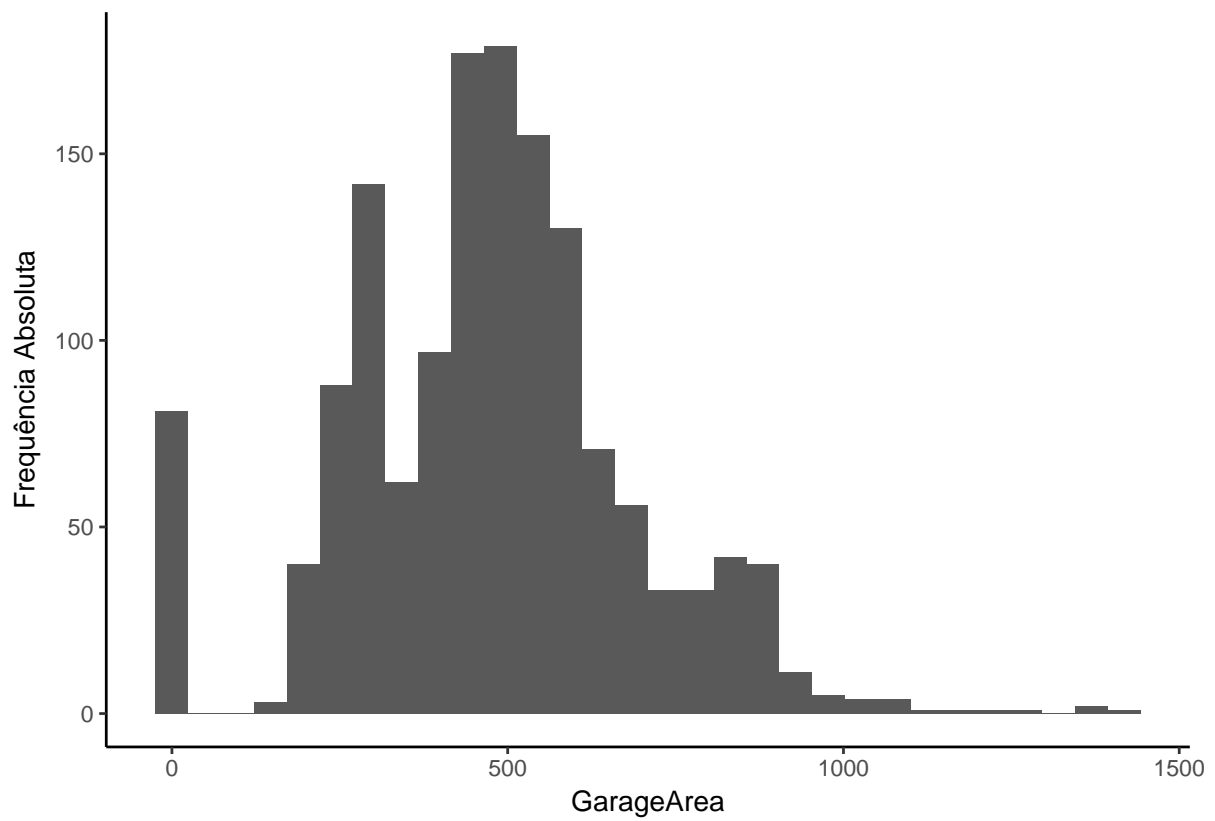


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

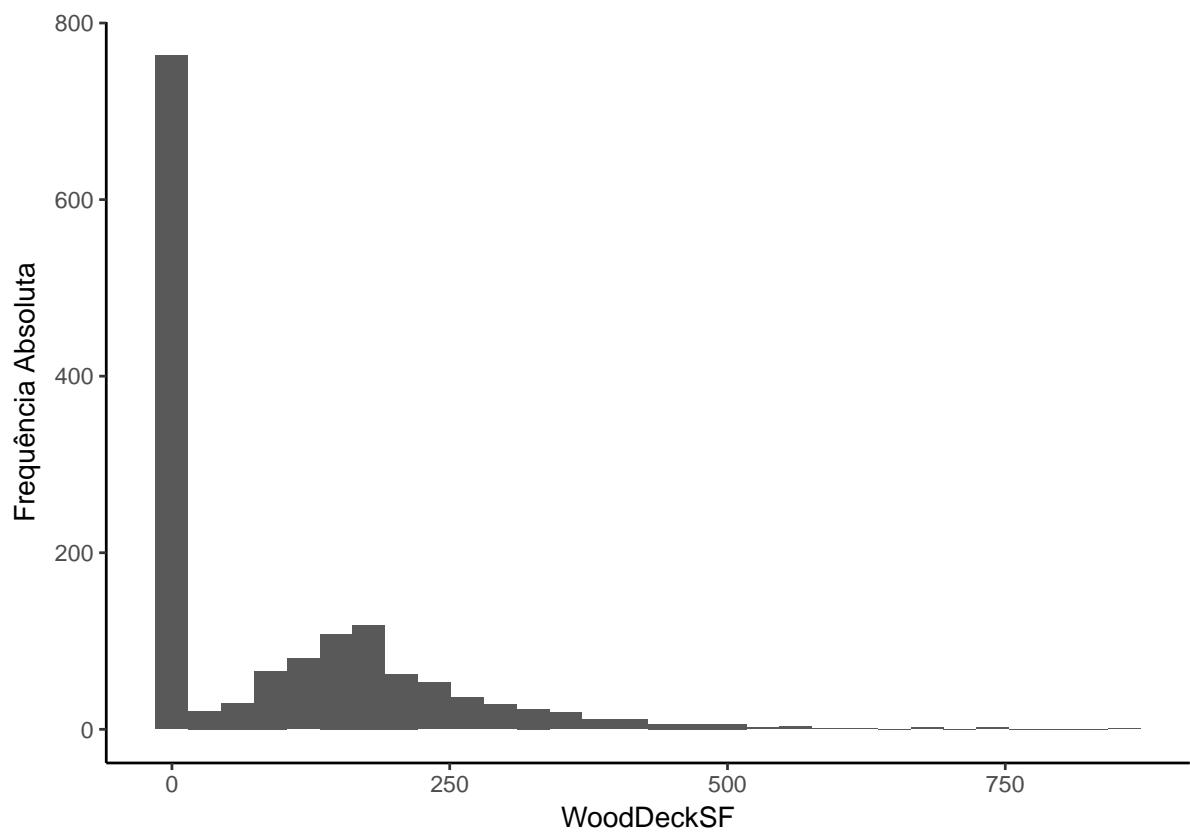


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

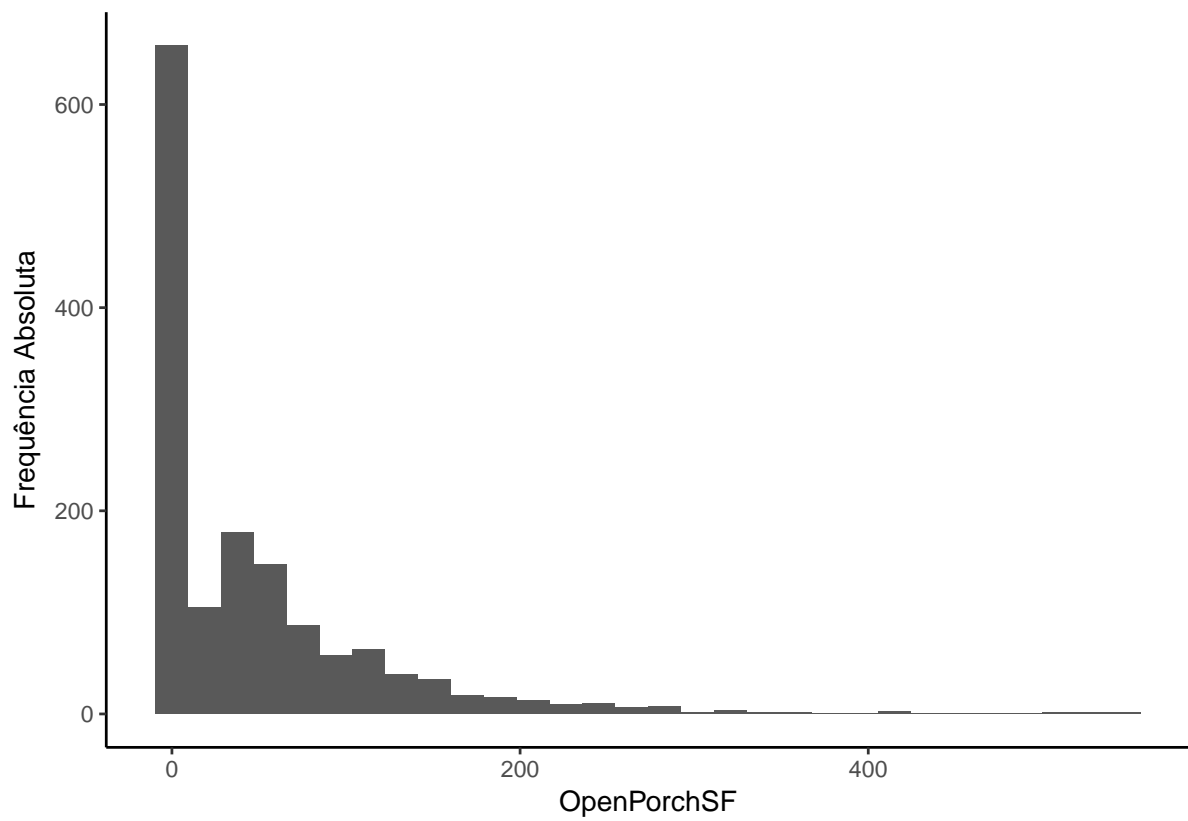


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

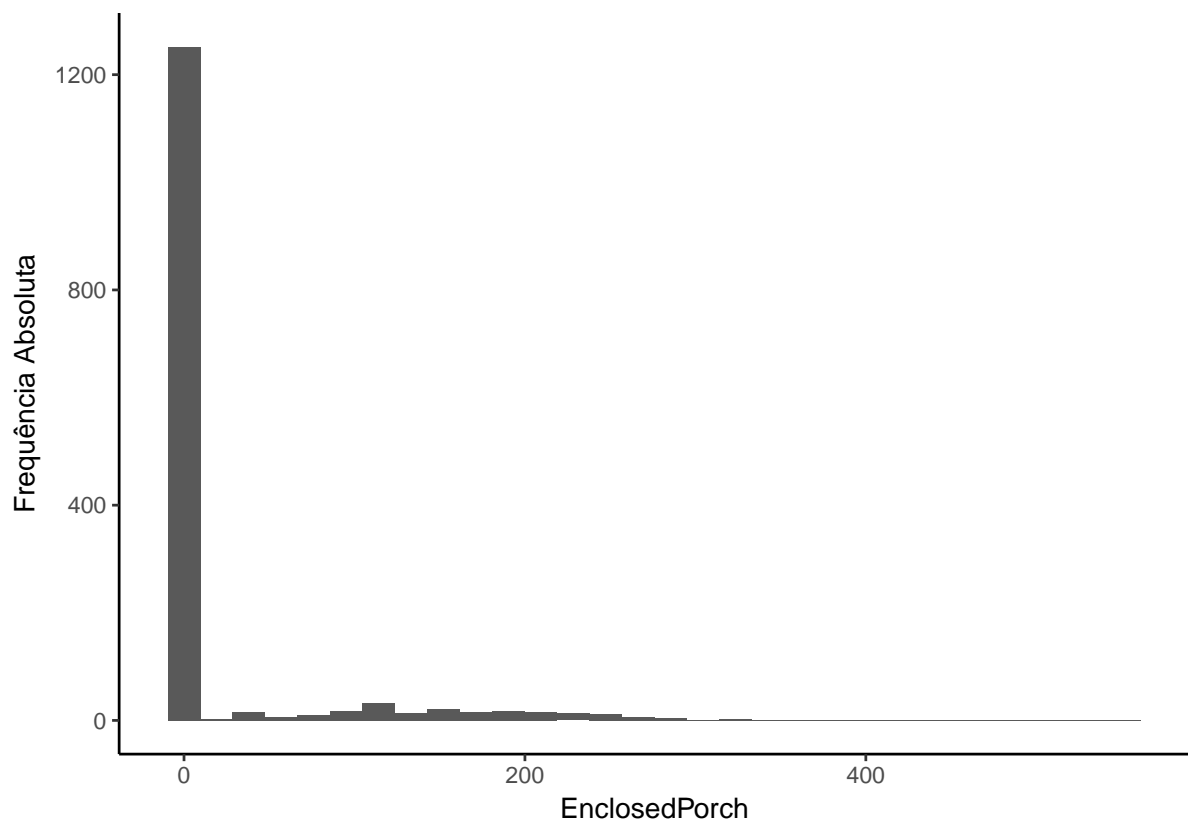


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

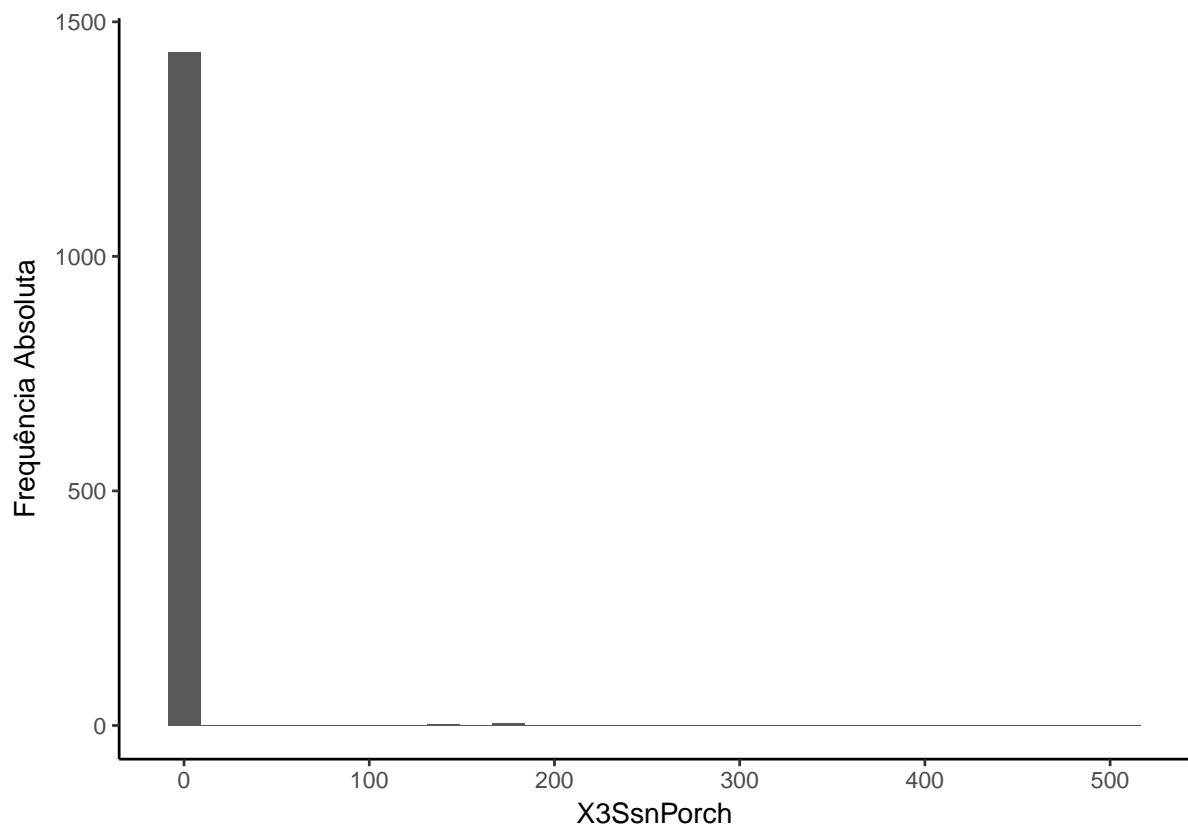


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

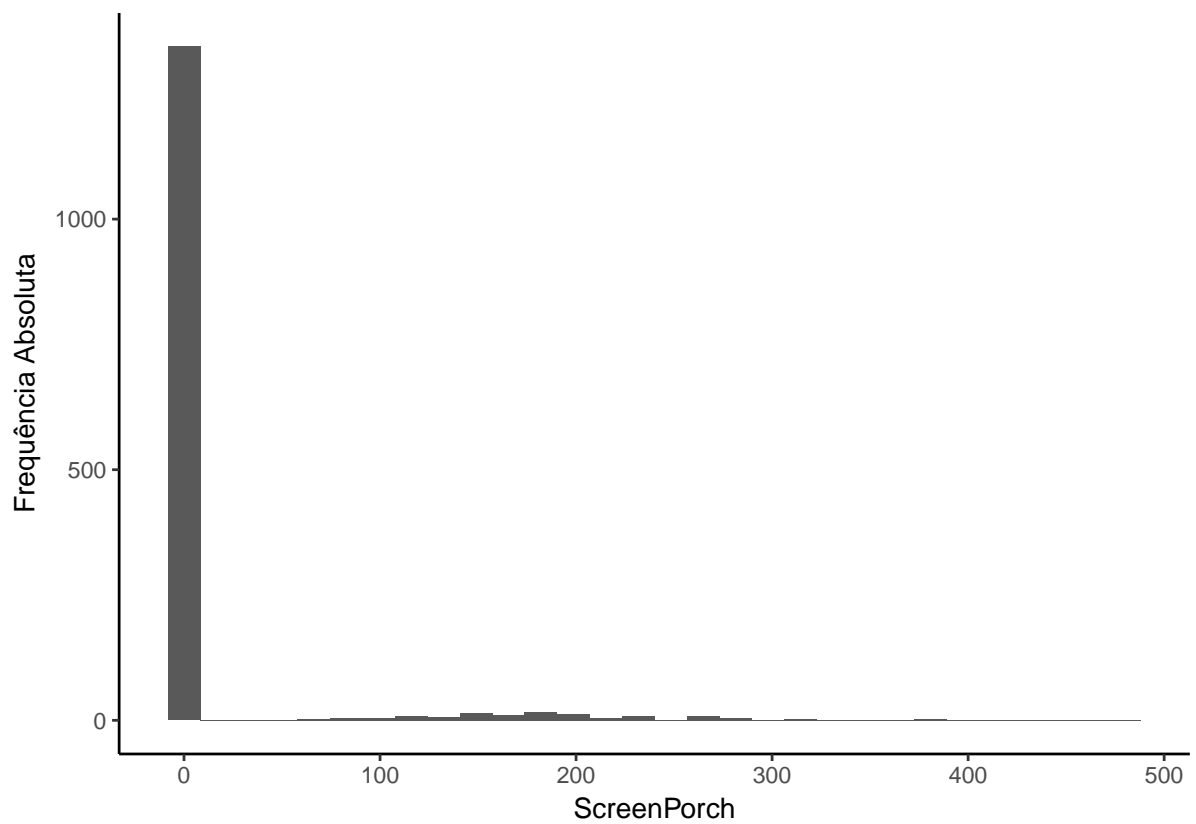


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

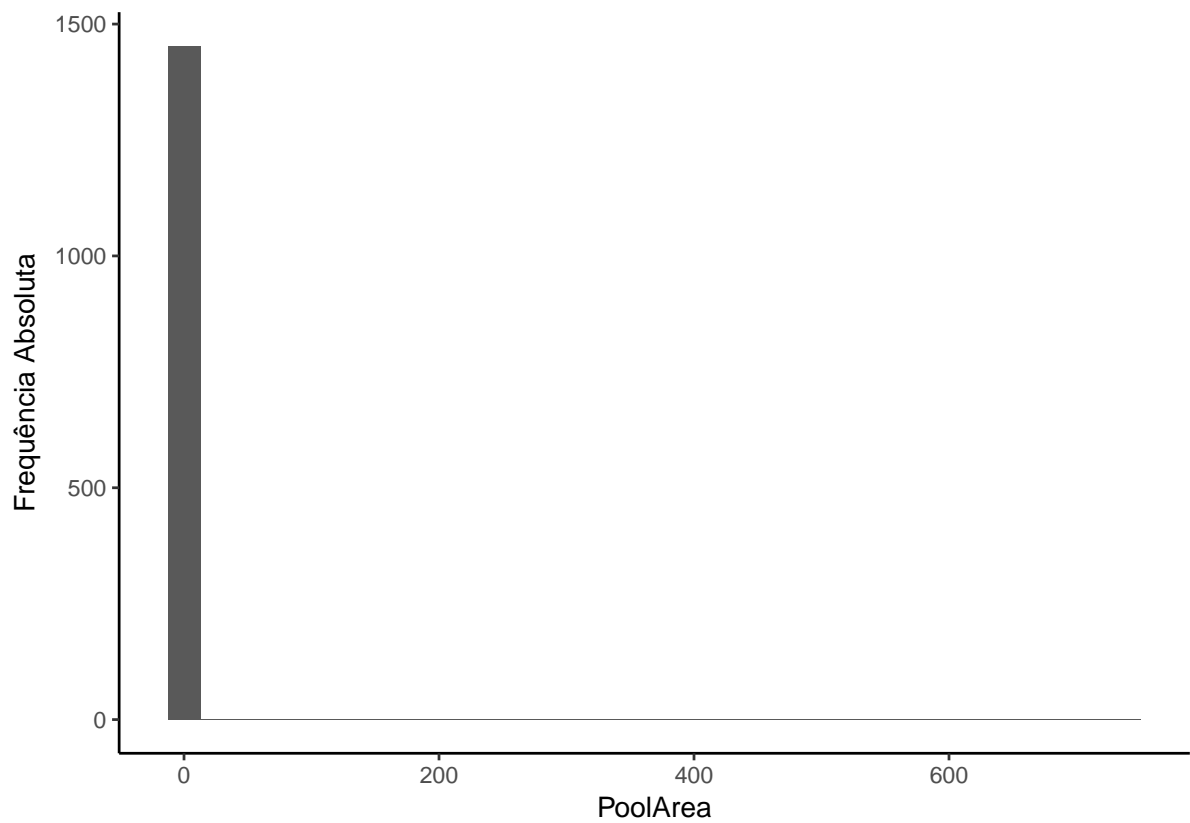


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

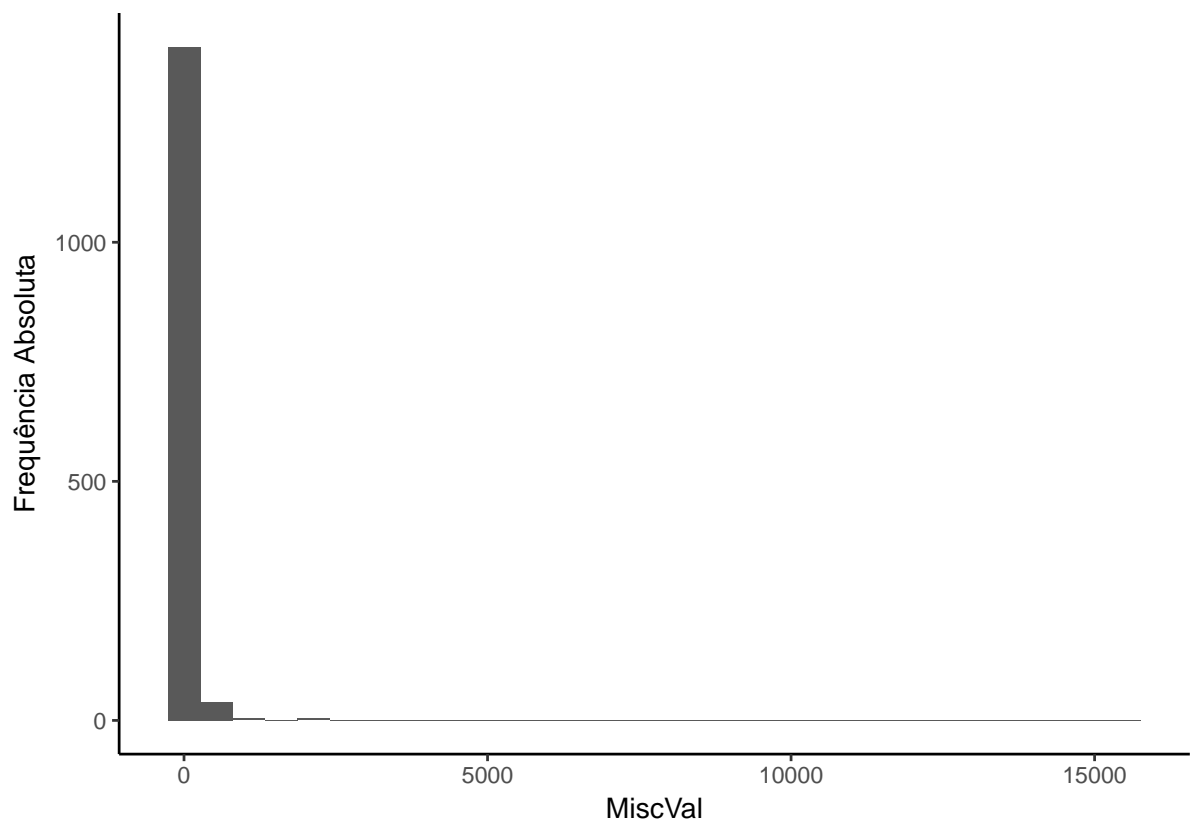


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

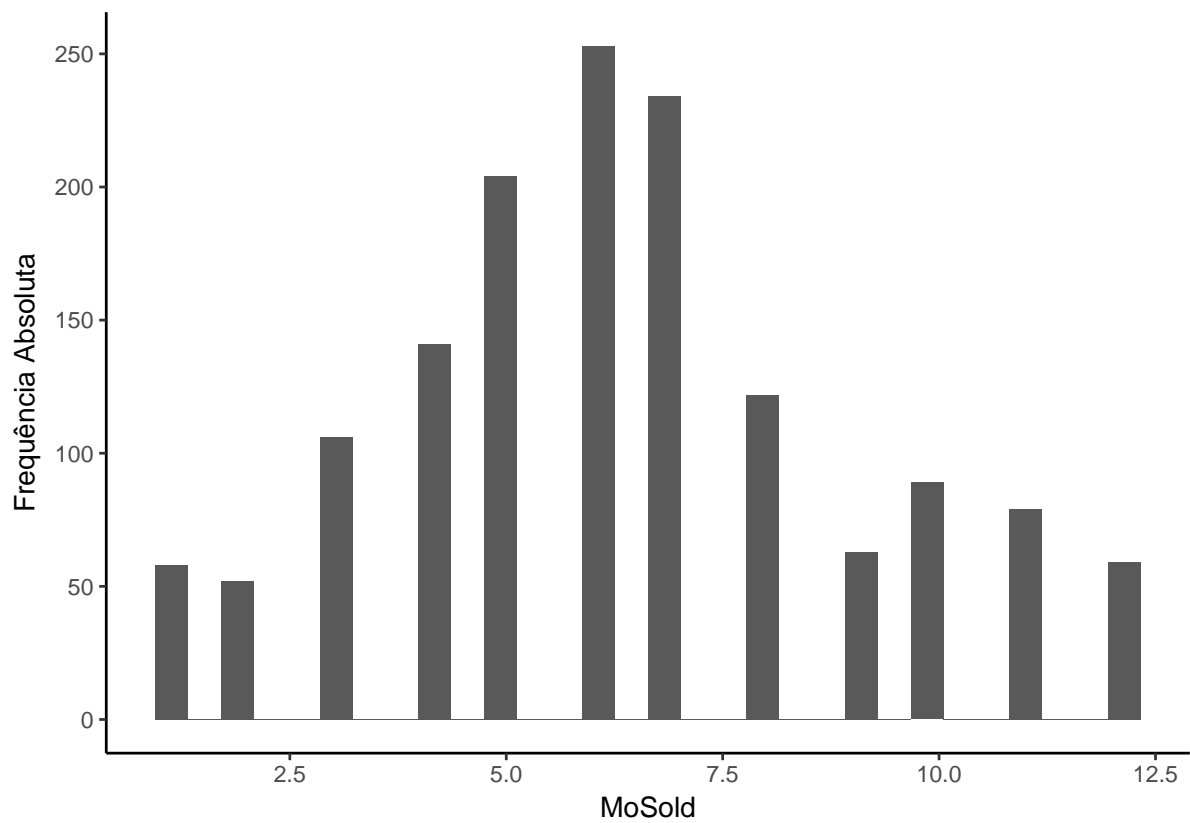

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

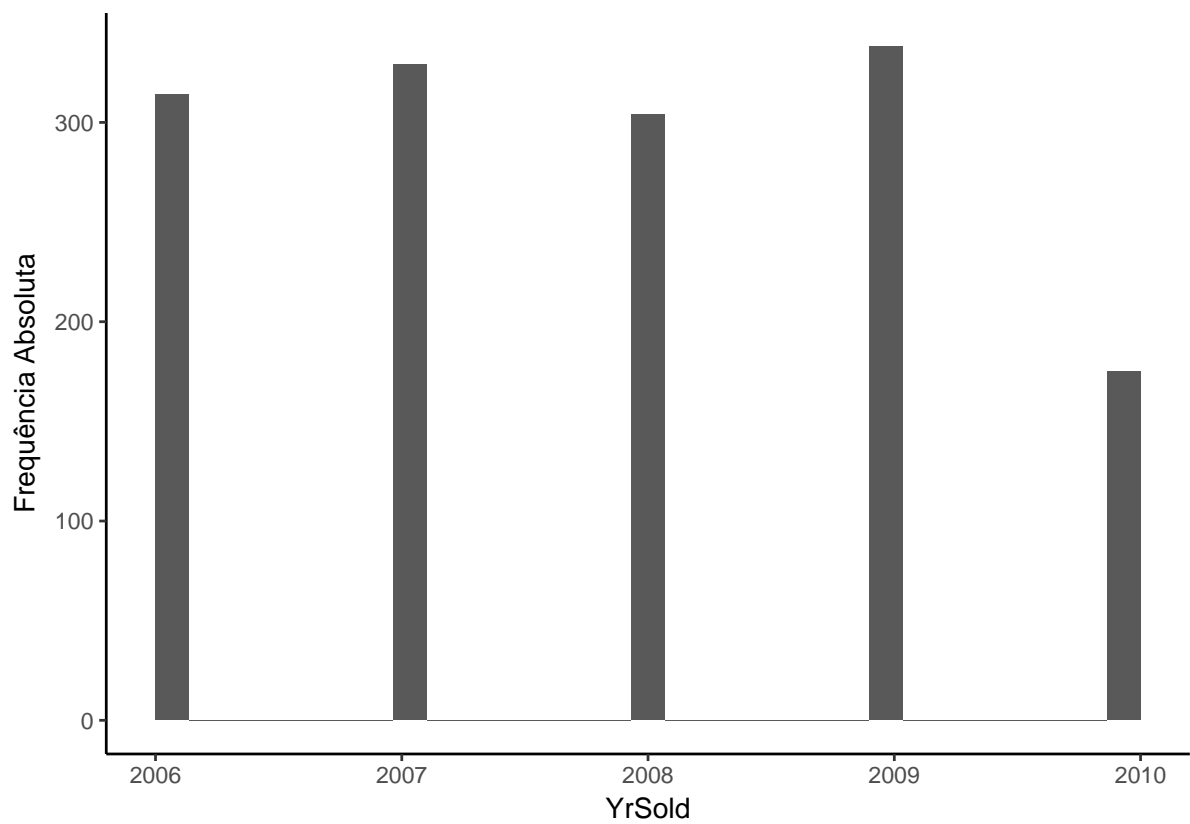

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

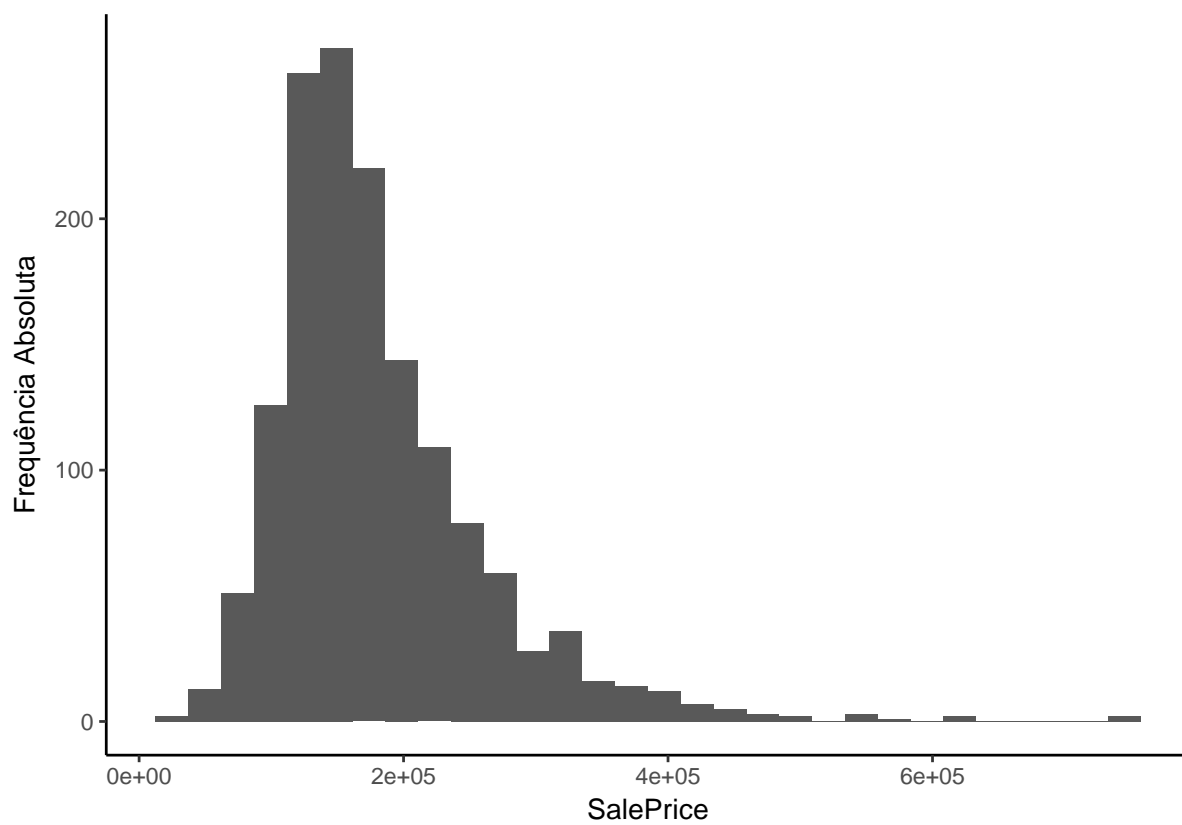APÊNDICES

```
# Antes de começar dê um setwd na pasta HousePrices  
# (onde quer que ela esteja no seu pc)
```

```
# setwd("Exploratory/");
```

```
# Importando dados
```

```
training_data <- read.csv(file="../Data/train.csv", as.is=FALSE);  
remover_colunas <- c("Id");  
training_data <- training_data[ , !(names(training_data) %in% remover_colunas )];
```

```
# Transformando as variáveis qualitativas que aparecem como um código numérico em fatores  
training_data$MSSubClass <- as.factor(training_data$MSSubClass);
```

```
# Tipos das variáveis
```

```
vars_tipo <- sapply(X=training_data, FUN=class);
```

```
library("ggplot2");
```

```
qualitativas <- which(vars_tipo=="factor");
```

```
for(ii in qualitativas){  
  gg <- ggplot(data=training_data, mapping=aes_string(x=colnames(training_data)[ii]) ) +  
    geom_bar() +  
    scale_y_continuous(name="Frequência Absoluta") +  
    theme(axis.text.x = element_text(angle = 60, hjust = 1))  
    theme_classic();  
  print(gg);  
}
```

```
quantitativas <- which(vars_tipo=="integer");
```

```
for(ii in quantitativas){  
  gg <- ggplot(data=training_data,  
    mapping=aes_string(x=colnames(training_data)[ii]) ) +  
    geom_histogram() +  
    scale_y_continuous(name="Frequência Absoluta") +  
    theme_classic();  
  print(gg);  
}
```