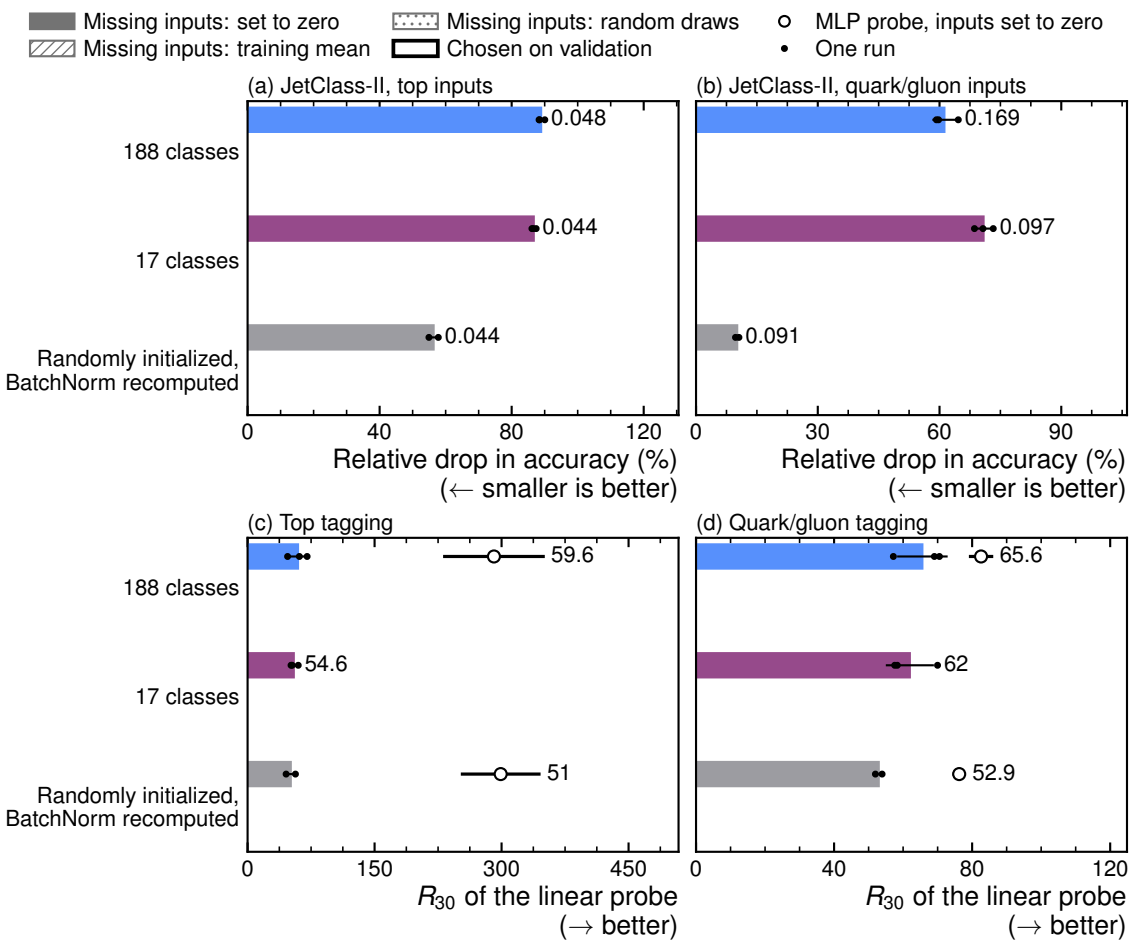

Missing inputs: set to zero
Missing inputs: training mean
Missing inputs: random draws
Chosen on validation
MLP probe, inputs set to zero
One run
(a) JetClass-II, top inputs
188 classes
17 classes
Randomly initialized, BatchNorm recomputed
0.048
0.044
0.044
0
40
80
120
Relative drop in accuracy (%)
(← smaller is better)
(b) JetClass-II, quark/gluon inputs
0.169
0.097
0.091
0
30
60
90
Relative drop in accuracy (%)
(← smaller is better)
(c) Top tagging
59.6
54.6
51
0
150
300
450
R_{30} of the linear probe
(→ better)
(d) Quark/gluon tagging
65.6
62
52.9
0
40
80
120
R_{30} of the linear probe
(→ better)