

TRYING OUT SOME COMMANDS

NAME	S.SHANTHAN REDDY
ROLL No.	CB.EN.U4CSE19459


1. cmd.exe

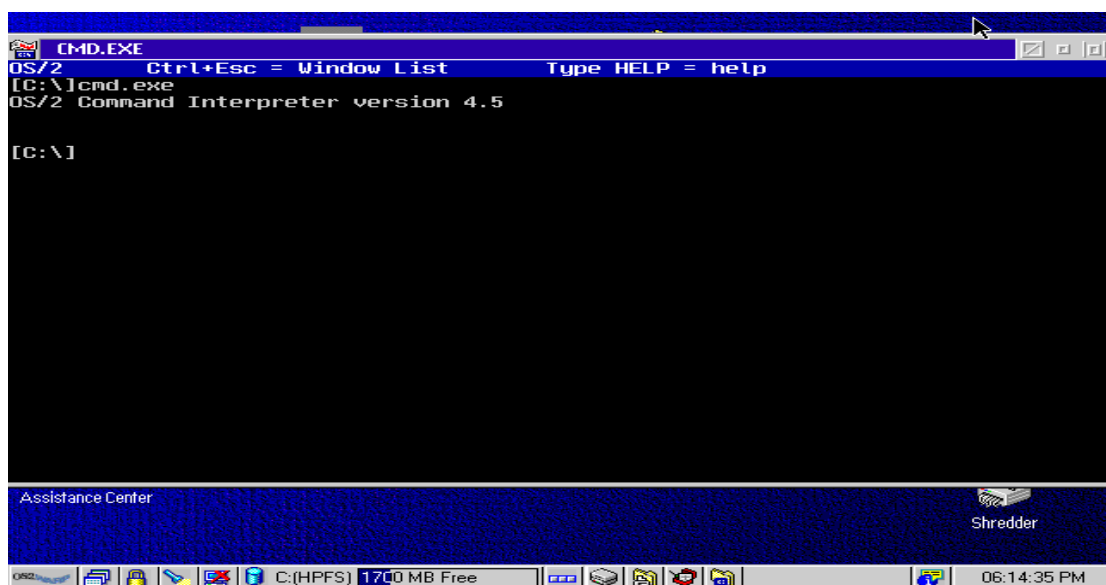

```
OS/2 Ctrl+Esc = Window List Type HELP = help
[C:\>cmd.exe]
OS/2 Command Interpreter version 4.5

[C:\>]
```


2. dir

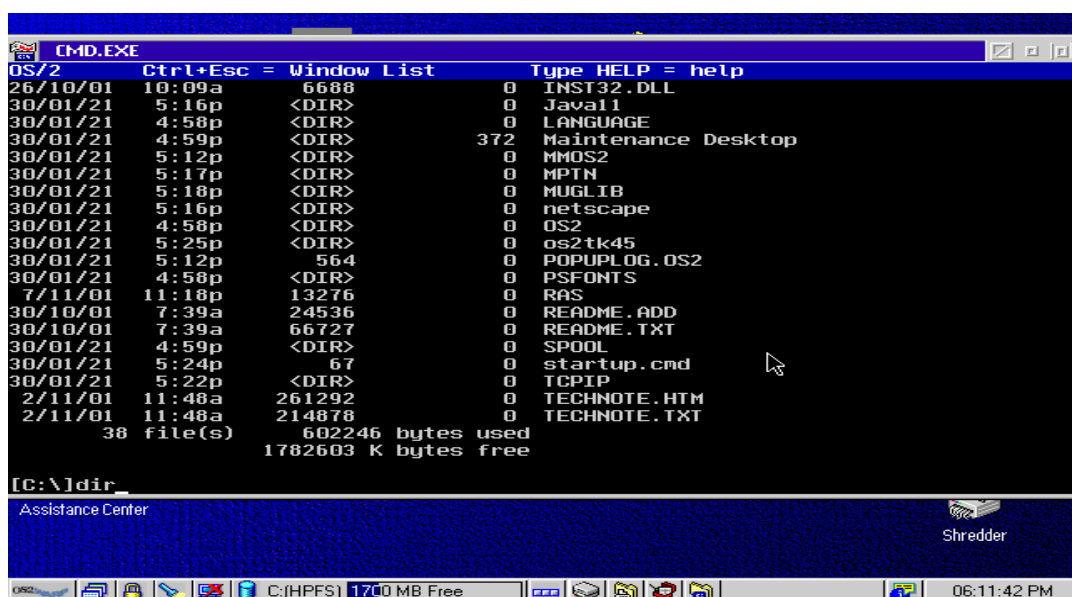

```
OS/2 Ctrl+Esc = Window List Type HELP = help
[C:\>dir]
26/10/01 10:09a 6688 0 INST32.DLL
30/01/21 5:16p <DIR> 0 Java11
30/01/21 4:58p <DIR> 0 LANGUAGE
30/01/21 4:59p <DIR> 372 Maintenance Desktop
30/01/21 5:12p <DIR> 0 MMOS2
30/01/21 5:17p <DIR> 0 MPTN
30/01/21 5:18p <DIR> 0 MUGLIB
30/01/21 5:16p <DIR> 0 netscape
30/01/21 4:58p <DIR> 0 OS2
30/01/21 5:25p <DIR> 0 os2tk45
30/01/21 5:12p 564 0 POPUPLOG.OS2
30/01/21 4:58p <DIR> 0 PSFONTS
7/11/01 11:18p 13276 0 RAS
30/10/01 7:39a 24536 0 README.ADD
30/10/01 7:39a 66727 0 README.TXT
30/01/21 4:59p <DIR> 0 SPOOL
30/01/21 5:24p 67 0 startup.cmd
30/01/21 5:22p <DIR> 0 TCPIP
2/11/01 11:48a 261292 0 TECHNOTE.HTM
2/11/01 11:48a 214878 0 TECHNOTE.TXT
38 file(s) 602246 bytes used
1782603 K bytes free

[C:\>dir]
```

3. Ifconfig :

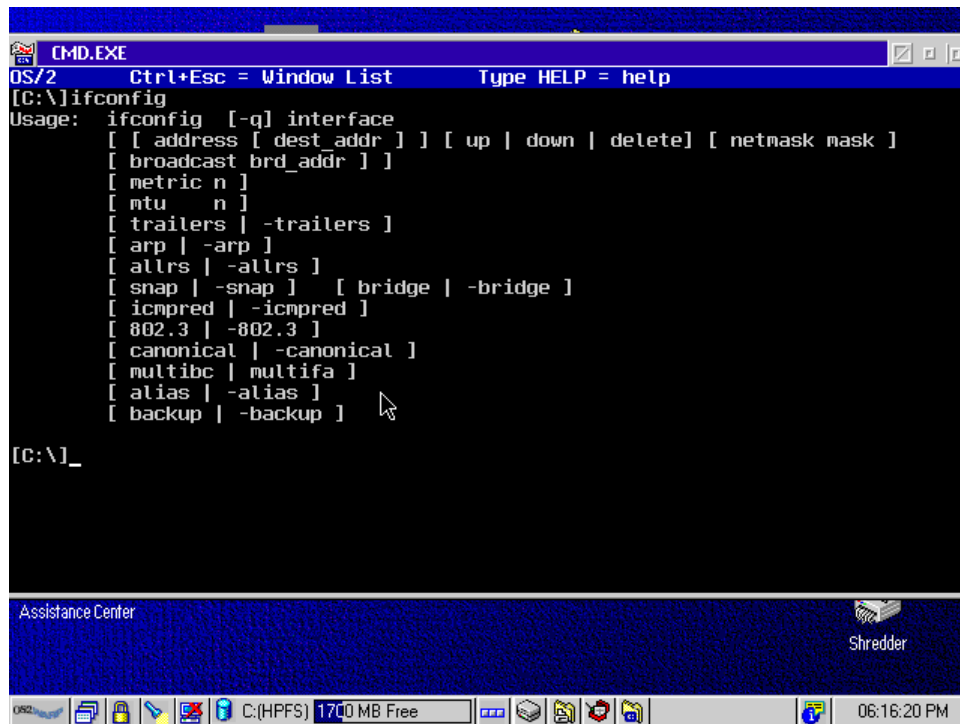

The screenshot shows a Windows 95/98 desktop environment. A Command Prompt window titled "CMD.EXE" is open, displaying the help text for the `ifconfig` command. The window has a menu bar with "OS/2", "Ctrl+Esc = Window List", and "Type HELP = help". The command prompt shows the user has entered `[C:\]ifconfig`, and the help text is displayed. The help text lists various options for the `ifconfig` command, including `[-q]`, `interface`, `address`, `dest_addr`, `broadcast`, `brd_addr`, `metric`, `ntu`, `trailers`, `-trailers`, `arp`, `-arp`, `allrs`, `-allrs`, `snap`, `-snap`, `bridge`, `-bridge`, `icmpred`, `-icmpred`, `802.3`, `-802.3`, `canonical`, `-canonical`, `multibc`, `multifa`, `alias`, `-alias`, `backup`, and `-backup`. The window also shows an "Assistance Center" button and a "Shredder" icon in the taskbar. The taskbar includes a clock showing "06:16:20 PM" and a status bar showing "C:(HPFS) 1700 MB Free".

```
CMD.EXE
OS/2      Ctrl+Esc = Window List      Type HELP = help
[C:\]ifconfig
Usage:  ifconfig [-q] interface
        [ [ address [ dest_addr ] ] [ up | down | delete] [ netmask mask ]
        [ broadcast brd_addr ] ]
        [ metric n ]
        [ mtu n ]
        [ trailers | -trailers ]
        [ arp | -arp ]
        [ allrs | -allrs ]
        [ snap | -snap ] [ bridge | -bridge ]
        [ icmpred | -icmpred ]
        [ 802.3 | -802.3 ]
        [ canonical | -canonical ]
        [ multibc | multifa ]
        [ alias | -alias ]
        [ backup | -backup ]
```