


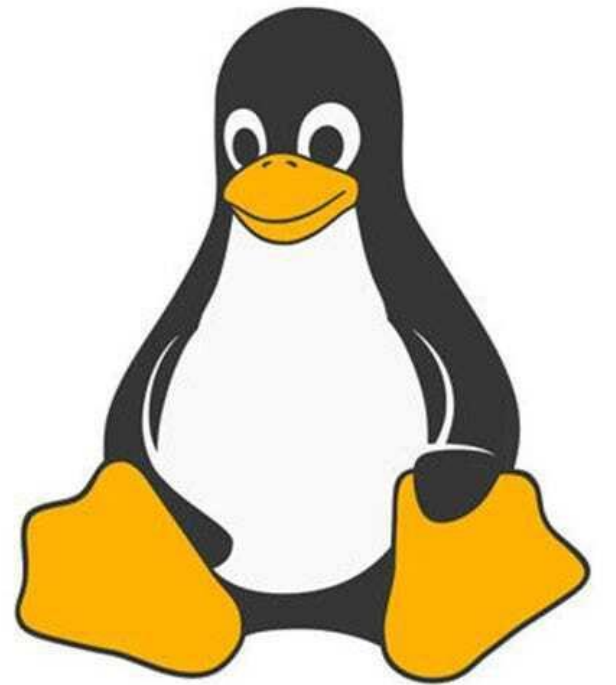

Linux™

Commands of Linux

Creating the user and groups		Purpose	Command
useradd : Command used to create users Command: useradd username sudo useradd <username> - If you are not non-admin user Example: useradd ram sudo useradd username groupname – to useradd to particular group. cat /etc/passwd – to see list of users userdel : command used to delete users Command: userdel username sudo userdel <username> - If you are not non-admin user Example: userdel ram passwd : command used to set/modify password Command: passwd username sudo passwd <username> - If you are not non-admin user Example: passwd ram who - username along with sessions and when they logged in whoami - just username users - Shows only usernames of logged-in users last - Previous logins lastlog - Shows last login of all users id - display id of user uptime - shows Current time, Logged-in users count, System load		Add user	useradd
		Delete user	userdel
		Modify user	usermod
		Set password	passwd
		Manage groups	groupadd

Creating the user and groups

usermod : command used to modify user

Example: **sudo usermod -l newname oldname** - to change user name

sudo usermod -d /new/home username - to delete user home directory

sudo usermod -aG group1,group2 username - to add user to multiple group

sudo usermod -d /new/home username - to change home directory

sudo usermod -d /new/home -m username - Move existing content: where -m is move

groupadd : Command used to create

Command: **groupadd groupname**

sudo groupadd groupname - If you are not non-admin user

Example: **sudo groupadd groupname** - to create new group

sudo groupdel groupname - to delete group

sudo groupmod -n newname oldname - to change the name of existing group

sudo usermod -aG groupname username - to add user to group

cat /etc/group - to see list of group

groups username - list of groups of a user

groups - list group of current user

additional info

cat /etc/passwd – to see list of users

Output:- ravi : x : 1001 : 1001 : Ravi : /home/ravi : /bin/bash

username : password : UID : GID : comment : home_dir : shell

👉 Unique ID for the user

- 0 → root
- 1-999 → system users
- 1000+ → normal users

ravi:x:... --- Password stored in /etc/shadow ✅ (secure)

ravi:*:... --- Account is disabled

ravi:!:... --- Password login is disabled

ravi:::... --- User can log in without password

chown : command used to change the ownership of a file.

Command: **chown newowner filename**

Example: **chown ram example.txt** - to change ownership of example.txt to ram

sudo chown ravi:dev file.txt - Owner = ravi, Group = dev

sudo chown :dev file.txt - Only group changes

sudo chown -R ravi /project - Applies to all files/folders inside

echo : used to display lines of text or variables directly to the terminal.

Command: **echo [-neE] [Arguments]**

Options:

-n do not append a newline or trailing newline is suppressed

-e enable interpretation of the following backslash escapes

-E explicitly suppress interpretation of backslash escapes

Redirect(>) : used to write output of a command to a file,

If file does't exists then it will create a file and write it,

if file exists the it will overwrite the entire file.

Examples: **ls -lrt > files.txt**

date > date.txt

echo Hello World > file.txt

echo New Content > file.txt

Append(>>) : used to attach the content or output of a command to end of a file. The new content will not overwrite the existing content of a file.

Examples: **ls -lrt > files.txt**

explicitly suppress interpretation of backslash escapes

Notes:

Without Options & without Arguments echo just prints/displays an empty line

Arguments :

Only String(s)

Only Variable(s) (Variable can have any kind of data like:

(strings,chars,numbers,path,cmdoutput)

Wildcard *

Command Output also

Combination of all these

Although not necessary, it is a good practice to enclose the arguments in double or single quotes

If we use single quotes Variables will not be expanded and wildcard wont work

Example: **echo -e "name1 \ name2" - backslash**
echo -e "name1 \a name2" - alert
echo -e "name1 \b name2" - backspace
echo -e "name1 \n name2" - new linehorizontal tab
echo -e "name1 \t name2" - horizontal tab
echo -e "name1 \v name2" - vertical tab
echo -e "\033[0;33m name\033[0m" - to change output of a colour