

C1 implements I1, I2

Program Code:

```
package core_java;

interface I1 {
    void start();
}

interface I2 {
    void stop();
}

class C1 implements I1, I2 {

    public void start() {
        System.out.println("System started");
    }

    public void stop() {
        System.out.println("System stopped");
    }

    void checkStatus() {
        System.out.println("System status is normal");
    }
}

public class C1toI1I2 {
    public static void main(String[] args) {

        C1 obj = new C1();

        obj.start();
        obj.checkStatus();
        obj.stop();
    }
}
```

Explanation:

This program demonstrates multiple interface implementation. Interface I1 declares the start() method and interface I2 declares the stop() method. Class C1 implements both interfaces and provides implementations for their methods. It also contains its own method checkStatus().


Compilation and Execution Commands:

Save the file as: C1toI1I2.java

Compile:
javac -d . C1toI1I2.java

Run:
java core_java.C1toI1I2

Output Screenshot:

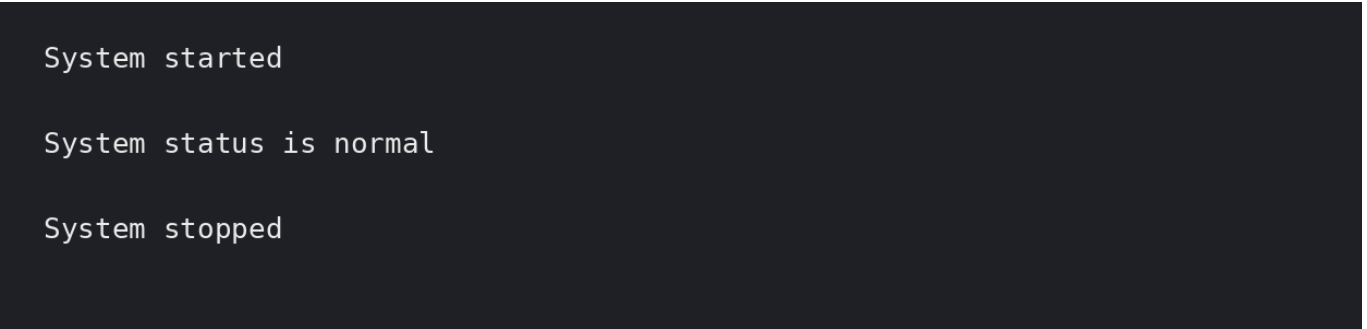

```
System started

System status is normal

System stopped
```

Verification:

The output confirms that the C1 object successfully executes methods from both interfaces I1 and I2, along with its own method.

Result:

Thus, the program was successfully executed and the relationship C1 implements I1, I2 was verified successfully.