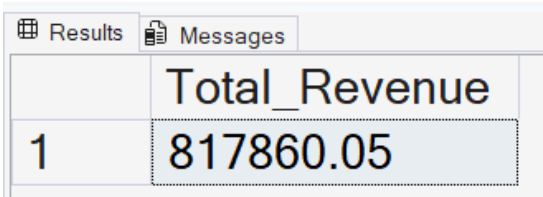
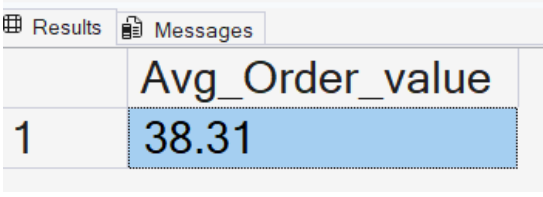
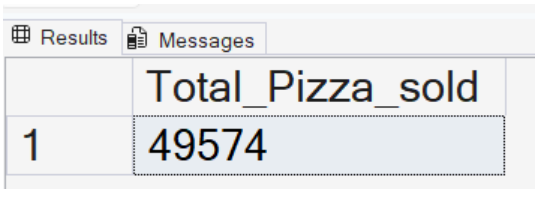


Pizza Sales SQL Queries

A. KPI Cards

SQL Queries	Output				
-- 1. Find the total Revenue <pre>SELECT CAST(SUM(total_price) AS Decimal(10,2)) AS Total_Revenue FROM Pizza_sales;</pre>	 The screenshot shows a SQL query results window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a single row with the column name 'Total_Revenue' and the value '817860.05'. <table><thead><tr><th></th><th>Total_Revenue</th></tr></thead><tbody><tr><td>1</td><td>817860.05</td></tr></tbody></table>		Total_Revenue	1	817860.05
	Total_Revenue				
1	817860.05				
-- 2. Average Order Value <pre>SELECT CAST(SUM(total_price) / COUNT(DISTINCT Order_id) AS Decimal(10,2)) AS Avg_Order_value FROM Pizza_sales;</pre>	 The screenshot shows a SQL query results window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a single row with the column name 'Avg_Order_value' and the value '38.31'. <table><thead><tr><th></th><th>Avg_Order_value</th></tr></thead><tbody><tr><td>1</td><td>38.31</td></tr></tbody></table>		Avg_Order_value	1	38.31
	Avg_Order_value				
1	38.31				
-- 3. Total Pizza Sold <pre>SELECT SUM(Quantity) as Total_Pizza_sold FROM Pizza_sales;</pre>	 The screenshot shows a SQL query results window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a single row with the column name 'Total_Pizza_sold' and the value '49574'. <table><thead><tr><th></th><th>Total_Pizza_sold</th></tr></thead><tbody><tr><td>1</td><td>49574</td></tr></tbody></table>		Total_Pizza_sold	1	49574
	Total_Pizza_sold				
1	49574				
-- 4. Total Order Place <pre>SELECT COUNT(DISTINCT Order_Id) as Total_orders FROM Pizza_sales;</pre>	 The screenshot shows a SQL query results window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a single row with the column name 'Total_orders' and the value '21350'. <table><thead><tr><th></th><th>Total_orders</th></tr></thead><tbody><tr><td>1</td><td>21350</td></tr></tbody></table>		Total_orders	1	21350
	Total_orders				
1	21350				

-- 5. Average Pizza per Order

```
SELECT
    CAST(
        CAST(SUM(Quantity) AS DECIMAL(10,2)) /
        COUNT(DISTINCT Order_id)
        AS DECIMAL(10,2)
    )as Avg_pizzas_per_Orders
FROM pizza_sales;
```

Results Messages	
	Avg_pizzas_per_Orders
1	2.32

B. Visual Charts

-- 1. Daily Trends for total Orders

```
SELECT
    DATENAME(DW, Order_date) AS DayOfWeek,
    COUNT(distinct Order_id) AS Total_Orders
FROM Pizza_sales
GROUP BY DATENAME(DW, Order_date)
ORDER BY Total_Orders DESC;
```

Results Messages		
	DayOfWeek	Total_Orders
1	Friday	3538
2	Thursday	3239
3	Saturday	3158
4	Wednesday	3024
5	Tuesday	2973
6	Monday	2794
7	Sunday	2624

-- 2. Monthly Trend for total Orders

```
SELECT
    DATENAME(MONTH, Order_date) AS MonthOfYear,
    COUNT(DISTINCT Order_id) AS Total_orders
FROM Pizza_Sales
GROUP BY DATENAME(MONTH, Order_date)
ORDER BY Total_orders;
```

Results Messages		
	MonthOfYear	Total_orders
1	October	1646
2	September	1661
3	December	1680
4	February	1685
5	June	1773
6	November	1792
7	April	1799
8	March	1840
9	August	1841
10	January	1845
11	May	1853
12	July	1935

-- 3. Percentage of Sales by Pizza Category

```
WITH total_sales AS (  
SELECT SUM(Total_price) AS total_Sales  
FROM Pizza_sales  
)  
SELECT  
    Pizza_Category,  
    CAST(SUM(Total_Price) AS DECIMAL(10,2)) As Total_Sales,  
    Round(SUM(Total_Price) * 100.0 / ts.total_Sales,2) As Sales_Percentage  
FROM Pizza_sales  
CROSS JOIN Total_sales ts  
Group by Pizza_Category, ts.Total_sales  
ORDER BY Total_sales DESC;
```

Results Messages

	Pizza_Category	Total_Sales	Sales_Percentage
1	Classic	220053.10	26.91
2	Supreme	208197.00	25.46
3	Chicken	195919.50	23.96
4	Veggie	193690.45	23.68

Note

I want to apply the month, quarter, and week filter to the Queries
Can use WHERE CLAUSE. Follow some of the examples below

-- 3. Percentage of Sales by Pizza Category

```
SELECT  
    Pizza_Category,  
    CAST(SUM(Total_Price) AS DECIMAL(10,2)) As Total_Sales,  
    Round(  
        SUM(Total_Price) * 100.0 / (SELECT SUM(Total_price) AS total_Sales FROM Pizza_sales  
        WHERE Month(Order_date) = 1),2  
    )As Sales_Percentage  
FROM Pizza_sales  
WHERE Month(Order_date) = 1  
Group by Pizza_Category  
ORDER BY Total_sales DESC;  
  
(SELECT SUM(Total_price) AS total_Sales FROM Pizza_sales  
WHERE Month(Order_date) = 1)
```


--	--