# Drink Diary Pro Testing Reports

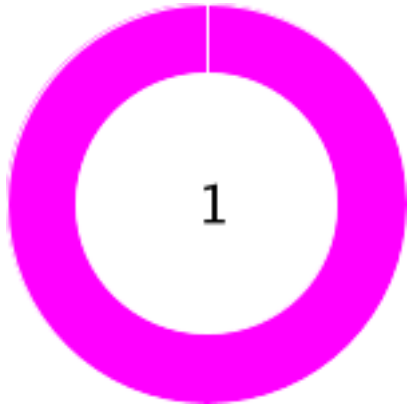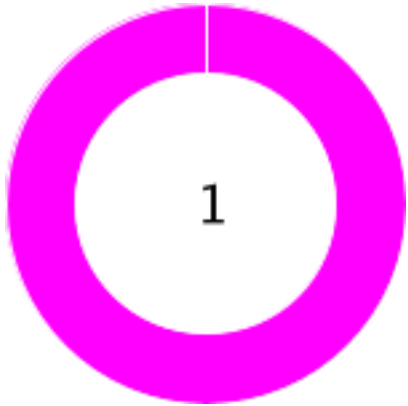| Start : Sep 10, 5:16:30.433 PM | End : Sep 10, 5:17:18.937 PM | Duration : 48.504 s |
|---|---|---|
| Features | Scenarios | Steps |
| PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 |

| Feature | | Scenario | | | | Step | | | |
|---|---|---|---|---|---|---|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| *RC4 Test Scenarios* | *48.504 s* | *1* | *0* | *1* | *0* | *1* | *0* | *1* | *0* |

| Tag | Scenario | | | | Feature | | | |
|---|---|---|---|---|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @Regresion | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|
| 1 | RC4 Test Scenarios | 1 | 0 | 1 | 0 | 48.504 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|---|
| 1 | RC4 Test Scenarios | Verify app should open successfully without crashing | 1 | 0 | 1 | 0 | 48.501 s |
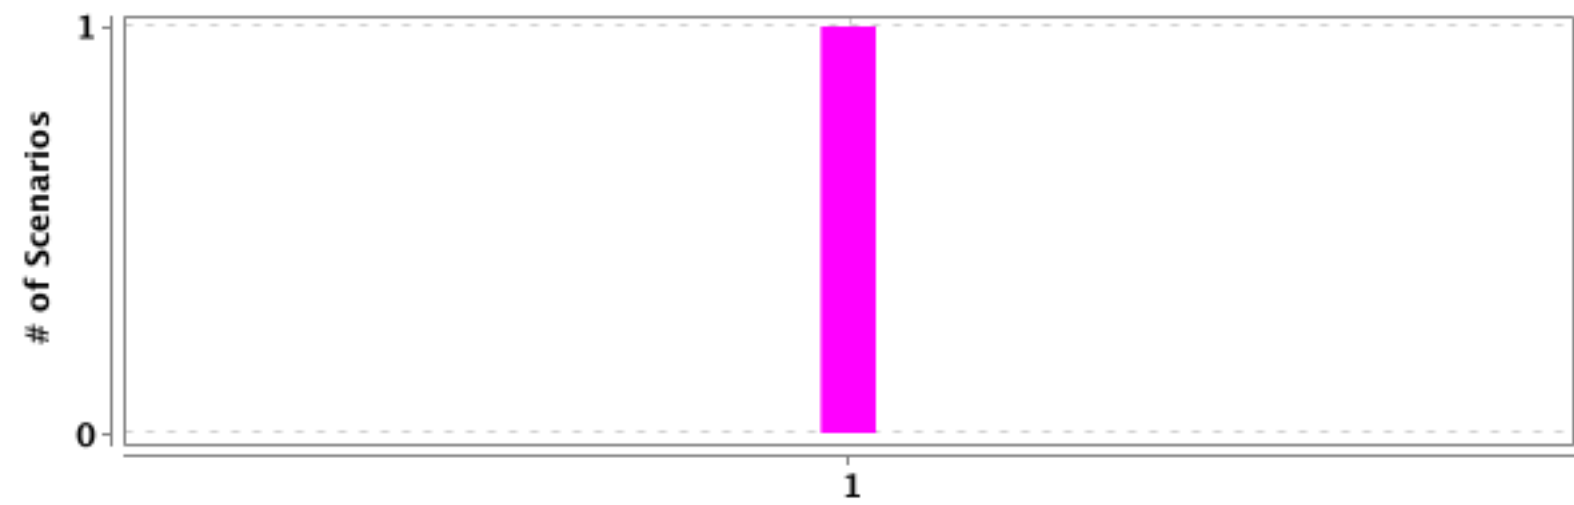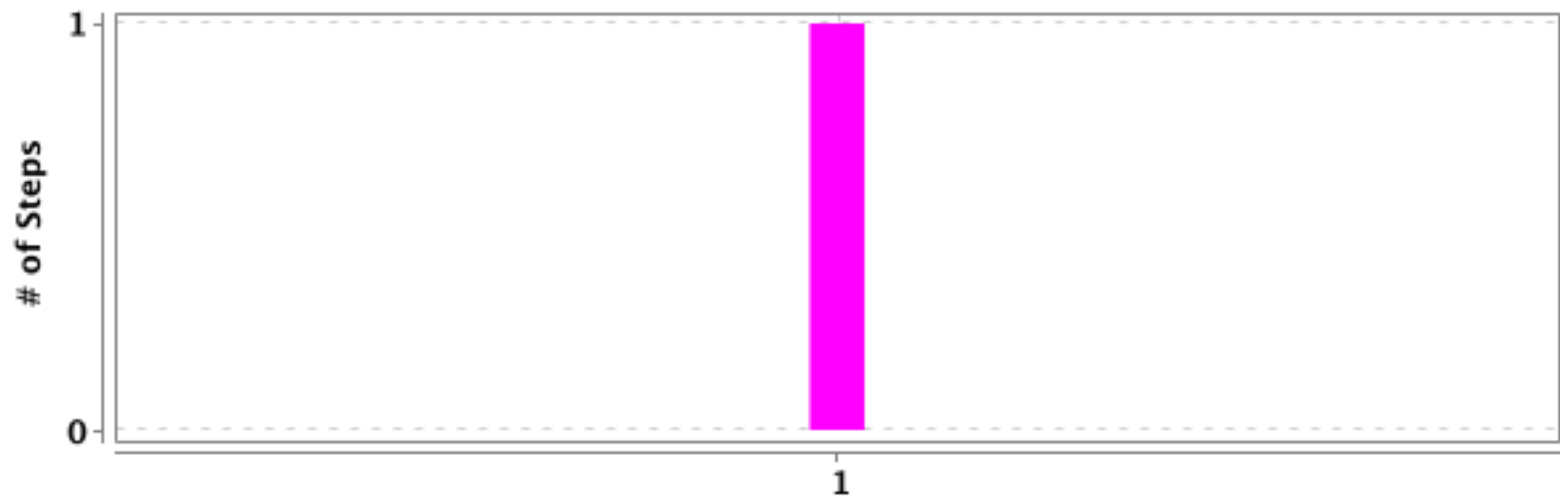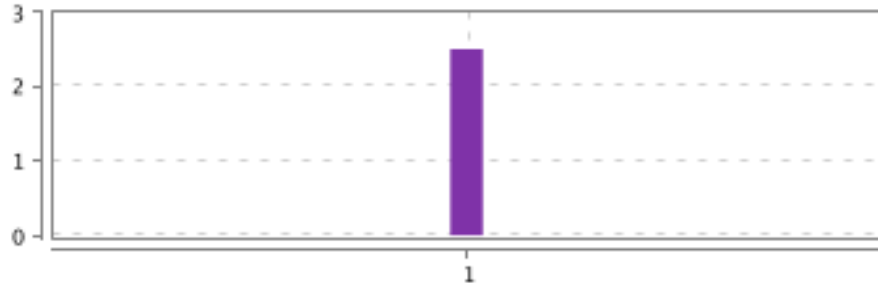
# RC4 Test Scenarios

| FAILED | DURATION - 48.504 s | Scenarios | | Steps | |
|---|---|---|---|---|---|
| | | Total - 1 | | Total - 1 | |
| / 5:16:30.433 PM // 5:17:18.937 PM / | | Pass - 0 | 1 | Pass - 0 | 1 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 0 | |

## Verify app should open successfully without crashing

| FAILED | DURATION - 48.501 s | | Steps | |
|---|---|---|---|---|
| / 5:16:30.436 PM // 5:17:18.937 PM / | | | Total - 1 | |
| RC4 Test Scenarios | | | Pass - 0 | 1 |
| @Regresion | | | Fail - 1 | |
| | | | Skip - 0 | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | BEFORE - Apphooks.Applicationhooks.setUp(io.cucumber.java.Scenario) | PASSED | 44.592 s |
| | Platform name :iOS | | |
| | Device name : iPhone | | |
| 1 | When Add a Drink button should show | FAILED | 2.504 s |
| | org.openqa.selenium.NoSuchElementException: An element could not be located on the page using the given search parameters. For documentation on this error, please visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'ASAHI-GH22010s-MacBook-Air.local', ip: '2400:2410:ae23:600:e47f:3ec:23a7:57ea%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.4.1', java.version: '17.0.10' Driver info: io.appium.java_client.ios.IOSDriver Capabilities {app: com.dearNatura.supplementDxApp, autoAcceptAlerts: true, automationName: XCUITest, browserName: , databaseEnabled: false, deviceName: iPhone 11, javascriptEnabled: true, locationContextEnabled: false, networkConnectionEnabled: false, platform: MAC, platformName: iOS, platformVersion: 17.6, takesScreenshot: true, udid: 00008030-001255311498C02E, webStorageEnabled: false, xcodeOrgId: S4T6PVN6LR, xcodeSigningId: iPhone Developer} Session ID: 84e760f5-3e41-4bb2-984f-2353e149a3d8 *** Element info: {Using=xpath, value=//XCUIElementTypeButton[@name="Add a Drink"]}    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) | | |
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) | | |
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) | | |
| | at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:250) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) | | |
| | at io.appium.java_client.DefaultGenericMobileDriver.execute(DefaultGenericMobileDriver.java:41) | | |
| | at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) | | |
| | at io.appium.java_client.ios.IOSDriver.execute(IOSDriver.java:1) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) | | |
| | at io.appium.java_client.DefaultGenericMobileDriver.findElement(DefaultGenericMobileDriver.java:61) | | |
| | at io.appium.java_client.AppiumDriver.findElement(AppiumDriver.java:1) | | |
| | at io.appium.java_client.ios.IOSDriver.findElement(IOSDriver.java:1) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428) | | |
| | at io.appium.java_client.DefaultGenericMobileDriver.findElementByXPath(DefaultGenericMobileDriver.java:151) | | |
| | at io.appium.java_client.AppiumDriver.findElementByXPath(AppiumDriver.java:1) | | |
| | at io.appium.java_client.ios.IOSDriver.findElementByXPath(IOSDriver.java:1) | | |
| | at org.openqa.selenium.By$ByXPath.findElement(By.java:353) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) | | |
| | at io.appium.java_client.DefaultGenericMobileDriver.findElement(DefaultGenericMobileDriver.java:57) | | |
| | at io.appium.java_client.AppiumDriver.findElement(AppiumDriver.java:1) | | |
| | at io.appium.java_client.ios.IOSDriver.findElement(IOSDriver.java:1) | | |
| | at StepDefinitions.StepDefinitions.Add_a_Drink_button_should_show(StepDefinitions.java:140) | | |
| | at ?.Add a Drink button should show(classpath:Features/RC4.feature:7) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER - Apphooks.Applicationhooks.failedScreenshot(io.cucumber.java.Scenario) | PASSED | 0.328 s |
| | Verify_app_should_open_successfully_without_crashing | | |
| |  | | |