


LinkedIn Connect — Session Capture (Extension OR Paste Cookies)


Two ways to attach a LinkedIn session — both end at encrypted storage

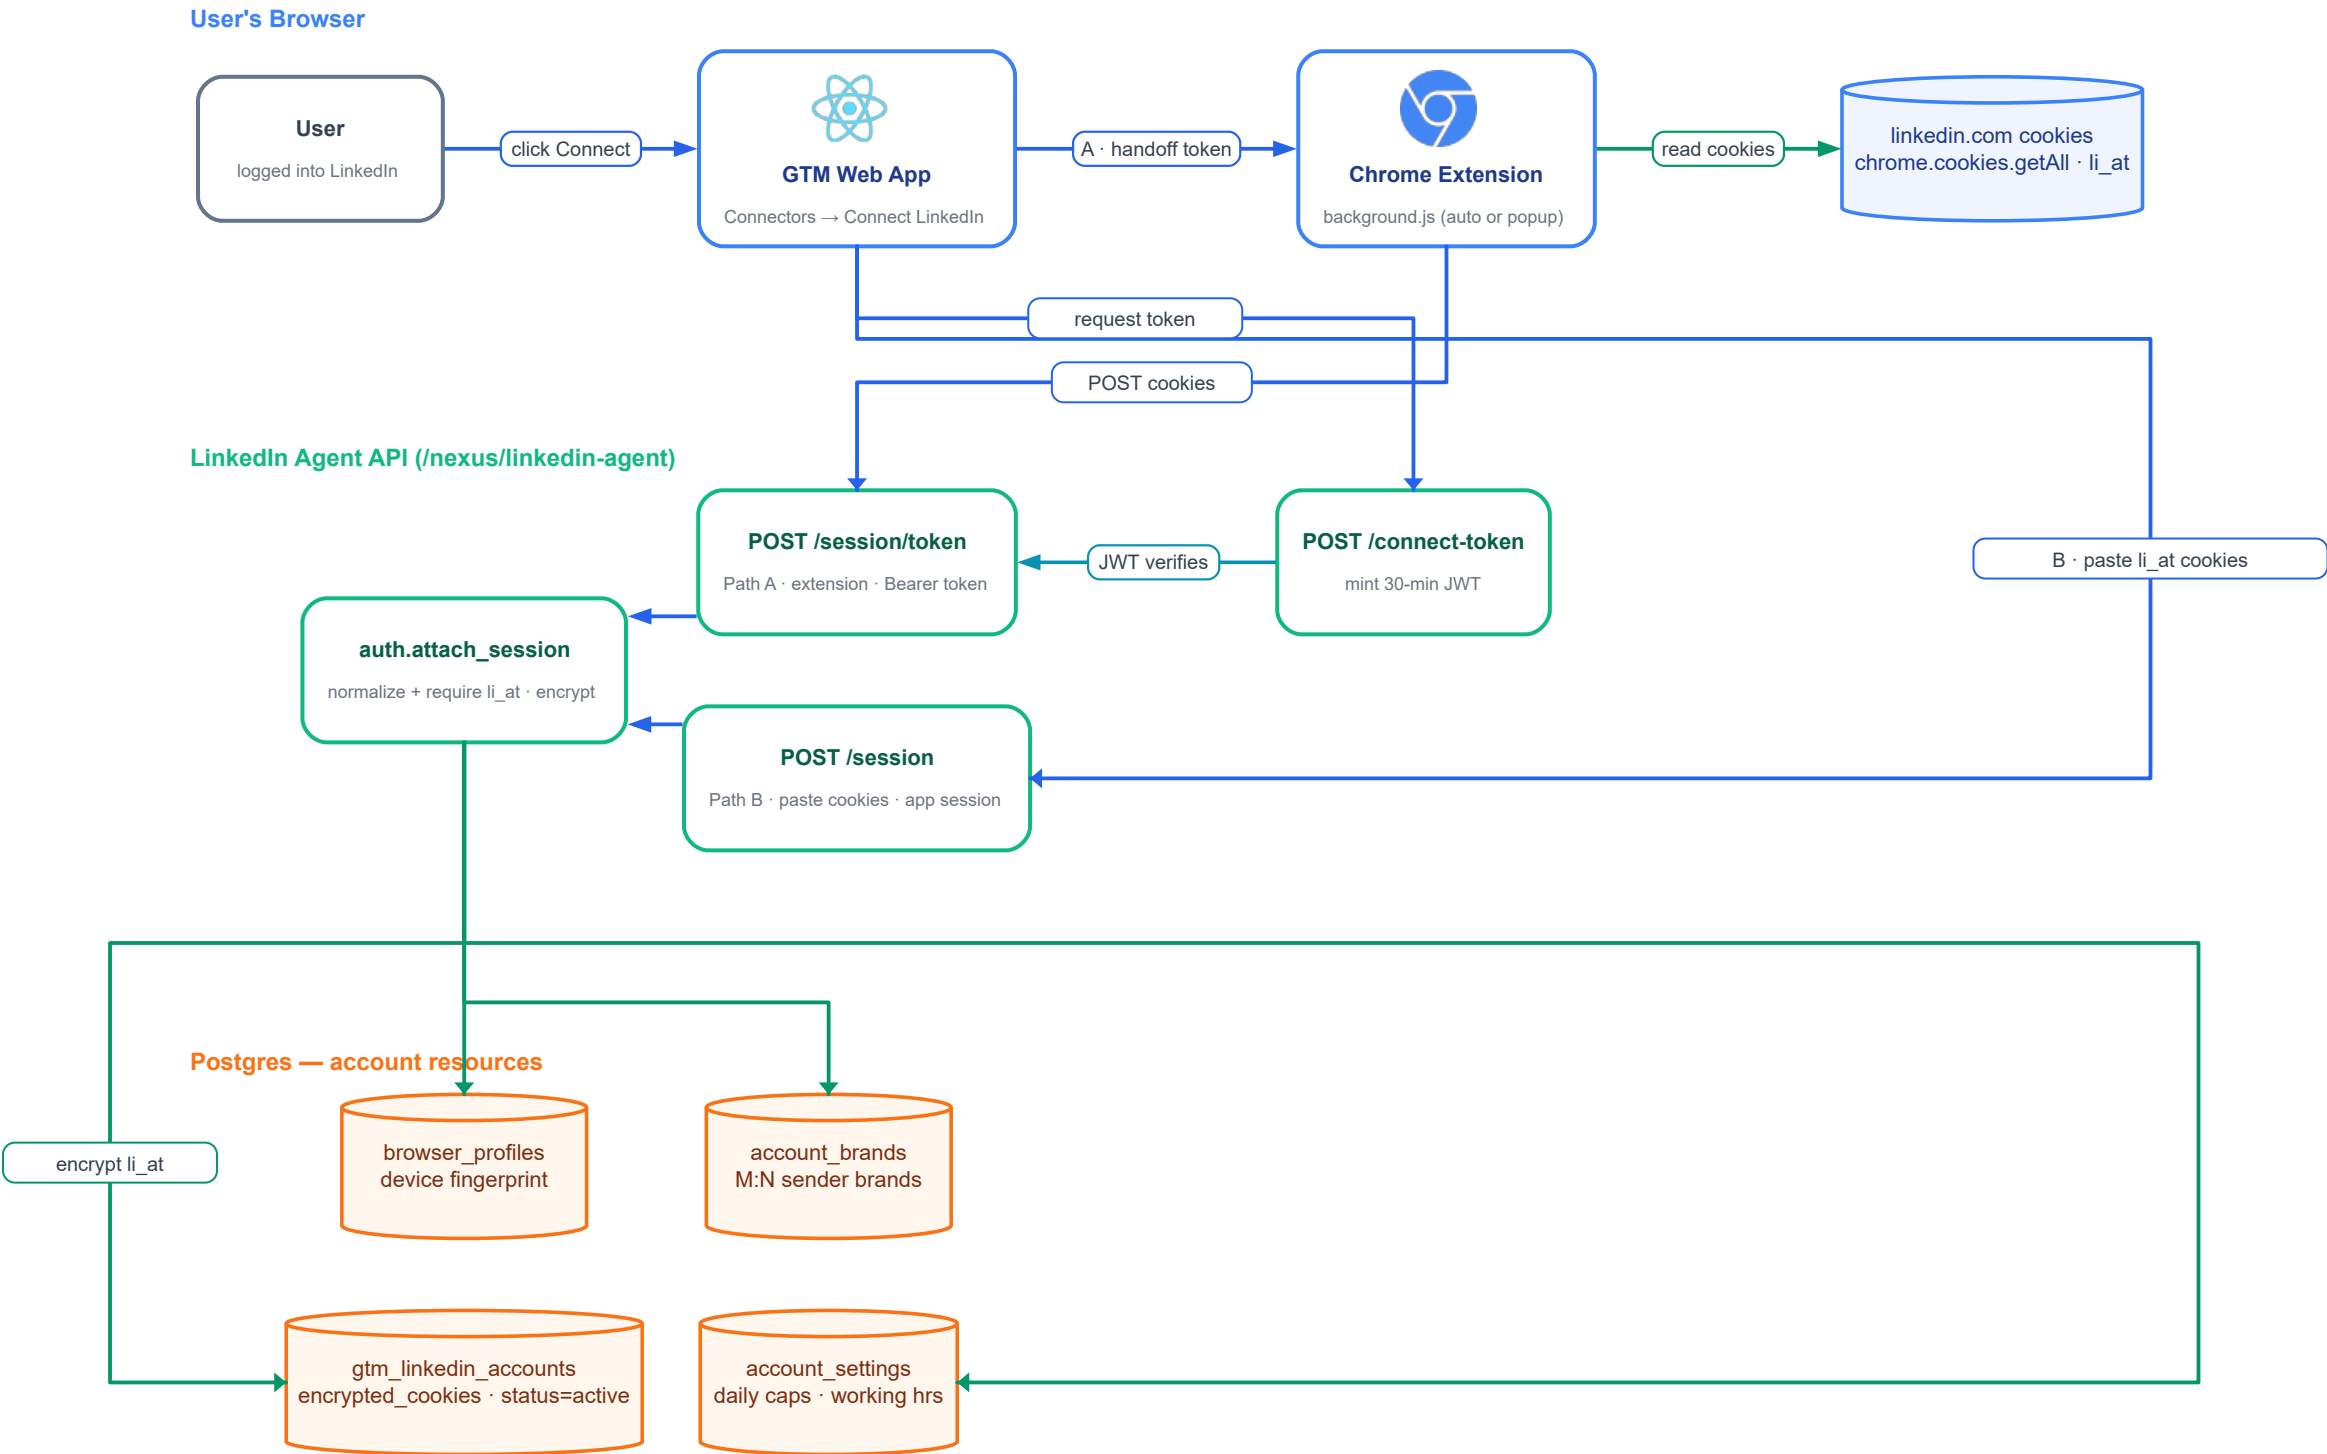


LinkedIn Engine — Scheduling & Dispatch

How a due step is picked, gated, and enqueued (EventBridge → SQS)

Triggers & Lead State

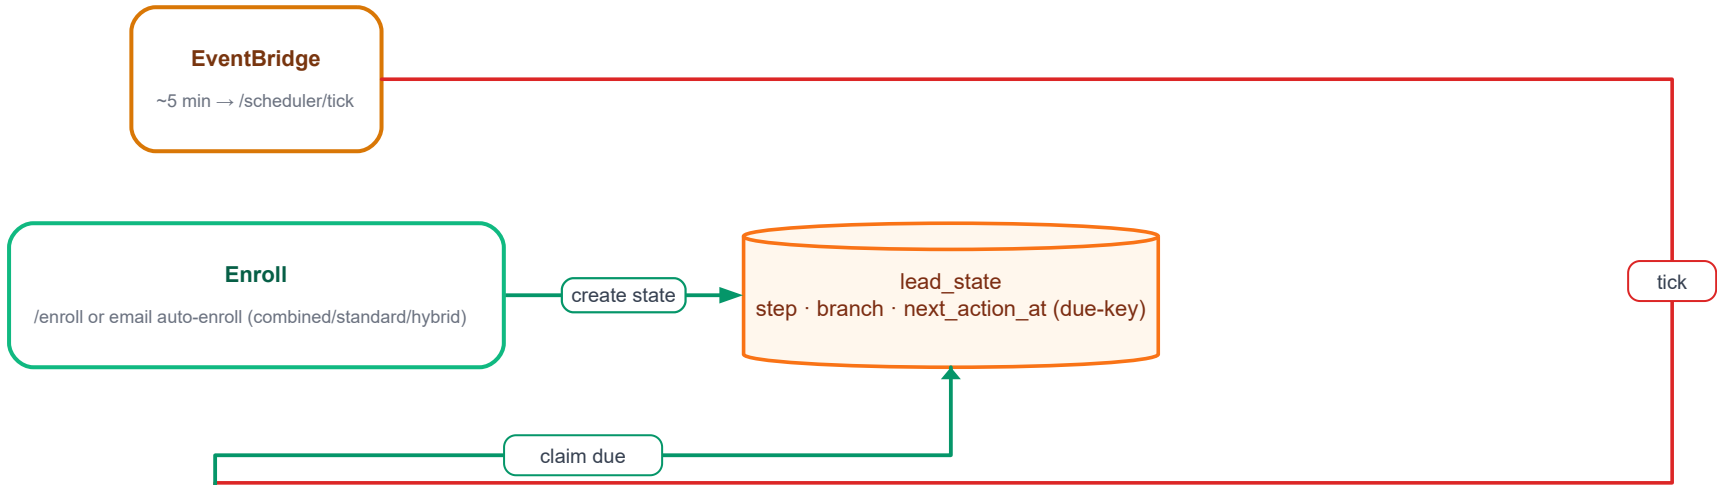

Dispatch & Safety Gate

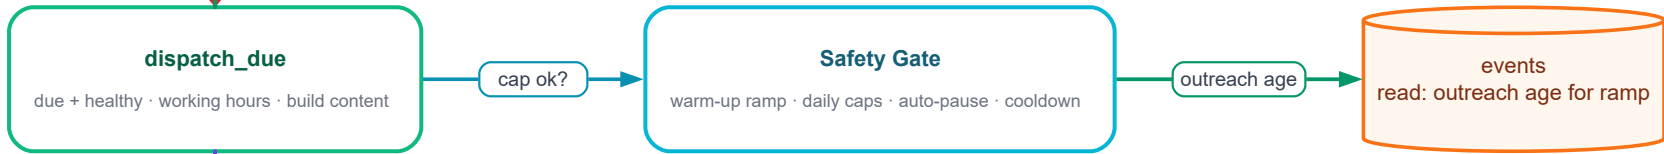


Job & Queue




LinkedIn Engine — Worker Execution (Playwright)

How one SQS job becomes a browser action and reschedules the lead

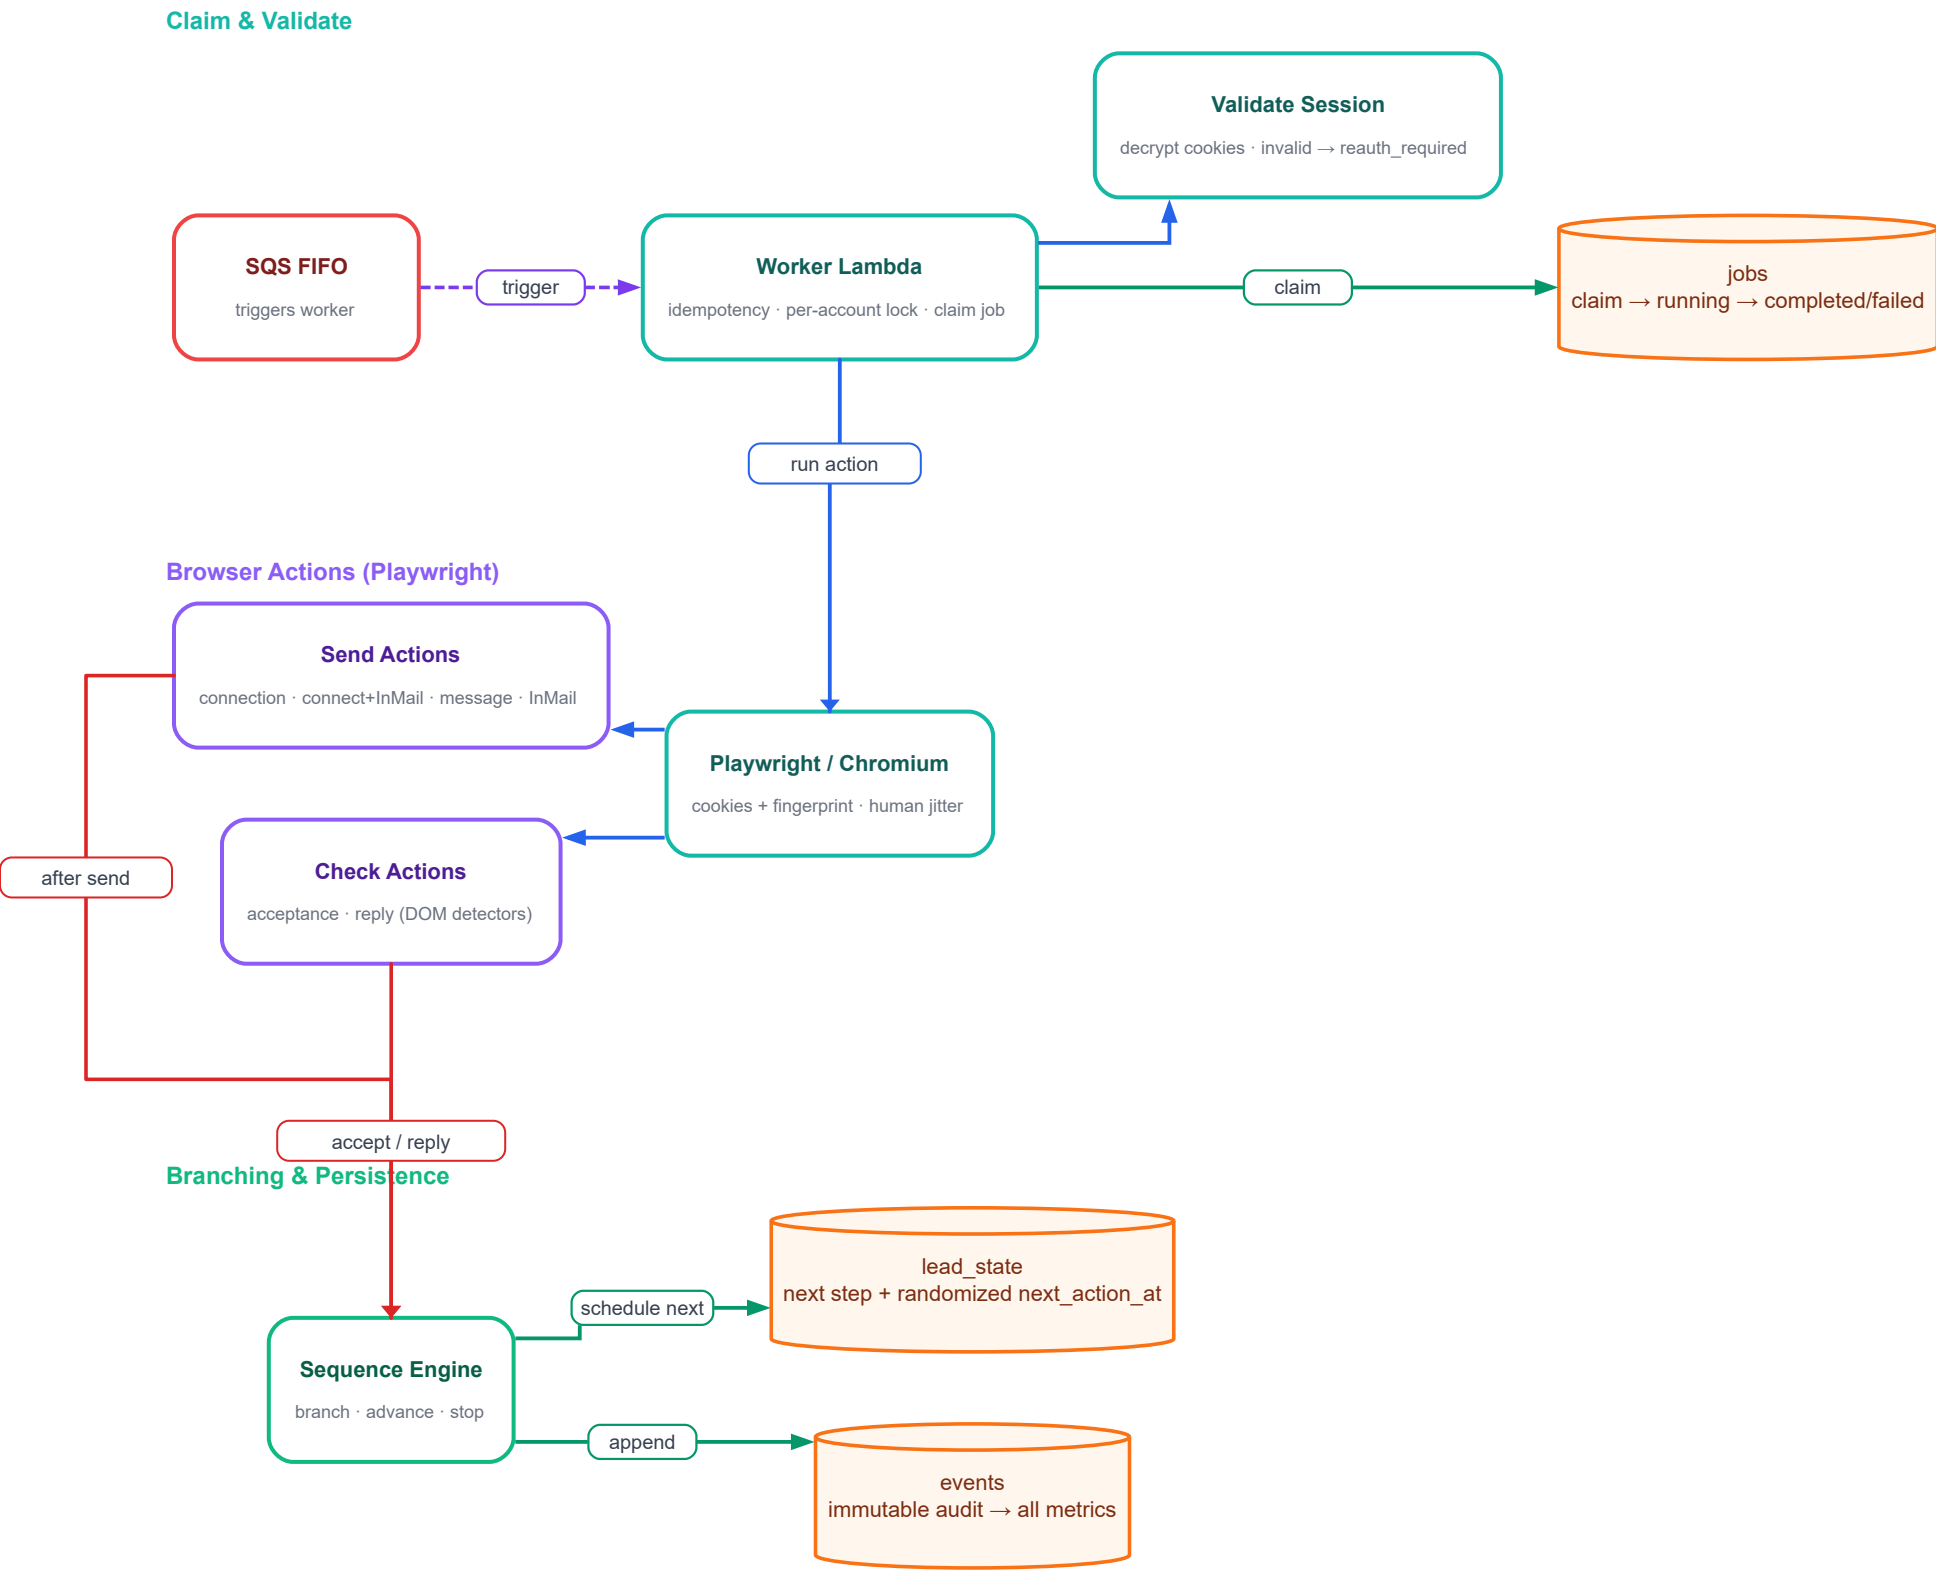

LinkedIn Sequence Engine — Branching State Machine

sequence_engine.py — transitions after each browser action

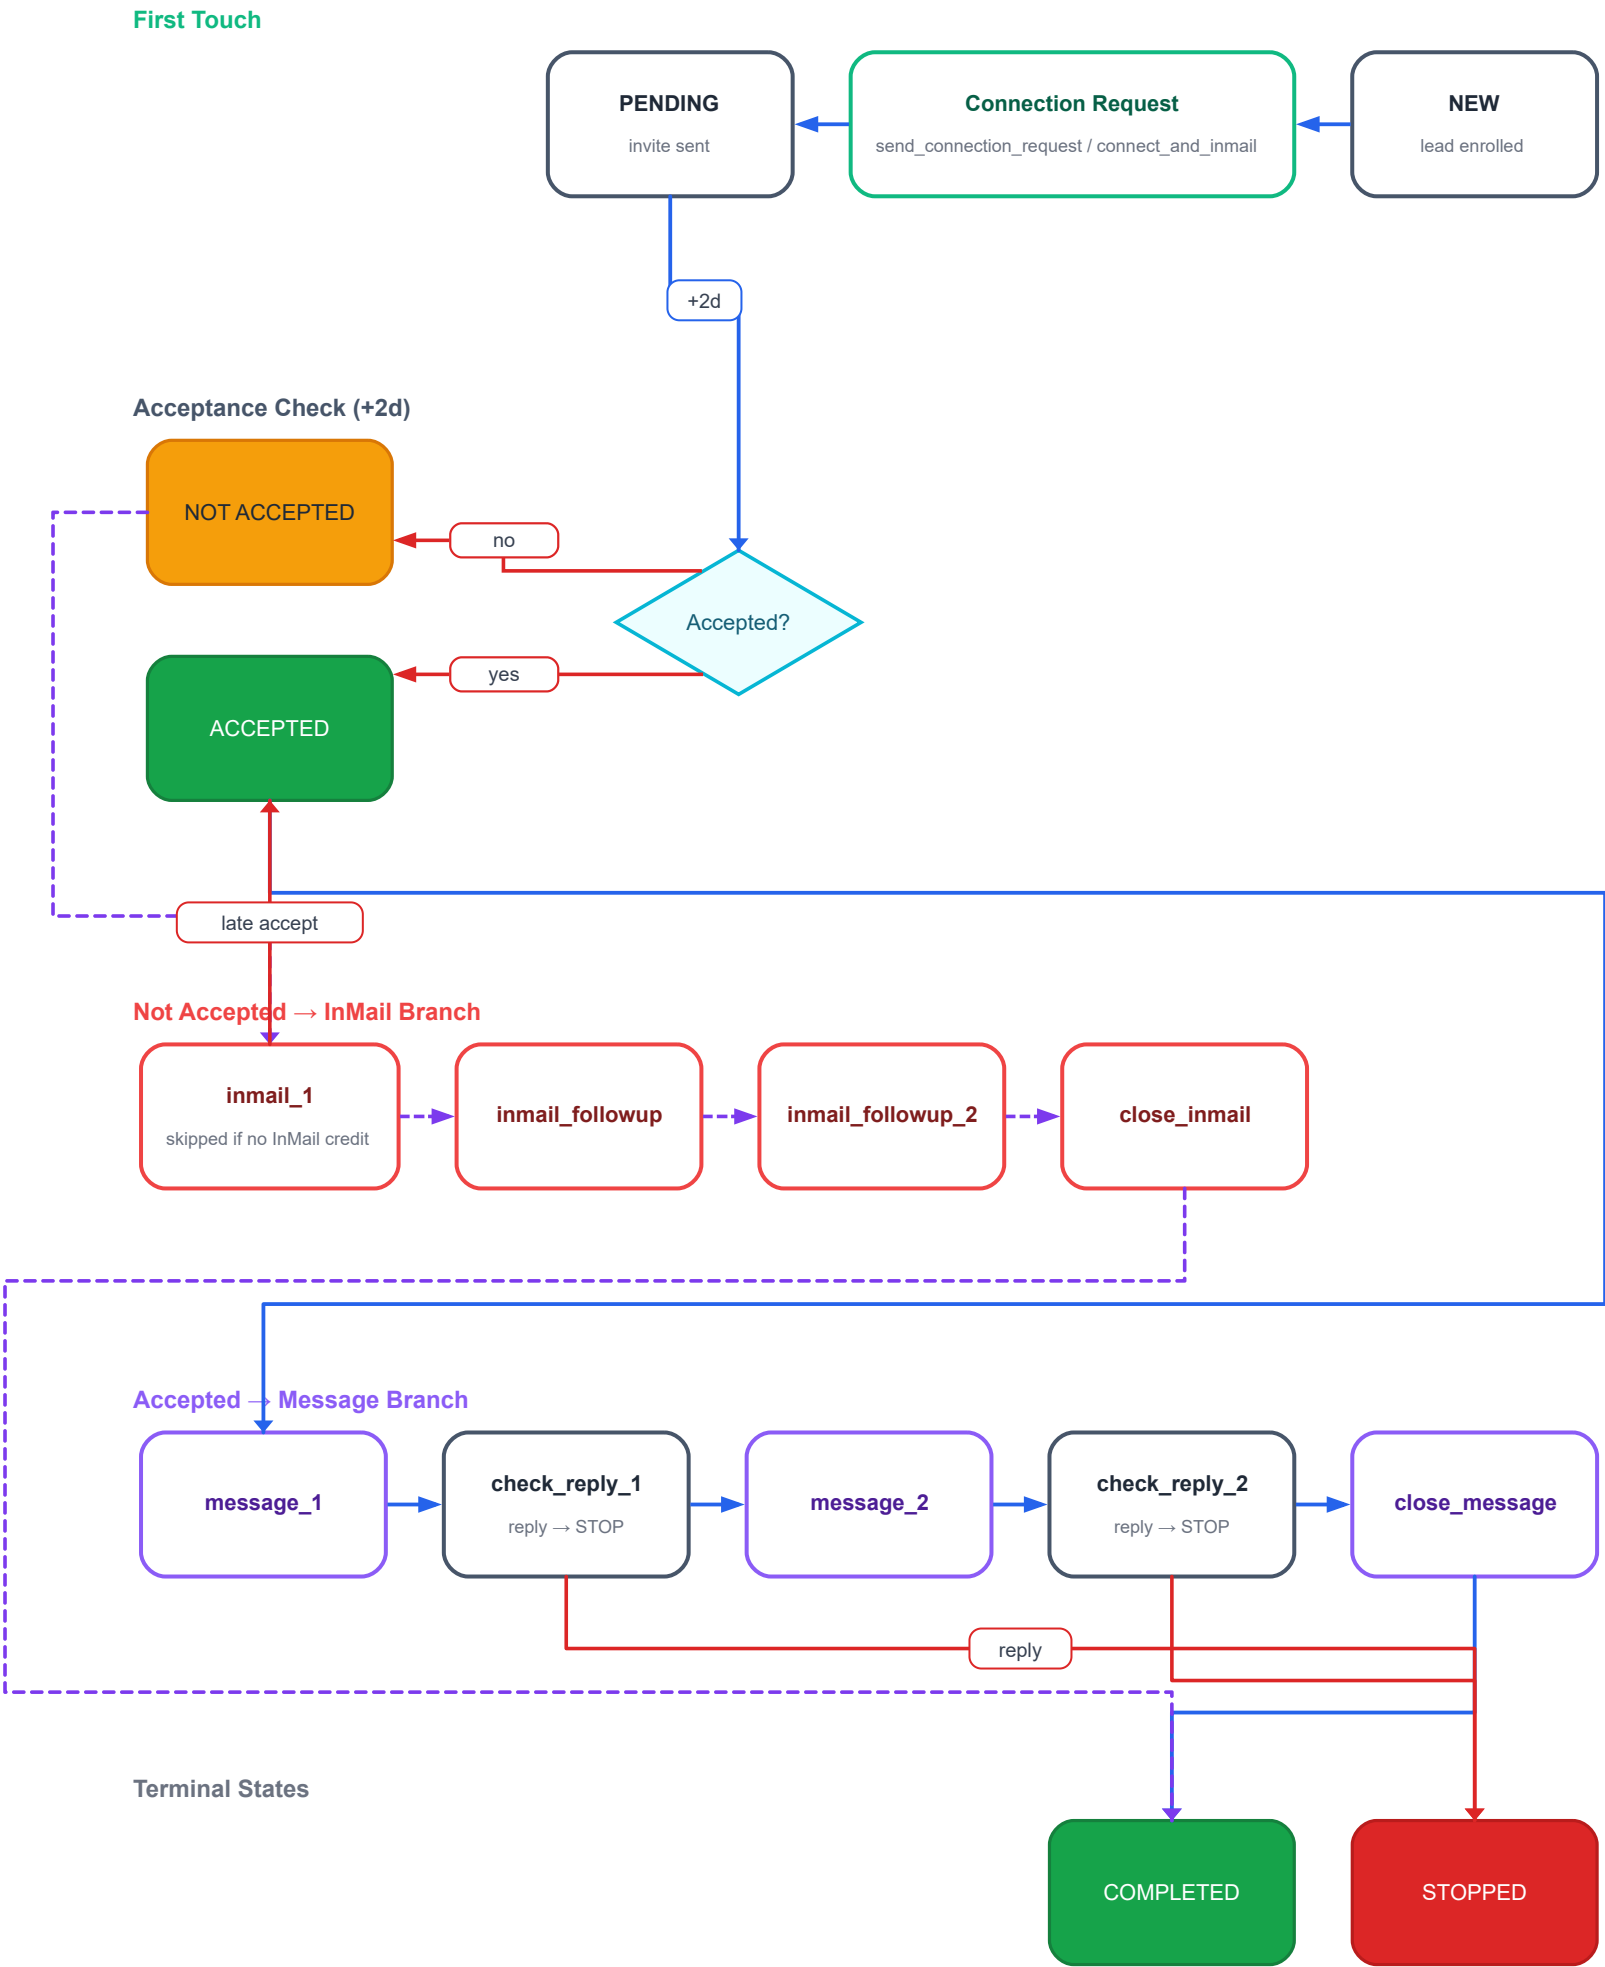

Current Status — LinkedIn Actions Not Working

Both connection methods attach the session, but neither can run outreach reliably yet.

- 1 Both methods currently fail — paste cookies and the Chrome extension.**

Whether the user pastes their `li_at` cookies into the app or connects through the browser extension, the session is stored fine, but the actual LinkedIn actions (connect / message / InMail) get challenged or blocked.
- 2 Root cause: device & browser snapshot mismatch.**

The cookies are captured in the user's own browser and IP, but the backend worker replays them from AWS Lambda with a different browser fingerprint (user-agent, viewport, locale, timezone) and a datacenter IP. LinkedIn sees the session being used from a device/browser snapshot that does not match where it was created, and flags it.
- 3 Fix: make the replay match the session's origin.**

Route each account through a residential proxy in the user's region, pin one consistent device fingerprint per account, and keep warm-up + human pacing + daily limits — so the replayed session looks like the same device, browser, and location that logged in.

Bottom line: the connect flow works; the **replay environment** is the gap. Hardening the proxy + fingerprint is the prerequisite before either connection method can drive live outreach.