

1. Install git.


➔ Installed git using package manager

2. Create a repo in github with README.md and .ignore file.

➔ Created a repo >> Sample

➔ Added README.md file

➔ Added .gitignore file

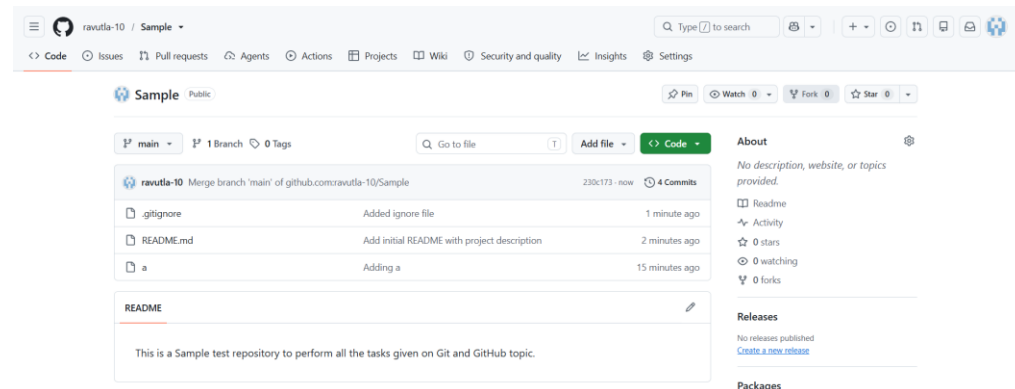

3. Clone the created repo to local.

➔ Used “git clone <SSH URL>” to clone the repository from central to local.

```
MINGW64:/c/Users/pooji/OneDrive/Desktop
pooji@Poojith MINGW64 ~/OneDrive/Desktop (master)
$ ls
.Brave.lnk*  Canva.lnk*  Desktop_Files/  'Docker Desktop.lnk'*  'Eclipse IDE for Java Developers - 2025-09.lnk'*  Git_Test/  desktop.ini
pooji@Poojith MINGW64 ~/OneDrive/Desktop (master)
$ git clone git@github.com:ravutla-10:Sample.git
Cloning into 'Sample'...
remote: Enumerating objects: 10, done.
remote: Counting objects: 100% (10/10), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 10 (delta 0), reused 7 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (10/10), done.
pooji@Poojith MINGW64 ~/OneDrive/Desktop (master)
$ ls
.Brave.lnk*  Canva.lnk*  Desktop_Files/  'Docker Desktop.lnk'*  'Eclipse IDE for Java Developers - 2025-09.lnk'*  Git_Test/  Sample/  desktop.ini
pooji@Poojith MINGW64 ~/OneDrive/Desktop (master)
$
```

4. Create two files in local repo.

➔ Created two files(1, 2) using touch command.



```
MINGW64:/c/Users/pooji/OneDrive/Desktop/Sample
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ ls
README.md  a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ touch 1 2
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ ls
1 2 README.md a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$
```

5. Commit two files and push to central Repository.

- ➔ First added two files to tracking area by using – git add .
- ➔ Committed the files using git commit -m “message”
- ➔ Pushed the files using git push -u origin main

```
MINGW64~/Users/pooji/OneDrive/Desktop/Sample
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ ls
1 2 README.md a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git add .
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   1
        new file:   2
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git commit -m "Adding files 1 and 2"
[main 65df115] Adding files 1 and 2
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 1
 create mode 100644 2
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 235 bytes | 235.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:ravutla-10/Sample.git
   230c173..65df115  main -> main
branch 'main' set up to track 'origin/main'.
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$
```

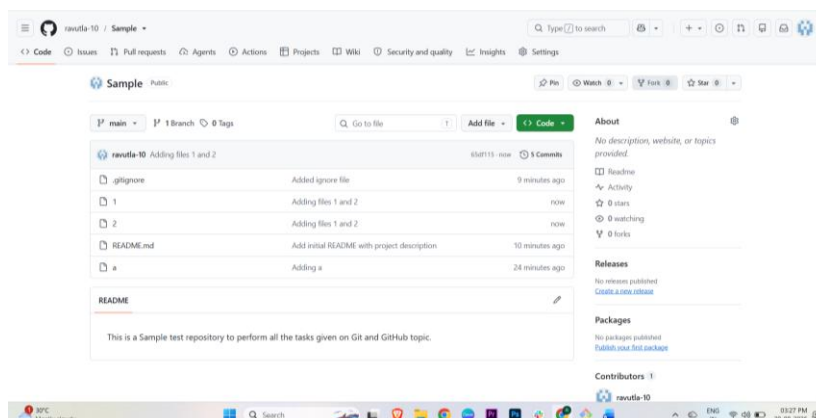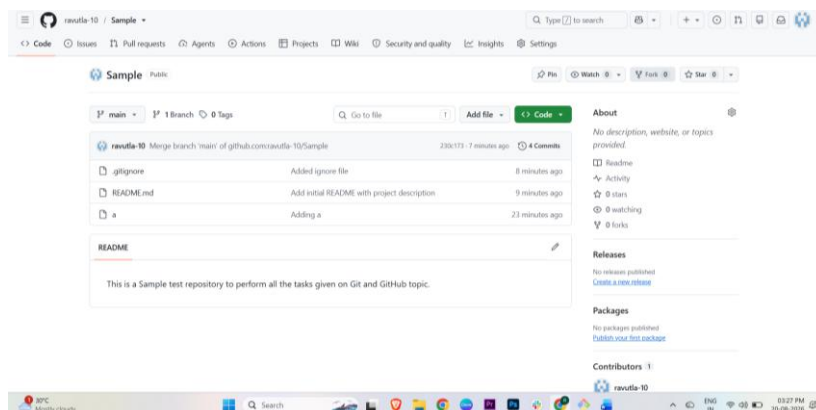

6. Create a branch in local and create a sample file and push to central.

- ➔ Created a branch using command >> git branch branch_name
- ➔ Switched to the branch using command >> git checkout branch_name
- ➔ Created the sample file using touch
- ➔ Added it to tracking area and committed it then pushed it to the Poojith branch.
- ➔ Verified in GitHub that the Poojith branch is created and the sample file is pushed inside it successfully.

```
MINGW64/c/Users/pooji/OneDrive/Desktop/Sample
pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git branch Poojith

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git branch --list
* Poojith
  main

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (main)
$ git checkout Poojith
Switched to branch 'Poojith'

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ ls
1 2 README.md a

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ touch Sample_file


pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ ls
1 2 README.md Sample_file a

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ git add .

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ git commit -m "adding sample file to Poojith branch"
[Poojith 2a8a1a3] adding sample file to Poojith branch
1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 Sample_file


pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$ git push -u origin Poojith
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 253 bytes | 253.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'Poojith' on GitHub by visiting:
remote:   https://github.com/ravutla-10/Sample/pull/new/Poojith
remote:
To github.com:ravutla-10/Sample.git
 * [new branch]      Poojith -> Poojith
branch 'Poojith' set up to track 'origin/Poojith'.

pooji@Poojith MINGW64 ~/OneDrive/Desktop/Sample (Poojith)
$
```

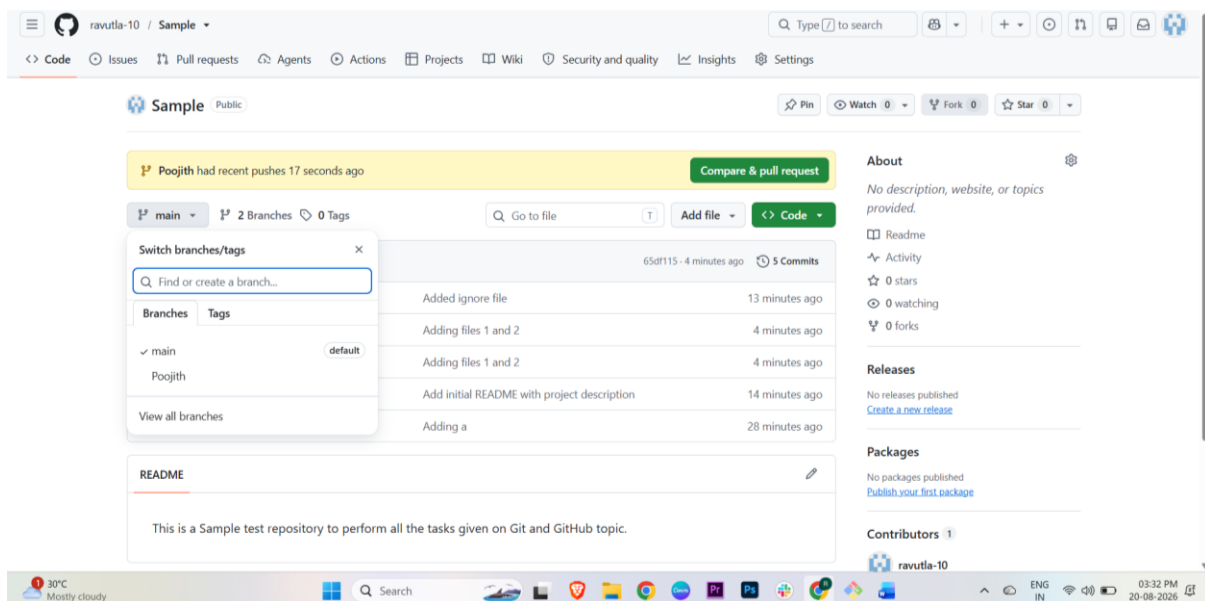

7. Create a branch in github and clone that to local.

- ➔ Created a branch called **Ravutla** from main in Repository in GitHub.
- ➔ Added an extra file inside the Branch Ravutla
- ➔ Pulled the recent changes to local
- ➔ Tried to switch the branch using **git checkout**, but unable to switch because of the same names of the branch and a File inside it.
- ➔ So, I have used **git switch -c Branch_name --track origin/Branch_name**
- ➔ Verified that I have successfully cloned the branch with a file in it.

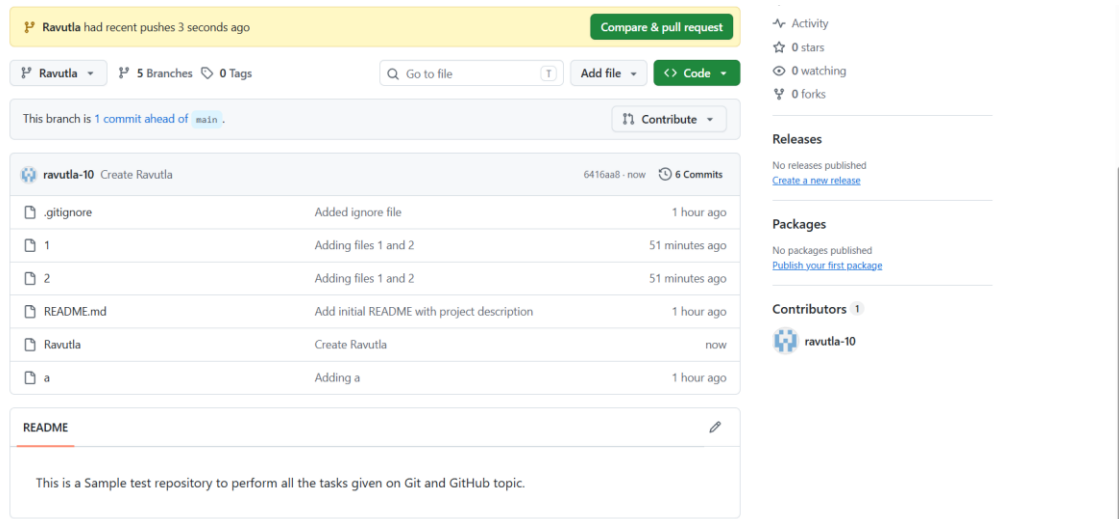

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Horizon)
$ git pull
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 948 bytes | 67.00 KiB/s, done.
From github.com:ravutla-10/sample
+ adb876a...6416aa8 Ravutla -> origin/Ravutla (forced update)
Already up to date.
```

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Horizon)
$ git checkout Ravutla
fatal: 'Ravutla' could be both a local file and a tracking branch.
Please use -- (and optionally --no-guess) to disambiguate
```

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Horizon)
$ git branch -a
* Horizon
  Poojith
  Techie
  main
remotes/origin/HEAD -> origin/main
remotes/origin/Horizon
remotes/origin/Poojith
remotes/origin/Ravutla
remotes/origin/Techie
remotes/origin/main

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Horizon)
$ git switch -c Ravutla --track origin/Ravutla
Switched to a new branch 'Ravutla'
branch 'Ravutla' set up to track 'origin/Ravutla'.

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Ravutla)
$ ls
1 2 README.md Ravutla a

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Ravutla)
$ |
```

8. Merge the created branch with master in git local.

- ➔ Switched to main branch – git checkout main
- ➔ Merged the branch using “git merge Ravutla”
- ➔ Verified by checking branch list using “git branch --list”


```
pooji@Pooji: ~/OneDrive/Desktop/sample/sample (Ravutla)
$ git checkout main
Switched to a new branch 'main'
branch 'main' set up to track 'origin/main'.

pooji@Pooji: ~/OneDrive/Desktop/sample/sample (main)
$ git merge Ravutla
Updating 65df115..adb876a
Fast-forward
 Ravutla | 1
 1 file changed, 1 insertion(+)
 create mode 100644 Ravutla

pooji@Pooji: ~/OneDrive/Desktop/sample/sample (main)
$ git branch --list
* main
  Ravutla
```

9. Merge the created branch with master in github by sending a pull request.

- ➔ Opened the GitHub repository
- ➔ Created a pull request for Ravutla branch
- ➔ Selected main as the target
- ➔ Accepted and Merged the pull request.

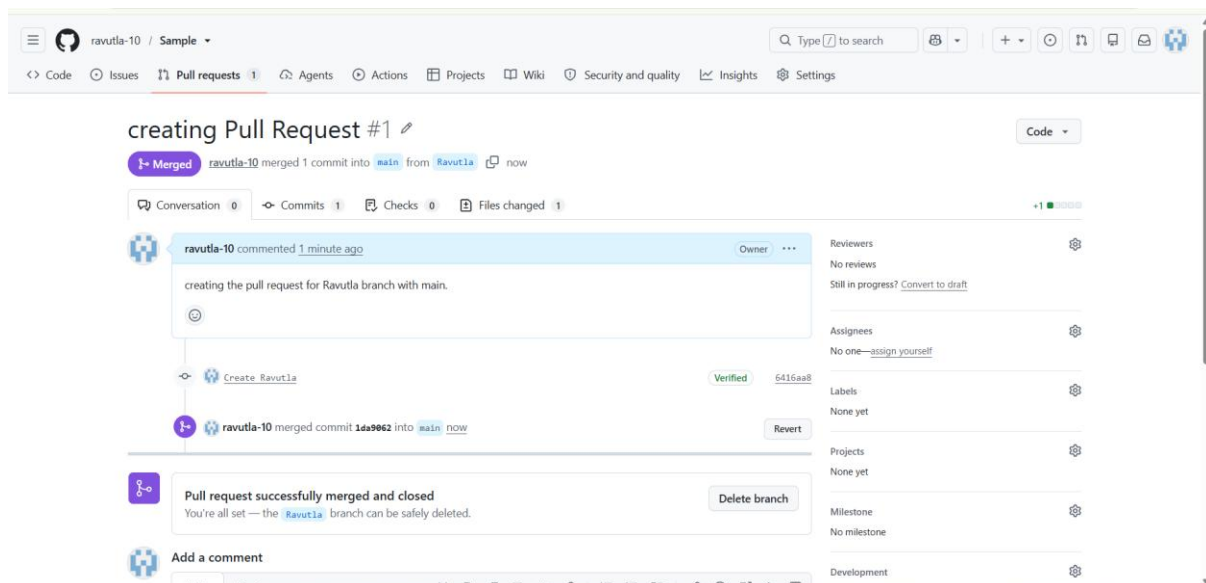

10. Create a file in local and send that to branch in github.

- ➔ Created a file Sample using touch
- ➔ Added the file to tracking area using “git add .”
- ➔ Committed the file > “git commit -m “message”.
- ➔ Pushed it to Ravutla branch using “git push origin Ravutla”

Ravutla
5 Branches
0 Tags
Go to file
Add file
Code

This branch is 1 commit ahead of and 1 commit behind main.
Contribute

ravutla-10
adding new file - sample
e2fa395 · 1 minute ago
7 Commits

.gitignore	Added ignore file	1 hour ago
1	Adding files 1 and 2	1 hour ago
2	Adding files 1 and 2	1 hour ago
README.md	Add initial README with project description	1 hour ago
Ravutla	Create Ravutla	22 minutes ago
a	Adding a	1 hour ago
sample	adding new file - sample	1 minute ago

README

This is a Sample test repository to perform all the tasks given on Git and GitHub topic.

11. Clone only a branch from github to local.

- ➔ Created a branch in repository first
- ➔ Used git clone to clone specific branch >> “ git clone -b branch_name <SSH URL>
- ➔ Verified by using ls.

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Ravutla)
$ git clone -b clone_branch git@github.com:ravutla-10/sample.git
Cloning into 'sample'...
remote: Enumerating objects: 26, done.
remote: Counting objects: 100% (26/26), done.
remote: Compressing objects: 100% (19/19), done.
remote: Total 26 (delta 7), reused 11 (delta 2), pack-reused 0 (from 0)
Receiving objects: 100% (26/26), 5.69 KiB | 2.85 MiB/s, done.
Resolving deltas: 100% (7/7), done.

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Ravutla)
$ ls
1 2 README.md Ravutla Sample/ a

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Ravutla)
$ |
```

12. Create a file with all passwords and make that untrackable with git.

- ➔ Created a file named “Password” and stored the information
- ➔ Created a file .gitignore.
- ➔ Added the file name **Password** in .gitignore file
- ➔ Checked git status (only .gitignore file is in untracking area)

- ➔ Added the file and committed it
- ➔ Pushed the files to repository.
- ➔ Verified that Password file is not pushed into the repository

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md Sample/ Sample_file a

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ vi .gitignore
```

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is up to date with 'origin/Poojith'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   .gitignore

no changes added to commit (use "git add" and/or "git commit -a")
```

```

root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)
# git add .
warning: the working copy of 'gittignore', LF will be replaced by CRLF the next time Git touches it
root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)
# git commit -m "adding ignore file"
[Poojithh 7c8a633] adding ignore file
1 file changed, 1 insertion(+)
root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)
# ls
1
1 2 Password README.md Sample_file a
root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)
# cat .gittignore
Password
root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)
# git push -u origin Poojithh
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 288 bytes | 289.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving objects: 100% (3/3), completed with 1 local object.
To github.com:raavula10/sample.git
  28a1a3..7c8a633 Poojithh -> Poojithh
branch 'Poojithh' set up to track origin/'Poojithh'.
root@Poojithh MINGW64 ~\OneDrive\Desktop/sample (Poojithh)

```

Poojith had recent pushes 1 minute ago
 Compare & pull request

Poojith

6 Branches
 0 Tags

This branch is 2 commits ahead of and 2 commits behind `main`.
 Contribute

ravutla-10 adding ignore file 7c8a633 · 2 minutes ago 7 Commits		
<code>.gitignore</code>	adding ignore file	2 minutes ago
1	Adding files 1 and 2	1 hour ago
2	Adding files 1 and 2	1 hour ago
<code>README.md</code>	Add initial README with project description	1 hour ago
<code>Sample_file</code>	adding sample file to Poojith branch	1 hour ago
<code>a</code>	Adding a	2 hours ago

README

This is a Sample test repository to perform all the tasks given on Git and GitHub topic.

Activity
 0 stars
 0 watching
 0 forks

Releases
 No releases published
[Create a new release](#)

Packages
 No packages published
[Publish your first package](#)

Contributors 1

ravutla-10

13. Make a commit and make that commit reset without savings changes.

- ➔ Created a file "reset_file"
- ➔ Added it to tracking area and committed the file
- ➔ Used `git reset --hard HEAD~1` (to reset the commit without saving changes)
- ➔ Verified that commit and changes were removed.

MINGW64:/c/Users/pooji/OneDrive/Desktop/sample

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md Sample_file a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ touch reset_file
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md Sample_file a reset_file
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git add .
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git commit -m "adding reset_file to Poojith Branch"
[Poojith 1bc3ae5] adding reset_file to Poojith Branch
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 reset_file
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git reset --hard HEAD~1
HEAD is now at 7c8a633 adding ignore file
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is up to date with 'origin/Poojith'.

nothing to commit, working tree clean
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$
```

14. Revert a committed commit to the older version.

- ➔ Used git log to select the commit and commit id to revert
- ➔ Used git revert commit_ID to revert the committed commit
- ➔ Verified that a new revert commit is created.

MINGW64:/c/Users/pooji/OneDrive/Desktop/sample

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ touch sample_commit
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md a sample_commit
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git add .
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git commit -m "adding sample_commit file"
[Poojith 977bc80] adding sample_commit file
1 file changed, 0 insertions(+), 0 deletions(-)
rename Sample_file => sample_commit (100%)
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git revert 977bc80
[Poojith 8a740a8] Revert "adding sample_commit file"
1 file changed, 0 insertions(+), 0 deletions(-)
rename sample_commit => Sample_file (100%)
```

15. Push a file to stash without savings the changes and work on another file.

- ➔ Started working on a file "file_1"
- ➔ Pushed the file to stash >> git stash
- ➔ Verified that working directory was clean
- ➔ Checked that the file is stored in stash >> git stash list
- ➔ Worked on another file


```

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 Password README.md Sample_file a
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ vi file_1
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is ahead of 'origin/Poojith' by 2 commits.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   stash_file

Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        deleted:    stash_file

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        file_1

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git add
warning: in the working copy of 'file_1', LF will be replaced by CRLF the next time git touches it
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is ahead of 'origin/Poojith' by 2 commits.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   file_1

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git stash
Saved working directory and index state WIP on Poojith: 8a740a8 Revert "adding sample_commit file"

```

```

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git stash list
stash@{0}: WIP on Poojith: 8a740a8 Revert "adding sample_commit file"

```

16. Undo the stash file and start working on that again.

- ➔ Checked the stash list and identifies my file
- ➔ Used git stash pop to undo the stash file
- ➔ Started working on that file again.

```

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git stash list
stash@{0}: WIP on Poojith: 8a740a8 Revert "adding sample_commit file"
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ vi New_filr
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git add
warning: in the working copy of 'New_filr', LF will be replaced by CRLF the next time git touches it
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is ahead of 'origin/Poojith' by 2 commits.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   New_filr

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git commit -m "adding New_filr"
[Poojith 1559f09] adding New_filr
1 file changed, 2 insertions(+)
create mode 100644 New_filr

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git push -u origin Poojith
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 749 bytes | 749.00 KiB/s, done.
Total 6 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To github.com:raavutla-10/sample.git
7c8a833..1559f09 Poojith -> Poojith
branch 'Poojith' set up to track 'origin/Poojith'.

pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git stash pop
On branch Poojith
Your branch is up to date with 'origin/Poojith'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   file_1

Dropped refs/stash@{0} (ada1a451afdbaacf73d542d6cd9e1e421d0135fa)
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ vi file_1
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ vi file_1


```

17. Generate a ssh-keygen and configure into github.

- ➔ Generated a ssh-keygen
- ➔ Copied the key
- ➔ Configured it in github SSH keys (settings ➔ SSH and GPG keys)

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ssh-keygen -t ed25519
Generating public/private ed25519 key pair.
Enter file in which to save the key (/c/Users/pooji/.ssh/id_ed25519):
/c/Users/pooji/.ssh/id_ed25519 already exists.
Overwrite (y/n)? y
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/pooji/.ssh/id_ed25519
Your public key has been saved in /c/Users/pooji/.ssh/id_ed25519.pub
The key fingerprint is:
SHA256:uicew90npLOck010kocly7PvBD9d1/owOUYXXFgSwfM pooji@Poojith
The key's randomart image is:
+--[ED25519 256]--+
|                 o+*o|
|                 *+  |
|                 +   |
|      . . . . . E   |
|    .O S . . .+o    |
|   %ooo o *=       |
|  o B*.o =.oo.     |
| o.o*o  +.o        |
|  +*o  ....        |
+-----[SHA256]-----+


pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ cat /c/Users/pooji/.ssh/id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIBsByFRT3VMu+1Dufk6iyXBQWRL1Lp/mVC03EnYns2gn pooji@Poojith
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
```

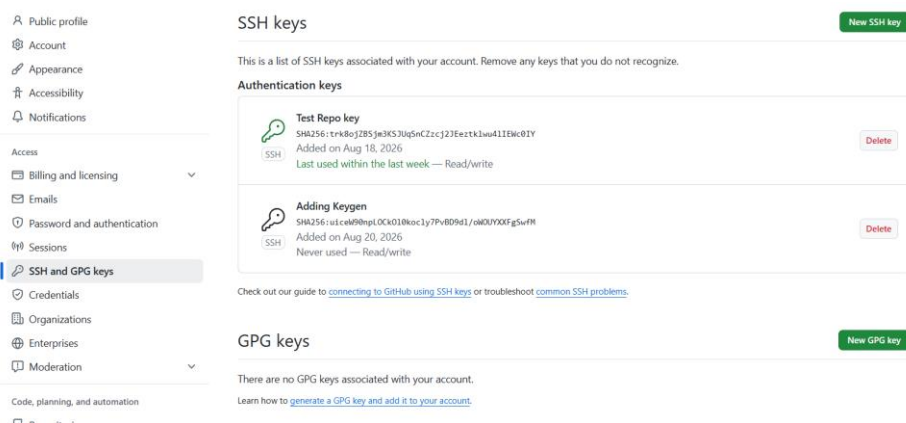

18. Configure webhooks to github.

- ➔ Created a webhook testing url using webhook site.
- ➔ Opened Webhooks in Github Repository (settings → webhooks)
- ➔ Added the Payload URL in webhook
- ➔ Selected application/json.
- ➔ Enabled the webhook
- ➔ Used git push to test the webhook
- ➔ Verified the webhook delivery

```
MINGW64/d/Poojith/Devops/TEST/Sample
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ echo "Webhook test" >> test.txt
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ git add .
warning: in the working copy of 'test.txt', LF will be replaced by CRLF the next time Git touches it
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ git commit -m "Test Github webhook"
[Ravutla 6ab4585] Test Github webhook
1 file changed, 1 insertion(+)
create mode 100644 test.txt
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ git push origin Ravutla
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (6/6), 586 bytes | 586.00 KiB/s, done.
Total 6 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To github.com:ravutla-10/Sample.git
e2fa395..6ab4585 Ravutla -> Ravutla
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ |
```

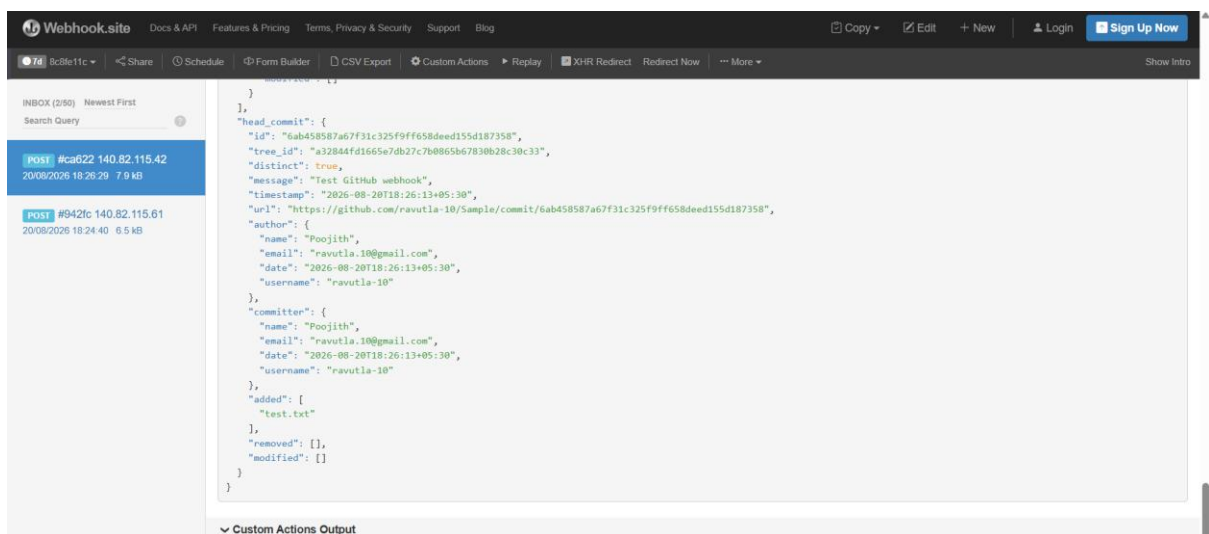

19. Basic understanding of .git file.

- ➔ Initialized git >> git init
- ➔ Entered into .git directory
- ➔ Listed its content
- ➔ Verified and reviewed the files in it like.. COMMIT_EDITMSG FETCH_HEAD HEAD ORIG_HEAD REBASE_HEAD

```
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ cd .git
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample/.git (GIT_DIR!)
$ ls
COMMIT_EDITMSG FETCH_HEAD HEAD ORIG_HEAD REBASE_HEAD config description hooks/ index info/ logs/ objects/ packed-refs refs/
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample/.git (GIT_DIR!)
$ |
```

20. Check all the logs of git.

➔ Used git log to check all the logs of GIT

```
poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git log
commit 1559f9974e2b8d82c0762468018b59dc0418aab5 (HEAD -> Poojith, origin/Poojith)
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 17:27:18 2026 +0530

    adding New_file

commit 8a740a8e1074de3130c3a7811243abc68c7656b6
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 17:13:10 2026 +0530

    Revert "adding sample_commit file"

    This reverts commit 977bc80c416b193d2d087bb2896a5d8f99b8a034.

commit 977bc80c416b193d2d087bb2896a5d8f99b8a034
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 17:12:54 2026 +0530

    adding sample_commit file

commit 7c8a633e44a6f7926ea38a1b377d3db762fd9f8
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 16:59:33 2026 +0530

    adding ignore file

commit 2a8a1a3abca3fc08edd8fd9f4e94f1beaf01be0
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 15:31:25 2026 +0530

    adding sample file to Poojith branch

commit 65df1159e7477e538eab5ef38bbd04219c8ff2 (origin/main, origin/HEAD, main)
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 15:27:22 2026 +0530

    Adding files 1 and 2

commit 230c173e4106a74016577828b9106ccaae98017
Merge: 3f6f81c bf9326a
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 15:19:01 2026 +0530

    Merge branch 'main' of github.com:ravutla-10/sample

commit 3f6f81c55cacb6dd29410a8e905a2d61a759eb1
Author: Poojith <ravutla.10@gmail.com>
Date: Thu Aug 20 15:18:06 2026 +0530

    Added ignore file

commit bf9326a5f8338a339837d92c1ee0580c78158c1
Author: ravutla-10 <ravutla.10@gmail.com>
Date: Thu Aug 20 15:17:10 2026 +0530

    Add initial README with project description
```

21. Rename the commit message.

➔ Committed a new file.

➔ Used git commit --amend to rename the commit message

➔ Made changes in commit message

➔ Verified in the updated history.

```
poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ ls
1 2 New_file Password README.md Sample_file a file_1 file_q
poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git add file_q
poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$
poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git status
On branch Poojith
Your branch is up to date with 'origin/Poojith'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   file_1
        new file:   file_q

poojith@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git commit -m "adding 2 new files"
[Poojith 319e397] adding 2 new files
 2 files changed: 7 insertions(+)
 create mode 100644 file_1
 create mode 100644 file_q
```

```
MINGW64/C:/Users/poojith/OneDrive/Desktop/sample
adding 2 new files file_1, file_q

# Please enter the commit message for your changes. Lines starting
# with '#' will be ignored, and an empty message aborts the commit.
#
# Date:      Thu Aug 20 17:35:55 2026 +0530
#
# On branch Poojith
# Your branch is ahead of 'origin/Poojith' by 1 commit.
#   (use "git push" to publish your local commits)
#
# Changes to be committed:
#   new file:   file_1
#   new file:   file_q
#
#
#
#
#
#
```

```
pooji@Poojith MINGW64 ~/OneDrive/Desktop/sample (Poojith)
$ git commit --amend
[Poojith 6cd5c7d] adding 2 new files file_1, file_q
Date: Thu Aug 20 17:35:55 2026 +0530
2 files changed, 7 insertions(+)
create mode 100644 file_1
create mode 100644 file_q
```

22. Merge multiple commits into single commit.

- ➔ Checked the commit history using “git log”
- ➔ Identified the commits to merge (top 2)
- ➔ Used git rebase -i HEAD~2
- ➔ Kept the first commit as pick and changed other to squash
- ➔ Updated the final commit message
- ➔ Verified the updated history.

```
pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ git commit -m "adding files"
[Ravutla 3d6a897] adding files
3 files changed, 2 insertions(+), 2 deletions(-)
delete mode 100644 .gitignore
create mode 100644 Password

pooji@Poojith MINGW64 /d/Poojith/Devops/TEST/Sample (Ravutla)
$ git rebase -i HEAD~2
[detached HEAD 4ab9df0] adding ignore file
Date: Thu Aug 20 16:53:51 2026 +0530
2 files changed, 3 insertions(+)
create mode 100644 Password
mode change 100644 => 160000 sample
Successfully rebased and updated refs/heads/Ravutla.
```