

1. Execute all scripts shown in video and capture the screenshots.

1. Test file

```
[root@ip-172-31-25-75 ~]# vi test
[root@ip-172-31-25-75 ~]# cat test
#!/bin/bash

free -m
ps -ef
df

[root@ip-172-31-25-75 ~]# ./test
Mem:              total    used    free    shared  buff/cache   available
Mem:              913      221      390         0        300        559
Swap:              0         0         0

UID          PID    PPID  C  STIME TTY          TIME CMD
root         1      0  0  09:16 ?        00:00:00 /usr/lib/systemd/systemd --switched-root --system --deserialize=32
root         2      0  0  09:16 ?        00:00:00 [kthreadd]
root         3      2  0  09:16 ?        00:00:00 [pool_workqueue_release]
root         4      2  0  09:16 ?        00:00:00 [kworker/R-rcu_gp]
root         5      2  0  09:16 ?        00:00:00 [kworker/R-sync_wq]
root         6      2  0  09:16 ?        00:00:00 [kworker/R-kvfree_rcu_reclaim]
root         7      2  0  09:16 ?        00:00:00 [kworker/R-lub_flushwq]
root         8      2  0  09:16 ?        00:00:00 [kworker/R-nets]
root         9      2  0  09:16 ?        00:00:00 [kworker/0:0-cgroup_free]
root        10      2  0  09:16 ?        00:00:00 [kworker/0:0H-events_highpri]
root        12      2  0  09:16 ?        00:00:00 [kworker/u8:0-events_unbound]
root        13      2  0  09:16 ?        00:00:00 [kworker/R-mm_percpu_wq]
root        14      2  0  09:16 ?        00:00:00 [ksftirqd/0]
root        15      2  0  09:16 ?        00:00:00 [rcu_preempt]
root        16      2  0  09:16 ?        00:00:00 [rcu_exp_par_gp_kthread_worker/0]
root        17      2  0  09:16 ?        00:00:00 [rcu_exp_gp_kthread_worker]
root        18      2  0  09:16 ?        00:00:00 [migration/0]
root        19      2  0  09:16 ?        00:00:00 [cpuhp/0]
root        20      2  0  09:16 ?        00:00:00 [cpuhp/1]
root        21      2  0  09:16 ?        00:00:00 [migration/1]
root        22      2  0  09:16 ?        00:00:00 [ksftirqd/1]
root        24      2  0  09:16 ?        00:00:00 [kworker/1:0H-events_highpri]
root        26      2  0  09:16 ?        00:00:00 [kworker/u8:1-xfs-blockgc/nvme0n1p1]
root        27      2  0  09:16 ?        00:00:00 [kdevtmpfs]
root        28      2  0  09:16 ?        00:00:00 [kworker/R-inet_frag_wq]
root        29      2  0  09:16 ?        00:00:00 [rcu_tasks_kthread]
root        30      2  0  09:16 ?        00:00:00 [rcu_tasks_rude_kthread]
root        31      2  0  09:16 ?        00:00:00 [rcu_tasks_trace_kthread]
root        32      2  0  09:16 ?        00:00:00 [kauditd]
root        34      2  0  09:16 ?        00:00:00 [khungtaskd]
root        35      2  0  09:16 ?        00:00:00 [oom_reaper]
root        36      2  0  09:16 ?        00:00:00 [kworker/u8:2-events_unbound]
root        37      2  0  09:16 ?        00:00:00 [kworker/R-writeback]
root        38      2  0  09:16 ?        00:00:00 [kcompactd0]
root        39      2  0  09:16 ?        00:00:00 [khugetpaged]
root        40      2  0  09:16 ?        00:00:00 [kworker/R-kblockd]
root        41      2  0  09:16 ?        00:00:00 [kworker/R-bkcg_pont-bio]
root        42      2  0  09:16 ?        00:00:00 [kworker/R-kintegrityd]
root        43      2  0  09:16 ?        00:00:00 [irq/9-acpi]
root        45      2  0  09:16 ?        00:00:00 [kworker/R-tpm_dev_wq]
root        46      2  0  09:16 ?        00:00:00 [kworker/R-md_bitmap]
root        47      2  0  09:16 ?        00:00:00 [kworker/R-edac-poller]
root        48      2  0  09:16 ?        00:00:00 [watchdogd]
root        49      2  0  09:16 ?        00:00:00 [kworker/R-quota_events_unbound]
root        50      2  0  09:16 ?        00:00:00 [kworker/0:1H-xfs-log/nvme0n1p1]
root        74      2  0  09:16 ?        00:00:00 [kswapd0]
```

```
root        1056      2  0  09:16 ?        00:00:00 [kworker/R-xfs-reclaim/nvme0n1p1]
root        1057      2  0  09:16 ?        00:00:00 [kworker/R-xfs-blockgc/nvme0n1p1]
root        1058      2  0  09:16 ?        00:00:00 [kworker/R-xfs-inodegc/nvme0n1p1]
root        1059      2  0  09:16 ?        00:00:00 [kworker/R-xfs-log/nvme0n1p1]
root        1060      2  0  09:16 ?        00:00:00 [kworker/R-xfs-c1/nvme0n1p1]
root        1061      2  0  09:16 ?        00:00:00 [xfsaild/nvme0n1p1]
root        1066      2  0  09:16 ?        00:00:00 [kworker/1:3-cgroup_free]
root        1108      1  0  09:16 ?        00:00:00 /usr/lib/systemd/systemd-journald
root        1141      2  0  09:16 ?        00:00:00 [kworker/0:3-events]
root        1540      1  0  09:16 ?        00:00:00 /usr/lib/systemd/systemd-udev
root        1567      2  0  09:16 ?        00:00:00 [kworker/R-ena]
root        1587      1  0  09:16 ?        00:00:00 /usr/lib/systemd/systemd-resolved
root        1605      1  0  09:16 ?        00:00:00 [sbin/auditd]
root        1619      2  0  09:17 ?        00:00:00 [kworker/R-rpccid]
root        1620      2  0  09:17 ?        00:00:00 [kworker/R-xprtio]
root        1691      1  0  09:17 ?        00:00:00 /usr/bin/systemd-inhibit --what=handle-suspend-key:handle-hibernate-key --who=ec2-hibinit-agent --why=acpid-sleep-handler --mode=block /usr/sbin/acpid -f
root        1695      1  0  09:17 ?        00:00:00 /usr/sbin/irqbalance --foreground
root        1696      1  0  09:17 ?        00:00:00 /usr/bin/lsmd -d
root        1699      1  0  09:17 ?        00:00:00 /usr/lib/systemd/systemd-homed
root        1700      1  0  09:17 ?        00:00:00 /usr/lib/systemd/systemd-logind
root        1705      1  0  09:17 ?        00:00:00 /usr/bin/dbus-broker-launch --scope system --audit
root        1706      1  0  09:17 ?        00:00:00 /usr/lib/systemd/systemd-networkd
root        1726      1705  0  09:17 ?        00:00:00 dbus-broker --log 4 --controller 9 --machine-id ec27bcabb9c35909c8da1c74d9bb6571 --max-bytes 536870912 --max-fds 4096 --max-matches 16384 --audit
root        1727      1691  0  09:17 ?        00:00:00 /usr/sbin/acpid -f
root        1733      1  0  09:17 ?        00:00:05 /usr/bin/java -Djava.util.logging.config.file=/opt/apache-tomcat-9.0.120/conf/logging.properties -Djava.util.logging.manager=org.apache.juli.ClassLoaderLogManager
root        1743      1  0  09:17 ?        00:00:00 /usr/sbin/gssproxy -D
root        1895      1  0  09:17 ?        00:00:00 /usr/bin/amazon-ssm-agent
root        1904      1  0  09:17 ?        00:00:00 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
root        1914      1  0  09:17 ?        00:00:00 /usr/sbin/atd -f
root        1918      1  0  09:17 tty1    00:00:00 /sbin/agetty -o -p -- \u --noclear - linux
root        1920      1  0  09:17 tty0    00:00:00 /sbin/agetty -o -p -- \u --keep-baud 115200,57600,38400,9600 - vt220
root        1933      1  0  09:17 ?        00:00:00 /usr/sbin/chromyd -F 2
root        2040      1904  0  09:18 ?        00:00:00 ssh-session: ec2-user [priv]
root        2044      1  0  09:18 ?        00:00:00 /usr/lib/systemd/systemd-userdbd
root        2066      2044  0  09:18 ?        00:00:00 systemd-userwork: waiting...
root        2067      2044  0  09:18 ?        00:00:00 systemd-userwork: waiting...
root        2068      2044  0  09:18 ?        00:00:00 systemd-userwork: waiting...
root        2105      1  0  09:18 ?        00:00:00 /usr/lib/systemd/systemd --user
ec2-user    2107      2105  0  09:18 ?        00:00:00 (sd-pam)
ec2-user    2114      2040  0  09:18 ?        00:00:00 ssh-session: ec2-user@pts/0
ec2-user    2115      2114  0  09:18 pts/0    00:00:00 -bash
root        2143      2115  0  09:19 pts/0    00:00:00 sudo su -
root        2145      2143  0  09:19 pts/1    00:00:00 sudo su -
root        2146      2145  0  09:19 pts/1    00:00:00 su -
root        2147      2146  0  09:19 pts/1    00:00:00 -bash
root        2105      2  0  09:22 ?        00:00:00 [kworker/u8:4]
root        2311      2147  0  09:23 pts/1    00:00:00 /bin/bash ./test
root        2313      2311  0  09:23 pts/1    00:00:00 ps -ef
Filesystem      1K-blocks      Used Available Use% Mounted on
devtmpfs        429640          0    429640   0% /dev
tmpfs            467548          0    467548   0% /dev/shm
tmpfs           187020          440    186580   1% /run
efivarfs         128            3      121    3% /sys/firmware/efi/efivars
/dev/nvme0n1p1   8310764 2101684    6209080 26% /
tmpfs            467548          32    467516   1% /tmp
/dev/nvme0n1p128 10202         1318     8884  13% /boot/efi
tmpfs            93508          0     93508   0% /run/user/1000
[root@ip-172-31-25-75 ~]#
```

2. Sample file execution

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# ls
sample.bash
[root@ip-172-31-25-75 scripts]# vi sample.bash
[root@ip-172-31-25-75 scripts]# cat sample.bash
#!/bin/bash
# Purpose: Testing script format
#Date: 14/08/2026
#Modification: 14/08/2026
a='poojith'
echo $a
date
    if [ $a -eq file ]
    then
        echo $a
    else
        echo File not available
    fi

[root@ip-172-31-25-75 scripts]# ./sample.bash
poojith
Fri Aug 14 09:48:32 UTC 2026
./sample.bash: line 8: [: poojith: integer expression expected
File not available
[root@ip-172-31-25-75 scripts]#
```

3. Sequence of script

```
t@ip-172-31-25-75 scripts]# vi sequence.bash
t@ip-172-31-25-75 scripts]# cat sequence.bash
#!/bin/bash

try
t@ip-172-31-25-75 scripts]# ./sequence.bash
le.bash sequence.bash
Aug 14 09:51:27 UTC 2026
t@ip-172-31-25-75 scripts]#
```

4. Basic Admin Tasks

```
[root@ip-172-31-25-75 scripts]# vi admin.bash
[root@ip-172-31-25-75 scripts]# cat admin.bash
#!/bin/bash

top | head -10
df -h
free -m
uptime
iostat
[root@ip-172-31-25-75 scripts]# chmod 755 admin.bash
[root@ip-172-31-25-75 scripts]# ./admin.bash
top - 09:54:14 up 37 min,  2 users,  load average: 0.00, 0.00, 0.00
Tasks: 111 total,   1 running, 109 sleeping,   1 stopped,   0 zombie
%Cpu(s):  0.0 us,  0.0 sy,  0.0 ni,100.0 id,  0.0 wa,  0.0 hi,  0.0 si,  0.0 st
MiB Mem :   913.2 total,   369.0 free,   242.8 used,   301.4 buff/cache
MiB Swap:    0.0 total,    0.0 free,    0.0 used.   538.1 avail Mem

  PID USER      PR  NI   VIRT   RES   SHR  S  %CPU  %MEM     TIME+ COMMAND
    1 root        20   0  173160  17556  10960 S   0.0   1.9   0:00.98 systemd
    2 root        20   0        0        0        0 S   0.0   0.0   0:00.00 kthreadd
    3 root        20   0        0        0        0 S   0.0   0.0   0:00.00 pool_workqueue_release

Filesystem            Size  Used Avail Use% Mounted on
devtmpfs               420M    0  420M   0% /dev
tmpfs                  457M    0  457M   0% /dev/shm
tmpfs                  183M  440K  183M   1% /run
efivarfs               128K  2.7K  121K   3% /sys/firmware/efi/efivars
/dev/nvme0n1p1         8.0G  2.1G   6.0G  26% /
tmpfs                  457M    0  457M   1% /tmp
/dev/nvme0n1p128       10M  1.3M   8.7M  13% /boot/efi
tmpfs                  92M    0   92M   0% /run/user/1000
      total            used        free      shared  buff/cache   available
Mem:           913         242         369           0         301         538
Swap:            0           0           0
 09:54:14 up 37 min,  2 users,  load average: 0.00, 0.00, 0.00
Linux 6.18.39-79.141.amzn2023.x86_64 (ip-172-31-25-75.ec2.internal)      08/14/26      _x86_64_      (2 CPU)

avg-cpu:  %user   %nice %system %iowait  %steal   %idle
           0.30    0.00   0.15   0.06   0.01   99.48

Device            tps    kB_read/s    kB_wrtn/s    kB_dscd/s    kB_read    kB_wrtn    kB_dscd
nvme0n1             5.22       139.62       15.11         0.00      312355      33792         0

[root@ip-172-31-25-75 scripts]#
```

5. Basic second script

```
[root@ip-172-31-25-75 scripts]# vi basic_second.bash
[root@ip-172-31-25-75 scripts]# cat basic_second.bash
#!/bin/bash

pwd
ls
whoami
date
cal
touch a b c
[root@ip-172-31-25-75 scripts]# ./basic_second.bash
/root/poojith/scripts
admin.bash basic_second.bash sample.bash sequence.bash
root
Fri Aug 14 09:57:30 UTC 2026
    August 2026
Su Mo Tu We Th Fr Sa
                1
 2  3  4  5  6  7  8
 9 10 11 12 13 14 15
16 17 18 19 20 21 22
23 24 25 26 27 28 29
30 31
[root@ip-172-31-25-75 scripts]#
```

6. Defining Variable

```

root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi variable.bash
[root@ip-172-31-25-75 scripts]# cat variable.bash
#!/bin/bash
#Define Variables

p=pwd
l=ls
wi=whoami
d=date
c='cal 2023'

#run variables
echo
$p
$wi
$d
$c
[root@ip-172-31-25-75 scripts]# ll
total 20

```

```

[root@ip-172-31-25-75 scripts]# ./variable.bash
/root/poojith/scripts
root
Fri Aug 14 10:01:47 UTC 2026
2023
    January      February      March
Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa
 1  2  3  4  5  6  7   1  2  3  4   1  2  3  4
 8  9 10 11 12 13 14   5  6  7  8  9 10 11   5  6  7  8  9 10 11
15 16 17 18 19 20 21  12 13 14 15 16 17 18  12 13 14 15 16 17 18
22 23 24 25 26 27 28  19 20 21 22 23 24 25  19 20 21 22 23 24 25
29 30 31           26 27 28           26 27 28 29 30 31

    April      May      June
Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa
 1           1  2  3  4  5  6   1  2  3
 2  3  4  5  6  7  8   7  8  9 10 11 12 13   4  5  6  7  8  9 10
 9 10 11 12 13 14 15  14 15 16 17 18 19 20  11 12 13 14 15 16 17
16 17 18 19 20 21 22  21 22 23 24 25 26 27  18 19 20 21 22 23 24
23 24 25 26 27 28 29  28 29 30 31           25 26 27 28 29 30
30

    July      August      September
Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa
 1           1  2  3  4  5   1  2
 2  3  4  5  6  7  8   6  7  8  9 10 11 12   3  4  5  6  7  8  9
 9 10 11 12 13 14 15  13 14 15 16 17 18 19  10 11 12 13 14 15 16
16 17 18 19 20 21 22  20 21 22 23 24 25 26  17 18 19 20 21 22 23
23 24 25 26 27 28 29  27 28 29 30 31   24 25 26 27 28 29 30
30 31

    October      November      December
Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa Su Mo Tu We Th Fr Sa
 1  2  3  4  5  6  7   1  2  3  4   1  2
 8  9 10 11 12 13 14   5  6  7  8  9 10 11   3  4  5  6  7  8  9
15 16 17 18 19 20 21  12 13 14 15 16 17 18  10 11 12 13 14 15 16
22 23 24 25 26 27 28  19 20 21 22 23 24 25  17 18 19 20 21 22 23
29 30 31           26 27 28 29 30   24 25 26 27 28 29 30
                                     31

```

7. Input output

```
[root@ip-172-31-25-75 scripts]# vi sample_input.bash
[root@ip-172-31-25-75 scripts]# cat sample_input.bash
#!/bin/bash

echo Hello, my name is sabair
echo
echo what is your name?
read name
echo
echo Hello $name
echo
[root@ip-172-31-25-75 scripts]# chmod 755 sample_input.bash
[root@ip-172-31-25-75 scripts]# ./sample_input.bash
Hello, my name is sabair

what is your name?
Poojith

Hello Poojith

[root@ip-172-31-25-75 scripts]#
```

8. Input output 2

```
[root@ip-172-31-25-75 scripts]# vi sample_input2.bash
[root@ip-172-31-25-75 scripts]# cat sample_input2.bash
#!/bin/bash

a=`hostname`
echo Hello, my name is $a
echo
echo what is your name?
read b
echo
echo Hello $b
echo
[root@ip-172-31-25-75 scripts]# chmod 755 sample_input2.bash
[root@ip-172-31-25-75 scripts]# ./sample_input2.bash
Hello, my name is ip-172-31-25-75.ec2.internal

what is your name?
Poojith

Hello Poojith

[root@ip-172-31-25-75 scripts]# ./sample_input2.bash
Hello, my name is ip-172-31-25-75.ec2.internal

what is your name?
Ravutla

Hello Ravutla

[root@ip-172-31-25-75 scripts]#
```

2. Execute all the scripts share in #devops-cloud-documents-14 channel.

Basic Shell Scripts:

Output to screen

```
#!/bin/bash
# Simple output script

echo "Hello World"
```

```
[root@ip-172-31-25-75 scripts]# vi hello_world.bash
[root@ip-172-31-25-75 scripts]# chomd 755 hello_world.bash
-bash: chomd: command not found
[root@ip-172-31-25-75 scripts]# chmod 755 hello_world.bash
[root@ip-172-31-25-75 scripts]# ./hello_world.bash
Hello world
[root@ip-172-31-25-75 scripts]#
```

Defining Tasks

```
#!/bin/bash
# Define small tasks

whoami
echo
pwd
echo
hostname
echo
ls -ltr
echo
```

```
[root@ip-172-31-25-75 scripts]# vi define_tasks.bash
[root@ip-172-31-25-75 scripts]# cat define_tasks.bash
#!/bin/bash
# Define small tasks

whoami
echo
pwd
echo
hostname
echo
ls -ltr
echo

[root@ip-172-31-25-75 scripts]# chmod 755 define_tasks.bash
[root@ip-172-31-25-75 scripts]# ./define_tasks.bash
root

/root/poojith/scripts
ip-172-31-25-75.ec2.internal

total 36
-rwxr-xr-x. 1 root root 194 Aug 14 09:47 sample.bash
-r-sr-sr-t. 1 root root 29 Aug 14 09:49 sequence.bash
-r-sr-sr-t. 1 root root 56 Aug 14 09:53 admin.bash
-rwxr-xr-x. 1 root root 49 Aug 14 09:56 basic_second.bash
-rw-r--r--. 1 root root 0 Aug 14 09:57 c
-rw-r--r--. 1 root root 0 Aug 14 09:57 b
-rw-r--r--. 1 root root 0 Aug 14 09:57 a
-rwxr-xr-x. 1 root root 106 Aug 14 10:01 variable.bash
-rwxr-xr-x. 1 root root 109 Aug 14 10:03 sample_input.bash
-rwxr-xr-x. 1 root root 118 Aug 14 10:06 sample_input2.bash
-rwxr-xr-x. 1 root root 56 Aug 14 10:12 hello_world.bash
-rwxr-xr-x. 1 root root 83 Aug 14 10:13 define_tasks.bash

[root@ip-172-31-25-75 scripts]#
```

Defining variables

```
#!/bin/bash
# Example of defining variables
```

```
a=Imran
b=Afzal
c='Linux class'
```

```
echo "My first name is $a"
echo "My surname is $b"
echo 'My surname is $c'
```

```
[root@ip-172-31-25-75 scripts]# cat define_var.bash
#!/bin/bash
# Example of defining variables

a=Imran
b=Afzal
c='$b'

echo "My first name is $a"
echo "My surname is $b"
echo 'My surname is $c'

[root@ip-172-31-25-75 scripts]# ./define_var.bash
My first name is Imran
My surname is Afzal
'My surname is 'Afzal''
[root@ip-172-31-25-75 scripts]#
```

Read Input

```
#!/bin/bash
# Read user input

echo "What is your first name?"
read a
echo

echo "What is your last name?"
read b
echo

echo Hello $a $b
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi read_input.bash
[root@ip-172-31-25-75 scripts]# chmod 755 read_input.bash
[root@ip-172-31-25-75 scripts]# cat read_input.bash
#!/bin/bash
# Read user input

echo "What is your first name?"
read a
echo

echo "What is your last name?"
read b
echo

echo Hello $a $b

[root@ip-172-31-25-75 scripts]# ./read_input.bash
What is your first name?
Poojith

What is your last name?
Ravutla

Hello Poojith Ravutla
[root@ip-172-31-25-75 scripts]#
```

Scripts to run commands within

```
#!/bin/bash

# Script to run commands within

clear

echo "Hello `whoami`"

echo

echo "Today is `date`"

echo

echo "Number of user login: `who | wc -l`"

echo
```

```
[root@ip-172-31-25-75 scripts]# vi commands_within.bash
[root@ip-172-31-25-75 scripts]# chmod 755 commands_within.bash
[root@ip-172-31-25-75 scripts]# cat commands_within.bash
#!/bin/bash
# Script to run commands within

clear
echo "Hello `whoami`"
echo
echo "Today is `date`"
echo
echo "Number of user login: `who | wc -l`"
echo

[root@ip-172-31-25-75 scripts]#
```

```
root@ip-172-31-25-75:~/poojith/scripts
Hello root

Today is Fri Aug 14 10:29:46 UTC 2026

Number of user login: 2

[root@ip-172-31-25-75 scripts]#
```

Read input and perform a task

```
#!/bin/bash

# This script will rename a file

echo Enter the file name to be renamed
read oldfilename
```

```
echo Enter the new file name
```

```
read newfilename
```

```
mv $oldfilename $newfilename
```

```
echo The file has been renamed as $newfilename
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi perform_task.bash
[root@ip-172-31-25-75 scripts]# chmod 755 perform_task.bash
[root@ip-172-31-25-75 scripts]# cat perform_task.bash
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfilename

echo Enter the new file name
read newfilename

mv $oldfilename $newfilename
echo The file has been renamed as $newfilename

[root@ip-172-31-25-75 scripts]# ./perform_task.bash
Enter the file name to be renamed
commands_within.bash
Enter the new file name
run_commands_within.bash
The file has been renamed as run_commands_within.bash
[root@ip-172-31-25-75 scripts]# ls
'.'  admin.bash  basic_second.bash  define_tasks.bash  hello_world.bash  read_input.bash  sample.bash  sample_input2.bash  variable.bash
a    b           c                 define_var.bash    perform_task.bash  run_commands_within.bash  sample_input.bash  sequence.bash
[root@ip-172-31-25-75 scripts]#
```

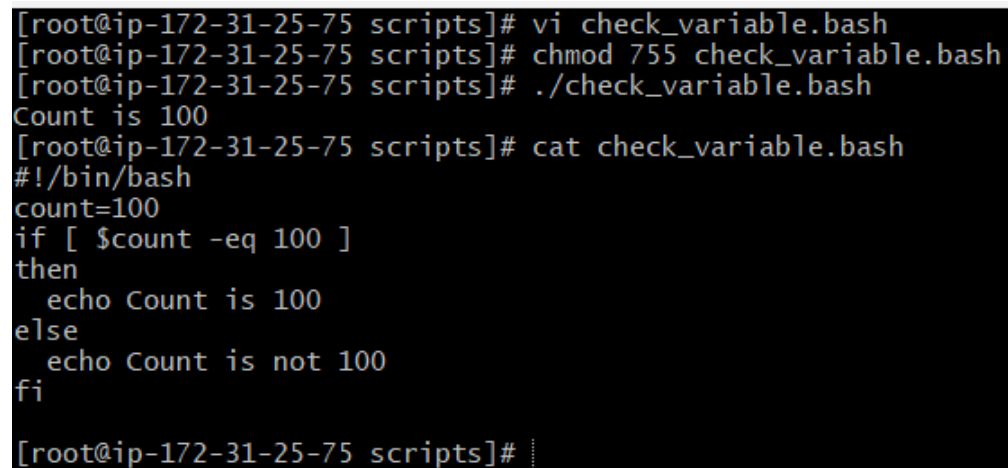
If-then Scripts:

Check the variable

```
#!/bin/bash

count=100

if [ $count -eq 100 ]
then
    echo Count is 100
else
    echo Count is not 100
fi
```

A terminal window with a black background and white text. It shows the execution of a script named 'check_variable.bash'. The user is in the 'scripts' directory on a machine with IP 172-31-25-75. The script is created with 'vi', permissions are set to 755 with 'chmod', and then executed with './'. The output is 'Count is 100'. The script content is then displayed using 'cat'.

```
[root@ip-172-31-25-75 scripts]# vi check_variable.bash
[root@ip-172-31-25-75 scripts]# chmod 755 check_variable.bash
[root@ip-172-31-25-75 scripts]# ./check_variable.bash
Count is 100
[root@ip-172-31-25-75 scripts]# cat check_variable.bash
#!/bin/bash
count=100
if [ $count -eq 100 ]
then
    echo Count is 100
else
    echo Count is not 100
fi
[root@ip-172-31-25-75 scripts]#
```

Check if a file error.txt exist

```
#!/bin/bash

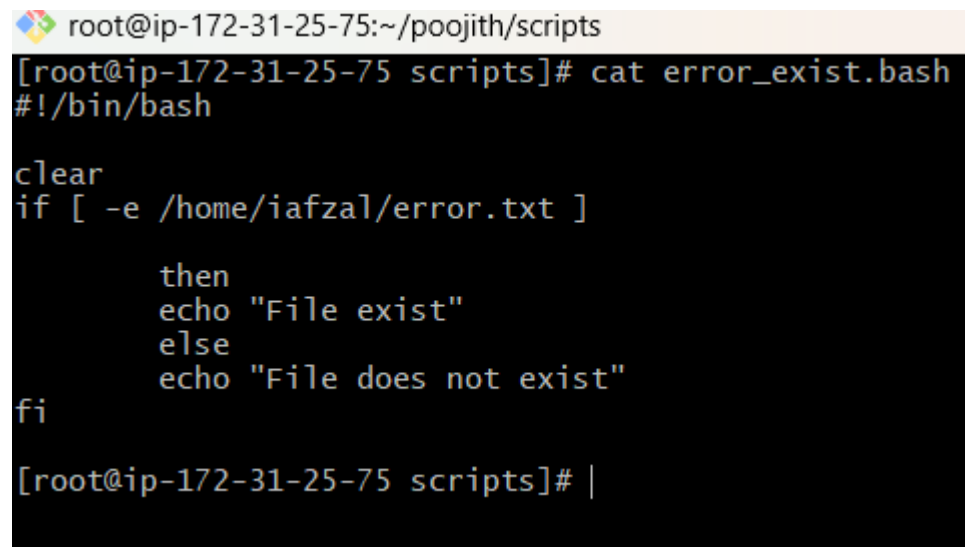
clear

if [ -e /home/iafzal/error.txt ]

then

    echo "File exist"
```

```
        else
            echo "File does not exist"
    fi
```

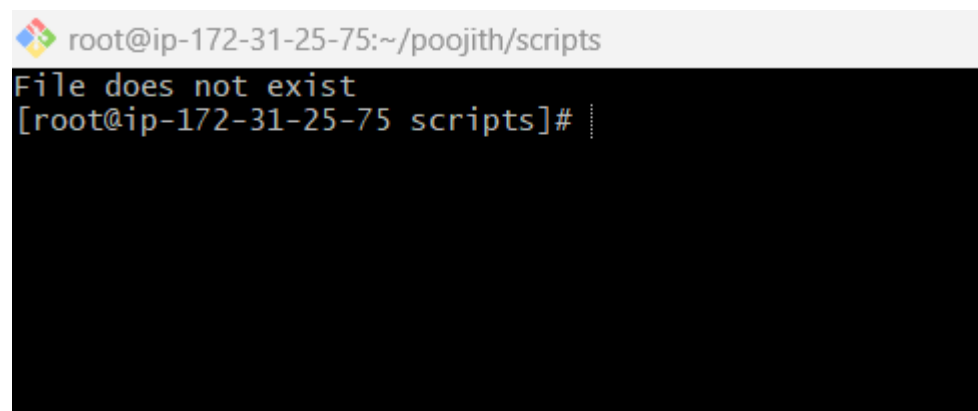


A terminal window with a light orange title bar showing the command prompt 'root@ip-172-31-25-75:~/poojith/scripts'. The terminal content shows the command 'cat error_exist.bash' being executed, displaying the script's content: a shebang line, a 'clear' command, an 'if' statement checking for the existence of '/home/iafzal/error.txt', and an 'echo' statement for the 'else' branch. The prompt returns to the shell after the command.

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# cat error_exist.bash
#!/bin/bash

clear
if [ -e /home/iafzal/error.txt ]
    then
        echo "File exist"
    else
        echo "File does not exist"
fi

[root@ip-172-31-25-75 scripts]# |
```



A terminal window with a light grey title bar showing the command prompt 'root@ip-172-31-25-75:~/poojith/scripts'. The terminal content shows the output 'File does not exist' followed by a new prompt line. A vertical cursor is visible on the second line of the prompt.

```
root@ip-172-31-25-75:~/poojith/scripts
File does not exist
[root@ip-172-31-25-75 scripts]# |
```

Check if a variable value is met

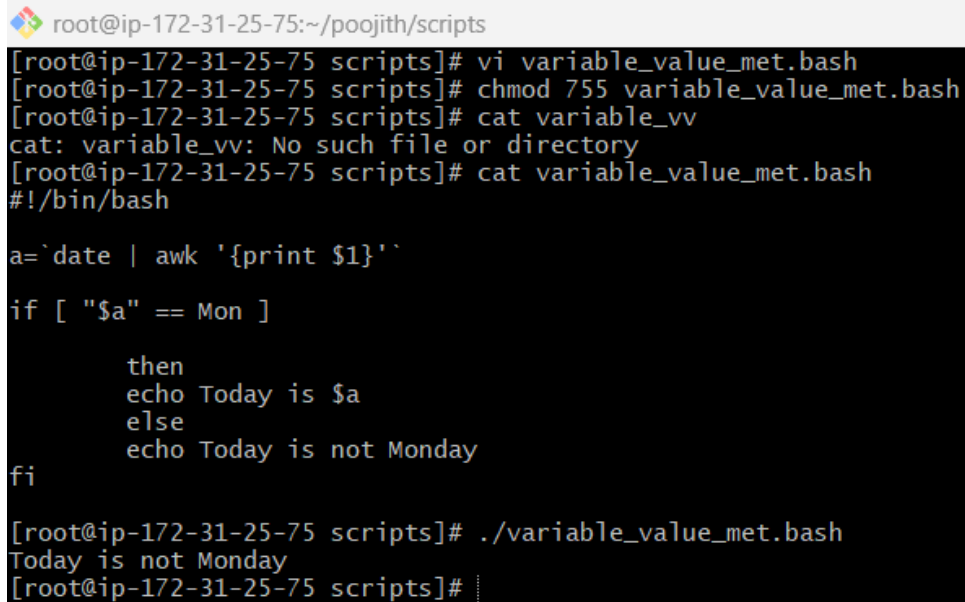
```
#!/bin/bash

a=`date | awk '{print $1}'`

if [ "$a" == Mon ]

    then
```

```
        echo Today is $a
    else
        echo Today is not Monday
fi
```



A terminal window with a light gray title bar showing the path `root@ip-172-31-25-75:~/poojith/scripts`. The terminal has a black background with white text. It shows the following commands and output:

```
[root@ip-172-31-25-75 scripts]# vi variable_value_met.bash
[root@ip-172-31-25-75 scripts]# chmod 755 variable_value_met.bash
[root@ip-172-31-25-75 scripts]# cat variable_vv
cat: variable_vv: No such file or directory
[root@ip-172-31-25-75 scripts]# cat variable_value_met.bash
#!/bin/bash

a=`date | awk '{print $1}'`

if [ "$a" == Mon ]
    then
        echo Today is $a
    else
        echo Today is not Monday
fi

[root@ip-172-31-25-75 scripts]# ./variable_value_met.bash
Today is not Monday
[root@ip-172-31-25-75 scripts]#
```

Check the response and then output

```
#!/bin/bash

clear

echo

echo "What is your name?"
```

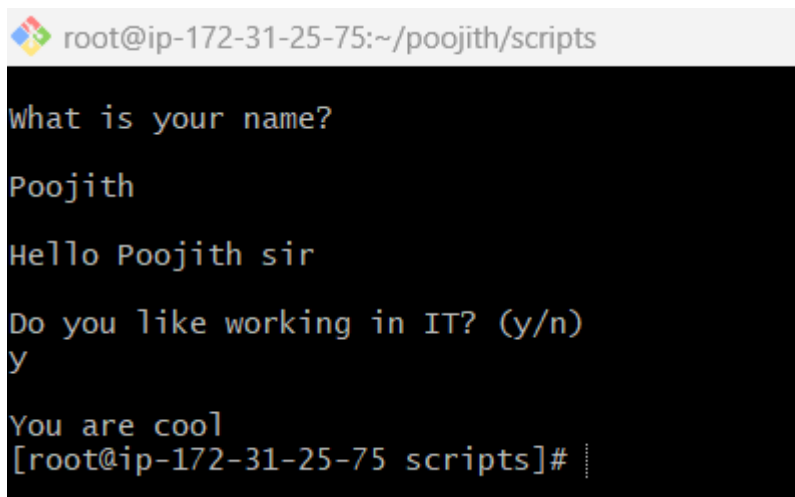
```
echo
read a
echo

echo Hello $a sir
echo

echo "Do you like working in IT? (y/n)"
read Like
echo

if [ "$Like" == y ]
then
echo You are cool

elif [ "$Like" == n ]
then
echo You should try IT, it's a good field
echo
fi
```

A terminal window with a black background and light blue text. The title bar at the top shows a multi-colored icon followed by the text 'root@ip-172-31-25-75:~/poojith/scripts'. The terminal content shows the execution of a script: it prompts 'What is your name?', receives the input 'Poojith', outputs 'Hello Poojith sir', prompts 'Do you like working in IT? (y/n)', receives the input 'y', outputs 'You are cool', and ends with the prompt '[root@ip-172-31-25-75 scripts]# |'.

```
root@ip-172-31-25-75:~/poojith/scripts
What is your name?
Poojith
Hello Poojith sir
Do you like working in IT? (y/n)
y
You are cool
[root@ip-172-31-25-75 scripts]# |
```

Other If statements

If the output is either Monday or Tuesday

```
if [ "$a" = Monday ] || [ "$a" = Tuesday ]
```

```
[root@ip-172-31-25-75 scripts]# vi mon_tue.bash
[root@ip-172-31-25-75 scripts]# chmod 755 mon_tue.bash
[root@ip-172-31-25-75 scripts]# cat mon_tue.bash
#!/bin/bash

a=`date | awk '{print $1}'`

if [ "$a" = Monday ] || [ "$a" = Tuesday ]
then
    echo Today is $a
else
    echo Today is not monday or tuesday
fi

[root@ip-172-31-25-75 scripts]# ./mon_tue.bash
Today is not monday or tuesday
[root@ip-172-31-25-75 scripts]#
```

Test if the error.txt file exist and its size is greater than zero

```
if test -s error.txt
```

<pre>if [\$? -eq 0]</pre>	If input is equal to zero (0)
<pre>if [-e /export/home/filename]</pre>	If file is there
<pre>if ["\$a" != ""]</pre>	If variable does not match
<pre>if [error_code != "0"]</pre>	If file not equal to zero (0)

```
root@ip-172-31-25-75:~/poajith/scripts
[root@ip-172-31-25-75 scripts]# touch error.txt
[root@ip-172-31-25-75 scripts]# vi error.txt
[root@ip-172-31-25-75 scripts]# cat error
cat: error: No such file or directory
[root@ip-172-31-25-75 scripts]# cat error.txt
this is the error file.
[root@ip-172-31-25-75 scripts]# ls
l      admin.bash      c      check_variable.bash  define_var.bash  error_file.bash  perform_task.bash  run_commands_within.bash  sample_input2.bash  variable_value_met.bash
a      basic_second.bash  define_tasks.bash  error_exist.bash  hello_world.bash  read_input.bash  sample.bash  sequence.bash  variable.bash
[root@ip-172-31-25-75 scripts]# vi error_exist.bash
[root@ip-172-31-25-75 scripts]# vi error_file.bash
[root@ip-172-31-25-75 scripts]# ./error_file.bash
./error_file.bash: line 10: syntax error: unexpected end of file
[root@ip-172-31-25-75 scripts]# vi error_file.bash
[root@ip-172-31-25-75 scripts]# vi error_file.bash
[root@ip-172-31-25-75 scripts]# chmod 755 error_file.bash
[root@ip-172-31-25-75 scripts]# ./error_file.bash
the error.txt file exists and has data
the input is equal to zero (0)
error code is note Zero
[root@ip-172-31-25-75 scripts]# cat error_file.bash
#!/bin/bash

if test -s error.txt
then
    echo "The error.txt file exists and has data"
fi

if [ $? -eq 0 ]
then
    echo "the input is equal to zero (0)"
fi

if [ -e /export/home/error.txt ]
then
    echo "File Exists"
fi

if [ "$a" != "" ]
then
    echo "Variable doesn't match"
fi

if [ error_code != "0" ]
then
    echo "Error code is note Zero"
fi

[root@ip-172-31-25-75 scripts]# |
```

case Scripts:

```
#!/bin/bash
```

```
echo
```

```
echo Please chose one of the options below
```

```
echo
```

```
echo 'a = Display Date and Time'
```

```
echo 'b = List file and directories'
```

```
echo 'c = List users logged in'
```

```
echo 'd = Check System uptime'
```

```
echo
```

```
    read choices
```

```
    case $choices in
```

```
a) date;;
```

```
b) ls;;
```

```
c) who;;
```

```
d) uptime;;
```

```
*) echo Invalid choice - Bye.
```

```
    esac
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi case_scripts.bash
[root@ip-172-31-25-75 scripts]# chmod 755 case_scripts.bash
[root@ip-172-31-25-75 scripts]# cat case_scripts.bash
#!/bin/bash
echo
echo Please chose one of the options below
echo
echo 'a = Display Date and Time'
echo 'b = List file and directories'
echo 'c = List users logged in'
echo 'd = Check System uptime'
echo
echo      read choices
echo      case $choices in
a) date;;
b) ls;;
c) who;;
d) uptime;;
*) echo Invalid choice - Bye.
esac

[root@ip-172-31-25-75 scripts]# ./case_scripts.bash
Please chose one of the options below
a = Display Date and Time
b = List file and directories
c = List users logged in
d = Check System uptime

Invalid choice - Bye.
[root@ip-172-31-25-75 scripts]# ./case_scripts.bash
Please chose one of the options below
a = Display Date and Time
b = List file and directories
c = List users logged in
d = Check System uptime

c
ec2-user pts/0      2026-08-14 09:18 (103.203.172.230)
ec2-user pts/1      2026-08-14 09:19 (103.203.172.230)
[root@ip-172-31-25-75 scripts]# ./case_scripts.bash
Please chose one of the options below
a = Display Date and Time
b = List file and directories
c = List users logged in
d = Check System uptime

a
Fri Aug 14 11:12:44 UTC 2026
[root@ip-172-31-25-75 scripts]#
```

This script will look at your current day and tell you the state of the backup

```
#!/bin/bash

NOW=$(date +"%a")
case $NOW in
    Mon)
        echo "Full backup";;
    Tue|Wed|Thu|Fri)
        echo "Partial backup";;
    Sat|Sun)
        echo "No backup";;
    *) ;;
esac
```

root@ip-172-31-25-75:~/poojith/scripts

```
[root@ip-172-31-25-75 scripts]# vi current_day.bash
[root@ip-172-31-25-75 scripts]# chmod 755 current_day.bash
[root@ip-172-31-25-75 scripts]# ./current_day.bash
Partial backup
[root@ip-172-31-25-75 scripts]# cat current_day.bash
#!/bin/bash
```

```
NOW=$(date +%a)
case $NOW in
    Mon)
        echo "Full backup";;
    Tue|Wed|Thu|Fri)
        echo "Partial backup";;
    Sat|Sun)
        echo "No backup";;
    *) ;;
esac
```

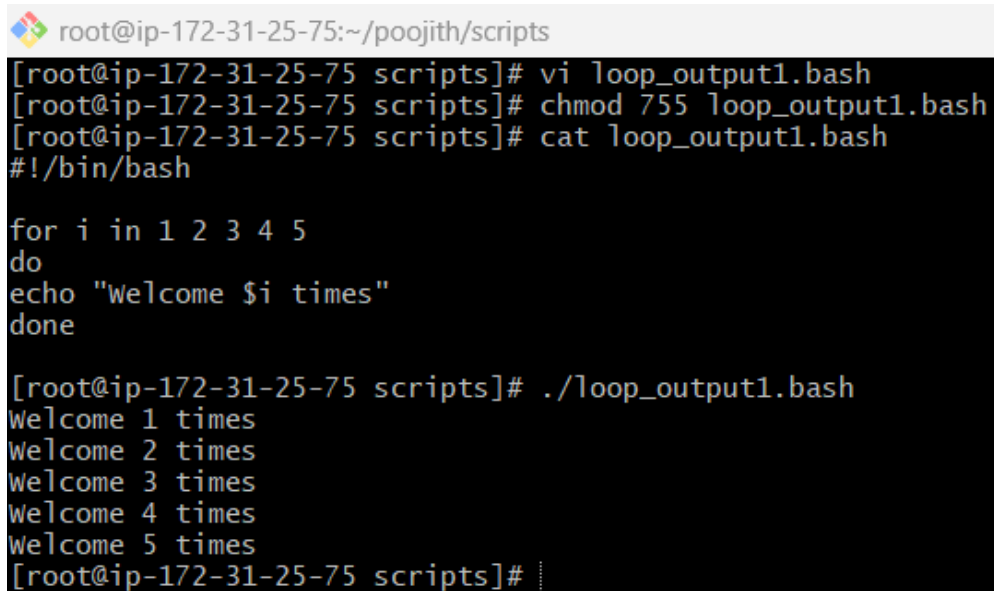
```
[root@ip-172-31-25-75 scripts]#
```

for loop Scripts:

Simple for loop output

```
#!/bin/bash

for i in 1 2 3 4 5
do
echo "Welcome $i times"
done
```

A terminal window screenshot showing the steps to create and run a for loop script. The prompt is root@ip-172-31-25-75:~/poojith/scripts. The user creates a file loop_output1.bash, sets permissions to 755, and cat's the file content. The script is a for loop that prints 'Welcome \$i times' for i from 1 to 5. Finally, the user runs the script with ./loop_output1.bash, resulting in five lines of output: 'Welcome 1 times' through 'Welcome 5 times'.

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi loop_output1.bash
[root@ip-172-31-25-75 scripts]# chmod 755 loop_output1.bash
[root@ip-172-31-25-75 scripts]# cat loop_output1.bash
#!/bin/bash

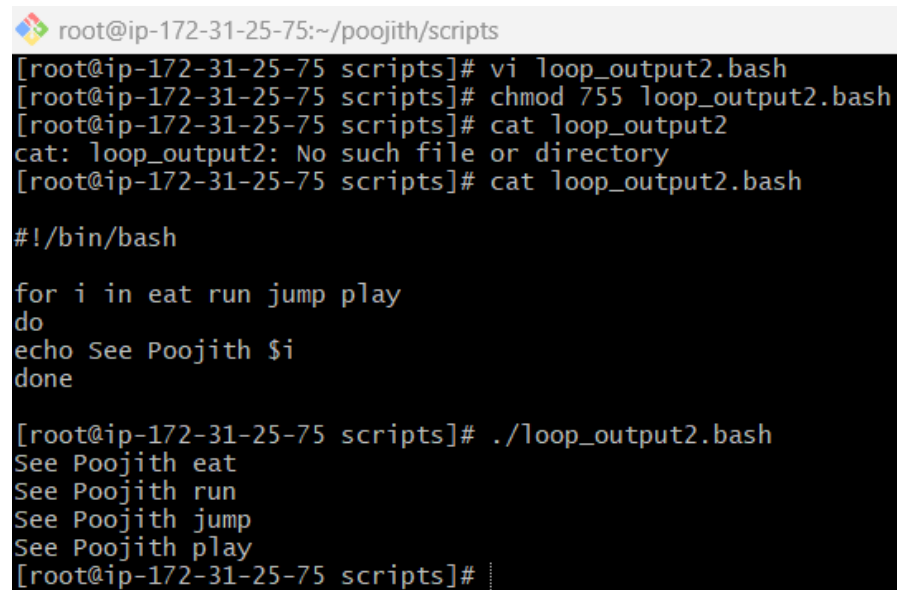
for i in 1 2 3 4 5
do
echo "Welcome $i times"
done

[root@ip-172-31-25-75 scripts]# ./loop_output1.bash
Welcome 1 times
Welcome 2 times
Welcome 3 times
Welcome 4 times
Welcome 5 times
[root@ip-172-31-25-75 scripts]#
```

Simple for loop output

```
#!/bin/bash

for i in eat run jump play
do
echo See Poojith $i
done
```

A terminal window with a light blue title bar showing the path 'root@ip-172-31-25-75:~/poojith/scripts'. The terminal has a black background with white text. It shows the user creating a file 'loop_output2.bash' with 'vi', setting permissions with 'chmod 755', attempting to view it with 'cat' (resulting in an error), and then running it with './loop_output2.bash'. The output of the script is four lines: 'See Poojith eat', 'See Poojith run', 'See Poojith jump', and 'See Poojith play'.

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi loop_output2.bash
[root@ip-172-31-25-75 scripts]# chmod 755 loop_output2.bash
[root@ip-172-31-25-75 scripts]# cat loop_output2
cat: loop_output2: No such file or directory
[root@ip-172-31-25-75 scripts]# cat loop_output2.bash

#!/bin/bash

for i in eat run jump play
do
echo See Poojith $i
done

[root@ip-172-31-25-75 scripts]# ./loop_output2.bash
See Poojith eat
See Poojith run
See Poojith jump
See Poojith play
[root@ip-172-31-25-75 scripts]#
```

for loop to create 5 files named 1-5

```
#!/bin/bash

for i in {1..5}
do
    touch $i
done
```

```

[root@ip-172-31-25-75 scripts]# vi create_5files.bash
[root@ip-172-31-25-75 scripts]# chmod 755 create_5files.bash
[root@ip-172-31-25-75 scripts]# cat create_5files.bash
#!/bin/bash

for i in {1..5}
do
    touch $i
done

[root@ip-172-31-25-75 scripts]# ./create_5files.bash
[root@ip-172-31-25-75 scripts]# ll
total 108
-rw-r--r--. 1 root root  24 Aug 14 11:40 1
-rw-r--r--. 1 root root   0 Aug 14 11:40 2
-rw-r--r--. 1 root root   0 Aug 14 11:40 3
-rw-r--r--. 1 root root   0 Aug 14 11:40 4
-rw-r--r--. 1 root root   0 Aug 14 11:40 5
-rw-r--r--. 1 root root 162 Aug 14 10:18 '\ '
-rw-r--r--. 1 root root   0 Aug 14 09:57 a
-r-sr-sr-t. 1 root root  56 Aug 14 09:53 admin.bash
-rw-r--r--. 1 root root   0 Aug 14 09:57 b
-rwxr-xr-x. 1 root root  49 Aug 14 09:56 basic_second.bash
-rw-r--r--. 1 root root   0 Aug 14 09:57 c
-rwxr-xr-x. 1 root root 341 Aug 14 11:11 case_scripts.bash
-rwxr-xr-x. 1 root root 102 Aug 14 10:39 check_variable.bash
-rwxr-xr-x. 1 root root  50 Aug 14 11:40 create_5files.bash
-rwxr-xr-x. 1 root root 163 Aug 14 11:17 current_day.bash
-rwxr-xr-x. 1 root root  83 Aug 14 10:13 define_tasks.bash
-rwxr-xr-x. 1 root root 153 Aug 14 10:25 define_var.bash
-rw-r--r--. 1 root root  24 Aug 14 10:56 error.txt
-rwxr-xr-x. 1 root root 144 Aug 14 10:42 error_exist.bash
-rwxr-xr-x. 1 root root 349 Aug 14 11:06 error_file.bash
-rwxr-xr-x. 1 root root  56 Aug 14 10:12 hello_world.bash
-rwxr-xr-x. 1 root root  65 Aug 14 11:35 loop_output1.bash
-rwxr-xr-x. 1 root root  70 Aug 14 11:37 loop_output2.bash
-rwxr-xr-x. 1 root root 193 Aug 14 10:50 mon_tue.bash
-rwxr-xr-x. 1 root root 227 Aug 14 10:31 perform_task.bash
-rwxr-xr-x. 1 root root 138 Aug 14 10:27 read_input.bash
-rwxr-xr-x. 1 root root 272 Aug 14 10:46 response_output.bash
-rwxr-xr-x. 1 root root 156 Aug 14 10:28 run_commands_within.bash
-rwxr-xr-x. 1 root root 194 Aug 14 09:47 sample.bash
-rwxr-xr-x. 1 root root 109 Aug 14 10:03 sample_input.bash
-rwxr-xr-x. 1 root root 118 Aug 14 10:06 sample_input2.bash
-r-sr-sr-t. 1 root root  29 Aug 14 09:49 sequence.bash
-rwxr-xr-x. 1 root root 106 Aug 14 10:01 variable.bash
-rwxr-xr-x. 1 root root 150 Aug 14 10:44 variable_value_met.bash
[root@ip-172-31-25-75 scripts]#

```

for loop to delete 5 files named 1-5

```
#!/bin/bash
```

```
for i in {1..5}
```

```
do

rm $i

done
```

```
root@ip-172-31-25-75: ~/scripts
[root@ip-172-31-25-75 scripts]# vi del_5files.bash
[root@ip-172-31-25-75 scripts]# chmod 755 del_5files.bash
[root@ip-172-31-25-75 scripts]# cat del_5files.bash
#!/bin/bash

for i in {1..5}
do
rm $i
done

[root@ip-172-31-25-75 scripts]# ll
total 112
-rw-r--r-- 1 root root 24 Aug 14 11:40 1
-rw-r--r-- 1 root root 0 Aug 14 11:40 2
-rw-r--r-- 1 root root 0 Aug 14 11:40 3
-rw-r--r-- 1 root root 0 Aug 14 11:40 4
-rw-r--r-- 1 root root 0 Aug 14 11:40 5
-rw-r--r-- 1 root root 162 Aug 14 10:18 '\`
-rw-r--r-- 1 root root 0 Aug 14 09:57 a
-rw-r--r-- 1 root root 56 Aug 14 09:53 adjust.bash
-rw-r--r-- 1 root root 0 Aug 14 09:57 b
-rwxr-xr-x 1 root root 49 Aug 14 09:56 basic_second.bash
-rw-r--r-- 1 root root 0 Aug 14 09:57 c
-rwxr-xr-x 1 root root 341 Aug 14 11:11 case_scripts.bash
-rwxr-xr-x 1 root root 102 Aug 14 10:39 check_variable.bash
-rwxr-xr-x 1 root root 50 Aug 14 11:40 create_5files.bash
-rwxr-xr-x 1 root root 163 Aug 14 11:17 current_day.bash
-rwxr-xr-x 1 root root 83 Aug 14 10:13 define_tasks.bash
-rwxr-xr-x 1 root root 153 Aug 14 10:25 define_var.bash
-rwxr-xr-x 1 root root 47 Aug 14 11:41 del_5files.bash
-rw-r--r-- 1 root root 24 Aug 14 10:56 error.txt
-rwxr-xr-x 1 root root 144 Aug 14 10:42 error_exist.bash
-rwxr-xr-x 1 root root 349 Aug 14 11:06 error_file.bash
-rwxr-xr-x 1 root root 56 Aug 14 10:12 hello_world.bash
-rwxr-xr-x 1 root root 65 Aug 14 11:35 loop_output1.bash
-rwxr-xr-x 1 root root 70 Aug 14 11:37 loop_output2.bash
-rwxr-xr-x 1 root root 193 Aug 14 10:50 mon_tue.bash
-rwxr-xr-x 1 root root 227 Aug 14 10:31 perform_task.bash
-rwxr-xr-x 1 root root 138 Aug 14 10:27 read_input.bash
-rwxr-xr-x 1 root root 272 Aug 14 10:46 response_output.bash
-rwxr-xr-x 1 root root 156 Aug 14 10:28 run_commands_within.bash
-rwxr-xr-x 1 root root 194 Aug 14 09:47 sample.bash
-rwxr-xr-x 1 root root 109 Aug 14 10:03 sample_input.bash
-rwxr-xr-x 1 root root 118 Aug 14 10:06 sample_input2.bash
-rw-r--r-- 1 root root 29 Aug 14 09:49 sequence.bash
-rwxr-xr-x 1 root root 106 Aug 14 10:01 variable.bash
-rwxr-xr-x 1 root root 150 Aug 14 10:44 variable_value_met.bash
[root@ip-172-31-25-75 scripts]# ./del_5files.bash
a
b
c
adjust.bash basic_second.bash case_scripts.bash current_day.bash del_5files.bash error_file.bash hello_world.bash loop_output2.bash read_input.bash sample.bash sequence.bash
error.txt create_5files.bash define_tasks.bash define_var.bash error_exist.bash error_file.bash hello_world.bash loop_output1.bash perform_task.bash response_output.bash run_commands_within.bash sample_input.bash sample_input2.bash variable.bash variable_value_met.bash
[root@ip-172-31-25-75 scripts]#
```

Specify days in for loop

```
#!/bin/bash

i=1

for day in Mon Tue Wed Thu Fri

do

echo "Weekday $((i++)) : $day"

done
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi specify_days.bash
[root@ip-172-31-25-75 scripts]# chmod 755 specify_days.bash
[root@ip-172-31-25-75 scripts]# cat specify_days.bash
#!/bin/bash

i=1
for day in Mon Tue Wed Thu Fri
do
    echo "Weekday $((i++)) : $day"
done

[root@ip-172-31-25-75 scripts]# ./specify_days.bash
Weekday 1 : Mon
Weekday 2 : Tue
Weekday 3 : Wed
Weekday 4 : Thu
Weekday 5 : Fri
[root@ip-172-31-25-75 scripts]#
```

List all users one by one from /etc/passwd file

```
#!/bin/bash
```

```
i=1
for username in `awk -F: '{print $1}' /etc/passwd`
do
    echo "Username $((i++)) : $username"
done
```

root@ip-172-31-25-75:~/poojith/scripts

```
[root@ip-172-31-25-75 scripts]# vi list_of_users.bash
[root@ip-172-31-25-75 scripts]# chmod 755 list_of_users.bash
[root@ip-172-31-25-75 scripts]# cat list_of_users.bash
#!/bin/bash
```

```
i=1
for username in `awk -F: '{print $1}' /etc/passwd`
do
    echo "Username $((i++)) : $username"
done
```

```
[root@ip-172-31-25-75 scripts]# ./list_of_users.bash
```

```
Username 1 : root
Username 2 : bin
Username 3 : daemon
Username 4 : adm
Username 5 : lp
Username 6 : sync
Username 7 : shutdown
Username 8 : halt
Username 9 : mail
Username 10 : operator
Username 11 : games
Username 12 : ftp
Username 13 : nobody
Username 14 : dbus
Username 15 : systemd-network
Username 16 : systemd-oom
Username 17 : systemd-resolve
Username 18 : rpc
Username 19 : libstoragemgmt
Username 20 : systemd-coredump
Username 21 : systemd-timesync
Username 22 : sshd
Username 23 : chrony
Username 24 : ec2-instance-connect
Username 25 : stapunpriv
Username 26 : rpcuser
Username 27 : tcpdump
Username 28 : ec2-user
Username 29 : apache
Username 30 : nginx
Username 31 : tomcat
[root@ip-172-31-25-75 scripts]#
```

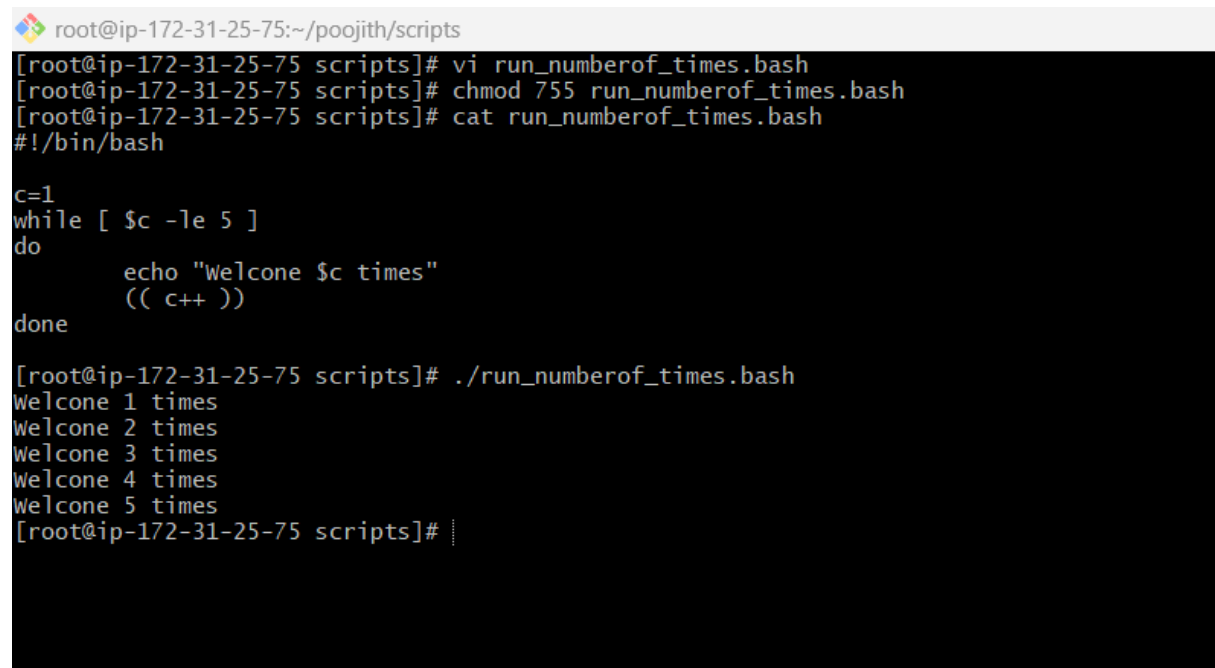
do-while Script

Script to run for a number of times

```
#!/bin/bash

c=1

while [ $c -le 5 ]
do
    echo "Welcone $c times"
    (( c++ ))
done
```



A terminal window showing the steps to create and run a script. The prompt is root@ip-172-31-25-75:~/poojith/scripts. The user creates a file run_numberof_times.bash with vi, sets permissions with chmod 755, and views the content with cat. The script content is: #!/bin/bash, c=1, while [\$c -le 5], do, echo "Welcone \$c times", ((c++)), done. The user then runs ./run_numberof_times.bash, which outputs "Welcone 1 times" through "Welcone 5 times".

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi run_numberof_times.bash
[root@ip-172-31-25-75 scripts]# chmod 755 run_numberof_times.bash
[root@ip-172-31-25-75 scripts]# cat run_numberof_times.bash
#!/bin/bash

c=1
while [ $c -le 5 ]
do
    echo "Welcone $c times"
    (( c++ ))
done

[root@ip-172-31-25-75 scripts]# ./run_numberof_times.bash
Welcone 1 times
Welcone 2 times
Welcone 3 times
Welcone 4 times
Welcone 5 times
[root@ip-172-31-25-75 scripts]#
```

Script to run for a number of seconds

```
#!/bin/bash

count=0

num=10

while [ $count -lt 10 ]
```

do

echo

echo \$num seconds left to stop this process \$1

echo

sleep 1

num=`expr \$num - 1`

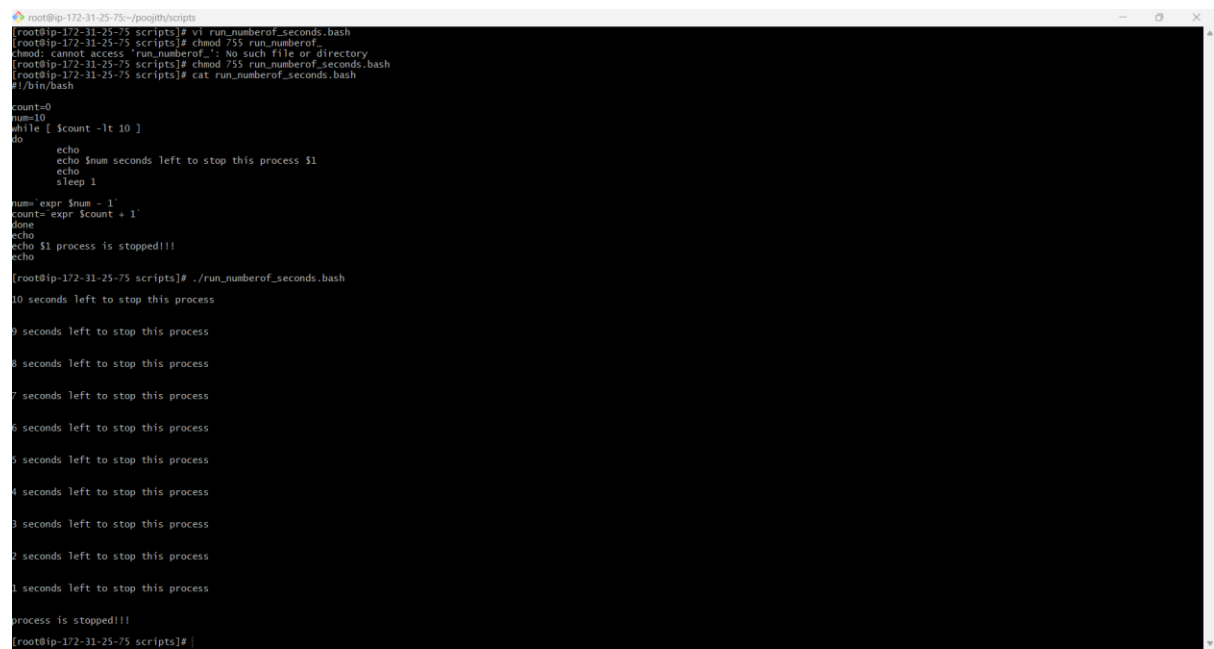
count=`expr \$count + 1`

done

echo

echo \$1 process is stopped!!!

echo

A terminal window titled 'root@ip-172-31-25-75:~/poojith/scripts' showing the execution of a script. The script sets 'count=0', 'num=10', and enters a 'while' loop 'while [\$count -lt 10]'. Inside the loop, it echoes '10 seconds left to stop this process', then '9 seconds left to stop this process', and so on, down to '1 seconds left to stop this process'. After the loop, it echoes 'process is stopped!!!'. The user then runs './run_numberof_seconds.bash' and the script outputs the sequence of countdown messages.

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi run_numberof_seconds.bash
[root@ip-172-31-25-75 scripts]# chmod 755 run_numberof_
chmod: cannot access 'run_numberof_': No such file or directory
[root@ip-172-31-25-75 scripts]# chmod 755 run_numberof_seconds.bash
[root@ip-172-31-25-75 scripts]# cat run_numberof_seconds.bash
#!/bin/bash
count=0
num=10
while [ $count -lt 10 ]
do
    echo
    echo $num seconds left to stop this process $1
    echo
    sleep 1

    num=`expr $num - 1`
    count=`expr $count + 1`
done
echo
echo $1 process is stopped!!!
echo

[root@ip-172-31-25-75 scripts]# ./run_numberof_seconds.bash
10 seconds left to stop this process

9 seconds left to stop this process

8 seconds left to stop this process

7 seconds left to stop this process

6 seconds left to stop this process

5 seconds left to stop this process

4 seconds left to stop this process

3 seconds left to stop this process

2 seconds left to stop this process

1 seconds left to stop this process

process is stopped!!!
[root@ip-172-31-25-75 scripts]#
```

EXIT STATUS

Return Successful Exist Status

ls -l

echo \$?

pwd

echo \$?

pwd

echo ?

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# ls -l
total 124
-rw-r--r--. 1 root root 162 Aug 14 10:18 '\ '
-rw-r--r--. 1 root root 0 Aug 14 09:57 a
-r-sr--sr-t. 1 root root 56 Aug 14 09:53 admin.bash
-rw-r--r--. 1 root root 0 Aug 14 09:57 b
-rwxr-xr-x. 1 root root 49 Aug 14 09:56 basic_second.bash
-rw-r--r--. 1 root root 0 Aug 14 09:57 c
-rwxr-xr-x. 1 root root 341 Aug 14 11:11 case_scripts.bash
-rwxr-xr-x. 1 root root 102 Aug 14 10:39 check_variable.bash
-rwxr-xr-x. 1 root root 50 Aug 14 11:40 create_5files.bash
-rwxr-xr-x. 1 root root 163 Aug 14 11:17 current_day.bash
-rwxr-xr-x. 1 root root 83 Aug 14 10:13 define_tasks.bash
-rwxr-xr-x. 1 root root 153 Aug 14 10:25 define_var.bash
-rwxr-xr-x. 1 root root 47 Aug 14 11:41 del_5files.bash
-rw-r--r--. 1 root root 24 Aug 14 10:56 error.txt
-rwxr-xr-x. 1 root root 144 Aug 14 10:42 error_exist.bash
-rwxr-xr-x. 1 root root 349 Aug 14 11:06 error_file.bash
-rwxr-xr-x. 1 root root 56 Aug 14 10:12 hello_world.bash
-rwxr-xr-x. 1 root root 115 Aug 14 11:45 list_of_users.bash
-rwxr-xr-x. 1 root root 65 Aug 14 11:35 loop_output1.bash
-rwxr-xr-x. 1 root root 70 Aug 14 11:37 loop_output2.bash
-rwxr-xr-x. 1 root root 193 Aug 14 10:50 mon_tue.bash
-rwxr-xr-x. 1 root root 227 Aug 14 10:31 perform_task.bash
-rwxr-xr-x. 1 root root 138 Aug 14 10:27 read_input.bash
-rwxr-xr-x. 1 root root 272 Aug 14 10:46 response_output.bash
-rwxr-xr-x. 1 root root 156 Aug 14 10:28 run_commands_within.bash
-rwxr-xr-x. 1 root root 243 Aug 14 11:48 run_numberof_seconds.bash
-rwxr-xr-x. 1 root root 95 Aug 14 11:47 run_numberof_times.bash
-rwxr-xr-x. 1 root root 194 Aug 14 09:47 sample.bash
-rwxr-xr-x. 1 root root 109 Aug 14 10:03 sample_input.bash
-rwxr-xr-x. 1 root root 118 Aug 14 10:06 sample_input2.bash
-r-sr--sr-t. 1 root root 29 Aug 14 09:49 sequence.bash
-rwxr-xr-x. 1 root root 89 Aug 14 11:43 specify_days.bash
-rwxr-xr-x. 1 root root 106 Aug 14 10:01 variable.bash
-rwxr-xr-x. 1 root root 150 Aug 14 10:44 variable_value_met.bash
[root@ip-172-31-25-75 scripts]# echo $?
0
[root@ip-172-31-25-75 scripts]# pwd
/root/poojith/scripts
[root@ip-172-31-25-75 scripts]# echo $?
0
[root@ip-172-31-25-75 scripts]# pwd
-bash: pwd: command not found
[root@ip-172-31-25-75 scripts]# echo $?
127
[root@ip-172-31-25-75 scripts]# |
```

```
#!/bin/bash
```

```
echo hello
```

```
echo $?
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi exit_status1.bash
[root@ip-172-31-25-75 scripts]# chmod 755 exit_status1.bash
[root@ip-172-31-25-75 scripts]# cat exit_status1.bash
#!/bin/bash

echo hello
echo $?

[root@ip-172-31-25-75 scripts]# ./exit_status1.bash
hello
0
[root@ip-172-31-25-75 scripts]#
```

Return Un-Successful Exist Status

```
#!/bin/bash
```

```
echi hello
```

```
echo $?
```

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi exit_status2.bash
[root@ip-172-31-25-75 scripts]# chmod 755 exit_status2.bash
[root@ip-172-31-25-75 scripts]# cat exit_status2.bash
#!/bin/bash

echi hello
echo $?

[root@ip-172-31-25-75 scripts]# ./exit_status2.bash
./exit_status2.bash: line 3: echi: command not found
127
[root@ip-172-31-25-75 scripts]#
```

Return exist status if file exist

```
#!/bin/bash
```

```
ls -l /home/poojith/check
```

```
if [ $? -eq 0 ]
```

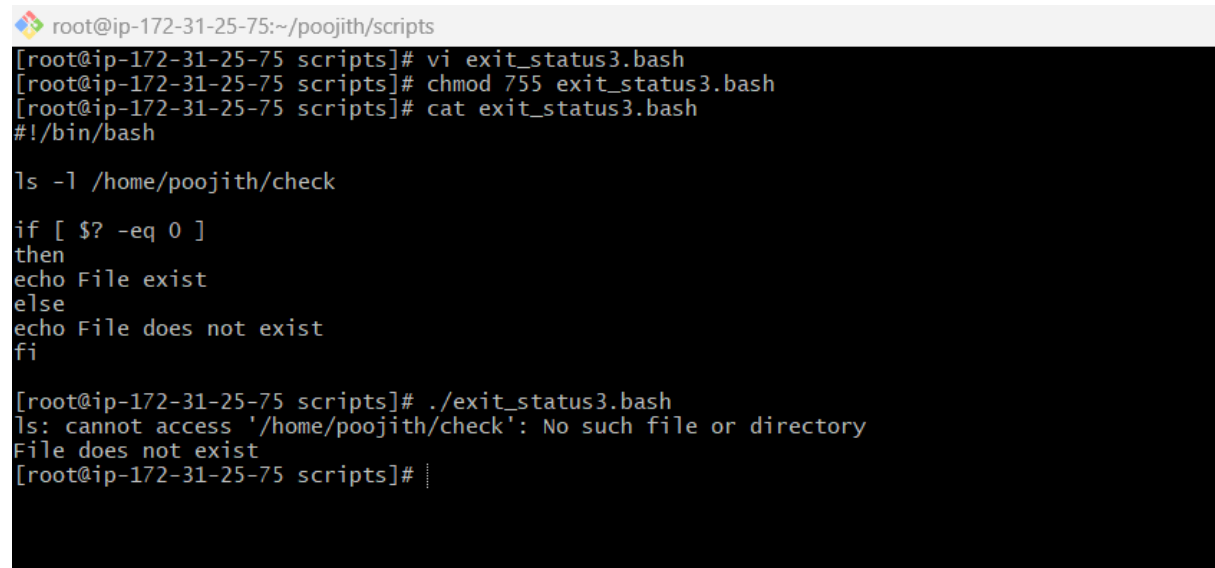
```
then
```

```
echo File exist
```

```
else
```

```
echo File does not exist
```

```
fi
```

A terminal window with a light gray title bar showing the path 'root@ip-172-31-25-75:~/poojith/scripts'. The terminal content shows the creation of a script 'exit_status3.bash' with 'vi', setting permissions with 'chmod 755', and viewing the script with 'cat'. The script contains a shell script that checks for the existence of '/home/poojith/check' using 'ls -l'. The script is then executed with './exit_status3.bash', resulting in an 'ls' error and the output 'File does not exist'.

```
root@ip-172-31-25-75:~/poojith/scripts
[root@ip-172-31-25-75 scripts]# vi exit_status3.bash
[root@ip-172-31-25-75 scripts]# chmod 755 exit_status3.bash
[root@ip-172-31-25-75 scripts]# cat exit_status3.bash
#!/bin/bash

ls -l /home/poojith/check

if [ $? -eq 0 ]
then
echo File exist
else
echo File does not exist
fi

[root@ip-172-31-25-75 scripts]# ./exit_status3.bash
ls: cannot access '/home/poojith/check': No such file or directory
File does not exist
[root@ip-172-31-25-75 scripts]#
```