1) Watch the **Terraform-02** video.

2) Execute all the **templates shown in the video**.

Terraform State File

Implementation steps


1. Opened the existing Terraform project folder C:\terraform-basic in VS Code.
2. Created and configured the main.tf file with a local file resource and a random pet resource.
3. Verified the Terraform configuration using the following command:


terraform validate


4. Checked the existing Terraform state using:
5. terraform state list


terraform show


6. Observed that the state was initially empty before the resources were created.
7. Executed Terraform operations and examined how the state file tracked the resources managed by Terraform.

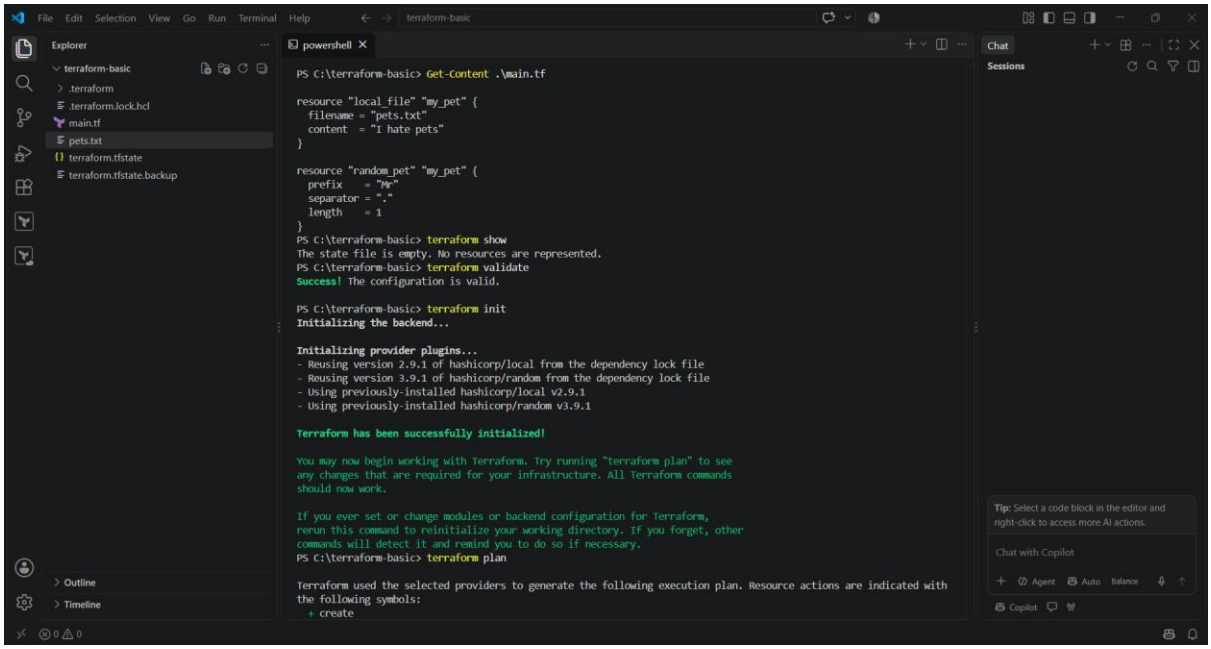


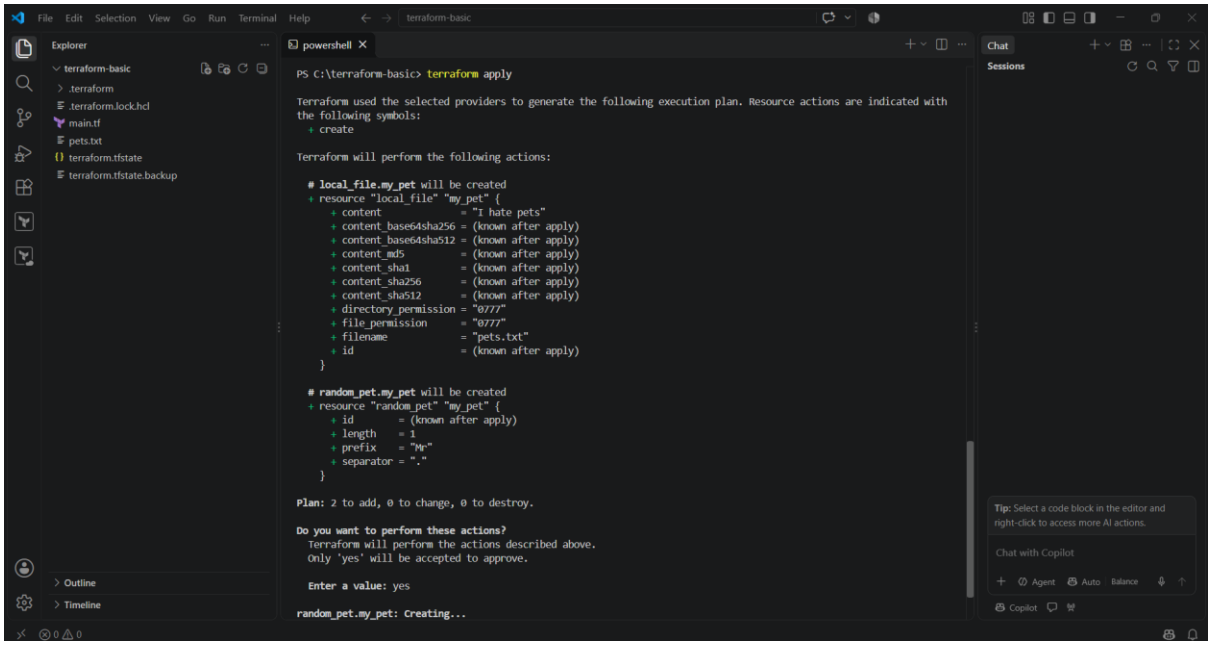

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
Outline
Timeline
powershell
PS C:\terraform-basic> terraform apply
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create
Terraform will perform the following actions:
local_file.my_pet will be created
+ resource "local_file" "my_pet" {
+ content = "I hate pets"
+ content_base64sha256 = (known after apply)
+ content_base64sha512 = (known after apply)
+ content_md5 = (known after apply)
+ content_sha1 = (known after apply)
+ content_sha256 = (known after apply)
+ content_sha512 = (known after apply)
+ directory_permission = "0777"
+ file_permission = "0777"
+ filename = "pets.txt"
+ id = (known after apply)
}
random_pet.my_pet will be created
+ resource "random_pet" "my_pet" {
+ id = (known after apply)
+ length = 1
+ prefix = "Mr"
+ separator = "."
}
Plan: 2 to add, 0 to change, 0 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
random_pet.my_pet: Creating...
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
Chat with Copilot
Agent
Auto
Balance
Copilot

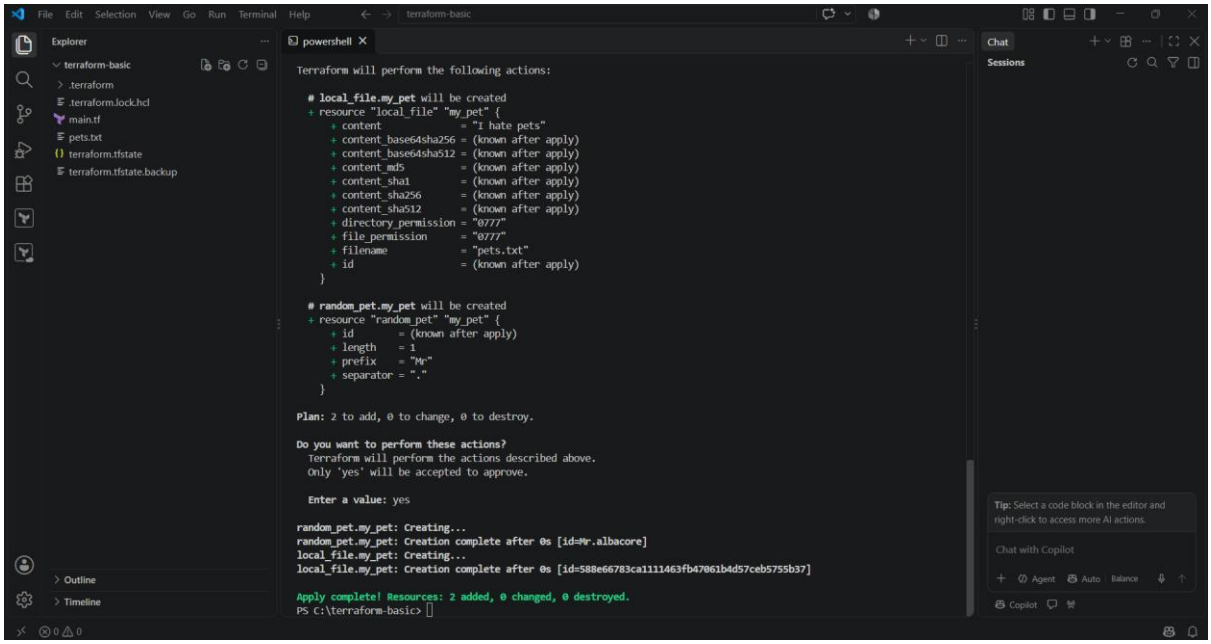

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
Outline
Timeline
powershell
Terraform will perform the following actions:
local_file.my_pet will be created
+ resource "local_file" "my_pet" {
+ content = "I hate pets"
+ content_base64sha256 = (known after apply)
+ content_base64sha512 = (known after apply)
+ content_md5 = (known after apply)
+ content_sha1 = (known after apply)
+ content_sha256 = (known after apply)
+ content_sha512 = (known after apply)
+ directory_permission = "0777"
+ file_permission = "0777"
+ filename = "pets.txt"
+ id = (known after apply)
}
random_pet.my_pet will be created
+ resource "random_pet" "my_pet" {
+ id = (known after apply)
+ length = 1
+ prefix = "Mr"
+ separator = "."
}
Plan: 2 to add, 0 to change, 0 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
random_pet.my_pet: Creating...
random_pet.my_pet: Creation complete after 0s [id=Mr.albacore]
local_file.my_pet: Creating...
local_file.my_pet: Creation complete after 0s [id=588e66783ca1111463fb47061b4d57ceb5755b37]
Apply complete! Resources: 2 added, 0 changed, 0 destroyed.
PS C:\terraform-basic>
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
Chat with Copilot
Agent
Auto
Balance
Copilot

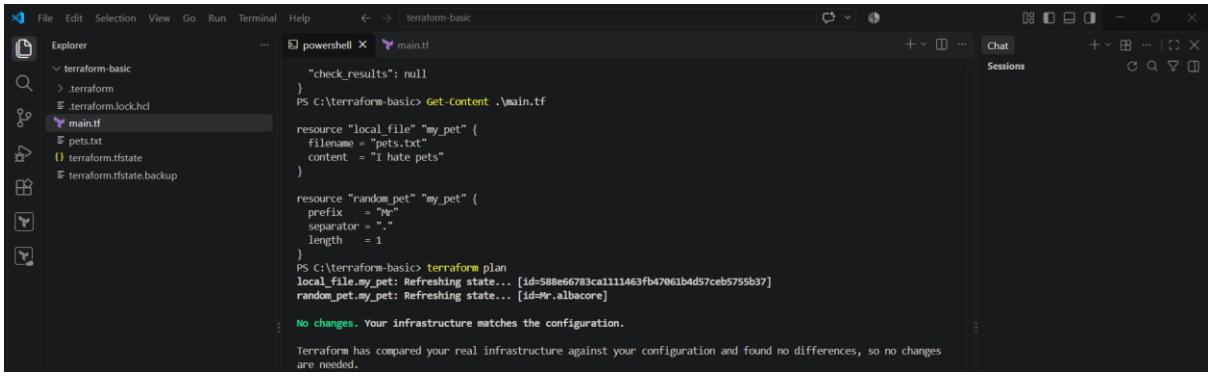

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
powershell
main.tf
Chat
Sessions
"check_results": null
}
PS C:\terraform-basic> Get-Content .\main.tf
resource "local_file" "my_pet" {
filename = "pets.txt"
content = "I hate pets"
}
resource "random_pet" "my_pet" {
prefix = "Mr"
separator = "."
length = 1
}
PS C:\terraform-basic> terraform plan
local_file.my_pet: Refreshing state... [id=588e66783ca1111463fb47061b4d57ceb5755b37]
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.

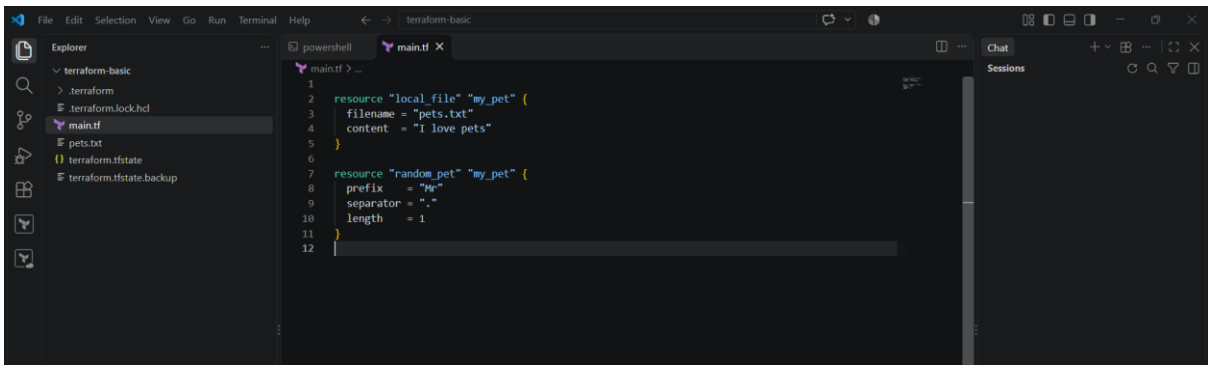
File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
powershell
main.tf
main.tf > ...
1
2 resource "local_file" "my_pet" {
3 filename = "pets.txt"
4 content = "I love pets"
5 }
6
7 resource "random_pet" "my_pet" {
8 prefix = "Mr"
9 separator = "."
10 length = 1
11 }
12
Chat
Sessions

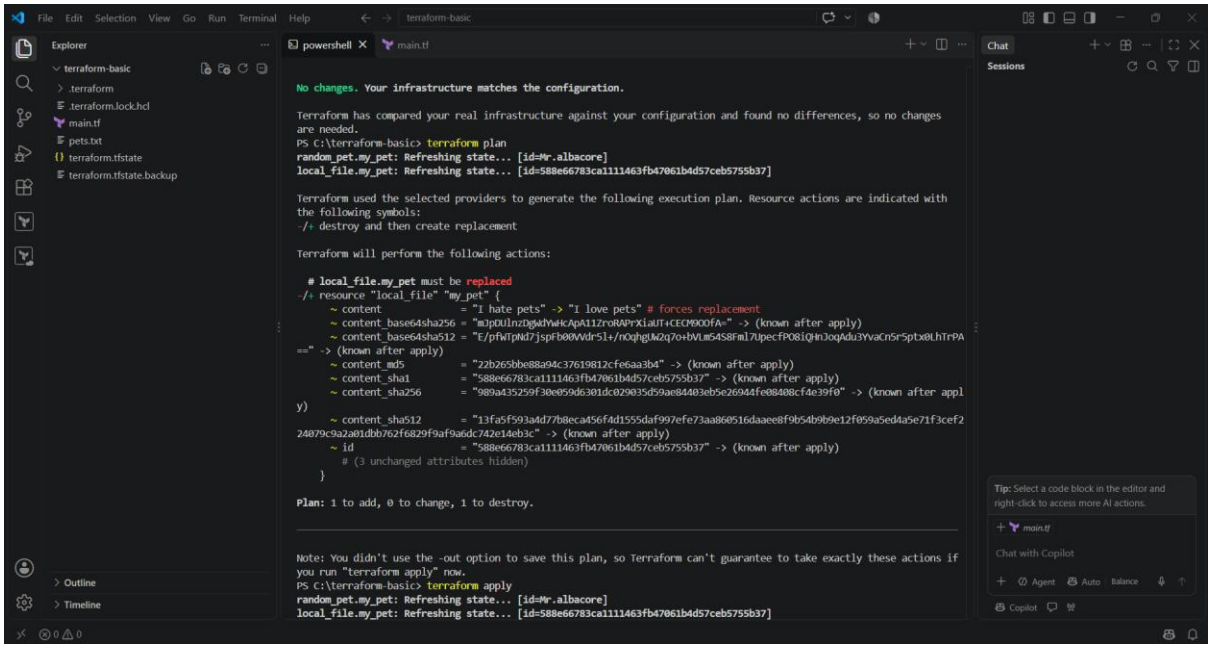
File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
Outline
Timeline
powershell
main.tf
Chat
Sessions
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
PS C:\terraform-basic> terraform plan
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
local_file.my_pet: Refreshing state... [id=588e66783ca1111463fb47061b4d57ceb5755b37]
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
-/+ destroy and then create replacement
Terraform will perform the following actions:
local_file.my_pet must be replaced
-/+ resource "local_file" "my_pet" {
~ content = "I hate pets" -> "I love pets" # forces replacement
~ content_base64sha256 = "mJpDUlnzDgWdYwHcApA11ZroRAPrXiaUT+CECM9OOfA=" -> (known after apply)
~ content_base64sha512 = "E/pfWTpNd7jspFb00VVdr5l+/nOqhgUw2q7o+bVLm54S8Fml7UpecfPO8iQHnJoqAdu3YvaCn5r5ptx0LhTrPA==" -> (known after apply)
~ content_md5 = "22b265bbe88a94c37619812cfe6aa3b4" -> (known after apply)
~ content_sha1 = "588e66783ca1111463fb47061b4d57ceb5755b37" -> (known after apply)
~ content_sha256 = "989a435259f30e059d6301dc029035d59ae84403eb5e26944fe08408cf4e39f0" -> (known after apply)
~ content_sha512 = "13fa5f593a4d77b8eca456f4d1555daf997efe73aa860516daaee8f9b54b9b9e12f059a5ed4a5e71f3cef224079c9a2a01dbb762f6829f9af9a6dc742e14eb3c" -> (known after apply)
~ id = "588e66783ca1111463fb47061b4d57ceb5755b37" -> (known after apply)
(3 unchanged attributes hidden)
}
Plan: 1 to add, 0 to change, 1 to destroy.
Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.
PS C:\terraform-basic> terraform apply
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
local_file.my_pet: Refreshing state... [id=588e66783ca1111463fb47061b4d57ceb5755b37]
Tip: Select a code block in the editor and right-click to access more AI actions.
main.tf
Chat with Copilot
Agent
Auto
Balance
Copilot

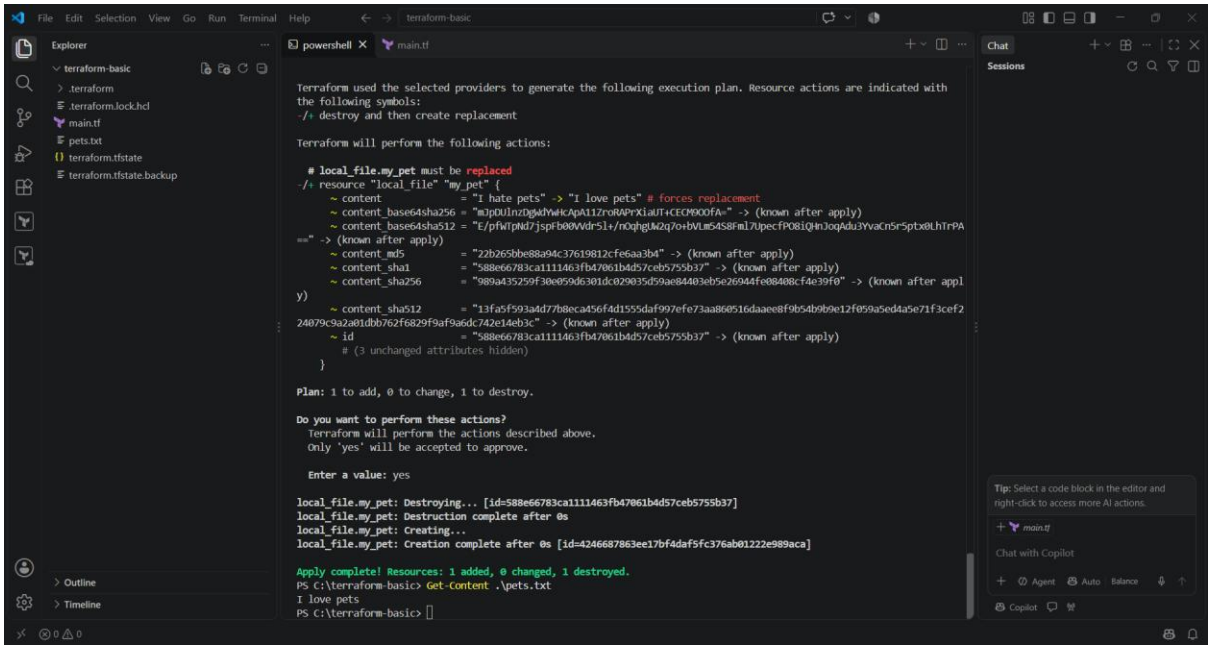
File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
Outline
Timeline
powershell
main.tf
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
-/+ destroy and then create replacement
Terraform will perform the following actions:
local_file.my_pet must be replaced
-/+ resource "local_file" "my_pet" {
~ content = "I hate pets" -> "I love pets" # forces replacement
~ content_base64sha256 = "mJpDUlnzDgWdYwHcApA117roRAPrXiaUT+CECM9OOfA=" -> (known after apply)
~ content_base64sha512 = "E/pfwTpNd7jspFb00VVdr5l+/nOqhgUw2q7o+bVLm54S8Fml7UpecfPO8iQHnJoqAdu3YvaCn5r5ptx0LhTrPA==" -> (known after apply)
~ content_md5 = "22b265bbe88a94c37619812cfe6aa3b4" -> (known after apply)
~ content_sha1 = "588e66783ca1111463fb47061b4d57ceb5755b37" -> (known after apply)
~ content_sha256 = "989a435259f30e059d6301dc029035d59ae84403eb5e26944fe08408cf4e39f0" -> (known after apply)
~ content_sha512 = "13fa5f593a4d77b8eca456f4d1555daf997efe73aa860516daaee8f9b54b9b9e12f059a5ed4a5e71f3cef224079c9a2a01dbb762f6829f9af9a6dc742e14eb3c" -> (known after apply)
~ id = "588e66783ca1111463fb47061b4d57ceb5755b37" -> (known after apply)
(3 unchanged attributes hidden)
}
Plan: 1 to add, 0 to change, 1 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
local_file.my_pet: Destroying... [id=588e66783ca1111463fb47061b4d57ceb5755b37]
local_file.my_pet: Destruction complete after 0s
local_file.my_pet: Creating...
local_file.my_pet: Creation complete after 0s [id=4246687863ee17bf4daf5fc376ab01222e989aca]
Apply complete! Resources: 1 added, 0 changed, 1 destroyed.
PS C:\terraform-basic> Get-Content .\pets.txt
I love pets
PS C:\terraform-basic>
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
main.tf
Chat with Copilot
Agent
Auto
Balance
Copilot

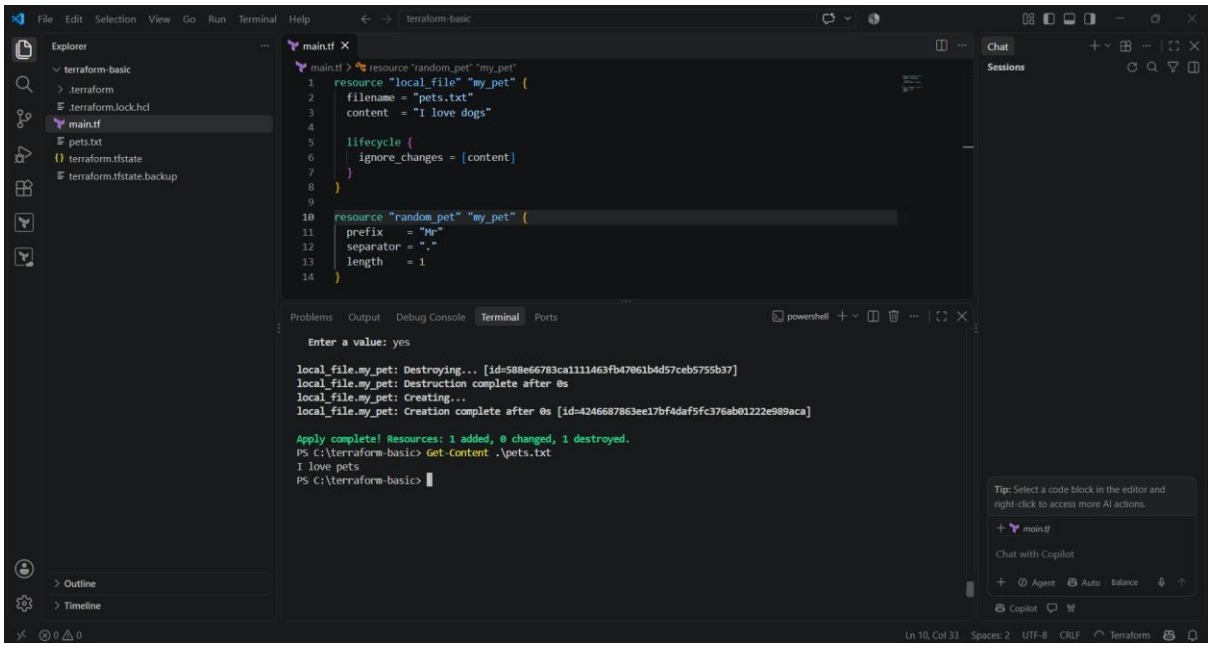
File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
Outline
Timeline
main.tf
main.tf > resource "random_pet" "my_pet"
resource "local_file" "my_pet" {
filename = "pets.txt"
content = "I love dogs"
lifecycle {
ignore_changes = [content]
}
}
resource "random_pet" "my_pet" {
prefix = "Mr"
separator = "."
length = 1
}
Problems Output Debug Console Terminal Ports
powershell
Enter a value: yes
local_file.my_pet: Destroying... [id=588e66783ca1111463fb47061b4d57ceb5755b37]
local_file.my_pet: Destruction complete after 0s
local_file.my_pet: Creating...
local_file.my_pet: Creation complete after 0s [id=4246687863ee17bf4daf5fc376ab01222e989aca]
Apply complete! Resources: 1 added, 0 changed, 1 destroyed.
PS C:\terraform-basic> Get-Content .\pets.txt
I love pets
PS C:\terraform-basic>
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
main.tf
Chat with Copilot
Agent
Auto
Balance
Copilot
Ln 10, Col 33
Spaces: 2
UTF-8
CRLF
Terraform

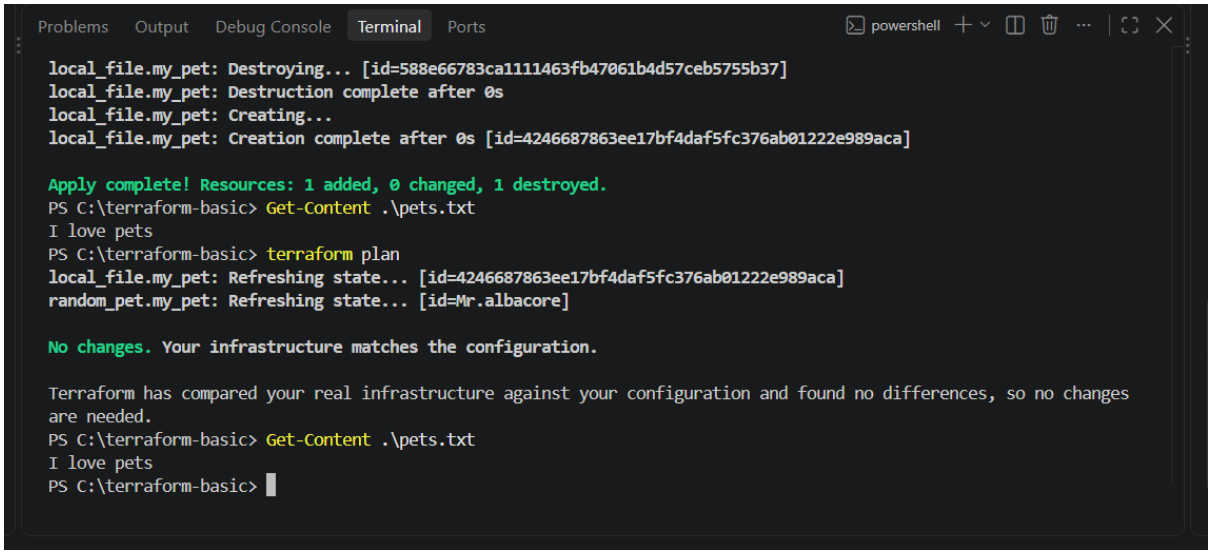

Implementation Steps

I tested the following lifecycle rules in the local Terraform project.

1. create_before_destroy

```
lifecycle {
  create_before_destroy = true
}
```

Configured the lifecycle rule to instruct Terraform to create a replacement resource before destroying the existing resource when replacement was required and supported.

2. prevent_destroy

```
lifecycle {
  prevent_destroy = true
}
```

Added the rule and examined how it prevented Terraform from planning the destruction of the protected resource. After testing, removed the rule from the active configuration as intended.

3. ignore_changes


```
lifecycle {
  ignore_changes = [content]
}
```

Modified the desired file content and executed terraform plan. Terraform reported that no changes were required because changes to the content attribute were being ignored.


Observed output:

No changes. Your infrastructure matches the configuration.

create_before_destroy

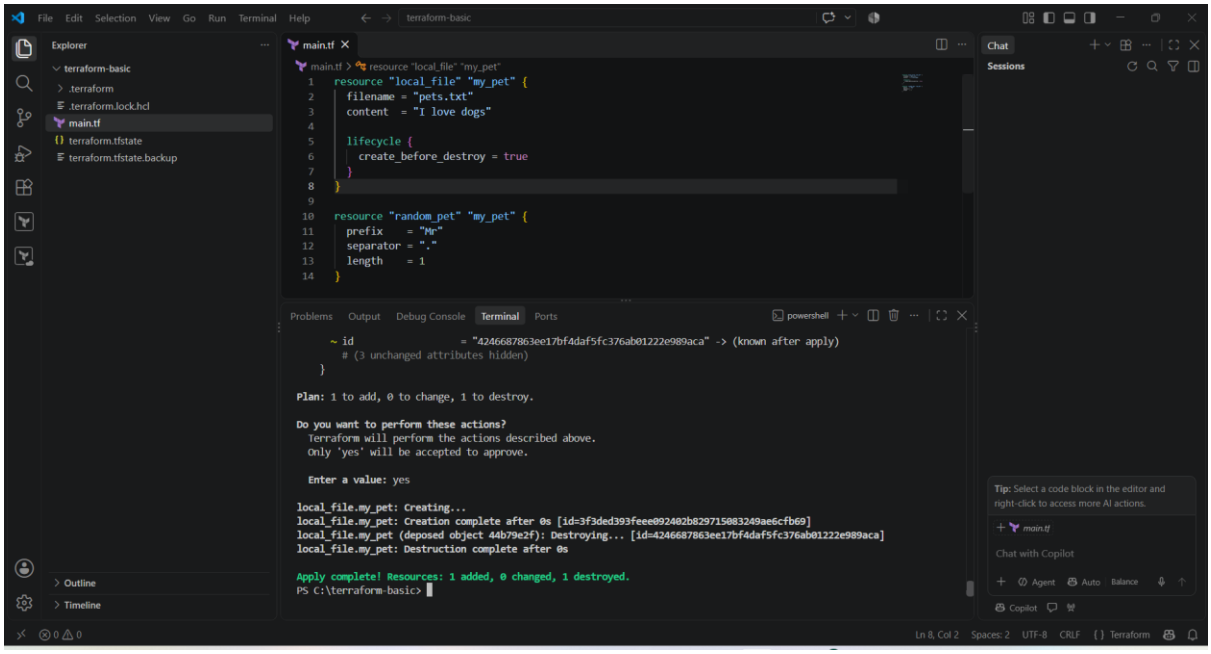

prevent_destroy

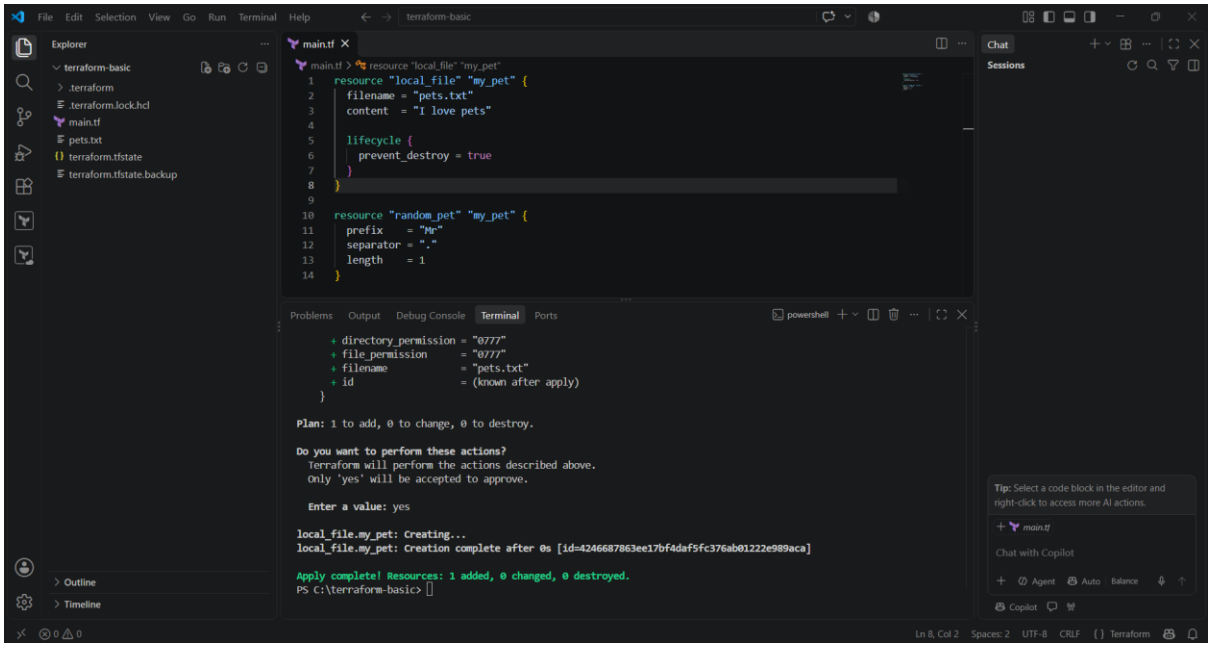

Variables

Implementation

1. Created variables.tf

Initially configured the variables for the filename and file content.

```
variable "filename" {
 type       = string
 description = "Name of the file to create"
 default    = "pets.txt"
}

variable "content" {
 type       = string
 description = "Content to write inside the file"
 default    = "I love pets"
}
```

2. Updated main.tf

Replaced hardcoded values with variable references.

```
resource "local_file" "my_pet" {
 filename = var.filename
 content  = var.content
}

resource "random_pet" "my_pet" {
 prefix    = "Mr"
 separator = "."
 length    = 1
}
```

3. Tested default variable values

Executed Terraform commands to validate the configuration and examine the planned changes using the default values.

4. Tested interactive variable input

Removed the default value for the content variable and ran:

terraform plan

Entered I love dogs when Terraform prompted for the variable value. The plan showed that the local file resource required replacement because the content change forced replacement.

Applied the configuration and verified the updated file content.

5. Tested command-line variables

Executed:

terraform plan -var="content=I love cats"


Also used the same variable override during terraform apply.


6. Tested environment variables


Executed the following PowerShell command:


$env:TF_VAR_content = "I love elephants"


Then ran terraform plan and terraform apply to test passing the variable through an environment variable.

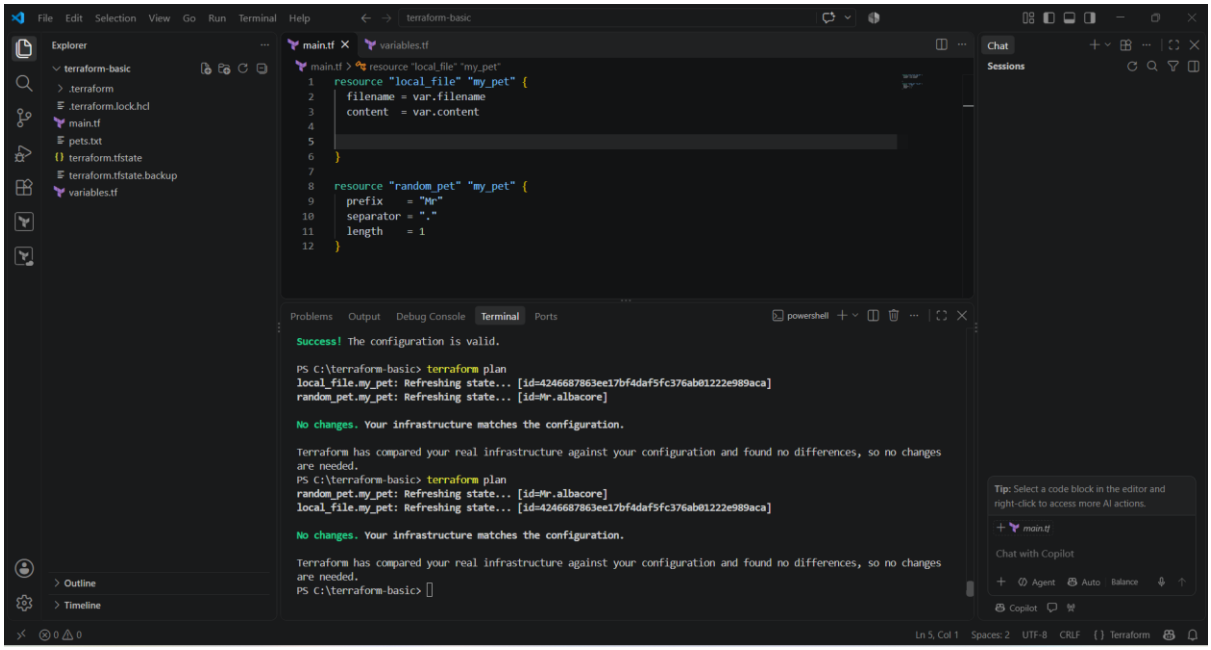

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
variables.tf
main.tf
variables.tf
main.tf > resource "local_file" "my_pet"
1 resource "local_file" "my_pet" {
2 filename = var.filename
3 content = var.content
4
5
6 }
7
8 resource "random_pet" "my_pet" {
9 prefix = "Mr"
10 separator = "."
11 length = 1
12 }
Problems Output Debug Console Terminal Ports
powershell
Success! The configuration is valid.
PS C:\terraform-basic> terraform plan
local_file.my_pet: Refreshing state... [id=4246687863ee17bf4daf5fc376ab01222e989aca]
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
PS C:\terraform-basic> terraform plan
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
local_file.my_pet: Refreshing state... [id=4246687863ee17bf4daf5fc376ab01222e989aca]
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
PS C:\terraform-basic>
Outline
Timeline
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
main.tf
Chat with Copilot
Agent
Auto
Balance
Copilot
Ln 5, Col 1
Spaces: 2
UTF-8
CRLF
{} Terraform

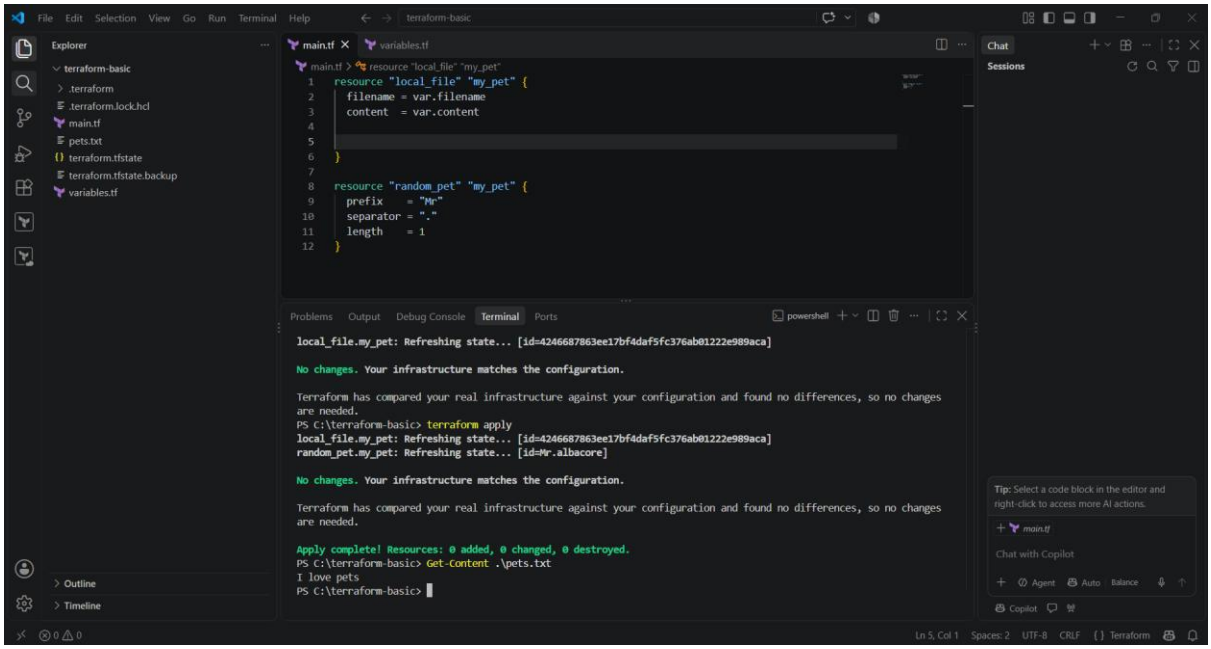
File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
variables.tf
main.tf
variables.tf
main.tf > resource "local_file" "my_pet"
1 resource "local_file" "my_pet" {
2 filename = var.filename
3 content = var.content
4
5
6 }
7
8 resource "random_pet" "my_pet" {
9 prefix = "Mr"
10 separator = "."
11 length = 1
12 }
Problems Output Debug Console Terminal Ports
powershell
local_file.my_pet: Refreshing state... [id=4246687863ee17bf4daf5fc376ab01222e989aca]
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
PS C:\terraform-basic> terraform apply
local_file.my_pet: Refreshing state... [id=4246687863ee17bf4daf5fc376ab01222e989aca]
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
No changes. Your infrastructure matches the configuration.
Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
Apply complete! Resources: 0 added, 0 changed, 0 destroyed.
PS C:\terraform-basic> Get-Content .\pets.txt
I love pets
PS C:\terraform-basic>
Outline
Timeline
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
main.tf
Chat with Copilot
Agent
Auto
Balance
Copilot
Ln 5, Col 1
Spaces: 2
UTF-8
CRLF
{} Terraform

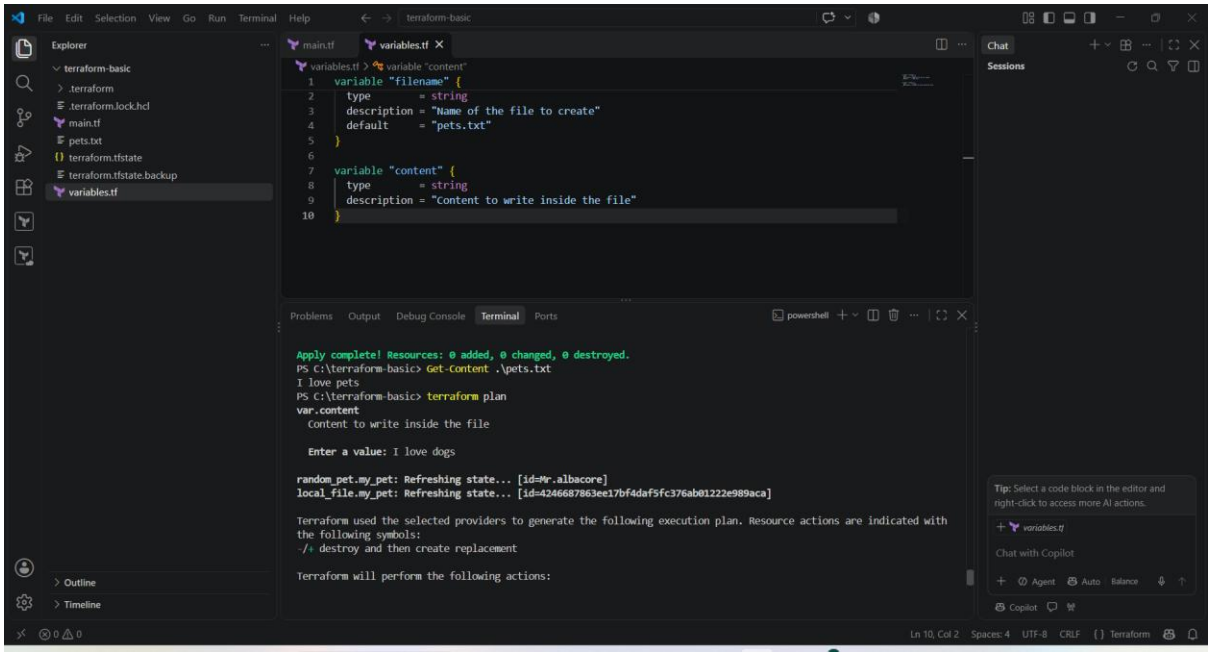

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
variables.tf
main.tf
variables.tf
variables.tf > variable "content"
1 variable "filename" {
2 type = string
3 description = "Name of the file to create"
4 default = "pets.txt"
5 }
6
7 variable "content" {
8 type = string
9 description = "Content to write inside the file"
10 }
Problems Output Debug Console Terminal Ports
powershell
Apply complete! Resources: 0 added, 0 changed, 0 destroyed.
PS C:\terraform-basic> Get-Content .\pets.txt
I love pets
PS C:\terraform-basic> terraform plan
var.content
Content to write inside the file
Enter a value: I love dogs
random_pet.my_pet: Refreshing state... [id=Mr.albacore]
local_file.my_pet: Refreshing state... [id=4246687863ee17bf4daf5fc376ab01222e989aca]
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
-/+ destroy and then create replacement
Terraform will perform the following actions:
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
variables.tf
Chat with Copilot
Agent Auto Balance
Copilot
Outline
Timeline
Ln 10, Col 2 Spaces: 4 UTF-8 CRLF Terraform

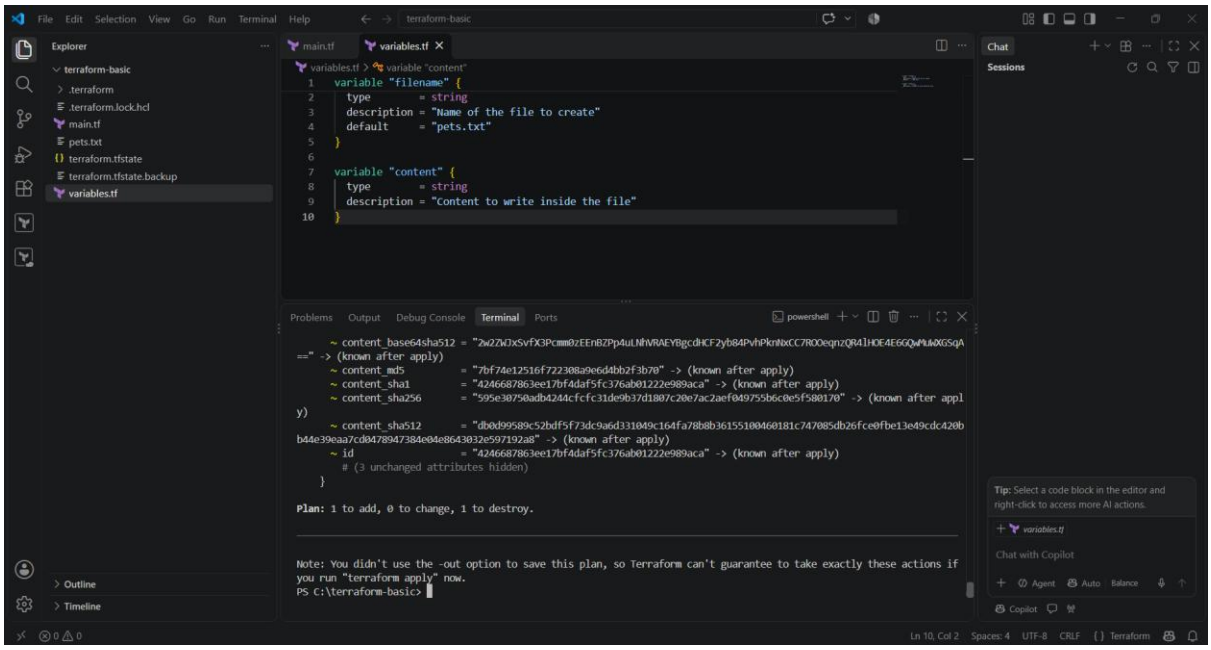

File Edit Selection View Go Run Terminal Help
terraform-basic
Explorer
terraform-basic
.terraform
.terraform.lock.hcl
main.tf
pets.txt
terraform.tfstate
terraform.tfstate.backup
variables.tf
main.tf
variables.tf
variables.tf > variable "content"
1 variable "filename" {
2 type = string
3 description = "Name of the file to create"
4 default = "pets.txt"
5 }
6
7 variable "content" {
8 type = string
9 description = "Content to write inside the file"
10 }
Problems Output Debug Console Terminal Ports
powershell
~ content_base64sha512 = "2w2ZWOxSvfX3Pcmm0zEEnBZPp4uLNhVRAEYBgcdHCF2yb84PvhPkn8xCC7ROOeqnzQR4lHDE4E6GQwMWWXGSqA==" -> (known after apply)
~ content_md5 = "7bf74e12516f722308a9e6d4bb2f3b70" -> (known after apply)
~ content_sha1 = "4246687863ee17bf4daf5fc376ab01222e989aca" -> (known after apply)
~ content_sha256 = "595e30750adb4244cfcfc31de9b37d1807c20e7ac2aef049755b6c0e5f580170" -> (known after apply)
~ content_sha512 = "db0d99589c52bdf5f73dc9a6d3310490c164fa78b8b36155100460181c747085db26fce0fbe13e49cdc420bb44e39eaa7cd9478947384e04e8643032e597192a8" -> (known after apply)
~ id = "4246687863ee17bf4daf5fc376ab01222e989aca" -> (known after apply)
(3 unchanged attributes hidden)
}
Plan: 1 to add, 0 to change, 1 to destroy.
Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.
PS C:\terraform-basic>
Chat
Sessions
Tip: Select a code block in the editor and right-click to access more AI actions.
variables.tf
Chat with Copilot
Agent Auto Balance
Copilot
Outline
Timeline
Ln 10, Col 2 Spaces: 4 UTF-8 CRLF Terraform

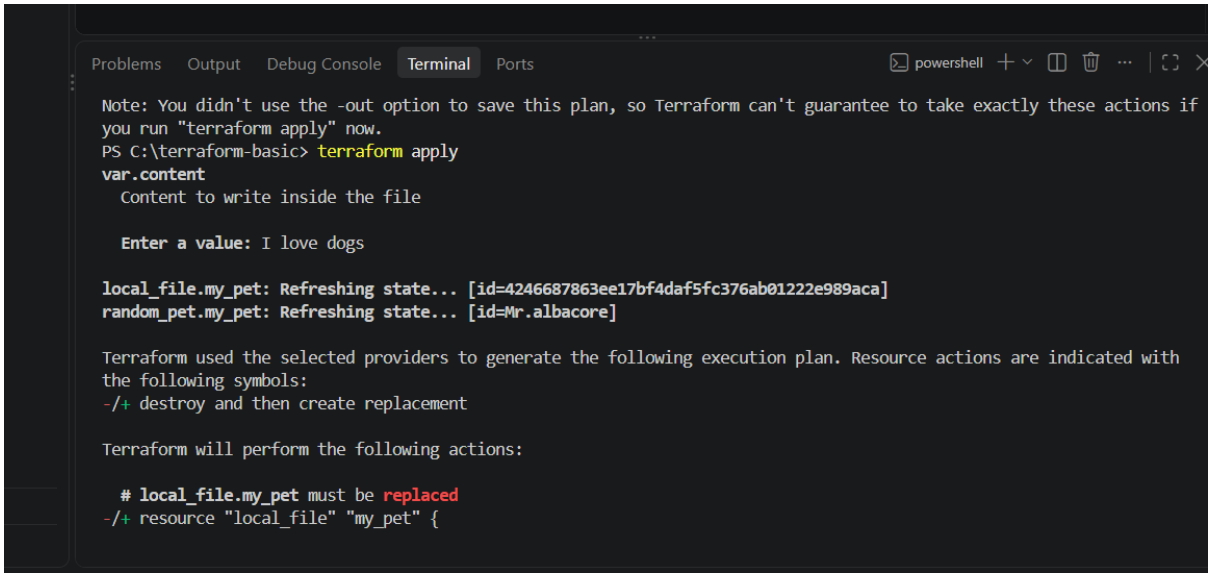


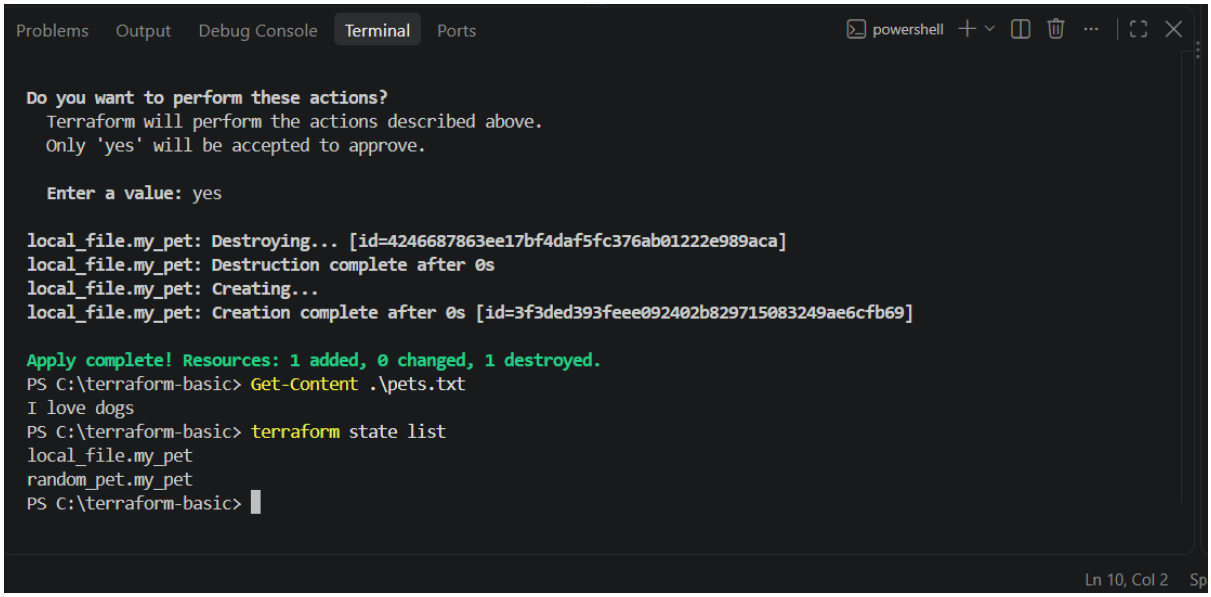


Run terraform plan with -var

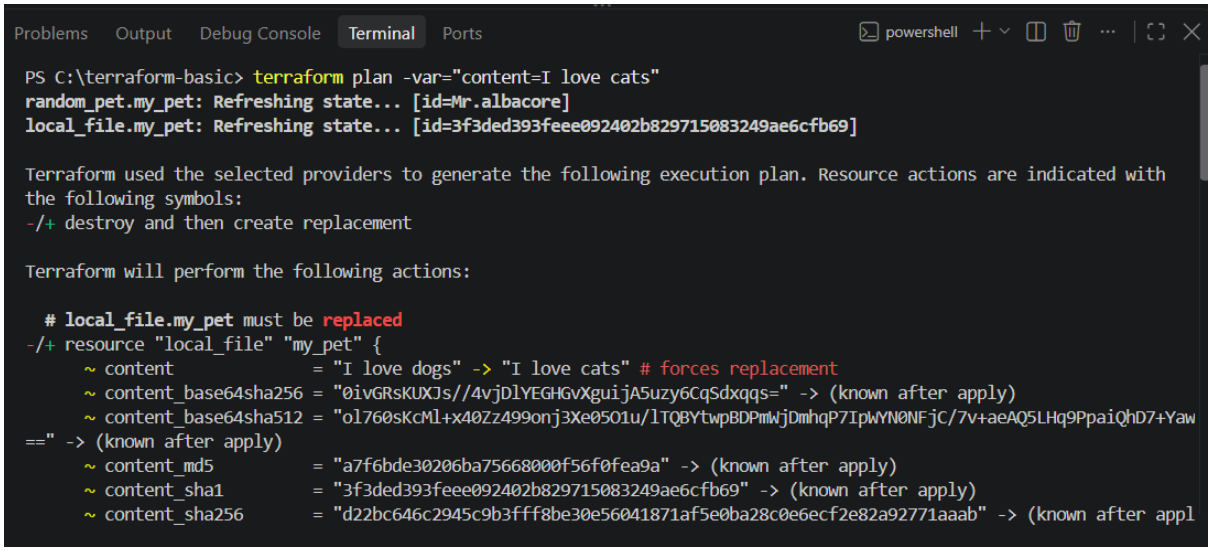


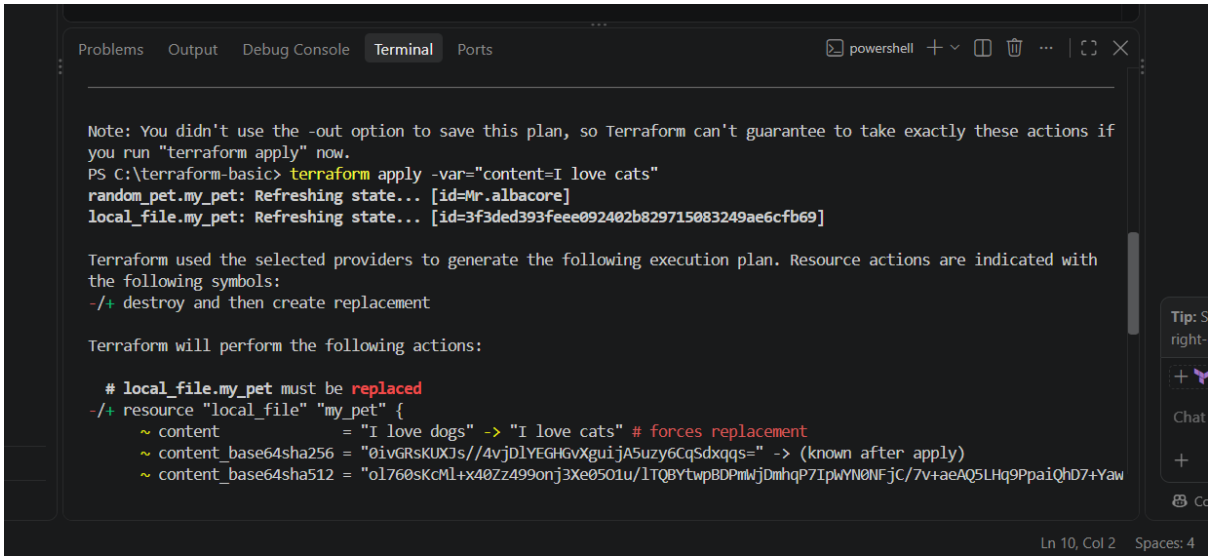


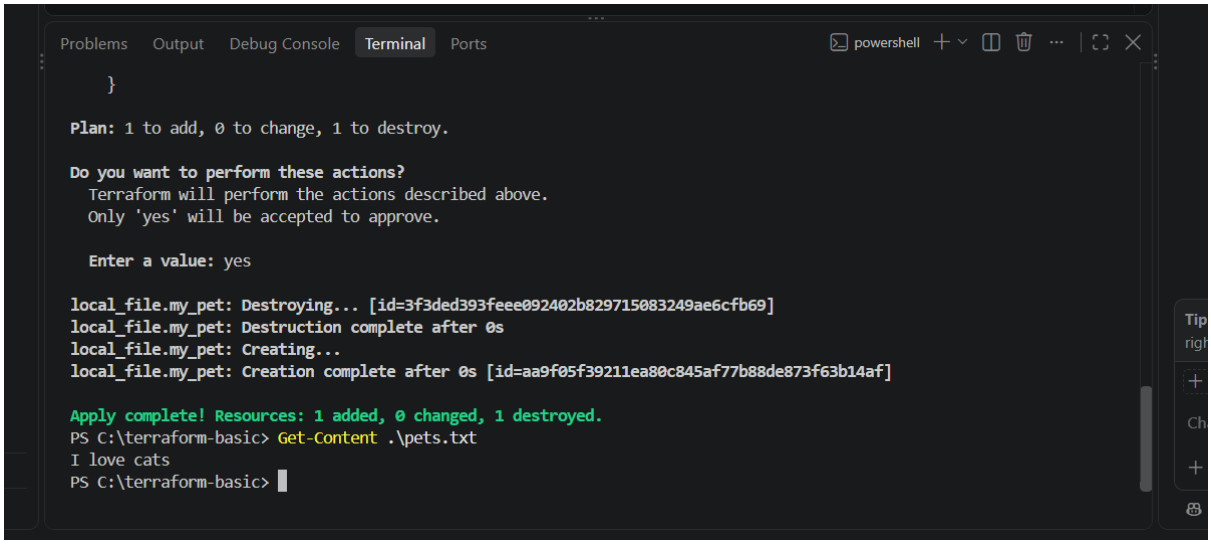

Environment Variables

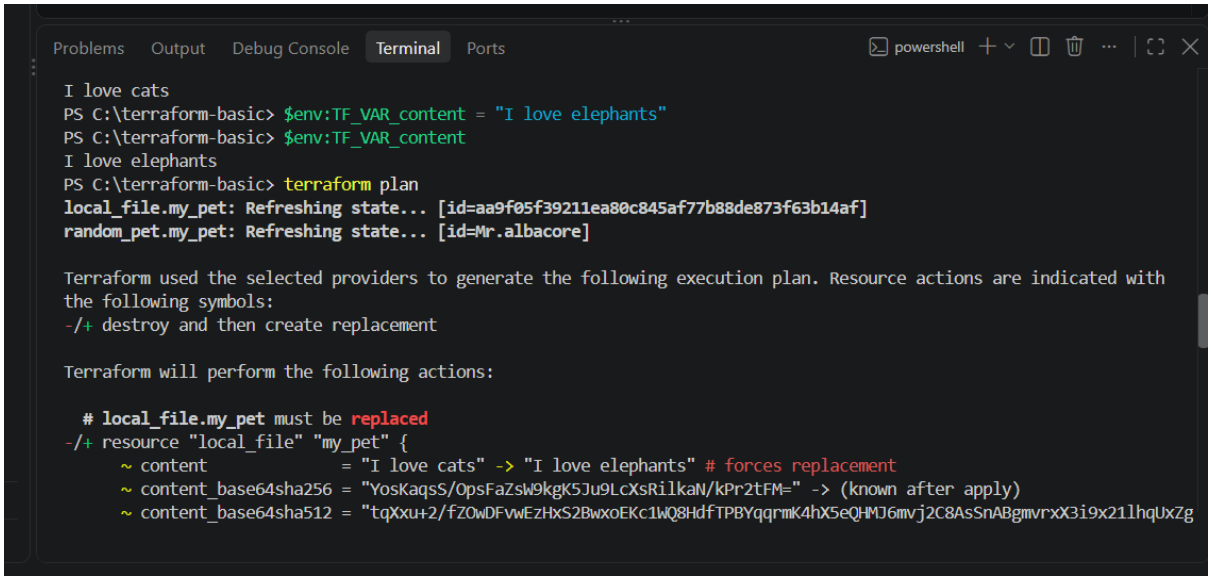

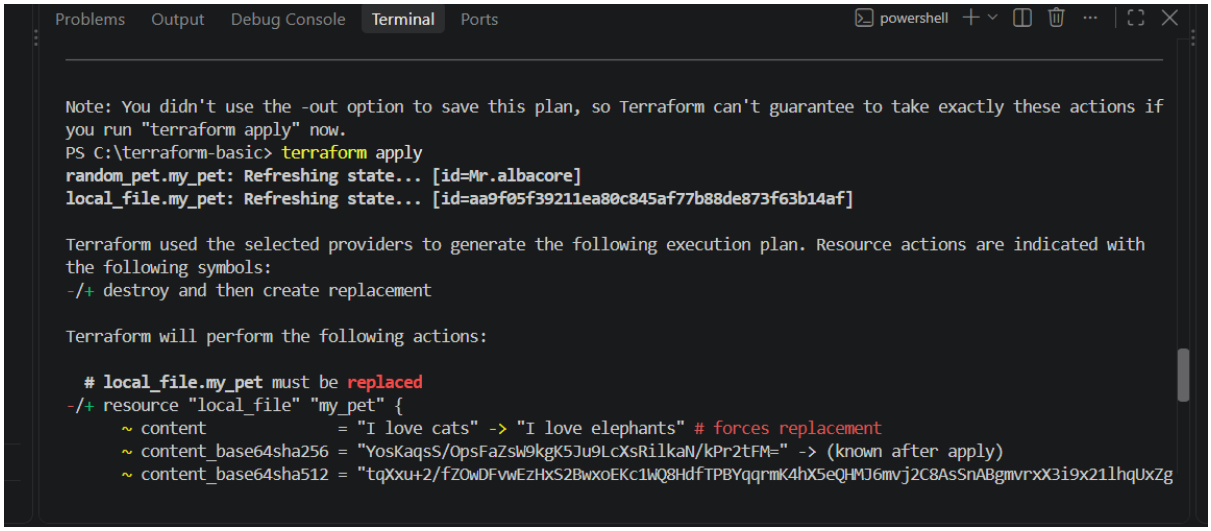

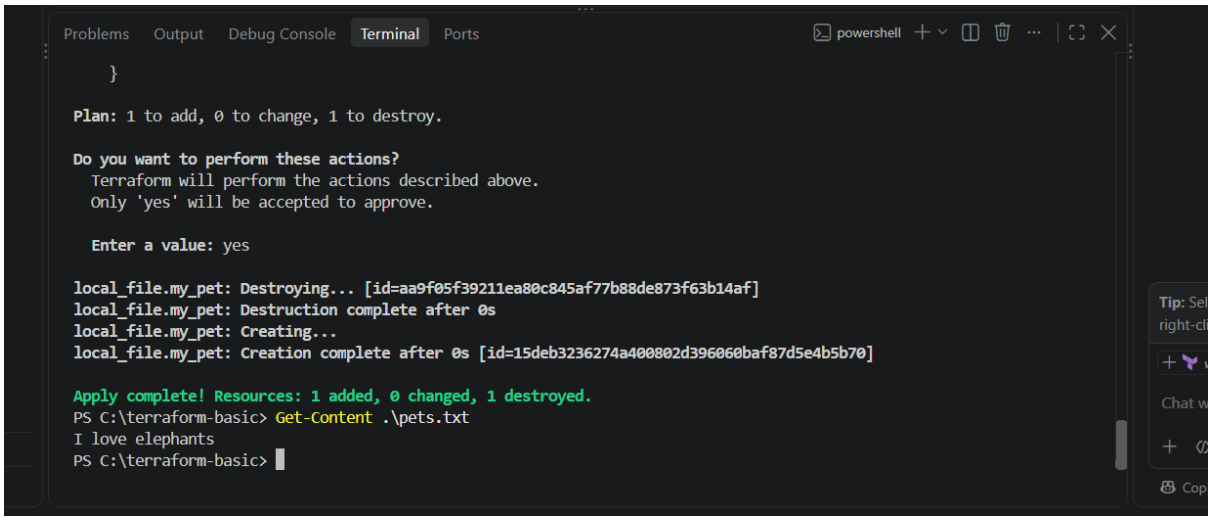

3) Integrate **Terraform in Jenkins** using the **Terraform plugin**.

Implementation

1. Started the existing Jenkins EC2 instance in AWS.
2. Logged in to the Jenkins dashboard.
3. Connected to the EC2 instance through SSH.
4. Checked the Terraform version:

terraform version

Observed:

Terraform v1.17.0

on linux_amd64

5. Verified the Terraform executable location:

which terraform

Observed:

/usr/bin/terraform

6. Verified that the Jenkins user could execute Terraform:

sudo -u jenkins /usr/bin/terraform version

Installed the Terraform Plugin in Jenkins

Objective

To configure Jenkins for Terraform-related tasks.

Implementation

1. Opened the Jenkins dashboard.
2. Navigated to Manage Jenkins → Plugins → Available plugins.
3. Searched for the Terraform plugin.
4. Selected and installed the plugin.
5. Opened the Jenkins tools configuration and saved the Terraform installation settings.

Created a Jenkins Freestyle Project

Objective

To execute Terraform commands automatically through a Jenkins job.

Implementation

1. Opened the Jenkins dashboard.
2. Selected New Item.
3. Created a Freestyle project named:

Terraform-Integration

4. Opened the project configuration.

5. Added an Execute shell build step.
6. Configured the shell script to create main.tf, initialize Terraform, validate the configuration, generate a plan, apply the configuration, and display the generated file.

The following script was used:

```
set -e

cd "$WORKSPACE"

cat > main.tf <<'EOF'
terraform {
 required_providers {
  local = {
   source  = "hashicorp/local"
   version = "~> 2.5"
  }
 }
}

resource "local_file" "my_pet" {
 filename = "pets.txt"
 content  = "i love dogs"
}
EOF

/usr/bin/terraform init
/usr/bin/terraform validate
/usr/bin/terraform plan
/usr/bin/terraform apply -auto-approve
```

echo "----- Created file content -----"

cat pets.txt

Executed and Verified the Jenkins Job

Objective

To verify that Jenkins could run Terraform successfully and create the expected output file.

Implementation

1. Opened the Terraform-Integration project.
2. Selected Build Now.
3. Opened the build's Console Output.
4. Verified that Terraform initialized the required provider, validated the configuration, generated an execution plan, and applied the configuration.

The execution log showed:

Success! The configuration is valid.

The Terraform apply operation completed successfully:

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.

The shell script displayed the generated file content:

----- Created file content -----

i love dogs

The Jenkins build finished with:

Finished: SUCCESS

Verified the Generated File on the Jenkins Server

Objective

To confirm that the file was created in the Jenkins job workspace.

Implementation

Connected to the Jenkins EC2 instance through SSH and navigated to the job workspace.

cd /var/lib/jenkins/workspace/Terraform-Integration

Listed the generated file:

ls -l pets.txt

Displayed its contents:


cat pets.txt

Verified the Terraform-managed resource:


/usr/bin/terraform state list


The file was present in the job workspace, and its content was:


i love dogs

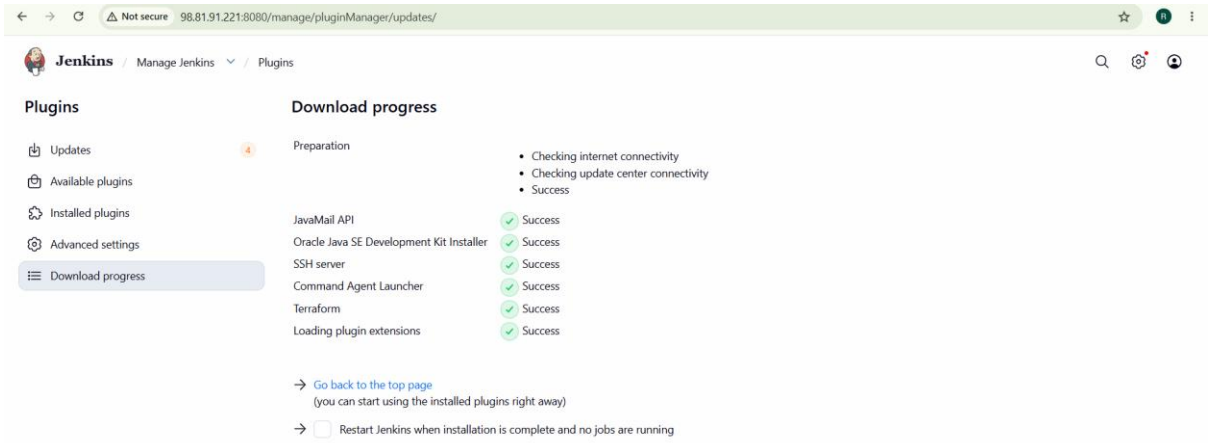


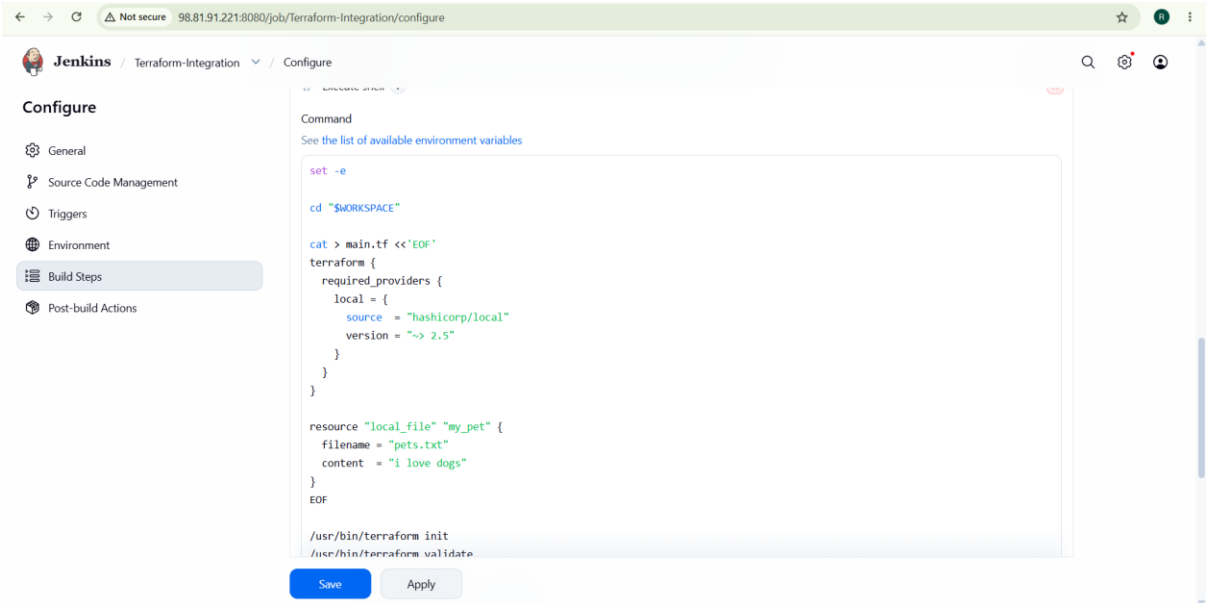


Not secure 98.81.91.221:8080/job/Terraform-Integration/configure
Jenkins / Terraform-Integration / Configure
Configure
General
Source Code Management
Triggers
Environment
Build Steps
Post-build Actions
Command
See the list of available environment variables
set -e
cd "$WORKSPACE"
cat > main.tf <<'EOF'
terraform {
required_providers {
local = {
source = "hashicorp/local"
version = "~> 2.5"
}
}
}
resource "local_file" "my_pet" {
filename = "pets.txt"
content = "i love dogs"
}
EOF
/usr/bin/terraform init
Save
Apply

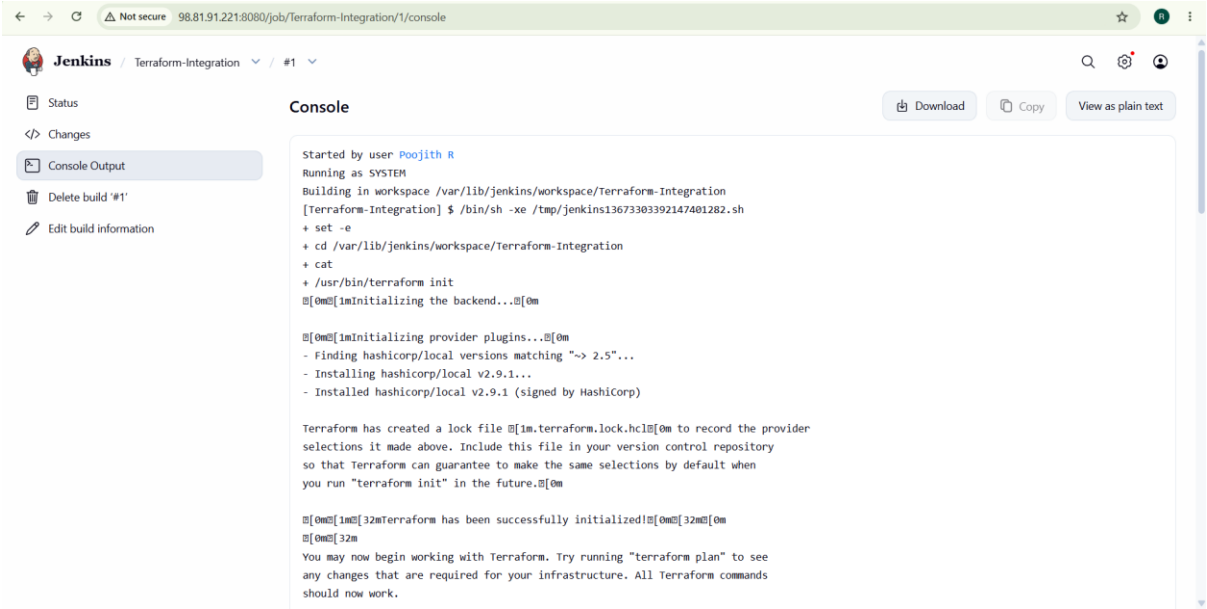
Not secure 98.81.91.221:8080/job/Terraform-Integration/1/console
Jenkins / Terraform-Integration / #1
Status
Changes
Console Output
Delete build '#1'
Edit build information
Console
Download
Copy
View as plain text
Started by user Poojith R
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/Terraform-Integration
[Terraform-Integration] $ /bin/sh -xe /tmp/jenkins13673303392147401282.sh
+ set -e
+ cd /var/lib/jenkins/workspace/Terraform-Integration
+ cat
+ /usr/bin/terraform init
Initializing the backend...
Initializing provider plugins...
- Finding hashicorp/local versions matching "~> 2.5"...
- Installing hashicorp/local v2.9.1...
- Installed hashicorp/local v2.9.1 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.
Terraform has been successfully initialized!
You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

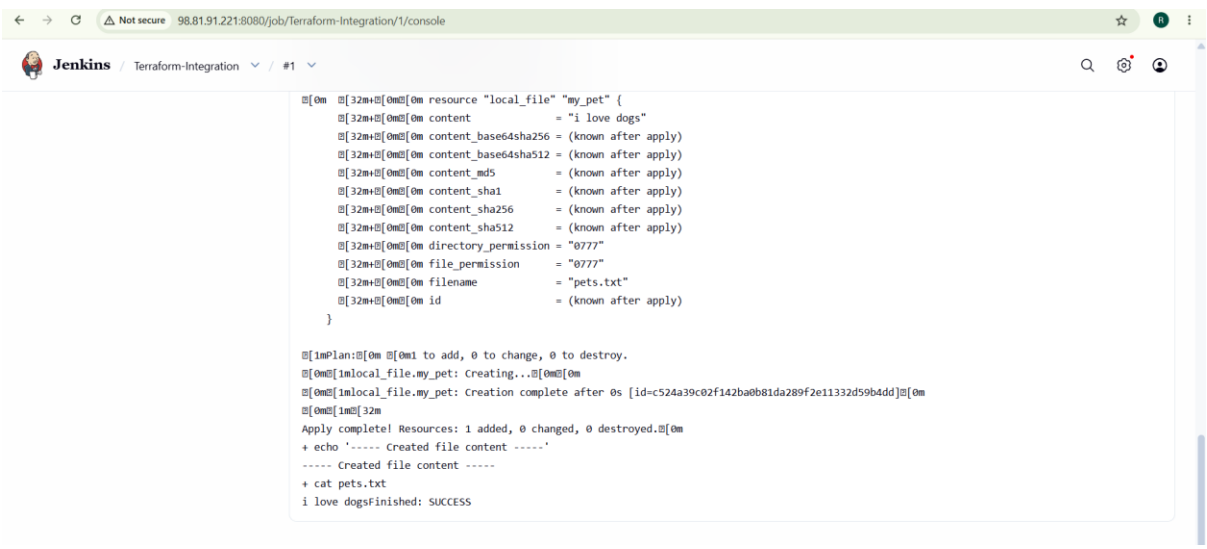
Not secure 98.81.91.221:8080/job/Terraform-Integration/1/console
Jenkins / Terraform-Integration / #1
local_file.my_pet will be created
+ resource "local_file" "my_pet" {
+ content = "i love dogs"
+ content_base64sha256 = (known after apply)
+ content_base64sha512 = (known after apply)
+ content_md5 = (known after apply)
+ content_sha1 = (known after apply)
+ content_sha256 = (known after apply)
+ content_sha512 = (known after apply)
+ directory_permission = "0777"
+ file_permission = "0777"
+ filename = "pets.txt"
+ id = (known after apply)
}
Plan: 1 to add, 0 to change, 0 to destroy.
local_file.my_pet: Creating...
local_file.my_pet: Creation complete after 0s [id=c524a39c02f142ba0b81da289f2e11332d59b4dd]
Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
+ echo '----- Created file content -----'
----- Created file content -----
+ cat pets.txt
i love dogsFinished: SUCCESS

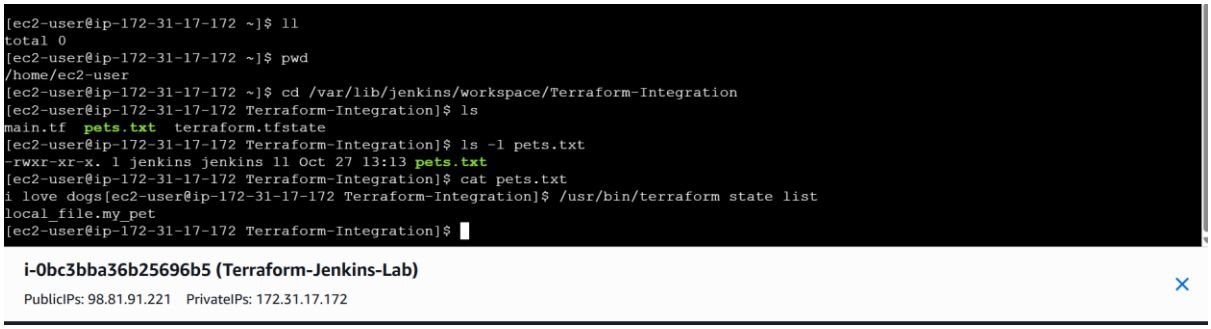
[ec2-user@ip-172-31-17-172 ~]$ ll
total 0
[ec2-user@ip-172-31-17-172 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-17-172 ~]$ cd /var/lib/jenkins/workspace/Terraform-Integration
[ec2-user@ip-172-31-17-172 Terraform-Integration]$ ls
main.tf pets.txt terraform.tfstate
[ec2-user@ip-172-31-17-172 Terraform-Integration]$ ls -l pets.txt
-rwxr-xr-x. 1 jenkins jenkins 11 Oct 27 13:13 pets.txt
[ec2-user@ip-172-31-17-172 Terraform-Integration]$ cat pets.txt
i love dogs[ec2-user@ip-172-31-17-172 Terraform-Integration]$ /usr/bin/terraform state list
local_file.my_pet
[ec2-user@ip-172-31-17-172 Terraform-Integration]$
i-0bc3bba36b25696b5 (Terraform-Jenkins-Lab)
PublicIPs: 98.81.91.221 PrivateIPs: 172.31.17.172