

1. Configure 2 slave machines in the Jenkins master.

Implementation steps:

- Login to the Slave-01 machine.
- Switch to root user: `sudo su -`
- Install JDK 11: `sudo yum install java-21-amazon-corretto -y`
- Verify Java: `java -version`
- Generate SSH key: `ssh-keygen`
- Navigate to the SSH directory
- Add the public key to `authorized_keys`: `cat id_rsa.pub >> authorized_keys`
- Set permissions: `chmod 700 authorized_keys`
- Repeat the same steps for Slave-02.

Steps on Jenkins Master

- Login to the Jenkins Master.
- Switch to root: `sudo su -`
- Create the Jenkins SSH directory: `mkdir -p /var/lib/jenkins/.ssh`
- Navigate to the directory: `cd /var/lib/jenkins/.ssh`
- Add Slave-01 to `known_hosts`: `ssh-keyscan -H <SLAVE-01-IP> >> /var/lib/jenkins/.ssh/known_hosts`
- Change ownership: `chown jenkins:jenkins known_hosts`
- Set permissions: `chmod 700 known_hosts`

Steps in Jenkins GUI

- Login to Jenkins.
- Go to Manage Jenkins → Nodes.
- Click New Node.
- Enter the node name as Slave-01.
- Select Permanent Agent and click Create.
- Enter the remote root directory: `/home/ec2-user`
- Set the number of executors.
- Enter the label: Java
- Under Launch method, select Launch agents via SSH.
- Enter the public IP of Slave-01.
- Under Credentials, select SSH Username with private key.
- Enter the username: `ec2-user`
- Paste the EC2 .pem private key.
- Select Known hosts file as the host key verification strategy.
- Click Save.
- Verify that Slave-01 is Online.
- Repeat the same process for Slave-02.
- Use the label: Python

- Verify that both Slave-01 and Slave-02 are Online.
- Jenkins Master can now execute jobs on both slave machines.

Successfully initiated starting of i-0488c9c7750b38f46

Instances (3) Info Last updated less than a minute ago

Name	Instance ID	Instance state	Instance type	Status check	Availability Zone
Slave-02	i-0c6d907415050ef25	Running	t3.micro	Initializing	us-east-1a
Jenkins_test	i-0488c9c7750b38f46	Running	t3.micro	3/3 checks passed	us-east-1a
Slave-01	i-0428f898a56eba334	Running	t3.micro	Initializing	us-east-1a

All instances

Instance alarm states: In alarm None

Service health: EC2 service status Operating normally

Health events affecting EC2 instances: Open events None

```

Your public key has been saved in /root/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:misSviEZNRvWmWlIG24yIbZjroIDc01NbQQMGY/vu8 root@ip-172-31-28-212.ec2.internal
The key's randomart image is:
+--[RSA 3072]-----+
| ..+ ..o+ |
|o + + + o |
|o = * + o |
|o + = + . |
|=B + o S |
|=+ =... o |
|+o+o o |
|+oo.o . |
|o.o.o.E. |
+-----[SHA256]-----+
[root@ip-172-31-28-212 ~]# pwd
/root
[root@ip-172-31-28-212 ~]# cd .ssh
[root@ip-172-31-28-212 .ssh]# cat id_rsa.pub > authorized_keys
[root@ip-172-31-28-212 .ssh]# chmod 700 authorized_keys
[root@ip-172-31-28-212 .ssh]#

```


```

[ec2-user@ip-172-31-6-74 ~]$ sudo su -
Last login: Tue Sep 29 12:02:16 UTC 2026 on pts/1
[root@ip-172-31-6-74 ~]# mkdir -p /var/lib/jenkins/.ssh
[root@ip-172-31-6-74 ~]# cd /var/lib/jenkins/.ssh
[root@ip-172-31-6-74 .ssh]# ssh-keyscan -H 3.85.22.49 >>/var/lib/jenkins/.ssh/known_hosts
[root@ip-172-31-6-74 .ssh]# chown jenkins:jenkins known_hosts
[root@ip-172-31-6-74 .ssh]# ll
total 4
-rw-r--r-- 1 jenkins jenkins 544 Sep 30 11:25 known_hosts
[root@ip-172-31-6-74 .ssh]# chmod 700 known_hosts
[root@ip-172-31-6-74 .ssh]#

```

i-0488c9c7750b38f46 (Jenkins_test)

PublicIPs: 44.204.114.225 PrivateIPs: 172.31.6.74

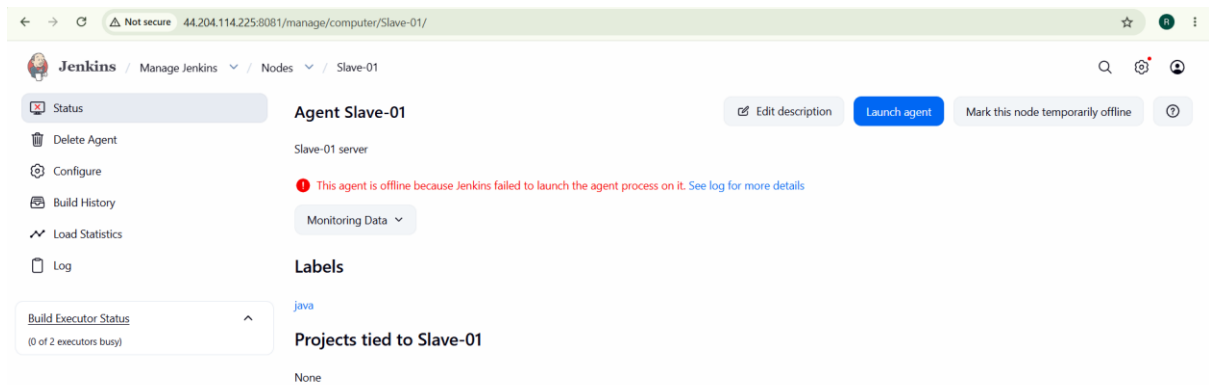

This screenshot shows the Jenkins configuration page for 'Agent Slave-01'. The browser address bar indicates the URL is 44.204.114.225:8081/manage/computer/Slave-01/. The page features a left sidebar with navigation options: Status, Delete Agent, Configure, Build History, Load Statistics, and Log. The main content area displays the agent's name 'Agent Slave-01' and its role 'Slave-01 server'. A red error message states: 'This agent is offline because Jenkins failed to launch the agent process on it. See log for more details'. Below this is a 'Monitoring Data' dropdown menu. The 'Labels' section shows 'java'. The 'Projects tied to Slave-01' section shows 'None'. At the bottom, there is a 'Build Executor Status' box indicating '(0 of 2 executors busy)'.



This screenshot is identical to the one above, showing the Jenkins configuration page for 'Agent Slave-01'. It displays the same error message and configuration details, including the 'java' label and 'None' projects tied to the agent.



This screenshot shows the Jenkins configuration page for 'Agent slave-02'. The browser address bar indicates the URL is 44.204.114.225:8081/computer/slave-02/. The left sidebar includes additional options like 'Script Console', 'System Information', and 'Disconnect'. The main content area shows the agent's name 'Agent slave-02' and its role 'slave 2 server'. The 'Labels' section shows 'Python'. The 'Projects tied to slave-02' section shows 'None'. The 'Build Executor Status' box at the bottom indicates '(0 of 2 executors busy)'.

2. Configure webhooks to the Jenkins job.

Implementation steps:

- Open the GitHub repository.
- Go to Settings → Webhooks → Add webhook.

- Enter the Jenkins webhook URL:
- `http://<JENKINS-IP>:8081/github-webhook/`
- Select application/json as the content type.
- Select all changes.
- Enable Active.
- Click Add webhook.
- Login to Jenkins.
- Open the required Jenkins job.
- Go to Configure → Build Triggers.
- Enable:
- GitHub hook trigger for GITScm polling
- Click Save.
- Push a new commit to the GitHub repository.
- Verify that Jenkins automatically starts a build.

github.com/ravutla-10/Daily_Tasks/settings/hooks/new

We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, x-www-form-urlencoded, etc). More information can be found in [our developer documentation](#).

Payload URL *
http://44.204.114.225:8081/github_webhook/

Content type *
application/x-www-form-urlencoded

Secret

SSL verification
By default, we verify SSL certificates when delivering payloads.
☒ Enable SSL verification ☐ Disable (not recommended)

Which events would you like to trigger this webhook?
☐ Just the push event.
☒ Send me **everything**.
☐ Let me select individual events.

☒ **Active**
We will deliver event details when this hook is triggered.

Add webhook

github.com/ravutla-10/Daily_Tasks/settings/hooks

Webhooks

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

✓ http://44.204.114.225:8081/github-... (all events)
Last delivery was successful.

Edit Delete

Add webhook

←

→

↺

Not secure

44.204.114.225:8081/job/jenkins-test/configure

☆

🔒

⋮

 Jenkins

Jenkins-test

Configure

🔍

⚙️

👤

Configure

⚙️ General

🔗 Source Code Management

🕒 Triggers

🌐 Environment

📋 Build Steps

🔧 Post-build Actions

Git ?

Repositories ?

Repository URL ?

https://github.com/ravutla-10/Daily_Tasks.git

Credentials ?

- none -

+ Add

Advanced ▾

+ Add Repository

Branches to build ?

Branch Specifier (blank for 'any') ?

*/main

Save

Apply

←

→

↺

Not secure

44.204.114.225:8081

☆

🔒

⋮

 Jenkins

Jenkins-test

Configure

🔍

⚙️

👤

Configure

⚙️ General

🔗 Source Code Management

🕒 Triggers

🌐 Environment

📋 Build Steps

🔧 Post-build Actions

Repository URL ?

(Auto)

Additional Behaviours

+ Add

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

☐ Trigger builds remotely (e.g., from scripts) ?

☐ Build after other projects are built ?

☐ Build periodically ?

☒ GitHub hook trigger for GITScm polling ?

☐ Poll SCM ?

Environment

Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.

Save

Apply

←

→

↺

Not secure

44.204.114.225:8081

☆

🔒

⋮

 Jenkins

+ New Item

📋 Build History

🔗 Project Relationship

🔍 Check File Fingerprint

Build Queue

No builds in the queue.

Build Executor Status




built-in node + 2 agents (0 of 4 executors busy)

All

+

S	W	Name	Last Success	Last Failure	Last Duration	
...	☀️	Jenkins-test	N/A	N/A	N/A	▶️
✅	☀️	Label-Test-Job	1 day 0 hr #1	N/A	85 ms	▶️
✅	☀️	Login-App-Job-1	1 day 0 hr #1	N/A	3.7 sec	▶️
✅	☀️	Login-App-Job-2	23 hr #1	N/A	0.98 sec	▶️

📄 Add description

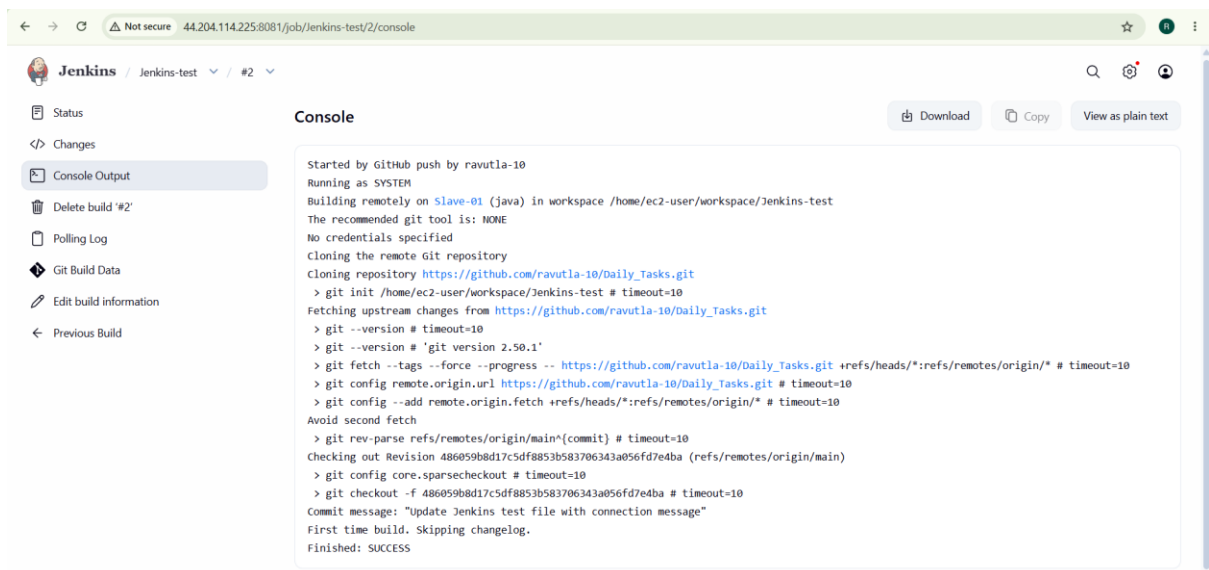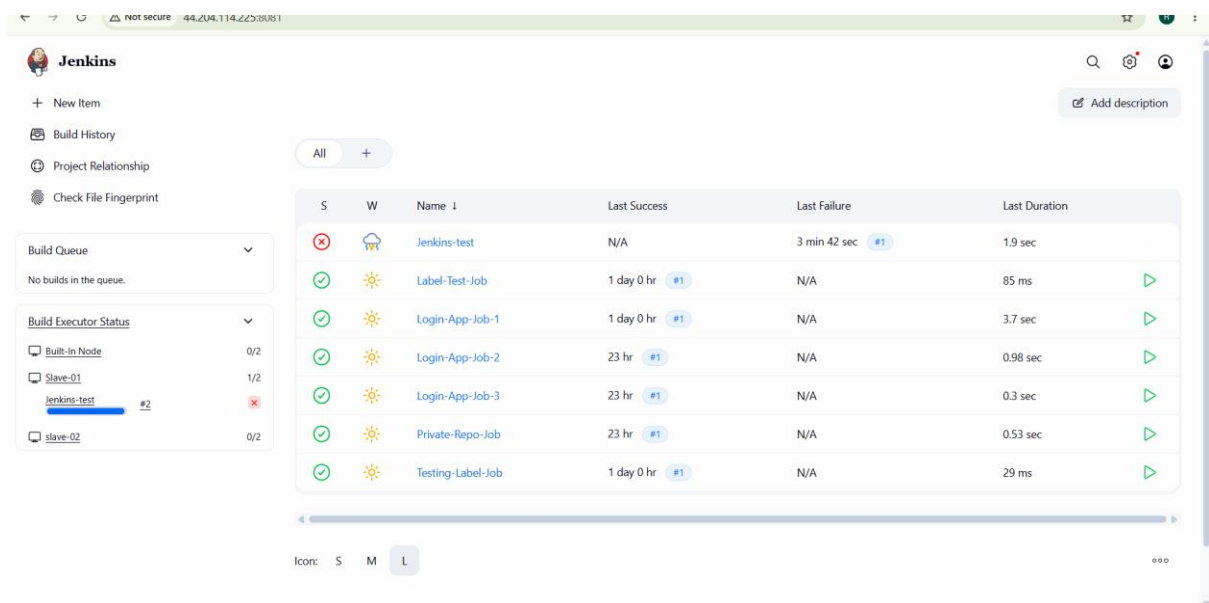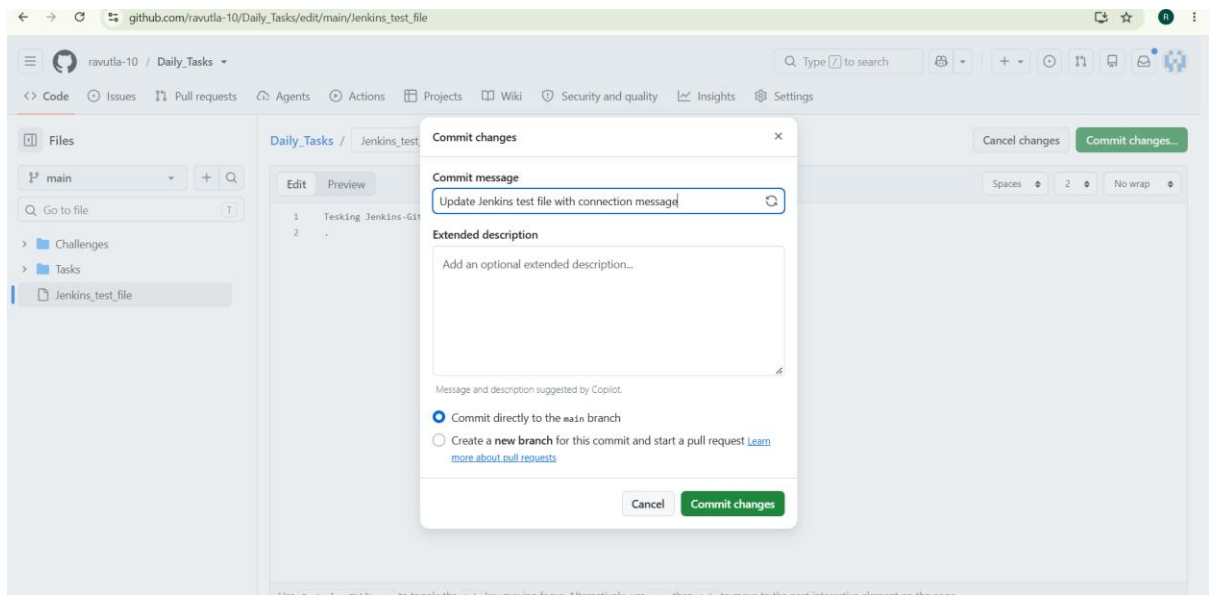

3. Configure Poll SCM and Build Periodically options in the Jenkins job.

Implementation steps:

Poll SCM

- Open the Jenkins job.
- Go to Configure → Build Triggers.
- Enable Poll SCM.
- Enter: * * * * *
- This checks the Git repository approximately every minute.
- Jenkins triggers a build when it detects a source-code change.
- Add a new commit and Verify.

Build Periodically

- Enable Build periodically.
- Enter: * * * * *
- This checks the Git repository approximately every minute.
- Click Save.
- Make changes in the source code and make a commit.
- Verify the scheduled build in Build History.

The screenshot shows the Jenkins job configuration page for a job named 'Jenkins-test'. The left sidebar contains a 'Configure' section with a list of tabs: General, Source Code Management, Triggers (which is selected and highlighted), Environment, Build Steps, and Post-build Actions. The main content area is titled 'triggers' and includes a description: 'Set up automated actions that start your build based on specific events, like code changes or scheduled times.' Below this, there are several checkboxes: 'Trigger builds remotely (e.g., from scripts)', 'Build after other projects are built', 'Build periodically', 'GitHub hook trigger for GITScm polling', and 'Poll SCM'. The 'Poll SCM' checkbox is checked. Below the checkboxes is a 'Schedule' field with a text input containing '**** *'. A note below the field states: 'No schedules so will only run due to SCM changes if triggered by a post-commit hook'. At the bottom of the triggers section is an 'Ignore post-commit hooks' checkbox, which is unchecked. Below the triggers section is an 'Environment' section with a description: 'Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.' and a checkbox for 'Delete workspace before build starts', which is unchecked. At the bottom of the page are two buttons: 'Save' and 'Apply'.

← → ↻ Not secure 44.204.114.225:8081/job/jenkins-test/3/console

Jenkins / Jenkins-test / #3

Status

Changes

Console Output

Delete build '#3'

Polling Log

Git Build Data

Edit build information

Previous Build

Console

Download Copy View as plain text

```
Started by an SCM change
Running as SYSTEM
Building remotely on Slave-01 (java) in workspace /home/ec2-user/workspace/Jenkins-test
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /home/ec2-user/workspace/Jenkins-test/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/ravutla-10/Daily_Tasks.git # timeout=10
Fetching upstream changes from https://github.com/ravutla-10/Daily_Tasks.git
> git --version # timeout=10
> git --version # 'git version 2.50.1'
> git fetch --tags --force --progress -- https://github.com/ravutla-10/Daily_Tasks.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 5b20e5597306ff0263cd6d81e3cf3be90b19c4f (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 5b20e5597306ff0263cd6d81e3cf3be90b19c4f # timeout=10
Commit message: "Update Jenkins_test_file"
> git rev-list --no-walk 486059bd17c5df8853b583706343a056fd7e4ba # timeout=10
Finished: SUCCESS
```

Build Periodically:

Jenkins / Jenkins-test / Configure

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

☐ Trigger builds remotely (e.g., from scripts) ?

☐ Build after other projects are built ?

☒ Build periodically ?

Schedule ?

⚠ Do you really mean "every minute" when you say "*****"? Perhaps you meant "H *****" to poll once per hour
Would last have run at Wednesday, September 30, 2026, 12:24:00 PM Coordinated Universal Time; would next run at Wednesday, September 30, 2026, 12:25:00 PM Coordinated Universal Time.

☐ GitHub hook trigger for GITScm polling ?

☐ Poll SCM ?

Save Apply

← → ↻ github.com/ravutla-10/Daily_Tasks/edit/main/Jenkins_test_file

ravutla-10 / Daily_Tasks

Type ↵ to search

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Files

main

Go to file

Challenges

Tasks

Jenkins_test_file

Daily_Tasks / Jenkins_test

Edit Preview

1 Testing Jenkins-Git

2 checking through b

Commit changes

Commit message

Update Jenkins test file with periodic check note

Extended description

Add a note about checking the Jenkins-GitHub webhook connection periodically.

Message and description suggested by Copilot.

☒ Commit directly to the main branch

☐ Create a new branch for this commit and start a pull request [Learn more about pull requests](#)

Cancel Commit changes

Cancel changes Commit changes...

Spaces 2 No wrap

The image shows two screenshots of the Jenkins web interface. The top screenshot displays the 'Console' view for a build named 'Jenkins-test' (#5). The console output shows a successful build process where a Jenkins test file was updated with a periodic check note. The bottom screenshot shows the 'Status' view for the same build, which is marked as successful with a green checkmark. Below the status, there are 'Permalinks' for various build types. At the bottom, a 'Builds' list shows the last two builds, #5 and #4, both completed successfully at 12:26 and 12:25 respectively, with build #5 circled in orange.

Jenkins / Jenkins-test / #5

Status

Changes

Console Output

Delete build #5

Git Build Data

Edit build information

Previous Build

Console

Download Copy View as plain text

```
Started by timer
Running as SYSTEM
Building remotely on Slave-01 (java) in workspace /home/ec2-user/workspace/Jenkins-test
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /home/ec2-user/workspace/Jenkins-test/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/ravutla-10/Daily_Tasks.git # timeout=10
Fetching upstream changes from https://github.com/ravutla-10/Daily_Tasks.git
> git --version # timeout=10
> git --version # 'git version 2.50.1'
> git fetch --tags --force --progress -- https://github.com/ravutla-10/Daily_Tasks.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 49138d79a6eaa5c0b28b038aa7d87299755dd34 (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 49138d79a6eaa5c0b28b038aa7d87299755dd34 # timeout=10
Commit message: "Update Jenkins test file with periodic check note"
> git rev-list --no-walk 5b20e5597306ff0263c8d0d81e3cf3be90b19c4f # timeout=10
Finished: SUCCESS
```

Jenkins / Jenkins-test

Status

Changes

Workspace

Build Now

Delete Project

Configure

Rename

Jenkins-test

Permalinks

- Last build (#5), 33 sec ago
- Last stable build (#5), 33 sec ago
- Last successful build (#5), 33 sec ago
- Last failed build (#1), 11 min ago
- Last unsuccessful build (#1), 11 min ago
- Last completed build (#5), 33 sec ago

Builds >

Filter

Today

- ✓ #5 12:26
- ✓ #4 12:25

4. Take a backup of the Jenkins server using a bash-script.

Step 1: Create Backup Directory

sudo mkdir -p /backup/jenkins

Step 2: Create the Backup Script

Create the script:

sudo vi /usr/local/bin/jenkins_backup.sh

Add:

#!/bin/bash

BACKUP_DIR="/backup/jenkins"

JENKINS_HOME="/var/lib/jenkins"

```
DATE=$(date +%Y-%m-%d_%H-%M-%S)
BACKUP_FILE="$BACKUP_DIR/jenkins_backup_$DATE.tar.gz"
```

```
echo "Starting Jenkins backup..."
```

```
sudo tar -czf "$BACKUP_FILE" "$JENKINS_HOME"
```

```
if [ $? -eq 0 ]; then
    echo "Jenkins backup completed successfully."
    echo "Backup file: $BACKUP_FILE"
else
    echo "Jenkins backup failed."
    exit 1
fi
Save and exit.
```

Step 3: Give Execute Permission


```
sudo chmod +x /usr/local/bin/jenkins_backup.sh
```

Step 4: Run the Backup Script

```
sudo /usr/local/bin/jenkins_backup.sh
```

Step 5: Verify the Backup

Step 6: Verify Backup Contents

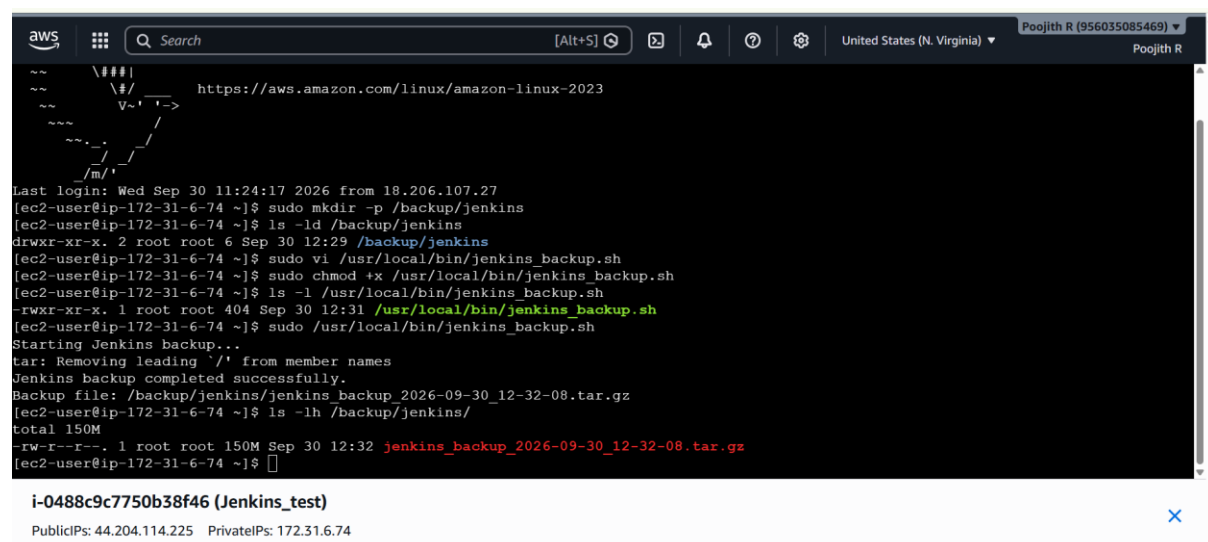

```
aws
Search [Alt+S]
United States (N. Virginia) Poojith R (956035085469) Poojith R
https://aws.amazon.com/linux/amazon-linux-2023
Last login: Wed Sep 30 11:24:17 2026 from 18.206.107.27
[ec2-user@ip-172-31-6-74 ~]$ sudo mkdir -p /backup/jenkins
[ec2-user@ip-172-31-6-74 ~]$ ls -ld /backup/jenkins
drwxr-xr-x. 2 root root 6 Sep 30 12:29 /backup/jenkins
[ec2-user@ip-172-31-6-74 ~]$ sudo vi /usr/local/bin/jenkins_backup.sh
[ec2-user@ip-172-31-6-74 ~]$ sudo chmod +x /usr/local/bin/jenkins_backup.sh
[ec2-user@ip-172-31-6-74 ~]$ ls -l /usr/local/bin/jenkins_backup.sh
-rwxr-xr-x. 1 root root 404 Sep 30 12:31 /usr/local/bin/jenkins_backup.sh
[ec2-user@ip-172-31-6-74 ~]$ sudo /usr/local/bin/jenkins_backup.sh
Starting Jenkins backup...
tar: Removing leading '/' from member names
Jenkins backup completed successfully.
Backup file: /backup/jenkins/jenkins_backup_2026-09-30_12-32-08.tar.gz
[ec2-user@ip-172-31-6-74 ~]$ ls -lh /backup/jenkins/
total 150M
-rw-r--r--. 1 root root 150M Sep 30 12:32 jenkins_backup_2026-09-30_12-32-08.tar.gz
[ec2-user@ip-172-31-6-74 ~]$
```

i-0488c9c7750b38f46 (Jenkins_test)

PublicIPs: 44.204.114.225 PrivateIPs: 172.31.6.74

```
#!/bin/bash

BACKUP_DIR="/backup/jenkins"
JENKINS_HOME="/var/lib/jenkins"
DATE=$(date +%Y-%m-%d_%H-%M-%S)
BACKUP_FILE="$BACKUP_DIR/jenkins_backup_$DATE.tar.gz"

echo "Starting Jenkins backup..."

sudo tar -czf "$BACKUP_FILE" "$JENKINS_HOME"

if [ $? -eq 0 ]; then
    echo "Jenkins backup completed successfully."
    echo "Backup file: $BACKUP_FILE"
else
    echo "Jenkins backup failed."
    exit 1
fi

"/usr/local/bin/jenkins_backup.sh" 18L, 404B 18,2 All
```


i-0488c9c7750b38f46 (Jenkins_test)


Public IPs: 44.204.114.225 Private IPs: 172.31.6.74

5. Take a backup of Jenkins using the ThinBackup plugin.

Implementation

- Install the ThinBackup plugin from Jenkins Plugin Manager.
- Create a dedicated directory for ThinBackup files.
- Provide Jenkins with permission to write to the backup directory.
- Open the ThinBackup configuration from Jenkins.
- Specify the backup directory.
- Configure the required backup options and schedule.
- Perform a backup and verify that the backup data is created.

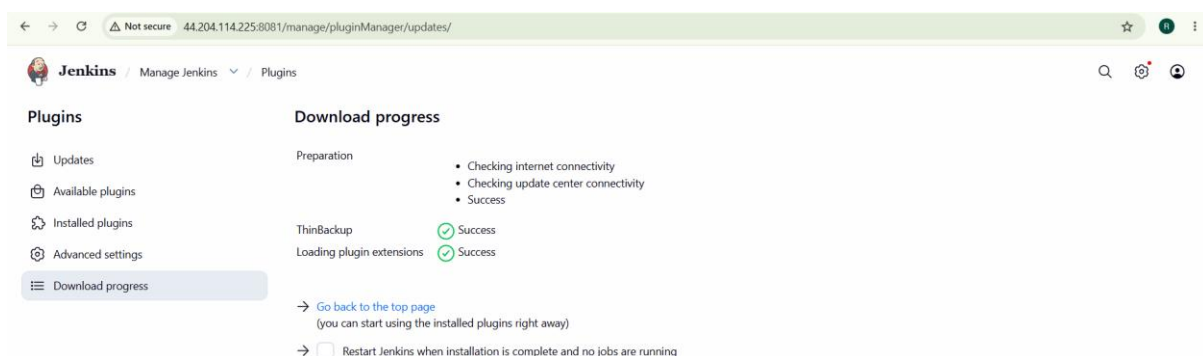

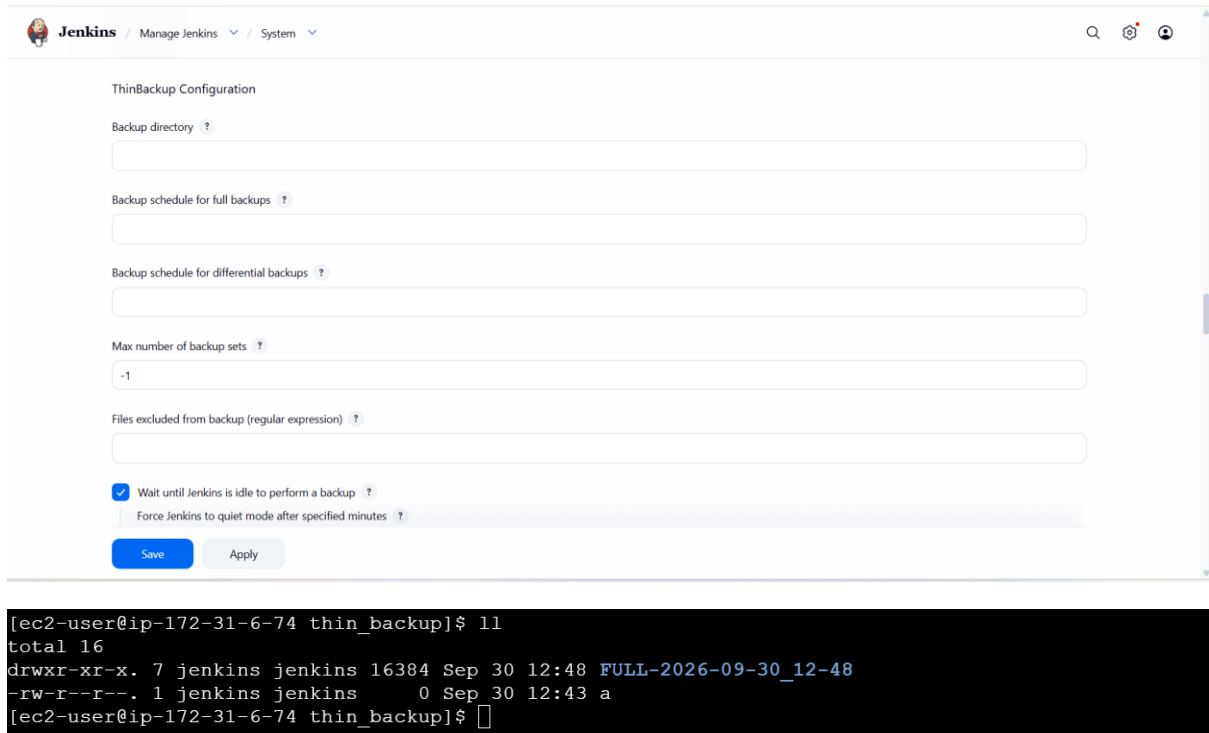

The image shows the Jenkins ThinBackup Configuration page. The configuration fields are as follows:

- Backup directory:
- Backup schedule for full backups:
- Backup schedule for differential backups:
- Max number of backup sets:
- Files excluded from backup (regular expression):
- ☒ Wait until Jenkins is idle to perform a backup
- ☐ Force Jenkins to quiet mode after specified minutes

Buttons: Save, Apply

```
[ec2-user@ip-172-31-6-74 thin_backup]$ ll
total 16
drwxr-xr-x. 7 jenkins jenkins 16384 Sep 30 12:48 FULL-2026-09-30_12-48
-rw-r--r--. 1 jenkins jenkins    0 Sep 30 12:43 a
[ec2-user@ip-172-31-6-74 thin_backup]$
```

6. Set up a new Jenkins server and restore the backup taken in task 4.

Implementation

- Launch a new EC2 instance for the Jenkins server.
- Install the required Java version.
- Install Jenkins on the new server.
- Transfer the Task 4 Bash backup from the old Jenkins server to the new server.
- Keep the newly created Jenkins Home directory as a backup.
- Extract the Bash backup and restore /var/lib/jenkins.
- Change ownership of the restored Jenkins files to the Jenkins user.
- Start Jenkins.
- Verify that Jenkins is running correctly.
- Access the new Jenkins server through the browser.
- Verify that the previous jobs, plugins, users, configurations, credentials, and nodes have been restored.

```

/m/'
[ec2-user@ip-172-31-27-0 ~]$ java -version
-bash: java: command not found
[ec2-user@ip-172-31-27-0 ~]$ sudo dnf install java-21-amazon-corretto -y
Waiting for process with pid 2035 to finish.
Amazon Linux 2023 Kernel Livepatch repository
Last metadata expiration check: 0:00:01 ago on Wed Sep 30 13:34:18 2026.
Dependencies resolved.
=====
Package                                Architecture      Version            Repository         Size
=====
Installing:
java-21-amazon-corretto                x86_64            1:21.0.12+9-1.amzn2023.1  amazonlinux        217 k
Installing dependencies:
alsa-lib                                x86_64            1.2.7.2-1.amzn2023.0.4   amazonlinux        503 k
cairo                                    x86_64            1.18.0-4.amzn2023.0.3    amazonlinux        717 k
dejavu-sans-fonts                       noarch            2.37-16.amzn2023.0.2     amazonlinux        1.3 M
dejavu-sans-mono-fonts                  noarch            2.37-16.amzn2023.0.2     amazonlinux        467 k
dejavu-serif-fonts                      noarch            2.37-16.amzn2023.0.2     amazonlinux        1.0 M
fontconfig                              x86_64            2.13.94-2.amzn2023.0.2   amazonlinux        273 k
fonts-filesystem                        noarch            1:2.0.5-12.amzn2023.0.2  amazonlinux        9.5 k
freetype                                x86_64            2.13.2-5.amzn2023.0.2    amazonlinux        422 k
giflib                                   x86_64            5.2.1-9.amzn2023.0.4     amazonlinux        49 k
google-noto-fonts-common                noarch            20240401-1.amzn2023.0.2  amazonlinux        17 k
=====

```

```

[ec2-user@ip-172-31-6-74 bin]$ sudo cp /backup/jenkins/jenkins backup_2026-09-30_12-32-08.tar.gz /tmp/
[ec2-user@ip-172-31-6-74 bin]$ sudo chmod 644 /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz
[ec2-user@ip-172-31-6-74 bin]$ ls -lh /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz
-rw-r--r--. 1 root root 150M Sep 30 13:38 /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz

```

```

[root@ip-172-31-6-74 ~]$ vi jenkins.pem
[root@ip-172-31-6-74 ~]$ chmod 600 jenkins.pem
[root@ip-172-31-6-74 ~]$ scp -i ~/jenkins.pem \
/tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz \
ec2-user@3.85.30.129:/tmp/
The authenticity of host '3.85.30.129 (3.85.30.129)' can't be established.
ED25519 key fingerprint is SHA256:6niFcxA/apvBouS052GN/2W5C2tEG2McRyJ1+JBm/uI.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '3.85.30.129' (ED25519) to the list of known hosts.
jenkins_backup_2026-09-30_12-32-08.tar.gz
100% 150MB 296.8MB/s 00:00
[root@ip-172-31-6-74 ~]$

```

```

Installed:
jenkins-2.580.1-1.noarch

Complete!
[ec2-user@ip-172-31-27-0 ~]$ sudo systemctl status jenkins
o jenkins.service - Jenkins Continuous Integration Server
   Loaded: loaded (/usr/lib/systemd/system/jenkins.service; disabled; preset: disabled)
   Active: inactive (dead)
[ec2-user@ip-172-31-27-0 ~]$ ls -lh /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz
-rw-r--r--. 1 ec2-user ec2-user 150M Sep 30 13:44 /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz
[ec2-user@ip-172-31-27-0 ~]$ sudo mv /var/lib/jenkins /var/lib/jenkins-fresh
[ec2-user@ip-172-31-27-0 ~]$ ls -ld /var/lib/jenkins-fresh
drwxr-xr-x. 2 jenkins jenkins 6 Sep 30 13:37 /var/lib/jenkins-fresh
[ec2-user@ip-172-31-27-0 ~]$ sudo tar -xzf /tmp/jenkins_backup_2026-09-30_12-32-08.tar.gz -C /
[ec2-user@ip-172-31-27-0 ~]$ sudo ls -lh /var/lib/jenkins
total 132K
-rw-r--r--. 1 jenkins jenkins 2.8K Sep 30 10:53 config.xml
-rw-r--r--. 1 jenkins jenkins 3.9K Sep 30 11:32 credentials.xml
drwxr-xr-x. 4 jenkins jenkins 26 Sep 30 11:33 fingerprints
-rw-r--r--. 1 jenkins jenkins 156 Sep 30 10:52 hudson.model.UpdateCenter.xml
-rw-r--r--. 1 jenkins jenkins 1.3K Sep 29 11:43 hudson.plugins.emailxt.ExtendedEmailPublisher.xml
-rw-r--r--. 1 jenkins jenkins 370 Sep 29 10:27 hudson.plugins.git.GitTool.xml
-rw-r--r--. 1 jenkins jenkins 1.7K Sep 29 10:27 identity.key.enc

```

```

[ec2-user@ip-172-31-27-0 ~]$ sudo chown -R jenkins:jenkins /var/lib/jenkins
[ec2-user@ip-172-31-27-0 ~]$ sudo ls -ld /var/lib/jenkins
drwxr-xr-x. 17 jenkins jenkins 16384 Sep 30 12:32 /var/lib/jenkins
[ec2-user@ip-172-31-27-0 ~]$ sudo systemctl start jenkins
[ec2-user@ip-172-31-27-0 ~]$ sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
   Loaded: loaded (/usr/lib/systemd/system/jenkins.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-09-30 13:47:40 UTC; 17s ago
     Main PID: 26975 (java)
       Tasks: 65 (limit: 2255)
      Memory: 447.8M
         CPU: 32.225s
       CGroup: /system.slice/jenkins.service
               └─26975 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --http
Sep 30 13:47:38 ip-172-31-27-0.ec2.internal jenkins[26975]: 2026-09-30 13:47:38.581+0000 [id=36] INFO h.p.b.g.GlobalTic
Sep 30 13:47:39 ip-172-31-27-0.ec2.internal jenkins[26975]: 2026-09-30 13:47:39.996+0000 [id=36] INFO hudson.slaves.Sl
Sep 30 13:47:39 ip-172-31-27-0.ec2.internal jenkins[26975]: 2026-09-30 13:47:39.997+0000 [id=36] INFO hudson.slaves.Sl
Sep 30 13:47:40 ip-172-31-27-0.ec2.internal jenkins[26975]: 2026-09-30 13:47:40.010+0000 [id=37] INFO jenkins.InitReac

```

