The preceding chapters optimized expected returns. This chapter relaxes that assumption in three directions: tracking full return distributions rather than means (distributional RL), imposing constraints on secondary objectives (constrained MDPs), and hedging against model misspecification (robust MDPs).

0.1 Distributional Reinforcement Learning and Risk Measures

Standard reinforcement learning characterizes a policy π by the expected return $V^\pi(s) = \mathbb{E}^\pi\Big[\sum_{t=0}^\infty \gamma^t R_t \mid S_0 = s\Big]$. Distributional reinforcement learning instead maintains the full random variable $Z^\pi(s,a) = \sum_{t=0}^\infty \gamma^t R_t$ whose expectation is $Q^\pi(s,a)$. Bellemare et al. (2017) showed that the Bellman equation has a distributional counterpart that propagates entire distributions rather than expectations, and that this distributional operator contracts in the Wasserstein metric.

Let $\mathcal{Z}$ denote the space of return-distribution functions mapping state-action pairs to distributions over $\mathbb{R}$. The distributional Bellman operator $\mathcal{T}^\pi$ is defined by

$$\mathcal{T}^\pi Z(s,a) \overset{D}{=} R(s,a) + \gamma Z(S',A'), \quad S' \sim P(\cdot|s,a),\ A' \sim \pi(\cdot|S'), \tag{1}$$

where $\overset{D}{=}$ denotes equality in distribution. Bellemare et al. (2017) proved that $\mathcal{T}^\pi$ is a γ-contraction in the Wasserstein distance (informally, the minimum cost of reshaping one distribution into another) between distributions,

$$\bar{d}_p(Z_1, Z_2) = \sup_{s,a} d_p\Big(Z_1(s,a),\ Z_2(s,a)\Big), \tag{2}$$

where d_p is the p-Wasserstein distance between univariate distributions. Since $\mathcal{T}^\pi$ is a contraction, iterating it converges to a unique return distribution Z^π under policy π. For quantile representations, minimizing the quantile regression loss (3) is equivalent to minimizing the 1-Wasserstein distance to the Bellman target (Dabney et al., 2018b), so QR-DQN and IQN directly inherit this convergence guarantee.[1]

A standard DQN network outputs a single scalar $Q_\theta(s,a)$ per action and minimizes the squared TD error $(r + \gamma \max_{a'} Q_{\bar\theta}(s',a') - Q_\theta(s,a))^2$, where r is the observed reward, s' is the next state, and $\bar\theta$ denotes a slowly-updated target network.

[1] $\mathcal{T}^\pi$ is not a contraction in total variation or KL divergence. The optimality operator $\mathcal{T}^*$ is not a contraction in any distribution metric, though expected values still converge (Bellemare et al., 2017).

Dabney et al. (2018b) introduced Quantile Regression DQN (QR-DQN), whose network instead outputs N values $\theta_1(s,a),\ldots,\theta_N(s,a)$ representing quantile locations of the return distribution, each with equal probability $1/N$. The quantile regression loss for a single quantile level $\tau \in (0,1)$ is $\rho_\tau(u) = u(\tau - \mathbb{1}\{u<0\})$, which penalizes underestimates by a factor of τ and overestimates by $1-\tau$. The full QR-DQN loss sums this over all pairs of current quantiles i and target quantiles j:

$$L_{\mathrm{QR}} = \frac{1}{N}\sum_{i=1}^{N}\sum_{j=1}^{N} \rho_{\hat{\tau}_i}\Big(\underbrace{r + \gamma\,\theta_j^{\mathrm{target}}(s',a^*)}_{\text{target quantile } j} - \underbrace{\theta_i(s,a)}_{\text{current quantile } i}\Big), \tag{3}$$

where $\hat{\tau}_i = (2i-1)/(2N)$ is the midpoint of the i-th quantile interval, $\theta_j^{\mathrm{target}}$ comes from the target network, and $a^* = \arg\max_{a'} \frac{1}{N}\sum_j \theta_j(s',a')$ is the greedy action under the mean return.[2]

Dabney et al. (2018a) extended this to Implicit Quantile Networks (IQN). Instead of outputting a fixed set of N quantiles, the IQN network takes a quantile level $\tau \in [0,1]$ as an additional input and outputs the corresponding return value $F_Z^{-1}(\tau; s,a)$. The IQN loss has the same pairwise structure, but with quantile levels sampled continuously:

$$L_{\mathrm{IQN}} = \frac{1}{KK'}\sum_{i=1}^{K}\sum_{j=1}^{K'} \rho_{\tau_i}\Big(r + \gamma\, F_Z^{-1}(\tau'_j; s',a^*) - F_Z^{-1}(\tau_i; s,a)\Big), \tag{4}$$

where $\tau_1,\ldots,\tau_K$ and $\tau'_1,\ldots,\tau'_{K'}$ are independent draws from $U([0,1])$, and K, K' are the number of samples per update. Because the quantile levels are sampled rather than fixed, IQN learns the full continuous quantile function rather than a discrete approximation. This continuous representation is the key bridge to risk-sensitive control.

An agent that maximizes expected return is indifferent between a certain payoff of 100 and a coin flip paying 0 or 200. In many applications this is inadequate: a portfolio manager, a robot near a cliff, or a firm facing bankruptcy all care about the shape of the return distribution, not just its mean. Distributional RL provides the return distribution; what remains is a principled way to convert that distribution into a scalar objective that encodes the desired risk attitude. Yaari (1987) showed that this can be done with a distortion function $h : [0,1] \to [0,1]$ (increasing, $h(0)=0$, $h(1)=1$) applied to the

[2] The resulting projected operator is a γ-contraction in the ∞-Wasserstein metric (Dabney et al., 2018b).

cumulative distribution before integrating:

$$\rho_h(Z) = \int_0^1 F_Z^{-1}(\tau)\, h'(1-\tau)\, d\tau. \tag{5}$$

This class includes the expected value ($h(\tau) = \tau$), Conditional Value-at-Risk at level α ($h(\tau) = \min(\tau/\alpha, 1)$), and the Cumulative Prospect Theory (Tversky and Kahneman, 1992), which overweights tail outcomes relative to their true probabilities. Since IQN can evaluate $F_Z^{-1}(\tau)$ at any τ, each of these risk measures reduces to choosing which quantiles to average over and how to weight them. The network itself does not change; only the sampling distribution of τ at decision time does. Sampling τ from the non-uniform distribution $\beta(\tau) = h'(1-\tau)$ rather than uniformly yields policies that maximize the distortion risk measure ρ_h.

CVaR at level α (the expected return in the worst α-fraction of outcomes) is the most widely used case. In IQN, sampling $\tau \sim U([0, \alpha])$ instead of $U([0, 1])$ yields a CVaR-optimal policy. CVaR can also be optimized exactly via dynamic programming on an augmented state space (Bäuerle and Ott, 2011), or through its equivalence to robust MDPs with adversarial transition reweighting (Chow et al., 2015).[3]

0.1.1 Simulation Study: Risk-Sensitive Inventory Management

A newsvendor MDP with fat-tailed demand illustrates the mechanism. The agent manages inventory over a 10-period horizon with state $s \in \{0, \ldots, 15\}$ (current stock) and action $a \in \{0, \ldots, 5\}$ (order quantity). Demand follows a mixture distribution, $D \sim 0.8 \cdot \text{Poisson}(3) + 0.2 \cdot \text{Poisson}(10)$, creating occasional demand spikes that make risk preferences matter.[4] A single IQN network is trained for 50,000 episodes with $\tau \sim U([0, 1])$, then evaluated under two τ-sampling distributions: $U([0, 1])$ for risk-neutral and $U([0, 0.05])$ for CVaR_{95}. Table 1 reports results over 50,000 evaluation episodes alongside the exact DP oracle.

The IQN-Neutral policy recovers 93% of the DP oracle's mean return. Switching to

[3] Risk-averse dynamic programming requires the risk measure to satisfy a recursive nestedness property (the multi-period risk decomposes into nested single-period evaluations, as the Bellman equation does for expected value) (Ruszczyński, 2010). Hau et al. (2023) showed that popular decompositions for CVaR are suboptimal regardless of discretization, correcting earlier claims. Tamar et al. (2015) extended the policy gradient theorem to coherent risk objectives as an alternative to the distributional approach. Prashanth et al. (2016) proved consistency of CPT-value estimation from sampled returns.

[4] Per-step reward: $5 \cdot \min(s + a, D) - 2a - 1 \cdot (s + a - D)^+ - 8 \cdot (D - s - a)^+$. The stockout penalty (8) exceeds the holding cost (1), so risk-averse agents should carry more safety stock.

Table 1: Risk-sensitive inventory management. The CVaR_{95} policy sacrifices mean return for improved worst-case performance by ordering more safety stock.

Policy	Mean Return	CVaR_{95}	CVaR_{99}	Avg. Order
DP Oracle	40.4	-52.6	-98.3	2.56
IQN-Neutral	37.4	-57.8	-104.0	2.44
IQN-CVaR_{95}	35.8	-55.0	-97.5	3.30

CVaR_{95} at decision time trades 1.6 points of mean return for 2.8 points of improved tail performance, achieved by ordering more safety stock (3.30 versus 2.44 units per period).

0.2 Constrained Markov Decision Processes

Many decision problems involve optimizing a primary objective subject to constraints on secondary costs. A firm maximizes profit subject to a budget; a regulator maximizes welfare subject to safety thresholds; an advertiser maximizes conversions subject to a spending limit. The theory of constrained MDPs (CMDPs) provides a unified framework for these problems.

A constrained MDP augments the standard MDP $(\mathcal{S}, \mathcal{A}, P, r, \gamma)$ with K auxiliary cost functions $c_k : \mathcal{S} \times \mathcal{A} \to \mathbb{R}$ and constraint thresholds q_k. The agent maximizes the primary objective subject to

$$\max_{\pi} \ \mathbb{E}^{\pi}\Big[\sum_{t=0}^{\infty} \gamma^t r(S_t, A_t)\Big] \quad \text{subject to} \quad \mathbb{E}^{\pi}\Big[\sum_{t=0}^{\infty} \gamma^t c_k(S_t, A_t)\Big] \le q_k, \quad k = 1, \ldots, K. \tag{6}$$

The key insight of Altman (1999) is that this problem becomes a linear program when reformulated over *occupation measures* (the discounted fraction of time spent in each state-action pair). The occupation measure of policy π is

$$\nu^{\pi}(s, a) = (1 - \gamma) \sum_{t=0}^{\infty} \gamma^t \mathbb{P}(S_t = s, A_t = a \mid \pi), \tag{7}$$

which satisfies the flow conservation constraints (probability flowing into each state from transitions equals probability flowing out via actions)

$$\sum_{a} \nu(s, a) = (1 - \gamma)\mu_0(s) + \gamma \sum_{s', a'} P(s|s', a')\nu(s', a') \quad \text{for all } s \in \mathcal{S}. \tag{8}$$

Since both the objective and constraints are linear in ν, and the feasible set forms a

polytope,[5] the CMDP becomes a standard LP. By Carathéodory's theorem,[6] optimal CMDP policies mix at most $K+1$ deterministic policies for K constraints.

The LP formulation yields *strong duality* under Slater's condition.[7] The dual problem is

$$\min_{\lambda \geq 0} \max_{\pi} \; L(\pi, \lambda) = \mathbb{E}^{\pi}\Big[\sum_{t=0}^{\infty} \gamma^t \Big(r(S_t, A_t) - \sum_{k=1}^{K} \lambda_k c_k(S_t, A_t)\Big)\Big] + \sum_{k=1}^{K} \lambda_k q_k, \tag{9}$$

and the optimal dual variable λ_k^* is the *shadow price* of the k-th constraint. By the envelope theorem, $\partial V^* / \partial q_k = \lambda_k^*$: the marginal change in optimal value per unit relaxation of constraint q_k. This is the same shadow price that appears in the linear programming dual of resource allocation problems.

Paternain et al. (2019) extended this result beyond the LP formulation. Despite the non-convexity of the objective in policy parameters, they proved that constrained RL has *zero duality gap*: the optimal dual value equals the primal. The proof exploits the convexity of the occupancy measure set and applies a minimax theorem. This means the CMDP can be solved exactly via dual ascent on the Lagrange multipliers, even when using parametric policy classes, with an approximation error bounded by the expressiveness of the parametrization.

Zero duality gap means the CMDP can be solved by iterating between two steps: for fixed multiplier λ, solve the unconstrained MDP with reward $r(s,a) - \sum_k \lambda_k c_k(s,a)$; then update λ by gradient ascent on the dual (9).

Achiam et al. (2017) gave the foundational trust-region instantiation. At iteration k, the policy update solves

$$\max_{\pi} \; \mathbb{E}_{s \sim d^{\pi_k}, a \sim \pi}\Big[A^r_{\pi_k}(s,a)\Big] \quad \text{s.t.} \quad J_{C_i}(\pi_k) + \frac{1}{1-\gamma} \mathbb{E}_{s \sim d^{\pi_k}, a \sim \pi}\Big[A^{C_i}_{\pi_k}(s,a)\Big] \leq d_i, \quad \bar{D}_{\mathrm{KL}}(\pi \| \pi_k) \leq \delta, \tag{10}$$

where $A^r_{\pi_k}$ and $A^{C_i}_{\pi_k}$ are the advantage functions for the reward and the i-th cost, d^{π_k} is the discounted state visitation distribution, and $\bar{D}_{\mathrm{KL}}(\pi \| \pi_k) = \mathbb{E}_{s \sim \pi_k}[D_{\mathrm{KL}}(\pi(\cdot|s) \| \pi_k(\cdot|s))]$.

[5] The feasible occupation measures form a bounded convex set (polytope) defined by non-negativity, the Bellman flow conservation equations, and the K linear constraint inequalities.

[6] Carathéodory's theorem states that any point in the convex hull of a set in $\mathbb{R}^d$ can be written as a convex combination of at most $d+1$ extreme points. The unconstrained MDP polytope has deterministic policies as its vertices, and the optimal LP solution sits at a vertex, which is why unconstrained optimal policies are deterministic. Adding K constraint inequalities introduces up to K additional dimensions along which the optimum may lie in the interior, so the optimal solution is a convex combination of at most $K+1$ vertices.

[7] Slater's condition requires the existence of a feasible policy π' satisfying all constraints with strict inequality: $\mathbb{E}^{\pi'}[\sum_t \gamma^t c_k(S_t, A_t)] < q_k$ for all k.

For the exact solution to (10), monotone reward improvement and per-iterate constraint satisfaction are guaranteed.[8,9]

In practice, the dominant method is PPO-Lagrangian, which replaces the trust-region constraint in (10) with the PPO clipped surrogate objective applied to the Lagrangian advantage $\hat{A}_t^\lambda = \hat{A}_t^r - \lambda \hat{A}_t^c$:

$$\max_\theta \; \mathbb{E}_{s,a\sim\pi_{\theta_k}}\Big[\min\Big(\rho_t \hat{A}_t^\lambda,\; \mathrm{clip}(\rho_t, 1-\epsilon, 1+\epsilon)\, \hat{A}_t^\lambda\Big)\Big], \qquad \rho_t = \frac{\pi_\theta(a_t|s_t)}{\pi_{\theta_k}(a_t|s_t)}, \tag{11}$$

where $\hat{A}_t^r$ and $\hat{A}_t^c$ are generalized advantage estimates computed from two separate critics $V_\phi^r(s)$ and $V_\psi^c(s)$ via $\hat{A}_t = \sum_{l=0}^{T-t}(\gamma\lambda_{\mathrm{GAE}})^l \delta_{t+l}$ with TD residuals $\delta_t = r_t + \gamma V(s_{t+1}) - V(s_t)$ (analogously for cost). After each policy update, the multiplier is adjusted by projected gradient ascent on the constraint violation:

$$\lambda_{t+1} = \Big[\lambda_t + \eta\Big(\hat{J}_C(\pi_\theta) - d\Big)\Big]_+. \tag{12}$$

Stooke et al. (2020) refined this update with a PID controller that dampens the multiplier oscillations characteristic of naive dual ascent.[10]

0.2.1 Simulation Study: Carbon-Constrained Production

A factory maximizes manufacturing profit subject to a carbon emissions budget. The state is (inventory level, demand regime), where inventory $\in \{0, \ldots, 8\}$ and demand switches between low and high regimes via a Markov chain. The action is (production level, energy source), where production $\in \{0, 1, 2, 3\}$ and energy is dirty (cheap, 3.0 tons CO_2 per unit) or clean (expensive, 0.5 tons per unit). The reward is daily profit; the cost is CO_2 emitted. The carbon budget d is set to 30% of the unconstrained optimum's discounted emissions, and the LP dual yields an analytical shadow price $\lambda^* = 1.20$.[11] The

[8] Achiam et al. (2017) bound the worst-case constraint degradation at $O(\sqrt{\delta}\,\gamma\varepsilon/(1-\gamma)^2)$, where ε bounds the cost advantage, via Pinsker's inequality. The implemented Constrained Policy Optimization (CPO) algorithm solves a quadratic approximation to (10); the hard guarantee applies to the exact solution.

[9] Subsequent theoretical work sharpened convergence rates for primal-dual CMDP methods: Tessler et al. (2019) proved almost-sure convergence of a three-timescale actor-critic-multiplier scheme (RCPO) to a local Lagrangian optimum; Ding et al. (2020) established the first non-asymptotic $O(1/\sqrt{T})$ rate for both optimality gap and constraint violation (dimension-free, via Fisher information geometry); Liu et al. (2022) improved this to $O(\log(T)/T)$ using policy mirror descent; and Ying et al. (2022) achieved $O(1/T)$ with entropy regularization.

[10] The FSRL library (Liu et al., 2024) provides a pip-installable implementation of PPO-Lagrangian alongside CPO and TRPO-Lagrangian.

[11] The constrained LP over occupation measures (18 states $\times$ 8 actions = 144 variables) is solved exactly with HiGHS. The shadow price λ^* is the dual variable on the carbon constraint, interpretable as the Pigouvian tax

CMDP is

$$\max_{\pi} \mathbb{E}^{\pi}\Big[\sum_{t=0}^{\infty}\gamma^t \underbrace{\Big(p\min(I_t + a_t^{\text{prod}},\, D_t) - \kappa_{e_t} a_t^{\text{prod}} - h\,(I_t + a_t^{\text{prod}} - D_t)^+\Big)}_{r(S_t,A_t)}\Big] \quad \text{s.t.} \quad \mathbb{E}^{\pi}\Big[\sum_{t=0}^{\infty}\gamma^t \underbrace{\xi_{e_t}\, a_t^{\text{prod}}}_{c(S_t,A_t)}\Big] \le d, \tag{13}$$

where $p = 10$ is the unit price, $\kappa_e \in \{2, 5\}$ is the production cost for dirty and clean energy respectively, $h = 1$ is the holding cost, $\xi_e \in \{3.0, 0.5\}$ is the emission rate, D_t is stochastic demand, and $\gamma = 0.95$.

Table 2 and Figure 1 compare three methods: the constrained LP oracle, unconstrained Q-learning, and Lagrangian Q-learning with dual ascent on (12). Unconstrained Q-learning converges near the DP optimum (return 255 versus 273) but violates the carbon budget by a factor of three (cost 96 versus $d = 31$). The learned multiplier rises from zero, overshoots to $\lambda \approx 3.2$ before settling at $\lambda \approx 1.40$, near the analytical shadow price $\lambda^* = 1.20$. The overshoot is the characteristic oscillation of naive dual ascent that Stooke et al. (2020)'s PID controller is designed to dampen. Because the transient spike drives the policy toward clean energy more aggressively than necessary, the final cost (27) undershoots the budget (31), leaving the Lagrangian agent slightly too conservative (return 180 versus the LP optimum of 186). The LP optimal policy is stochastic, mixing dirty and clean energy at a single state; Q-learning recovers a deterministic approximation.

Table 2: Carbon-constrained production results. Budget $d = 31.35$.

Method	Return	Cost	Budget	λ
LP Oracle	186.4	31.35	Y	1.20
Unconstrained Q-learning	255.2	95.83	N	–
Lagrangian Q-learning	180.3	26.88	Y	1.40

0.3 Robust MDPs and Ambiguity Aversion

When the transition kernel $P(s'|s, a)$ is known imprecisely, standard dynamic programming may produce policies that perform well under the nominal model[12] but fail under plausible alternatives. Robust MDPs address this by optimizing against worst-case transitions within an uncertainty set around the nominal model.

that internalizes the emissions externality.

[12]The nominal model $p_0(\cdot|s, a)$ is the agent's best estimate of the transition kernel, typically estimated from data or specified by a simulator.

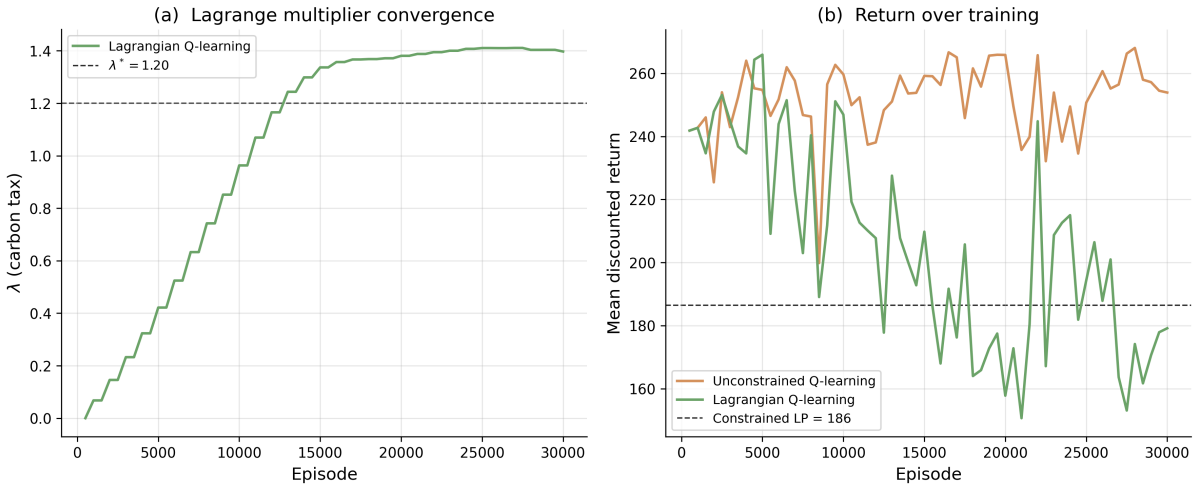

Figure 1: (a) Lagrange multiplier λ over training episodes, with the LP shadow price λ^* as the dashed reference. (b) Mean discounted return for unconstrained and Lagrangian Q-learning, with the constrained LP optimum as the dashed reference.

Iyengar (2005) defined the robust Bellman operator

$$(TV)(s) = \max_a \min_{p \in \mathcal{P}(s,a)} \Big\{ r(s,a) + \gamma\, p \cdot V \Big\}, \tag{14}$$

where $\mathcal{P}(s,a)$ is an uncertainty set of transition distributions for each state-action pair and $p_0(\cdot|s,a)$ is the nominal transition kernel. Under the rectangularity assumption (the uncertainty sets are independent across state-action pairs, so the joint set is a Cartesian product), T is a γ-contraction in the sup-norm, so robust value iteration and policy iteration converge with the same guarantees as their standard counterparts (recall Section **??**); the only change is substituting T for the standard Bellman operator.[13] For KL balls $\mathcal{P}(s,a) = \{p : \mathrm{KL}(p\|p_0) \le \kappa\}$,[14] the inner minimization has the closed-form solution $q^*(s') \propto p_0(s'|s,a)\exp(-\gamma V(s')/\theta)$, an exponential tilting of nominal transitions toward low-value states, where θ is the Lagrange multiplier on the KL constraint (Nilim

[13] Rectangularity means $\mathcal{P} = \prod_{s,a} \mathcal{P}(s,a)$. Without it, the problem becomes NP-hard (Wiesemann et al., 2013).

[14] A KL ball of radius κ around the nominal contains all distributions "close" to p_0 in an information-theoretic sense. For example, if $p_0 = (0.1, 0.3, 0.4, 0.2)$ across four states, a ball with $\kappa = 0.1$ allows distributions like $(0.15, 0.35, 0.35, 0.15)$ but not $(0.5, 0.5, 0, 0)$, which would be too far from the nominal. Barillas et al. (2009) proposed calibrating κ (equivalently θ) via detection error probabilities. When KL sets are insufficient because p_0 assigns zero probability to relevant outcomes, Wasserstein balls $\{Q : W_p(Q, P_0) \le \epsilon\}$ are the alternative (Mohajerin Esfahani and Kuhn, 2018; Grand-Clément and Kroer, 2021; Yu et al., 2023).

and El Ghaoui, 2005).[15,16]

0.3.1 Algorithms for Robust RL

The robust Bellman operator (14) is a drop-in replacement for the standard Bellman target. Robust Q-learning replaces the TD target with its worst-case counterpart:

$$Q(s,a) \leftarrow Q(s,a) + \alpha\Big[r + \gamma \min_{p \in \mathcal{P}(s,a)} \sum_{s'} p(s') \max_{a'} Q(s',a') - Q(s,a)\Big], \tag{15}$$

where the inner minimization uses the exponential tilting for KL balls or bisection for TV and chi-squared sets.[17]

For high-dimensional problems where tabular methods and explicit uncertainty sets are infeasible, Pinto et al. (2017) introduced Robust Adversarial Reinforcement Learning (RARL):

$$\max_{\pi_{\text{agent}}} \min_{\pi_{\text{adv}}} \mathbb{E}\Big[\sum_{t=0}^{\infty} \gamma^t r(s_t, a_t, a_t^{\text{adv}})\Big], \tag{16}$$

where a_t^{adv} is the adversary's action. Training alternates between updating the agent policy π_{agent} via TRPO or PPO with the adversary fixed, then updating the adversary π_{adv} with the agent fixed. The adversary's action space is problem-specific: joint torques for locomotion, force perturbations for manipulation. The resulting agent policies are more conservative, with wider stability margins; in locomotion tasks, robust agents adopt lower center-of-gravity gaits. Pinto et al. (2017) demonstrated that policies trained against an adversary in simulation transferred to physical robots more reliably than standard PPO policies.

Derman et al. (2021) proved that entropy regularization provides implicit robustness.

[15] Hansen and Sargent (2001) independently derived the same operator from decision theory as "multiplier preferences," in which the agent maximizes expected utility penalized by the cost of distorting beliefs away from the reference model: $\sup_c \inf_Q \{\mathbb{E}_Q[U(c)] + \theta \cdot \mathrm{KL}(Q\|P)\}$, where θ is the price of model uncertainty. Petersen et al. (2000) proved that KL-robust MDPs, multiplier preferences, and risk-sensitive control with exponential utility $\mathbb{E}_P[\exp(-\text{cost}/\theta)]$ are three descriptions of the same problem; see also Whittle (1981), Jacobson (1973), Fleming and McEneaney (1995).

[16] Maccheroni et al. (2006) axiomatized variational preferences, in which the agent evaluates each act under the worst-case belief penalized by a divergence cost: $V(f) = \min_p\{\int u(f)\,dp + c(p)\}$, nesting maxmin EU (Gilboa and Schmeidler, 1989), Hansen-Sargent, and mean-variance as special cases. Strzalecki (2011) showed KL is the unique penalty satisfying a natural invariance axiom; Hansen and Sargent (2024) provided a recent comprehensive treatment.

[17] Sample complexity for learning robust policies scales polynomially in $|\mathcal{S}||\mathcal{A}|$: Panaganti and Kalathil (2022) established the first bounds under (s,a)-rectangular uncertainty for TV, KL, and chi-squared sets; Clavier et al. (2024) improved the rates for model-based approaches.

The soft Bellman equation used in SAC,

$$V(s) = \tau \log \sum_a \exp\Big(Q(s,a)/\tau\Big), \tag{17}$$

is equivalent to solving a robust MDP with reward uncertainty set $\{r' : \mathrm{KL}(r' \| r) \le \kappa\}$, where the entropy temperature τ maps directly to the robustness radius κ. Adding a value-regularization term extends this to robustness against transition misspecification.[18] Standard SAC training therefore already implements reward-robust RL; the robustness radius is controlled by τ.

These three approaches offer different trade-offs. Robust Q-learning requires an explicit uncertainty set but provides exact minimax guarantees for tabular problems. RARL avoids specifying an uncertainty set by learning the adversary, making it practical for continuous control, but provides no formal robustness certificate. Entropy regularization provides implicit robustness at zero additional implementation cost for practitioners already using SAC, but ties the robustness radius to the temperature parameter.

0.3.2 Simulation Study: Consumption-Savings Under Model Mismatch

A consumption-savings agent with constant relative risk aversion (CRRA) utility $u(c) = c^{1-\sigma}/(1-\sigma)$, $\sigma = 2$, receives stochastic income $y \in \{1, \dots, 5\}$ each period and chooses how much to consume versus save at gross return $R = 1.02$, with $\gamma = 0.95$. The robust Bellman equation for this problem is

$$V(w) = \max_{c \in \{0,\dots,w\}} \Big\{ u(c) + \gamma \min_{q:\, \mathrm{KL}(q\|p_0) \le \kappa} \sum_y q(y)\, V\Big(R(w-c) + y\Big) \Big\}, \tag{18}$$

where w is wealth, c is consumption, and the inner minimization tilts income probabilities toward low-income states via $q^*(y) \propto p_0(y) \exp(-\gamma V(R(w-c)+y)/\theta)$. Seven policies are computed: standard DP under the nominal income distribution $p_0 = (0.05, 0.10, 0.20, 0.30, 0.35)$, robust DP at $\theta = 5$ (moderate) and $\theta = 2$ (high robustness), an oracle that knows the true perturbed distribution $\tilde{p} = (0.30, 0.30, 0.20, 0.10, 0.10)$, and three model-free coun-

[18] The "Twice Regularized MDP" (R^2-MDP) combines policy regularization (reward robustness) with value regularization (transition robustness). Standard SAC training already implements the reward-robust component; transition robustness requires an additional penalty on the divergence between learned and nominal dynamics models.

terparts trained via tabular Q-learning under the nominal model.[19] All seven policies are then evaluated under both the nominal and perturbed income models.

Table 3 reports discounted returns under both models. Under the nominal model, all policies perform similarly. Under the perturbed model, standard DP degrades by 76% while the $\theta = 2$ robust policy degrades by 72%. The Q-learning and robust Q-learning policies match their DP counterparts, confirming that the model-free algorithms recover the same precautionary savings behavior. Figure 2 shows the mechanism: robust agents consume less at each wealth level, building a precautionary savings buffer against adverse income realizations.

Table 3: Discounted returns under nominal and perturbed income. DP policies are computed via value iteration; Q-learning policies are trained under the nominal model.

Method	Nominal	Perturbed	Degradation (%)
Standard DP	−4.94	−8.69	−76.0
Q-learning	−4.94	−8.70	−76.0
Robust DP (θ=5.0)	−4.94	−8.67	−75.5
Robust Q-learning (θ=5)	−4.95	−8.68	−75.5
Robust DP (θ=2.0)	−4.95	−8.49	−71.6
Robust Q-learning (θ=2)	−4.95	−8.49	−71.5
Oracle	−5.46	−7.60	−39.1

[19] Standard Q-learning uses the usual TD target $r + \gamma \max_{a'} Q(s', a')$; robust Q-learning replaces this with the worst-case target (15), using the nominal kernel for the inner minimization (generative model setting). Visit-count learning rates $\alpha = C/(C + N(s, a))$ with $C = 100$ and ε-greedy exploration decaying from 1.0 to 0.05 over 10^5 episodes.

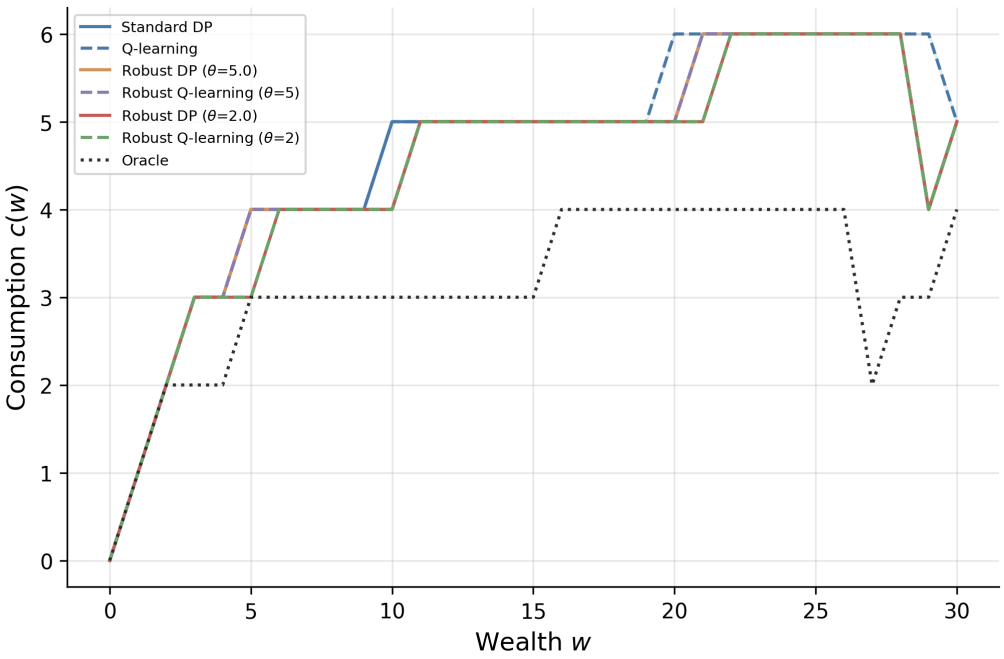

Figure 2: Consumption policy $c(w)$ for each method. Dashed lines show Q-learning policies; solid lines show DP. Robust agents consume less (save more) than the nominal-model optimum.

References

Joshua Achiam, David Held, Aviv Tamar, and Pieter Abbeel. Constrained policy optimization. In *Proceedings of the 34th International Conference on Machine Learning (ICML)*, pages 22–31, 2017.

Eitan Altman. *Constrained Markov Decision Processes*. Chapman and Hall/CRC, 1999.

Francisco Barillas, Lars Peter Hansen, and Thomas J. Sargent. Doubts or variability? *Journal of Economic Theory*, 144(6):2388–2418, 2009.

Nicole Bäuerle and Jonathan Ott. Markov decision processes with average-value-at-risk criteria. *Mathematical Methods of Operations Research*, 74:361–379, 2011.

Marc G. Bellemare, Will Dabney, and Rémi Munos. A distributional perspective on reinforcement learning. In *Proceedings of the 34th International Conference on Machine Learning (ICML)*, pages 449–458, 2017.

Yinlam Chow, Aviv Tamar, Shie Mannor, and Marco Pavone. Risk-sensitive and robust decision-making via CVaR optimization in Markov decision processes. In *Advances in Neural Information Processing Systems*, volume 28, 2015.

Pierre Clavier, Erwan Le Pennec, and Matthieu Geist. Towards minimax optimality of model-based robust reinforcement learning. In *Conference on Uncertainty in Artificial Intelligence (UAI)*, 2024.

Will Dabney, Georg Ostrovski, David Silver, and Rémi Munos. Implicit quantile networks for distributional reinforcement learning. In *Proceedings of the 35th International Conference on Machine Learning (ICML)*, pages 1096–1105, 2018a.

Will Dabney, Mark Rowland, Marc G. Bellemare, and Rémi Munos. Distributional reinforcement learning with quantile regression. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018b.

Esther Derman, Matthieu Geist, and Shie Mannor. Twice regularized MDPs and the equivalence between robustness and regularization. In *Advances in Neural Information Processing Systems*, volume 34, 2021.

Dongsheng Ding, Kaiqing Zhang, Tamer Başar, and Mihailo Jovanović. Natural policy gradient primal-dual method for constrained Markov decision processes. In *Advances in Neural Information Processing Systems*, volume 33, 2020.

Wendell H. Fleming and William M. McEneaney. Risk-sensitive control on an infinite time horizon. *SIAM Journal on Control and Optimization*, 33(6):1881–1915, 1995.

Itzhak Gilboa and David Schmeidler. Maxmin expected utility with non-unique prior. *Journal of Mathematical Economics*, 18(2):141–153, 1989.

Julien Grand-Clément and Christian Kroer. First-order methods for Wasserstein distributionally robust MDP. In *Proceedings of the 38th International Conference on Machine Learning (ICML)*, pages 2010–2019, 2021.

Lars Peter Hansen and Thomas J. Sargent. Robust control and model uncertainty. *American Economic Review*, 91(2):60–66, 2001.

Lars Peter Hansen and Thomas J. Sargent. Risk, ambiguity, and misspecification: Decision theory, robust control, and statistics. *Journal of Applied Econometrics*, 39(6): 969–999, 2024.

Jia Lin Hau, Erick Delage, Mohammad Ghavamzadeh, and Marek Petrik. On dynamic programming decompositions of static risk measures in Markov decision processes. In *Advances in Neural Information Processing Systems*, volume 36, 2023.

Garud N. Iyengar. Robust dynamic programming. *Mathematics of Operations Research*, 30(2):257–280, 2005.

David H. Jacobson. Optimal stochastic linear systems with exponential performance criteria and their relation to deterministic differential games. *IEEE Transactions on Automatic Control*, 18(2):124–131, 1973.

Yanli Liu, Kaiqing Ding, and Javad Lavaei. Policy optimization for constrained MDPs with provably fast convergence. *arXiv preprint arXiv:2111.00552*, 2022.

Zuxin Liu, Zijian Guo, Zhepeng Cen, Huan Zhang, Jie Tan, Bo Li, and Ding Zhao. Datasets and benchmarks for offline safe reinforcement learning. *Journal of Data-centric Machine Learning Research*, 2024.

Fabio Maccheroni, Massimo Marinacci, and Aldo Rustichini. Ambiguity aversion, robustness, and the variational representation of preferences. *Econometrica*, 74(6):1447–1498, 2006.

Peyman Mohajerin Esfahani and Daniel Kuhn. Data-driven distributionally robust optimization using the Wasserstein metric: Performance guarantees and tractable reformulations. *Mathematical Programming*, 171:115–166, 2018.

Arnab Nilim and Laurent El Ghaoui. Robust control of Markov decision processes with uncertain transition matrices. *Operations Research*, 53(5):780–798, 2005.

Kishan Panaganti and Dileep Kalathil. Sample complexity of robust reinforcement learning with a generative model. In *Proceedings of the 25th International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2022.

Santiago Paternain, Luiz Chamon, Miguel Calvo-Fullana, and Alejandro Ribeiro. Constrained reinforcement learning has zero duality gap. In *Advances in Neural Information Processing Systems*, volume 32, 2019.

Ian R. Petersen, Matthew R. James, and Paul Dupuis. Minimax optimal control of stochastic uncertain systems with relative entropy constraints. *IEEE Transactions on Automatic Control*, 45(3):398–412, 2000.

Lerrel Pinto, James Davidson, Rahul Sukthankar, and Abhinav Gupta. Robust adversarial reinforcement learning. In *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *PMLR*, pages 2817–2826, 2017.

L. A. Prashanth, Cheng Jie, Michael Fu, Steven Marcus, and Csaba Szepesvári. Cumulative prospect theory meets reinforcement learning: Prediction and control. In *Proceedings of the 33rd International Conference on Machine Learning (ICML)*, pages 1406–1415, 2016.

Andrzej Ruszczyński. Risk-averse dynamic programming for Markov decision processes. *Mathematical Programming*, 125:235–261, 2010.

Adam Stooke, Joshua Achiam, and Pieter Abbeel. Responsive safety in reinforcement learning by PID lagrangian methods. In *International Conference on Machine Learning (ICML)*, 2020.

Tomasz Strzalecki. Axiomatic foundations of multiplier preferences. *Econometrica*, 79 (1):47–73, 2011.

Aviv Tamar, Yinlam Chow, Mohammad Ghavamzadeh, and Shie Mannor. Policy gradient for coherent risk measures. *Advances in Neural Information Processing Systems*, 28, 2015.

Chen Tessler, Daniel J. Mankowitz, and Shie Mannor. Reward constrained policy optimization. In *International Conference on Learning Representations (ICLR)*, 2019.

Amos Tversky and Daniel Kahneman. Advances in prospect theory: Cumulative representation of uncertainty. *Journal of Risk and Uncertainty*, 5(4):297–323, 1992.

Peter Whittle. Risk-sensitive linear/quadratic/gaussian control. *Advances in Applied Probability*, 13(4):764–777, 1981.

Wolfram Wiesemann, Daniel Kuhn, and Berç Rustem. Robust Markov decision processes. *Mathematics of Operations Research*, 38(1):153–183, 2013.

Menahem E. Yaari. The dual theory of choice under risk. *Econometrica*, 55(1):95–115, 1987.

Dongjie Ying, Kaiqing Ding, and Javad Lavaei. A dual approach to constrained Markov decision processes with entropy regularization. *arXiv preprint arXiv:2110.08573*, 2022.

Zhuodong Yu, Ling Dai, Shaohang Xu, Siyang Gao, and Chin Pang Ho. Fast Bellman updates for Wasserstein distributionally robust MDPs. In *Advances in Neural Information Processing Systems*, volume 36, 2023.