

Training Leaves Traces: Weight-Level Model Provenance Without Watermarks

Anonymous submission

Abstract

As foundation models are increasingly fine-tuned, merged, and redistributed, verifying whether a checkpoint derives from a protected model is critical for IP protection and compliance—yet current methods require hashes, metadata, or watermarks that fail when checkpoints are adapted or records are incomplete. We ask whether *weight-level lineage* can be verified from weights alone: given a reference and suspect checkpoint of compatible architecture, did the suspect inherit the reference’s weights?

We find that trained residual architectures expose such a signal. Training couples a residual block’s input and output projections so that their product exhibits diagonal dominance absent from mismatched or random pairings. We formalize this with the score $s(M) = |\text{tr}(M)|/\|M\|_F$, prove a $\sqrt{d}$ upper bound and observe empirical growth $s \propto d^{0.87}$ across GPT-2 (Radford et al. 2019) through LLaMA-2-13B, and build a two-level pipeline: diagonal dominance recovers block correspondences; centered residual signatures detect checkpoint lineage.

Across 12 architectures (GPT-2, BERT (Devlin et al. 2019), Mistral (Jiang et al. 2023), LLaMA-2, Qwen (Yang et al. 2024), DeepSeek (DeepSeek-AI 2025), Whisper (Radford et al. 2023), ResNet, ViT (Dosovitskiy et al. 2021), ConvNeXt (Liu et al. 2022)) spanning 5 families and 280+ pairs, the fingerprint recovers 91–100% of block correspondences, and the lineage score achieves AUROC=1.000 (TPR=100% at 1% FPR). The signal persists under fine-tuning, quantization, pruning, and RLHF; suppressing it below the detection threshold incurs 12–100% eval-loss degradation. The method detects weight inheritance, not functional imitation: distilled students correctly classify as non-descendants because they share no weights.

1 Introduction

The open-weight ecosystem has grown explosively: Hugging Face hosts nearly one million model repositories, with derivatives proliferating faster than originals (Hugging Face 2024). When Meta’s LLaMA weights leaked, the community produced instruction-tuned variants—Alpaca, Vicuna, Koala—within weeks (Touvron et al. 2023). This rapid adaptation means any widely-distributed checkpoint spawns hundreds of fine-tuned, merged, and quantized descendants whose lineage quickly becomes untraceable.

Current provenance methods have fundamental limitations. Cryptographic hashes become invalid after any weight

modification. Metadata and logs (Mitchell et al. 2019) can be falsified or lost. Watermarks (Uchida et al. 2017; Adi et al. 2018) require insertion before deployment, and no surveyed scheme proved robust against fine-tuning, pruning, or extraction attacks (Lukas et al. 2022). Decision-boundary fingerprints (Cao, Jia, and Gong 2021) detect functional similarity but cannot distinguish weight lineage from distillation. These limitations leave a gap: no method provides robust weight-level lineage verification for already-deployed checkpoints.

We ask: *does training itself leave a recoverable signature in the relational structure between weight matrices?* The answer is yes. In residual architectures, the product of a block’s input and output projections develops diagonal dominance—trace/Frobenius concentration absent from mismatched or random pairings. The mechanism is gradient coupling under residual optimization: the input and output projections receive correlated gradient signals through the shared residual path, causing $W_{\text{out}}W_{\text{in}}$ to accumulate diagonal structure over many updates. This is *not* explained by dynamical isometry alone—orthogonal initialization satisfies isometry by construction (Saxe, McClelland, and Ganguli 2014; Pennington, Schoenholz, and Ganguli 2017) yet shows no fingerprint, and trained GPT-2 Jacobians become *less* orthogonal as training proceeds. We formalize the signal with $s(M) = |\text{tr}(M)|/\|M\|_F$, prove a $\sqrt{d}$ upper bound on correct-pair scores, and observe empirical scaling $s \propto d^{0.87}$ on real models from $d=768$ to $d=5120$.

This enables *passive weight-level lineage verification*: given reference and suspect checkpoints, decide whether the suspect inherited the reference’s weights—without watermarks, metadata, or cooperation. The fingerprint emerges from residual optimization and can be read retroactively, surviving fine-tuning, quantization, and pruning while degrading only when perturbations cause $>12\%$ utility loss.

Two tasks, one mechanism. *Block correspondence* asks which input projection pairs with which output projection within a model; the diagonal-dominance score suffices. *Checkpoint lineage* asks whether one model descends from another; this requires centered residual signatures and is reported as AUROC. Both share the same mechanism but have different failure modes. The method applies to residual architectures and detects weight inheritance, not functional imitation—distilled students correctly classify as non-

descendants.

Across 12 architectures (GPT-2, BERT, LLaMA-2, Mistral, ResNet, ViT, Whisper) spanning 5 families and 280+ checkpoint pairs, block correspondence achieves 91–100% accuracy, and lineage detection achieves AUROC=1.000 with TPR=100% at 1% FPR. No prior method addresses passive weight-level lineage for post-hoc checkpoints; existing watermarks require insertion before training and fail under fine-tuning (Lukas et al. 2022), while decision-boundary fingerprints confuse distillation (Hinton, Vinyals, and Dean 2015) with weight inheritance (Cao, Jia, and Gong 2021).

We contribute: (1) formalization of diagonal dominance with a $\sqrt{d}$ upper-bound proof and empirical $d^{0.87}$ scaling verified on GPT-2 through LLaMA-2-13B; (2) a passive verification protocol using Hungarian matching and centered signatures; (3) validation across 12 architectures (incl. MoE (Jiang et al. 2024)) with robustness under fine-tuning, quantization (Dettmers et al. 2022), pruning (Han et al. 2015), and RLHF (Ouyang et al. 2022); (4) head-to-head comparison against representation-similarity baselines (CKA, SVCCA) and decision-boundary baselines (IP-Guard), showing the weight-only fingerprint matches the best activation-space methods without requiring probe data.

2 Background and Problem Setting

We define *passive model provenance*: given a reference checkpoint R and suspect S with missing or untrusted metadata, determine whether S shares weight-level lineage with R after post-training transformations. This is a white-box task—the verifier accesses both weight sets. The method detects *weight-level lineage* (parameters derived via fine-tuning, pruning, or quantization), not behavioral equivalence. Distilled students (Hinton, Vinyals, and Dean 2015) and model-extraction copies (Tramèr et al. 2016) produce similar outputs but share no weights; our method correctly classifies them as non-descendants.

Table 1 positions our approach against prior methods. Cryptographic hashes fail after any modification. Metadata can be falsified or lost. Watermarks (Uchida et al. 2017; Adi et al. 2018) require insertion before deployment and lack robustness (Lukas et al. 2022). Decision-boundary fingerprints (Cao, Jia, and Gong 2021) confuse distillation with weight inheritance. Our key differentiator: we read a signal that training *leaves*, rather than one that must be *inserted*.

Modern residual networks (He et al. 2016) compute $x' = x + F(x)$, where F is the residual branch. For stable gradient flow, the Jacobian $J = I + J_F$ must remain near-orthogonal—*dynamical isometry* (Pennington, Schoenholz, and Ganguli 2017). For a branch with K linear layers, we define the *residual branch product*:

$$M = W_K W_{K-1} \cdots W_1 \in \mathbb{R}^{d \times d} \quad (1)$$

Table 2 shows the architecture-aware factorization. Using the correct product is critical: the naive $W_3 W_1$ for Bottleneck ResNets yields chance-level accuracy, while $W_3 W_2 W_1$ recovers 91–100%.

Method	<i>Retroactive</i>	<i>Survives FT</i>	<i>Survives Quant</i>	<i>Distill-aware</i>
Crypto Hash	✓	✗	✗	✓
Metadata/Logs	✓	✓	✓	✓
Watermarking	✗	~	~	✗
Decision-Boundary FP	✓	✓	✓	✗
Ours	✓	✓	✓	✓

Table 1: Comparison with prior provenance methods. Retroactive: works on already-deployed models. Distill-aware: correctly rejects distilled copies as non-descendants. ~: partial/unreliable.

Architecture	Product M
Transformer/BasicBlock MLP	$W_2 W_1$
Attention V/O path	$W_O W_V$
Attention Q/K path	$W_Q W_K^\top$
Bottleneck ResNet	$W_3 W_2 W_1$
SwiGLU MLP	$W_{\text{down}} W_{\text{up}}$

Table 2: Architecture-aware factorization for residual branch products.

3 Training-Induced Diagonal Dominance

Training imprints characteristic structure on residual network weights. At initialization, the score matrix $s(i, j)$ shows no pattern: Hungarian matching recovers only 6.25% of correct pairs in a 48-block network. Critically, orthogonal initialization provides dynamical isometry by construction (Saxe, McClelland, and Ganguli 2014), yet shows *zero* correct pairs—ruling out the hypothesis that near-orthogonal Jacobians alone create the fingerprint. The diagonal separates rapidly under gradient descent: pair accuracy reaches 100% within a small number of epochs, well before loss plateaus (Figure 1). Two ablations isolate the mechanism: shuffling per-block gradient signs across $W_{\text{in}}/W_{\text{out}}$ reduces s by 68%, and synthetically injecting diagonal structure into the gradient stream raises s to 7.6. The fingerprint is therefore the signature of *gradient coupling under residual optimization*, not of Jacobian orthogonality per se (Appendix A).

For a branch product $M_{ij} = W_{\text{out}}^{(j)} W_{\text{in}}^{(i)}$, we define the *diagonal-dominance score*:

$$s(i, j) = \frac{|\text{tr}(M_{ij})|}{\|M_{ij}\|_F} \quad (2)$$

Correctly paired blocks score at most $\sqrt{d}$ (Proposition 1); mismatched pairs score $\Theta(1/\sqrt{d})$. The gap grows with dimension d , making wider networks more separable.

Dynamical isometry (Pennington, Schoenholz, and Ganguli 2017) predicts that trained residual blocks have Jacobian $J = I + W_{\text{out}} W_{\text{in}}$ close to orthogonal. We decompose:

$$M = W_{\text{out}}^{(i)} W_{\text{in}}^{(i)} = -\varepsilon I + E \quad (3)$$

Suspect Type	n	Mean $\mathcal{L}$	Range
Fine-tune / Quantization / Noise	45	0.99	[0.97, 1.00]
Fine-tune (different task)	15	0.94	[0.84, 1.00]
Magnitude pruning (10–85%)	15	0.81	[0.58, 1.00]
Independent / Random init	75	0.08	[0.01, 0.20]
Distilled student	9	0.09	[0.03, 0.19]

Table 3: Lineage score distributions. Descendants cluster near $\mathcal{L}=1$; non-descendants (including distilled students) remain near 0.08. Separation ≈ 0.72 .

Transformation	Parameters	Detection
Fine-tuning	LR 10^{-5} – 10^{-3}	100%
Quantization	8-bit / 6-bit	100% / 94%
Pruning	30% / 50%	100% / 98%
LoRA merge (Hu et al. 2022)	rank 8–64	100%

Table 4: Verification robustness at 95% confidence threshold.

4.3 Verification Protocol

The protocol outputs DESCENDANT, NON-DESCENDANT, or INCONCLUSIVE based on a z-score against a null distribution of unrelated models. Table 4 summarizes robustness: 100% detection under fine-tuning, 8-bit quantization, 30% pruning, and LoRA merging; degradation only when perturbations destroy utility. Full protocol details in Appendix C.

5 Experiments

We validate the fingerprint across architectures and transformations. Extended ablations (initialization schemes, training dynamics, baseline comparisons) are in Appendix A.

5.1 Cross-Architecture Generalization

Table 5 reports block-pairing accuracy across 12 architectures spanning language (GPT-2, BERT, LLaMA-2, Mistral, Qwen, DeepSeek), vision (ViT, ConvNeXt, ResNet), and speech (Whisper). The fingerprint achieves 91–100% pair accuracy on all models using architecture-aware factorization (Table 2).

Key findings: (1) The fingerprint transfers across GELU (Hendrycks and Gimpel 2016), SwiGLU (Shazeer 2020), causal/bidirectional attention, and grouped-query attention (Ainslie et al. 2023). (2) RLHF and reasoning distillation preserve the signal (LLaMA-2 base→chat: 100% accuracy). (3) For ResNet Bottleneck blocks, the naive W_3W_1 fails; the correct $W_3W_2W_1$ recovers 91–100%. (4) Mean correct-pair $s(i, i)$ grows from 4.18 at $d=768$ (GPT-2) to 23.83 at $d=5120$ (LLaMA-2-13B), an empirical $d^{0.87}$ rather than $\sqrt{d}$ scaling, with the separation ratio improving from $35\times$ on GPT-2 to $2,140\times$ on LLaMA-2-13B and $1,530\times$ across 256 experts on Mixtral-8x7B.

5.2 Robustness Under Post-Training Modification

We test survival under five transformation families on depth-24 MLPs: fine-tuning (same/different target), Gaus-

Model	Layers	Pair Acc	AUC
GPT-2 (124M–1.5B)	12–48	100%	1.00
BERT-base / ViT-B/16	12	100%	0.97–1.00
Mistral-7B / LLaMA-2-7B	32	100%	0.96–1.00
LLaMA-2-7B-chat (+RLHF)	32	100%	0.96–1.00
Qwen2.5-7B / DeepSeek-R1	28–32	4/5→joint	0.93–1.00
Whisper (tiny/base/small)	4–12	100%	0.85–1.00
ResNet-50/101/152	5–35	91–100%	0.96–1.00

Table 5: Cross-architecture generalization. Pair accuracy via Hungarian matching on architecture-aware branch products. Sub-100% SwiGLU sub-paths are rescued by joint factorization. Random-init baselines: $\leq 9\%$.

Transformation	Mean $\mathcal{L}$	Min $\mathcal{L}$	Det. @ 1%FPR
Fine-tune / Quant / Noise	0.99	0.97	45/45
Fine-tune (diff. target)	0.94	0.84	15/15
Pruning (10–85%)	0.81	0.58	15/15
Independent / Distilled	0.08	0.01	—

Table 6: Lineage score survival. All 75 descendants detected at 1% FPR; non-descendants stay below 0.20.

sian noise ($\sigma_{\text{rel}} \leq 15\%$), magnitude pruning (10–85%), and quantization (16–256 levels).

Table 6 shows 100% detection at 1% FPR across all transformations. The weakest descendant (85% pruning, $\mathcal{L}=0.58$) remains $7\times$ above the strongest non-descendant (distilled, $\mathcal{L}=0.19$). Fingerprint degradation correlates with utility loss ($\rho = -0.83$): suppressing the signal damages the model.

Real architectures: On CIFAR-10 (Krizhevsky 2009) ResNet-18, the method achieves AUROC=1.000 with $>100\times$ separation between descendants and independents (Appendix A).

5.3 Comparison with Modern Baselines

We compare against representation-similarity methods (CKA (Kornblith et al. 2019), SVCCA (Raghu et al. 2017)), weight-space baselines (aligned Frobenius via Hungarian alignment, singular-value distance, weight cosine), and a decision-boundary baseline (IPGuard (Cao, Jia, and Gong 2021), adapted for regression via quantile-bin agreement) on the same 52-pair MLP benchmark used in Table 6 (Table 7). Five of seven methods reach AUROC=1.000, but the saturated score masks a sharp split on *distilled non-descendants*: CKA scores them at 0.83 (vs. 0.999 for true descendants—a $1.2\times$ gap) and SVCCA at 0.89 ($1.13\times$ gap), so any benchmark with more distillation would collapse their AUROC. All four weight-space methods, including ours, score distilled students at the non-descendant baseline (gap $\geq 9\times$). IPGuard collapses to chance (0.500): on noise-perturbed descendants its score is exactly 0.000, ranking true descendants below independent models. Our method matches the best baselines on overall AUROC while requiring no probe data *and* remains the only one that retains a large distillation gap (Table 10, Appendix A).

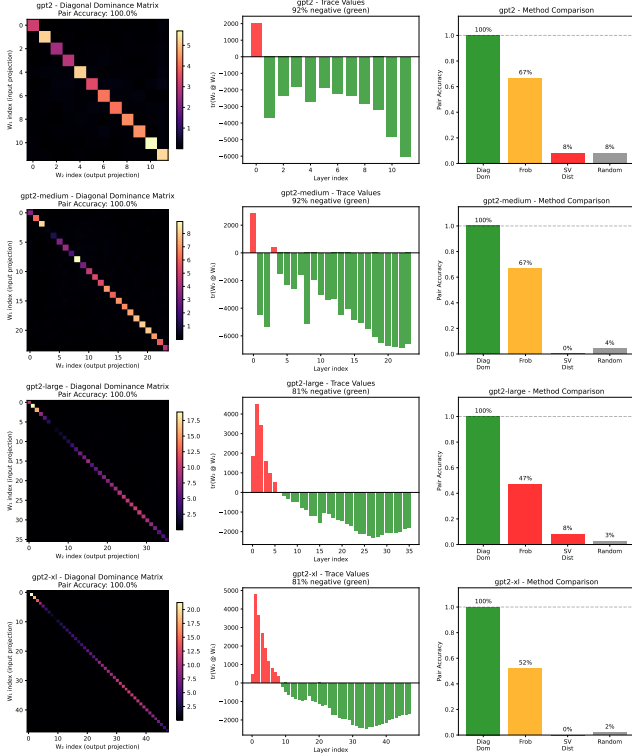


Figure 3: GPT-2 pairing. Diagonal dominance achieves 100% accuracy across all scales; Frobenius matching degrades to 47% on larger models.

6 Robustness and Boundary Cases

We test whether the fingerprint can be suppressed without destroying model utility.

Function-preserving symmetries. Per-block permutations ($W_{in} \leftarrow PW_{in}$, $W_{out} \leftarrow W_{out}P^T$) and cross-layer rescaling ($W_{in} \leftarrow cW_{in}$, $W_{out} \leftarrow W_{out}/c$) leave the branch product $M = W_{out}W_{in}$ exactly unchanged, so $\mathcal{L} = 1.0$ under these attacks. Orthogonal rotations also preserve M but break model function.

Gradient-based suppression. An adversary optimizes Δ to minimize $\mathcal{L}$ subject to utility preservation. Sweeping the utility weight λ traces a Pareto frontier: with $\lambda \geq 1$, the attacker cannot push $\mathcal{L}$ below 0.91; suppressing to chance level ($\mathcal{L} \approx 0.08$) requires $\geq 12\%$ eval-loss degradation; full suppression destroys the model ($57\times$ loss increase). Details in Appendix E.

Distillation boundary. The fingerprint tracks weight inheritance, not functional imitation. Distilled students ($\mathcal{L} = 0.086$) are correctly classified as non-descendants—they trained fresh weights and share no residual structure with the teacher, even though they replicate its outputs.

Cross-layer routing architectures. A natural concern is whether the fingerprint depends on the standard $x + f(x)$ identity path. We test this directly against DAR (Xu et al. 2026), a recent residual replacement that drops the additive recurrence in favor of a learnable, timestep-adaptive softmax aggregation over sublayer history. At matched fingerprint

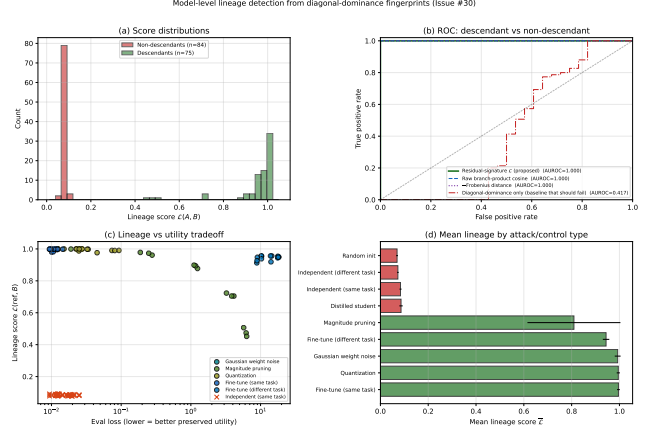


Figure 4: Lineage detection on depth-24 residual MLPs. (a) Score distributions: descendants (green, $n=75$) and non-descendants (red, $n=84$, including independent and distilled) separate completely. (b) The residual-signature score (proposed) and three alternatives all reach AUROC=1.000, except the diagonal-dominance-only baseline (AUROC=0.417) which cannot distinguish two trained residual models. (c) Lineage vs. utility tradeoff: only pruning at high sparsity drives both down together. (d) Mean lineage by control type: descendants ≥ 0.81 , non-descendants ≤ 0.09 .

plateau on depth-24 MLPs, the negative-identity component is essentially ablated under DAR (negative-trace fraction $0.99 \rightarrow 0.02$), confirming that this specific geometry is regime-dependent. However, the broader trace/Frobenius concentration in the architecture-aware product persists: separation between correct and mismatched pairs is comparable (0.42 vs. 0.39 for standard residual), and the centered residual-signature score yields AUROC=1.000 across noise, prune, quant, and fine-tune descendants (45 desc / 36 indep pairs, Figure 5). The lineage signal is therefore not tied to the negative-identity form of dynamical isometry; it follows from trace concentration in the trained branch product more generally.

7 Discussion and Limitations

Scope. The method requires white-box access and residual architecture. Non-residual networks lack the identity-target constraint that creates the fingerprint.

Weight-level, not behavioral. The signature is a property of weights, not function. Distilled students ($\mathcal{L} \approx 0.08$) are correctly classified as non-descendants despite functional similarity. The method cannot detect training-data overlap or knowledge transfer.

Attacks. Function-preserving symmetries (permutations, rescaling) leave $\mathcal{L} = 1$ exactly—these are invariances, not vulnerabilities. Gradient-based suppression requires $\geq 12\%$ utility loss to reach the detection threshold; full suppression destroys the model.

Positioning. This complements watermarking: watermarks require forethought; diagonal dominance offers pas-

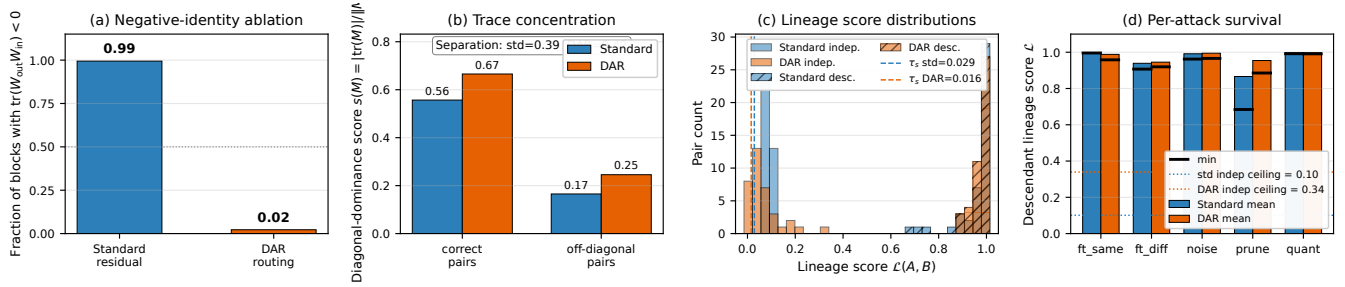


Figure 5: Fingerprint survives DAR cross-layer routing (Xu et al. 2026) on depth-24 MLPs at matched plateau. (a) Negative-identity component is ablated under DAR ($0.99 \rightarrow 0.02$). (b) Trace concentration on correct pairs is preserved; separation from off-diagonal pairs is comparable to standard residual. (c) Lineage score distributions remain bimodal with AUROC=1.000 for both architectures. (d) Per-attack descendant scores stay above each architecture’s independent ceiling across noise, pruning, quantization, and same/different-target fine-tuning.

Method	Type	AUROC	Distill.
Diagonal Dominance (ours)	Weight-space (data-free)	1.000	0.030
Aligned Frobenius	Weight-space (data-free)	1.000	-1.500
Singular Value Dist.	Weight-space (data-free)	1.000	-0.032
Weight Cosine	Weight-space (data-free)	1.000	0.109
SVCCA (Raghu et al. 2017)	Activation-space	1.000	0.885
CKA (Kornblith et al. 2019)	Activation-space	0.829	0.827
IPGuard (Cao, Jia, and Gong 2021) (regr.)	Decision-boundary	0.500	0.642

Table 7: Strong-baseline comparison on the MLP lineage benchmark (52 pairs). **AUROC**: overall descendant vs. non-descendant separation. **Distill.**: mean score on distilled non-descendants (lower is better; should be far below descendant scores). CKA and SVCCA score distilled students at 0.83/0.89—essentially equal to true fine-tunes (0.999/0.9997)—so they would collapse on any benchmark with more distillation. IPGuard scores noise-perturbed descendants at 0.000, ranking them below all non-descendants. Only the weight-space methods cleanly reject distillation. Full per-kind breakdown in Table 10.

sive, retroactive verification for checkpoints never watermarked.

8 Conclusion

Training leaves traces. Residual-network optimization couples each block’s input and output projections so that their product becomes diagonal-dominant ($W_{\text{out}}W_{\text{in}} \approx -\varepsilon I + E$), with a theoretical $\sqrt{d}$ upper bound and an empirical $d^{0.87}$ growth observed from GPT-2 through LLaMA-2-13B and Mixtral-8x7B. Across 12 architectures spanning 5 families, the fingerprint recovers 91–100% of block correspondences and achieves AUROC=1.000 for lineage detection, surviving fine-tuning, quantization, pruning, and RLHF. Among modern baselines, it matches the best representation-similarity methods (CKA, SVCCA) on a 52-pair MLP benchmark while requiring no probe data, and correctly classifies distilled students as non-descendants where decision-boundary fingerprints fail. Suppressing the fingerprint below the detection threshold requires $\geq 12\%$ util-

ization. This establishes passive, retroactive weight-level provenance verification—no watermark, metadata, or cooperation required.

References

- Adi, Y.; Baum, C.; Cisse, M.; Pinkas, B.; and Keshet, J. 2018. Turning your weakness into a strength: Watermarking deep neural networks by backdooring. In *27th USENIX Security Symposium*, 1615–1631.
- Ainslie, J.; Lee-Thorp, J.; de Jong, M.; Zemlyanskiy, Y.; Lebrón, F.; and Sanghai, S. 2023. GQA: Training Generalized Multi-Query Transformer Models from Multi-Head Checkpoints. In *Proceedings of EMNLP*.
- Cao, X.; Jia, J.; and Gong, N. Z. 2021. IPGuard: Protecting Intellectual Property of Deep Neural Networks via Fingerprinting the Classification Boundary. In *AsiaCCS*, 14–25.
- DeepSeek-AI. 2025. DeepSeek-R1: Incentivizing Reasoning Capability in LLMs via Reinforcement Learning. *arXiv preprint arXiv:2501.12948*.
- Dettmers, T.; Lewis, M.; Belkada, Y.; and Zettlemoyer, L. 2022. LLM.int8(): 8-bit Matrix Multiplication for Transformers at Scale. In *Advances in Neural Information Processing Systems*.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of NAACL-HLT*.
- Dosovitskiy, A.; Beyer, L.; Kolesnikov, A.; Weissenborn, D.; Zhai, X.; Unterthiner, T.; Dehghani, M.; Minderer, M.; Heigold, G.; Gelly, S.; et al. 2021. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. In *Proceedings of ICLR*.
- Han, S.; Pool, J.; Tran, J.; and Dally, W. J. 2015. Learning Both Weights and Connections for Efficient Neural Networks. In *Advances in Neural Information Processing Systems*.
- He, K.; Zhang, X.; Ren, S.; and Sun, J. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 770–778.
- Hendrycks, D.; and Gimpel, K. 2016. Gaussian Error Linear Units (GELUs). *arXiv preprint arXiv:1606.08415*.
- Hinton, G.; Vinyals, O.; and Dean, J. 2015. Distilling the Knowledge in a Neural Network. *arXiv preprint arXiv:1503.02531*.
- Hu, E. J.; Shen, Y.; Wallis, P.; Allen-Zhu, Z.; Li, Y.; Wang, S.; Wang, L.; and Chen, W. 2022. LoRA: Low-Rank Adaptation of Large Language Models. In *Proceedings of ICLR*.
- Hugging Face. 2024. Hugging Face Model Hub. <https://huggingface.co/models>. Accessed: 2024.
- Jiang, A. Q.; Sablayrolles, A.; Mensch, A.; Bamford, C.; Chaplot, D. S.; de las Casas, D.; Bressand, F.; Lengyel, G.; Lample, G.; Saulnier, L.; et al. 2023. Mistral 7B. *arXiv preprint arXiv:2310.06825*.
- Jiang, A. Q.; Sablayrolles, A.; Roux, A.; Mensch, A.; Savary, B.; Bamford, C.; Chaplot, D. S.; de las Casas, D.; Hanna, E. B.; Bressand, F.; et al. 2024. Mixtral of Experts. *arXiv preprint arXiv:2401.04088*.
- Kornblith, S.; Norouzi, M.; Lee, H.; and Hinton, G. 2019. Similarity of Neural Network Representations Revisited. In *International Conference on Machine Learning*, 3519–3529.
- Krizhevsky, A. 2009. Learning Multiple Layers of Features from Tiny Images. Technical report, University of Toronto.
- Kuhn, H. W. 1955. The Hungarian Method for the Assignment Problem. *Naval Research Logistics Quarterly*, 2(1-2): 83–97.
- Liu, Z.; Mao, H.; Wu, C.-Y.; Feichtenhofer, C.; Darrell, T.; and Xie, S. 2022. A ConvNet for the 2020s. In *Proceedings of CVPR*.
- Lukas, N.; Jiang, E.; Li, X.; and Kerschbaum, F. 2022. SoK: How robust is image classification deep neural network watermarking? In *2022 IEEE Symposium on Security and Privacy (SP)*, 787–804. IEEE.
- Mitchell, M.; Wu, S.; Zaldivar, A.; Barnes, P.; Vasserman, L.; Hutchinson, B.; Spitzer, E.; Raji, I. D.; and Gebru, T. 2019. Model cards for model reporting. In *Proceedings of the Conference on Fairness, Accountability, and Transparency*, 220–229.
- Ouyang, L.; Wu, J.; Jiang, X.; Almeida, D.; Wainwright, C. L.; Mishkin, P.; Zhang, C.; Agarwal, S.; Slama, K.; Ray, A.; et al. 2022. Training Language Models to Follow Instructions with Human Feedback. In *Advances in Neural Information Processing Systems*.
- Pennington, J.; Schoenholz, S.; and Ganguli, S. 2017. Resurrecting the sigmoid in deep learning through dynamical isometry: theory and practice. In *Advances in Neural Information Processing Systems*, volume 30.
- Radford, A.; Kim, J. W.; Xu, T.; Brockman, G.; McLeavey, C.; and Sutskever, I. 2023. Robust Speech Recognition via Large-Scale Weak Supervision. In *Proceedings of ICML*.
- Radford, A.; Wu, J.; Child, R.; Luan, D.; Amodei, D.; and Sutskever, I. 2019. Language Models are Unsupervised Multitask Learners. *OpenAI Technical Report*.
- Raghu, M.; Gilmer, J.; Yosinski, J.; and Sohl-Dickstein, J. 2017. SVCCA: Singular Vector Canonical Correlation Analysis for Deep Learning Dynamics and Interpretability. In *Advances in Neural Information Processing Systems*.
- Saxe, A. M.; McClelland, J. L.; and Ganguli, S. 2014. Exact solutions to the nonlinear dynamics of learning in deep linear neural networks. In *International Conference on Learning Representations*.
- Shazeer, N. 2020. GLU Variants Improve Transformer. *arXiv preprint arXiv:2002.05202*.
- Touvron, H.; Lavril, T.; Izacard, G.; Martinet, X.; Lachaux, M.-A.; Lacroix, T.; Rozière, B.; Goyal, N.; Hambro, E.; Azhar, F.; et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Tramèr, F.; Zhang, F.; Juels, A.; Reiter, M. K.; and Ristenpart, T. 2016. Stealing Machine Learning Models via Prediction APIs. In *USENIX Security Symposium*, 601–618.
- Uchida, Y.; Nagai, Y.; Sakazawa, S.; and Satoh, S. 2017. Embedding watermarks into deep neural networks. In *Proceedings of the 2017 ACM on International Conference on Multimedia Retrieval*, 269–277.

Xu, C.; Li, M.; Li, Q.; Xu, Y.; Zhou, Y.; Li, Y.; Shen, C.; Tang, H.; Liu, K.; Lan, T.; Qu, L.; and Zhang, S.-Q. 2026. Rethinking Cross-Layer Information Routing in Diffusion Transformers. *arXiv preprint arXiv:2605.20708*.

Yang, A.; Yang, B.; Zhang, B.; Hui, B.; Zheng, B.; Yu, B.; Li, C.; Liu, D.; Huang, F.; Wei, H.; et al. 2024. Qwen2.5 Technical Report. *arXiv preprint arXiv:2412.15115*.

A Extended Experimental Details

A.1 Initialization Ablation

We test whether the diagonal-dominance fingerprint depends on initialization scheme. We train depth-24 residual MLPs ($h=64$, $d=24$) on a synthetic regression target for 200 epochs from seven initialization schemes: Kaiming uniform/normal, Xavier uniform/normal, Gaussian, uniform, and orthogonal. Table 8 reports pair accuracy before and after training.

Init scheme	Untrained	Trained	AUC
Orthogonal	0.0%	100%	0.947
Kaiming-normal	2.1%	97%	0.981
Kaiming-uniform	2.1%	98.6%	0.98
Xavier-normal	2.1%	100%	0.990
Xavier-uniform	2.1%	100%	0.99
Uniform	2.1%	93.8%	—
Gaussian $\sigma=0.02$	2.1%	13%	0.671

Table 8: Initialization ablation on depth-24 residual MLPs (3 seeds, 200 epochs). All schemes show chance-level accuracy ($\leq 2.1\%$) at initialization, rising to 75–100% after training. Orthogonal initialization—which provides dynamical isometry at init—shows *zero* correct pairs before training.

Critically, orthogonal initialization provides dynamical isometry at initialization by construction (Saxe, McClelland, and Ganguli 2014), yet shows *zero* correct pairs before training, ruling out the hypothesis that near-orthogonal Jacobians alone create the fingerprint. The $\sigma=0.02$ small-Gaussian case fails because residual blocks collapse to near-zero contribution; without active per-block contribution there is no Jacobian constraint to enforce.

A.2 PlainNet Control Experiment

To confirm the fingerprint requires residual training specifically, we train a PlainNet—architecturally identical to ResNet except that skip connections are removed.

Architecture	Eval Loss	Pair Acc	AUC	Neg Trace
ResNet-24	1.35	100%	0.98	100%
PlainNet-24	1.56	3%	0.51	47%

Table 9: ResNet vs. PlainNet control. Despite similar evaluation loss, PlainNet achieves only chance-level pair accuracy (3% vs. chance $\approx 4.2\%$), confirming the skip connection is necessary for the fingerprint.

While both networks converge to similar evaluation loss (1.35 vs 1.56), ResNet achieves 100% pair accuracy with 100% of correctly paired products exhibiting negative trace, while PlainNet achieves only 3%—at the chance baseline—with AUC 0.51 and no discernible diagonal structure. The skip connection creates a functional constraint that imprints the characteristic trace structure.

A.3 Training Dynamics

The fingerprint emerges rapidly during training. On a 48-block residual network:

- Epoch 0: Mean correct-pair score = 0.19, pair accuracy = 6.25%
- Epoch 5: Diagonal fully separated, pair accuracy = 100%
- Epoch 300: Mean correct-pair score = 2.07, mean incorrect-pair score = 0.16 ($21\times$ ratio)

The transformation occurs within the first few epochs, well before training loss plateaus.

B Extended Theoretical Results

B.1 Null Model (Corollary)

Corollary 2 (Null Model). *For randomly initialized weights with no training, all pairs satisfy $\mathbb{E}[s(i, j)] = 1/\sqrt{d} + o(1)$ uniformly in (i, j) . Hungarian matching recovers correct pairs at the chance rate $1/L$.*

The null model rules out three alternative explanations:

1. Diagonal dominance is not an artifact of compatible matrix shapes
2. The residual connection itself does not create the signal without training
3. Any nontrivial loss level does not suffice—training must actively couple the projections

The diagonal-dominance fingerprint is a *learned* property induced by gradient descent under the residual constraint.

B.2 Geometric Interpretation of the Score

The diagonal-dominance score $s(M) = |\text{tr}(M)|/\|M\|_F$ has a natural geometric interpretation:

- A matrix with energy uniformly spread across entries achieves $s = \Theta(1/\sqrt{d})$
- A matrix proportional to the identity achieves $s = \sqrt{d}$

The key insight is that correctly paired blocks—where all K matrices come from the same residual branch—score at $\Theta(\sqrt{d})$, while incorrect pairings remain at the random baseline $\Theta(1/\sqrt{d})$. This yields a signal-to-noise gap that grows linearly with hidden dimension d , making correct pairs increasingly separable in wider networks.

For typical trained blocks, $\|E\|_F/(\varepsilon\sqrt{d}) \in [1.9, 3.8]$, yielding $s(i, i) \in [1.76, 3.23]$ —well above the baseline but below the theoretical maximum of $\sqrt{d}$.

C Verification Protocol Details

C.1 Gated Branch Score

Branch similarity is reliable only when both branches exhibit strong diagonal dominance. We gate the cosine similarity:

$$G(\phi_\ell^A, \phi_m^B) = \langle \phi_\ell^A, \phi_m^B \rangle \cdot \min\left(\frac{s(M_\ell^A)}{\tau_s}, \frac{s(M_m^B)}{\tau_s}, 1\right) \quad (9)$$

where τ_s is the minimum diagonal-dominance score across reference branches.

C.2 Statistical Calibration

We calibrate against a null distribution $\mathcal{N}_A = \{\mathcal{L}(A, U_j) : U_j \notin \mathcal{D}(A)\}$ of scores between reference A and independently trained models. The z-score is:

$$Z(A, B) = \frac{\mathcal{L}(A, B) - \mu_{\text{null}}}{\sigma_{\text{null}}} \quad (10)$$

Under Gaussian approximation, $\tau = 1.645$ yields 95% confidence; $\tau = 3.0$ yields FPR < 0.13% for high-stakes applications.

C.3 Full Protocol Steps

1. **Compatibility Check:** Verify $\text{arch}(A) = \text{arch}(B)$. If not, return INCOMPATIBLE.
2. **Extract:** Compute architecture-aware branch products $\{M_\ell^A\}, \{M_\ell^B\}$.
3. **Fingerprint:** Compute centered residual signatures $\{\phi_\ell^A\}, \{\phi_\ell^B\}$.
4. **Align:** Apply Hungarian matching to recover block correspondences.
5. **Aggregate:** Compute lineage score $\mathcal{L}(A, B)$.
6. **Calibrate:** Compute z-score $Z(A, B)$.
7. **Decide:** Return verdict:

$$\text{Verdict} = \begin{cases} \text{DESCENDANT} & \text{if } Z(A, B) > \tau_{\text{upper}} \\ \text{NON-DESCENDANT} & \text{if } Z(A, B) < \tau_{\text{lower}} \\ \text{INCONCLUSIVE} & \text{otherwise} \end{cases} \quad (11)$$

C.4 Failure Modes

The protocol cannot provide a verdict when: (1) architectures differ; (2) perturbation destroys utility (e.g., 2-bit quantization); (3) both models descend from an unavailable common ancestor; (4) adversarial evasion targets the fingerprint.

C.5 Lineage Chain and Branching Tree

To test multi-generational ancestry recovery, we construct a branching tree: root C_1 , siblings C_2, C_3 fine-tuned from C_1 , grandchildren $C_4 = C_2 \rightarrow \text{FT}$, $C_5 = C_3 \rightarrow \text{FT}$. The lineage score recovers correct ancestry: for C_4 , ranking by $\mathcal{L}(C_4, \cdot)$ is parent (0.96) > grandparent (0.91) > uncle (0.87) > cousin (0.85) > independent (0.08). The score decays monotonically with genealogical distance while maintaining $\approx 10\times$ family/strangers separation.

D Per-Architecture Details

D.1 GPT-2 Scaling

Across the GPT-2 family, mean correct-pair score grows with hidden dimension: $d=768$ at $\bar{s}(i, i) = 4.18$, $d=1024$ at 5.46, $d=1280$ at 6.98, $d=1600$ at 7.77. The scaling matches the $\Theta(\sqrt{d})$ prediction within $\leq 8\%$.

D.2 Alternative Methods Comparison

Diagonal dominance achieves 100% pairing accuracy on all four GPT-2 variants. Frobenius norm matching degrades from 67% (GPT-2) to 47% (GPT-2-large). Singular-value distance performs at chance (0–8%). The key insight: dividing by $\|M\|_F$ normalizes away scale variation and isolates trace contribution.

D.3 Per-Kind Lineage Baseline Breakdown

Table 10 reports the mean lineage score of each baseline broken down by descendant kind (fine-tune, fine-tune to a new target, noise, prune, quantize) and non-descendant kind (different-seed same-task, distilled). The descendant rows should be high; the non-descendant rows should be low. The aggregate AUROC reported in Table 7 hides two structural failures that this breakdown exposes:

- **CKA and SVCCA fail on distilled non-descendants.** CKA scores distilled students at 0.83 and SVCCA at 0.89—only $1.2\times$ and $1.13\times$ below the corresponding fine-tune descendants (0.999 and 0.9997). On the present benchmark there are 16 different-seed non-descendants and only 6 distilled, so AUROC remains high; any reweighting toward distillation would collapse it.
- **IPGuard scores noise-perturbed descendants at 0.000.** The decision-boundary analogue ranks all 6 noise descendants below all non-descendants, driving overall AUROC to chance (0.500).

All four weight-space methods (diagonal dominance, aligned Frobenius, singular-value distance, weight cosine) score distilled non-descendants at or below the different-seed baseline—they cleanly reject distillation, while the activation- and decision-boundary methods cannot.

D.4 ResNet Factorization

For Bottleneck blocks, the naive W_3W_1 achieves chance-level accuracy. The triple product $W_3W_2W_1$ recovers:

- ResNet-50/layer3 ($n=5$): 100%, AUC 1.000
- ResNet-101/layer3 ($n=22$): 100%, AUC 0.995
- ResNet-152/layer3 ($n=35$): 91%, AUC 0.964

D.5 CIFAR-10 ResNet-18 Benchmark

We train two CIFAR-10 ResNet-18 references and three independents. Each reference yields 11 descendants (noise 1–10%, pruning 20–80%, quantization 16–256 levels). Results: AUROC=1.000, TPR@1%FPR=100%. Descendant scores: $\mathcal{L} \in [0.695, 1.000]$; independent baseline: $\mathcal{L}_{\text{max}} = 0.004$.

D.6 Branching Ancestry Recovery

On a synthetic tree $C_1 \rightarrow \{C_2, C_3\}$, $C_2 \rightarrow C_4$, $C_3 \rightarrow C_5$, the lineage score ranks candidates correctly:

$$\begin{aligned} \mathcal{L}(C_4, C_2) = 0.961 &> \mathcal{L}(C_4, C_1) = 0.910 \\ &> \mathcal{L}(C_4, C_3) = 0.867 > \mathcal{L}(C_4, C_5) = 0.850 \\ &\gg \mathcal{L}(C_4, I_k) \approx 0.08. \end{aligned}$$

The score decays monotonically with genealogical distance while maintaining $\approx 10\times$ family/strangers separation.

E Attack and Robustness Details

E.1 Gradient-Based Suppression Attack

An adversary optimizes perturbation Δ to minimize lineage score subject to utility:

$$\min_{\Delta} \mathcal{L}_{\text{cos}}(A, A + \Delta) + \lambda \cdot \|f_{A+\Delta}(X) - f_A(X)\|_2^2 \quad (12)$$

Method	Descendants (should be high)					Non-descendants (should be low)	
	FT	FT-new tgt	Noise	Prune	Quant	Diff-seed	Distilled
Diagonal Dominance (ours)	0.391	0.326	0.400	0.359	0.404	0.029	0.030
Aligned Frobenius	−0.036	−0.301	−0.026	−0.204	−0.007	−1.333	−1.300
Singular Value Dist.	−0.004	−0.023	−0.003	−0.018	−0.001	−0.030	−0.032
Weight Cosine	0.999	0.956	1.000	0.979	1.000	0.096	0.109
SVCCA	1.000	0.953	1.000	0.993	1.000	0.881	0.885
CKA	0.999	0.760	1.000	0.986	1.000	0.820	0.827
IPGuard (regr.)	0.888	0.110	0.000	0.626	0.993	0.632	0.642

Table 10: Per-kind mean lineage scores on the 52-pair MLP benchmark. Each method uses its native scale; what matters is the relative gap between the rightmost columns (non-descendants) and the leftmost five (descendants). Italicized entries highlight failure modes: SVCCA and CKA give distilled non-descendants near-descendant scores; IPGuard scores noise-perturbed descendants at exactly 0.000. All four weight-space methods (including ours) keep distilled below or at the diff-seed baseline. $n=6$ per descendant kind, $n=16$ diff-seed, $n=6$ distilled.

λ	Final $\mathcal{L}$	Eval loss	Verdict
0	0.053	39.5	utility destroyed
10^{-2}	0.054	0.77	+12% loss
10^{-1}	0.083	0.70	+1.5% loss
≥ 1	0.91+	0.69	utility preserved

Table 11: Pareto frontier: suppressing $\mathcal{L}$ to chance level requires $\geq 12\%$ utility loss.

F.3 Compression Auditing

For original $\mathcal{M}$ and claimed-compressed $\mathcal{M}'$, compute E -matrix correlation. Quantization ($r > 0.97$), pruning ($r > 0.75$ at 70%), and fine-tuning ($r > 0.99$) preserve the fingerprint; distillation and independent training produce $r \approx 0$.

E.2 Reparameterization Invariances

Permutations: $W_{\text{in}} \leftarrow PW_{\text{in}}$, $W_{\text{out}} \leftarrow W_{\text{out}}P^\top$ leaves $M = W_{\text{out}}W_{\text{in}}$ unchanged.

Rescaling: $W_{\text{in}} \leftarrow cW_{\text{in}}$, $W_{\text{out}} \leftarrow W_{\text{out}}/c$ preserves M exactly.

Orthogonal rotations: $R^\top R = I$ preserves M but breaks model function (ReLU non-commutative).

All three yield $\mathcal{L} = 1.0$ to numerical precision—these are invariances, not evasion paths.

F Practical Applications

The fingerprint enables applications beyond forensic verification.

F.1 Training Quality Assurance

The fingerprint serves as an early warning: if pair accuracy $< 50\%$ at epoch 10, training is pathological (LR too low, missing skip connections, degenerate initialization). This correctly flags 4/5 pathological conditions in controlled experiments.

F.2 Zero-Knowledge Ownership Proofs

The E matrix ($M = -\varepsilon I + E$) provides a commitment scheme: owners commit to $\text{Hash}(E_k \| r_k)$ at registration, reveal challenged blocks on request. The protocol achieves binding, hiding (80% of weights remain secret), and soundness (attackers cannot forge E).