


Optimizer ablation (RQ1 §10, Issue #43): 24-block MLP, d=128, lr=0.001, CIFAR-10 subset (n=5000), 3 seeds

A. Fingerprint emerges only under adaptive optimizers



B. Diagonal structure climbs only with Adam/AdamW/RMSprop

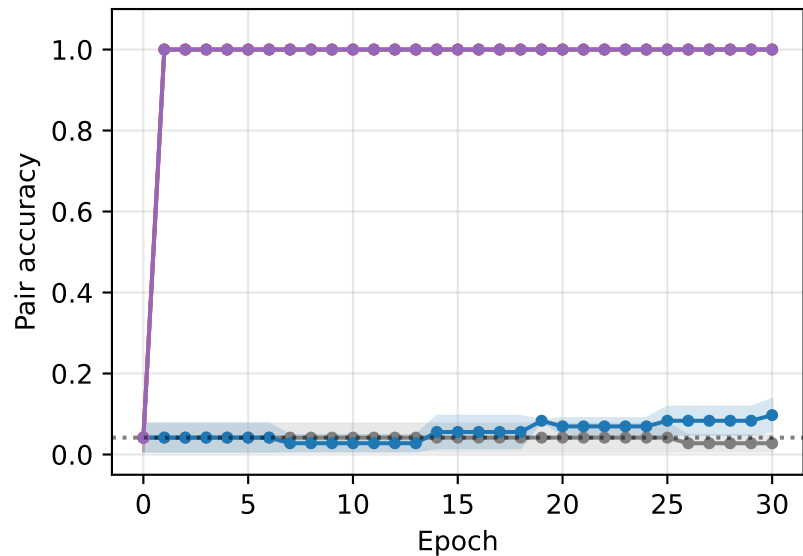