


Atividade 3 -


exercício 1

1, 2 e 3

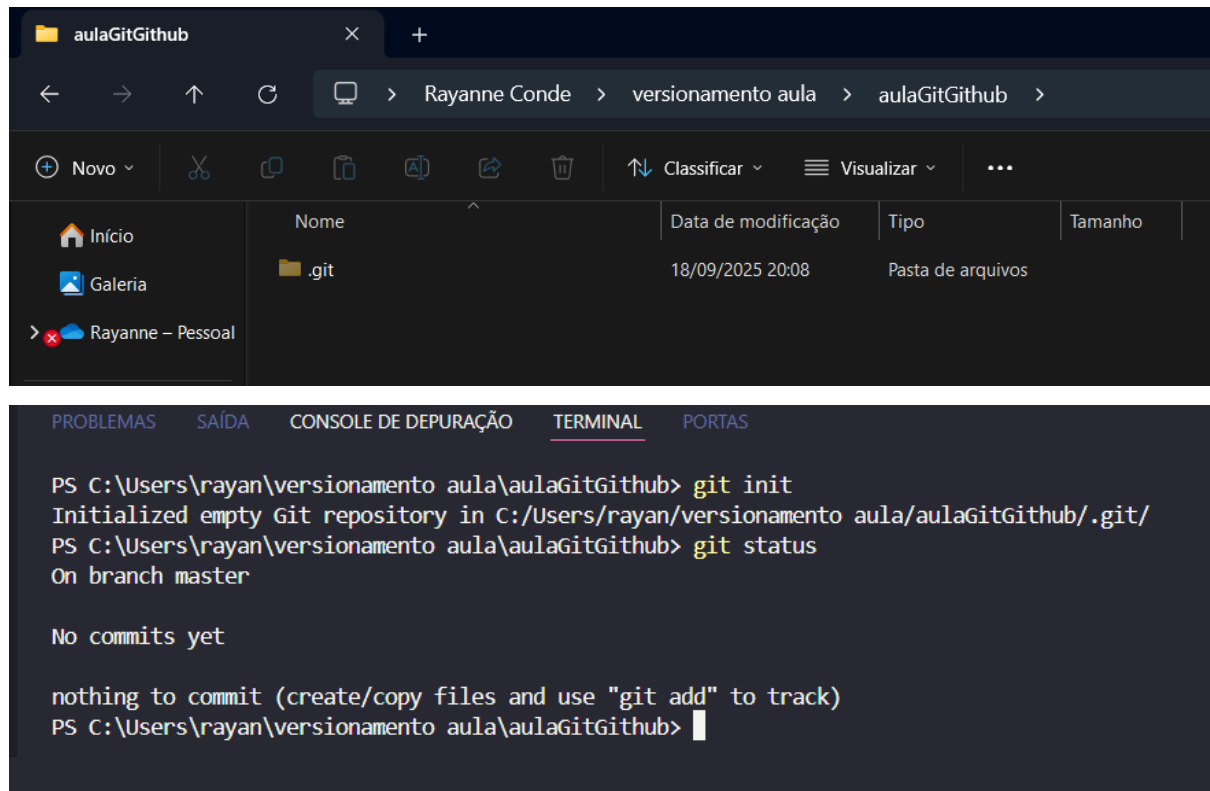

Exercicio 2

criando arquivo

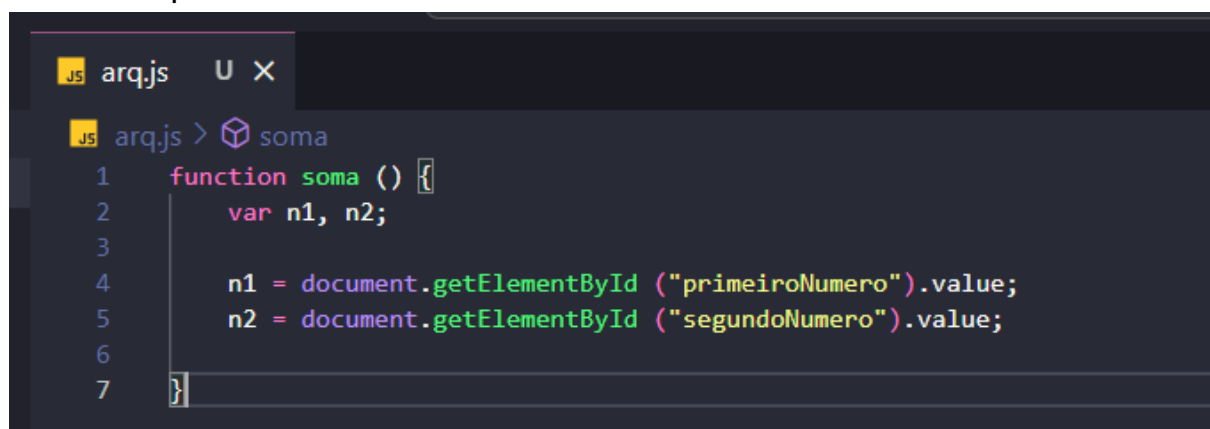

3 - reportar status e adicionar arquivo

```
PROBLEMAS  SAÍDA  CONSOLE DE DEPURAÇÃO  TERMINAL  PORTAS

PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        arq.js

nothing added to commit but untracked files present (use "git add" to track)
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git add arq.js
PS C:\Users\rayan\versionamento aula\aulaGitGithub> 
```

4 - reportar status

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   arq.js

PS C:\Users\rayan\versionamento aula\aulaGitGithub> 
```

5-

```
JS  arq.js  M  X
JS  arq.js > soma
1  function soma () {
2      var n1, n2;
3
4      n1 = document.getElementById ("primeiroNumero").value;
5      n2 = document.getElementById ("segundoNumero").value;
6
7      n1 = parseInt (n1);
8      n2 = parseInt (n2);
9
10 
```

6 e 7

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   arq.js

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   arq.js

PS C:\Users\rayan\versionamento aula\aulaGitGithub> git add arq.js
```

8 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   arq.js

PS C:\Users\rayan\versionamento aula\aulaGitGithub> 
```

9 - 10

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git commit -m "primeiro commit do projeto: ler dois inteiros informados pelo usuário"
[master (root-commit) 5901248] primeiro commit do projeto: ler dois inteiros informados pelo usuário
1 file changed, 10 insertions(+)
create mode 100644 arq.js
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> 
```

11 -

```
JS arq.js  M X
JS arq.js > soma
1  function soma () {
2      var n1, n2, soma;
3
4      n1 = document.getElementById ("primeiroNumero").value;
5      n2 = document.getElementById ("segundoNumero").value;
6
7      n1 = parseInt (n1);
8      n2 = parseInt (n2);
9
10     soma = n1 + n2;
11 }
```

12 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   arq.js

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

13, 14 e 15

```
"
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   arq.js

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git add arq.js
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   arq.js

PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

16 e 17

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git commit -m "Segundo commit do projeto: somar os dois inteiros informados pelo usuário"
[master 207f1f6] Segundo commit do projeto: somar os dois inteiros informados pelo usuário
 1 file changed, 2 insertions(+), 1 deletion(-)
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

Exercício 03

1

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git log
commit 207f1f6a43d1628953acceb60a30ab8371281714 (HEAD -> master)
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:32:00 2025 -0300

    Segundo commit do projeto: somar os dois inteiros informados pelo usuário

commit 5901248503af1d328167bbd6cd468dedf3ee7d
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:23:25 2025 -0300

    primeiro commit do projeto: ler dois inteiros informados pelo usuário
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

2

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git log --author="Rayanne"
commit 207f1f6a43d1628953acceb60a30ab8371281714 (HEAD -> master)
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:32:00 2025 -0300

    Segundo commit do projeto: somar os dois inteiros informados pelo usuário

commit 5901248503af1d328167bbd6cd468dedf3ee7d
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:23:25 2025 -0300
```

3 -

```
    primeiro commit do projeto: ler dois inteiros informados pelo usuário
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git log --graph
* commit 207f1f6a43d1628953acceb60a30ab8371281714 (HEAD -> master)
| Author: Rayanne Conde <rayanne.condex@gmail.com>
| Date: Thu Sep 18 20:32:00 2025 -0300
|
|     Segundo commit do projeto: somar os dois inteiros informados pelo usuário
|
| * commit 5901248503af1d328167bbd6cd468dedf3ee7d
|   Author: Rayanne Conde <rayanne.condex@gmail.com>
|   Date: Thu Sep 18 20:23:25 2025 -0300
|
|     primeiro commit do projeto: ler dois inteiros informados pelo usuário
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

4-

```
    primeiro commit do projeto: ler dois inteiros informados pelo usuário
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git shortlog
Rayanne Conde (2):
    primeiro commit do projeto: ler dois inteiros informados pelo usuário
    Segundo commit do projeto: somar os dois inteiros informados pelo usuário

PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

5 e 6

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git shortlog -s
2 Rayanne Conde
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git shortlog -sn
2 Rayanne Conde
```

7-

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git show 207f1f6a43d1628953acceb60a30ab8371281714
commit 207f1f6a43d1628953acceb60a30ab8371281714 (HEAD -> master)
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:32:00 2025 -0300
```

Segundo commit do projeto: somar os dois interiros informados pelo usuário

```
diff --git a/arq.js b/arq.js
index 1b45543..c3da3b2 100644
--- a/arq.js
+++ b/arq.js
@@ -1,5 +1,5 @@
 function soma () {
-   var n1, n2;
+   var n1, n2, soma;

   n1 = document.getElementById ("primeiroNumero").value;
   n2 = document.getElementById ("segundoNumero").value;
@@ -7,4 +7,5 @@ function soma () {
   n1 = parseInt (n1);
   n2 = parseInt (n2);

+   soma = n1 + n2;
 }
\ No newline at end of file
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

Exercício 4

1-

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

2 -

```
JS arq.js M X
JS arq.js > soma
1 function soma () {
2     var n1, n2, soma;
3
4     n1 = document.getElementById ("primeiroNumero").value;
5     n2 = document.getElementById ("segundoNumero").value;
6
7     n1 = parseInt (n1);
8     n2 = parseInt (n2);
9
10    soma = n1 + n2;
11
12    document.getElementById ("resposta").innerHTML = soma;
13 }
```

3-

```
nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   arq.js

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

4-

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git diff
diff --git a/arq.js b/arq.js
index c3da3b2..86a05a4 100644
--- a/arq.js
+++ b/arq.js
@@ -8,4 +8,6 @@ function soma () {
     n2 = parseInt (n2);

    soma = n1 + n2;
+
+    document.getElementById ("resposta").innerHTML = soma;
+ }
\ No newline at end of file
PS C:\Users\rayan\versionamento aula\aulaGitGithub>
```

5, 6 e 7 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git diff --name-only
arq.js
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git add arq.js
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   arq.js

PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

8 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git commit -m "Terceiro commit do projeto: apresentar o resultado da soma dos dois numeros"
[master a775046] Terceiro commit do projeto: apresentar o resultado da soma dos dois numeros
1 file changed, 2 insertions(+)
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

Rayanne Conde (há 17 minutos) Ln 4, Col 59 Espaços: 4 UTF-8 CRLF JavaScript Concluir a C

8.2 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git log
commit a7750461bc0edde8e8e03326c8e6ae7845a17a5e (HEAD -> master)
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:43:27 2025 -0300

    Terceiro commit do projeto: apresentar o resultado da soma dos dois numeros

commit 207f1f6a43d1628953acceb60a30ab8371281714
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:32:00 2025 -0300

    Segundo commit do projeto: somar os dois inteiros informados pelo usuário

commit 5901248503af1d328167bbd6cd468dedf3ee7d
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:23:25 2025 -0300

    primeiro commit do projeto: ler dois inteiros informados pelo usuário
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```


9 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git show 5901248503af1d328167bbd6cd468dedfce3ee7d
commit 5901248503af1d328167bbd6cd468dedfce3ee7d
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:23:25 2025 -0300

    primeiro commit do projeto: ler dois inteiros informados pelo usuário

diff --git a/arq.js b/arq.js
new file mode 100644
index 0000000..1b45543
--- /dev/null
+++ b/arq.js
@@ -0,0 +1,10 @@
+function soma () {
+  var n1, n2;
+  n1 = document.getElementById ("primeiroNumero").value;
+  n2 = document.getElementById ("segundoNumero").value;
+  n1 = parseInt (n1);
+  n2 = parseInt (n2);
+}
\ No newline at end of file
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

9.2 -

```
+}
\ No newline at end of file
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git diff
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

Exercício 5

1-

The screenshot shows the GitHub repository page for 'aulaGitGithub'. At the top, there are buttons for Pin, Watch (0), Fork (0), and Star (0). Below this, there are two main sections: 'Set up GitHub Copilot' and 'Add collaborators to this repository'. The 'Set up GitHub Copilot' section includes a button 'Get started with GitHub Copilot'. The 'Add collaborators to this repository' section includes a button 'Invite collaborators'. Below these sections, there is a 'Quick setup' section with options for 'Set up in Desktop', 'HTTPS', and 'SSH'. The 'SSH' option is selected, and the URL 'https://github.com/rayanneconde/aulaGitGithub.git' is displayed. Below the 'Quick setup' section, there is a section titled '...or create a new repository on the command line' with a code block containing the following commands:

```
echo "# aulaGitGithub" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/rayanneconde/aulaGitGithub.git
git push -u origin main
```

2, 3, 4 e 5 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git diff
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git remote add origin https://github.com/rayanneconde/aulaGitGithub.git
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git remote
origin
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git remote --v
origin https://github.com/rayanneconde/aulaGitGithub.git (fetch)
origin https://github.com/rayanneconde/aulaGitGithub.git (push)
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

Exercício 6

1 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git push -u origin master
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 16 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (9/9), 944 bytes | 314.00 KiB/s, done.
Total 9 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/rayanneconde/aulaGitGithub.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

2 -

The screenshot shows the GitHub interface for a repository named 'aulaGitGithub' which is public. At the top, there are buttons for 'Pin' and 'Watch' (0). Below this, the repository is shown to be on the 'master' branch with 1 branch and 0 tags. A search bar and buttons for 'Add file' and '<> Code' are visible. The commit history shows a single commit by 'rayanneconde' titled 'Terceiro commit do projeto: apresentar o resultado da soma dos dois n...' made 8 minutes ago. Below the commit list, there is a section for the README file, which currently shows a placeholder icon and the text 'Add a README' with a subtext 'Help people interested in this repository understand your project by adding a README.' and a green 'Add a README' button.

aulaGitGithub / arq.js

rayanneconde Terceiro commit do projeto: apresentar o resultado da soma dos dois n...

Code Blame 13 lines (9 loc) · 294 Bytes

```
1  function soma () {
2      var n1, n2, soma;
3
4      n1 = document.getElementById ("primeiroNumero").value;
5      n2 = document.getElementById ("segundoNumero").value;
6
7      n1 = parseInt (n1);
8      n2 = parseInt (n2);
9
10     soma = n1 + n2;
11
12     document.getElementById ("resposta").innerHTML = soma;
13 }
```




Exercício 7

1 -

aulaGitGithub / arq.js in master

Edit Preview

```
1  function soma () {
2      var n1, n2;
3
4      n1 = parseInt(document.getElementById ("primeiroNumero").value);
5      n2 = parseInt(document.getElementById ("segundoNumero").value);
6
7      soma = n1 + n2;
8
9      document.getElementById ("resposta").innerHTML = soma;
10 }
```

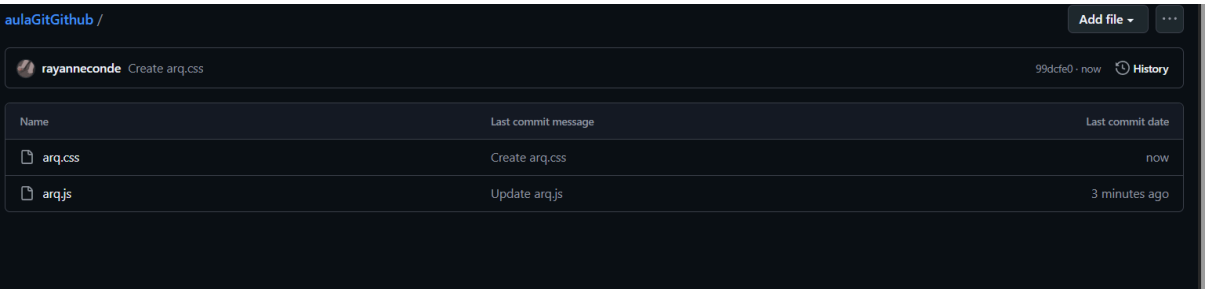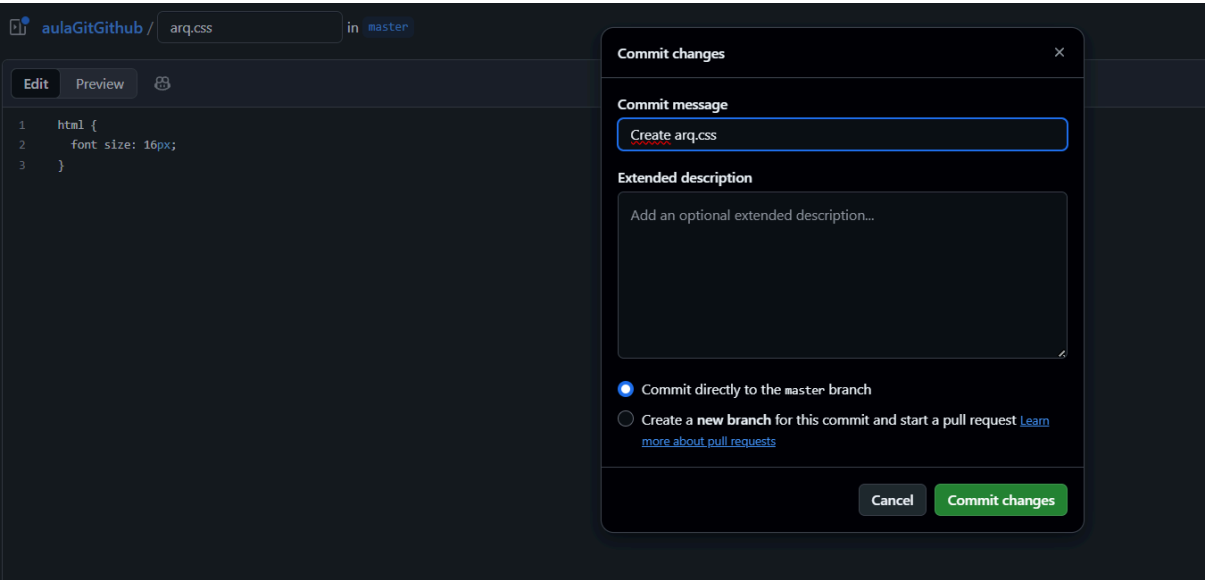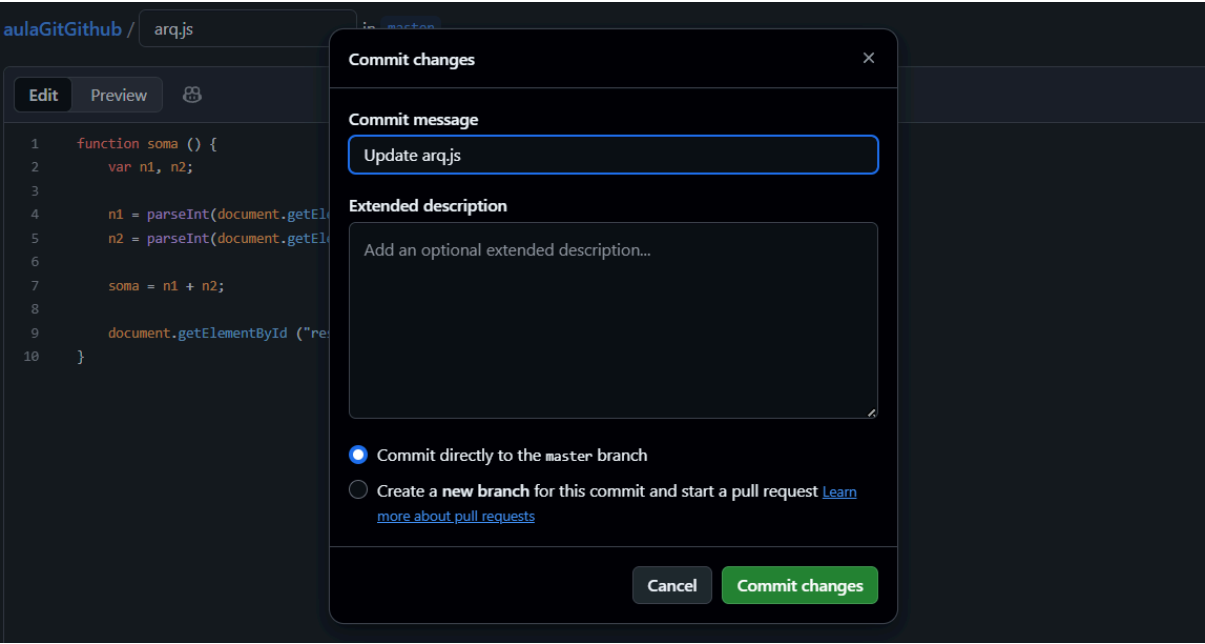

3 e 4 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git fetch origin
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.85 KiB | 78.00 KiB/s, done.
From https://github.com/rayanneconde/aulaGitGithub
   a775046..99dcfe0  master    -> origin/master
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Your branch is behind 'origin/master' by 2 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)

nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```


5 e 6 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git pull
Updating a775046..99dcfe0
Fast-forward
   arq.css | 3 +++
   arq.js  | 11 ++++-----
 2 files changed, 7 insertions(+), 7 deletions(-)
 create mode 100644 arq.css
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Your branch is up to date with 'origin/master'.

nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

Exercício 08

1 -

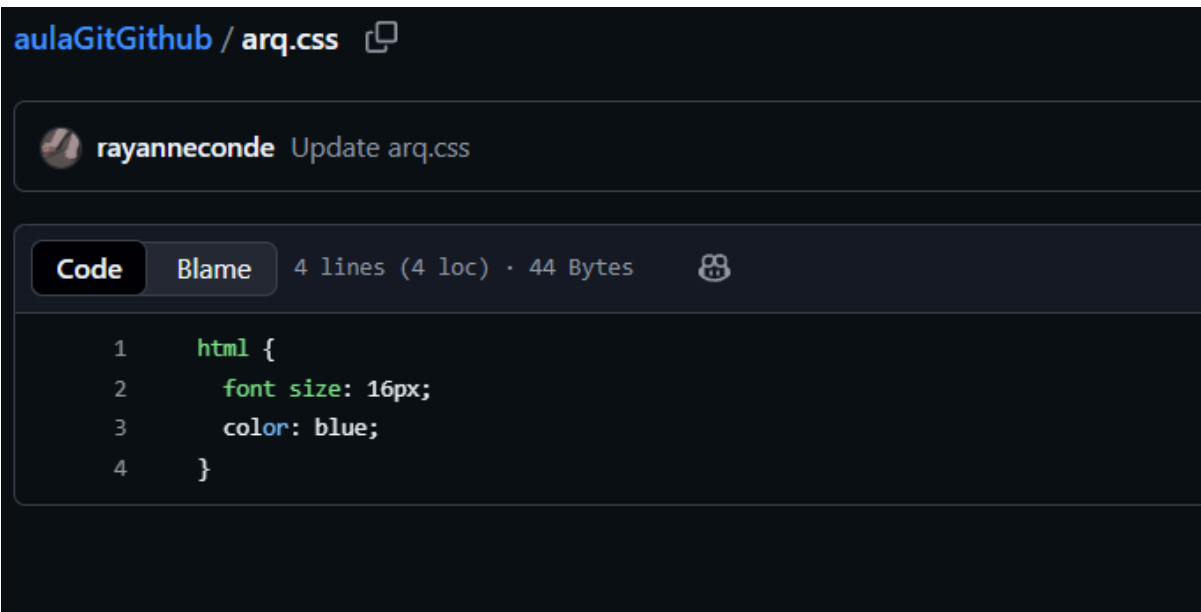A screenshot of a web browser showing a GitHub file view for 'aulaGitGithub / arq.css'. The file is owned by 'rayanneconde' and has a commit message 'Update arq.css'. The file content is displayed in a dark-themed editor with line numbers 1 to 4. The code defines a CSS rule for 'html' with a font size of 16px and a color of blue. The file statistics show 4 lines (4 loc) and 44 Bytes. There is a 'Code' button and a 'Blame' button at the top of the editor area.

```
aulaGitGithub / arq.css

rayanneconde Update arq.css

Code Blame 4 lines (4 loc) · 44 Bytes

1  html {
2    font size: 16px;
3    color: blue;
4  }
```

2 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git pull origin
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 959 bytes | 68.00 KiB/s, done.
From https://github.com/rayanneconde/aulaGitGithub
   99dcfe0..b16564a  master    -> origin/master
Updating 99dcfe0..b16564a
Fast-forward
  arq.css | 1 +
  1 file changed, 1 insertion(+)
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

3 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git status
On branch master
Your branch is up to date with 'origin/master'.

nothing to commit, working tree clean
PS C:\Users\rayan\versionamento aula\aulaGitGithub> |
```

4 -

	Nome	Data de modificação	Tip
Vídeos			
versionamen	.git	18/09/2025 21:05	Pas
aula-git-githi	arq	18/09/2025 21:05	Arq
TLOU	arq	18/09/2025 21:01	Arq
Wallpaper			
Exterminador dc			

5 -

```
PS C:\Users\rayan\versionamento aula\aulaGitGithub> git log
commit b16564a5b7abb464a892fa5b60d1dfab899ca946 (HEAD -> master, origin/master)
Author: rayanneconde <146242177+rayanneconde@users.noreply.github.com>
Date: Thu Sep 18 21:04:45 2025 -0300

    Update arq.css

commit 99dcfe070f885ef56806008a9d74af3708bfd34
Author: rayanneconde <146242177+rayanneconde@users.noreply.github.com>
Date: Thu Sep 18 20:59:36 2025 -0300

    Create arq.css

commit 64a22ee28e0ba50c853e669dff7f28cefcfd8008
Author: rayanneconde <146242177+rayanneconde@users.noreply.github.com>
Date: Thu Sep 18 20:56:33 2025 -0300

    Update arq.js

commit a7750461bc0edde8e8e03326c8e6ae7845a17a5e
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:43:27 2025 -0300

    Terceiro commit do projeto: apresentar o resultado da soma dos dois numeros

commit 207f1f6a43d1628953acceb60a30ab8371281714
Author: Rayanne Conde <rayanne.condex@gmail.com>
Date: Thu Sep 18 20:32:00 2025 -0300

    Segundo commit do projeto: somar os dois inteiros informados pelo usuário
... skipping ...
commit b16564a5b7abb464a892fa5b60d1dfab899ca946 (HEAD -> master, origin/master)
Author: rayanneconde <146242177+rayanneconde@users.noreply.github.com>
Date: Thu Sep 18 21:04:45 2025 -0300

    Update arq.css


commit 99dcfe070f885ef56806008a9d74af3708bfd34
Author: rayanneconde <146242177+rayanneconde@users.noreply.github.com>
Date: Thu Sep 18 20:59:36 2025 -0300

    Create arq.css
```

Exercício 9


2 -

aulaGitGithub / arq.css

 **rayanneconde** Update arq.css


Code Blame

4 lines (4 loc) · 43 Bytes




```
1  html {
2      font size: 20px;
3      color: red;
4  }
```

3 -

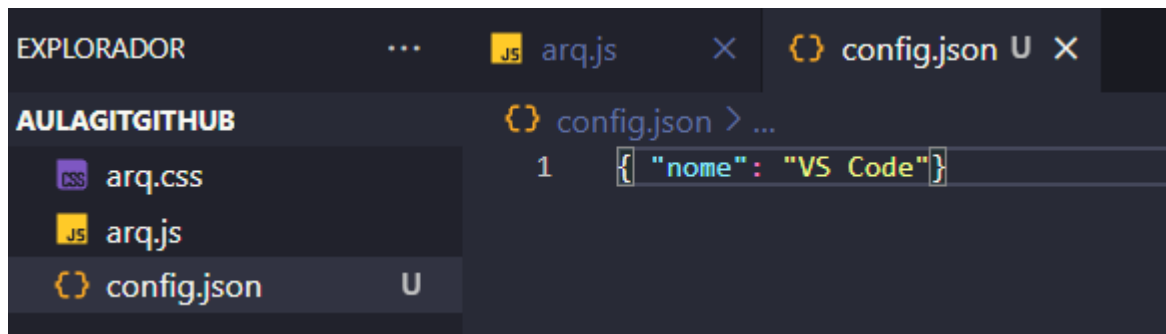

4 -

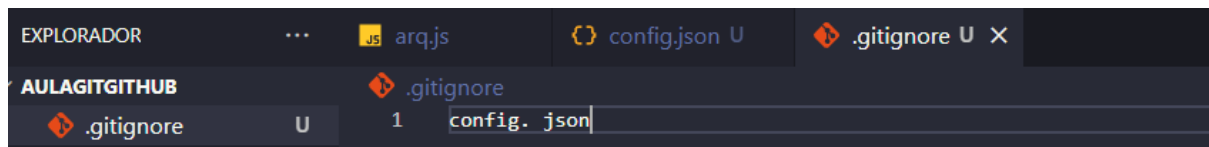

5 -

