

COSC 4368

Fundamentals of Artificial Intelligence

Neural Networks
October 16th, 2023
(slides modified from Stanford cs321n)

Neural networks: the original linear classifier

(Before) Linear score function: $f = Wx$

$$x \in \mathbb{R}^D, W \in \mathbb{R}^{C \times D}$$

Neural networks: 2 layers

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: also called fully connected network

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

“Neural Network” is a very broad term; these are more accurately called “fully-connected networks” or sometimes “multi-layer perceptrons” (MLP)

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: 3 layers

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$
or 3-layer Neural Network
 $f = W_3 \max(0, W_2 \max(0, W_1 x))$


$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H_1 \times D}, W_2 \in \mathbb{R}^{H_2 \times H_1}, W_3 \in \mathbb{R}^{C \times H_2}$$

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: hierarchical computation

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

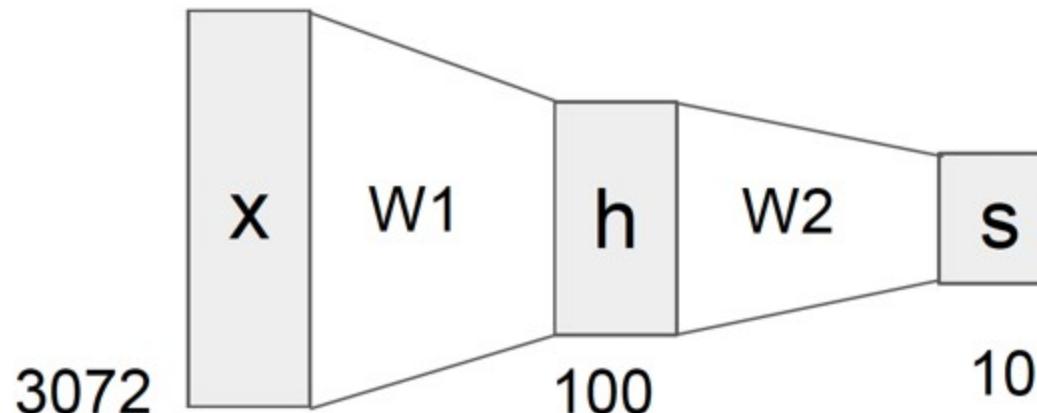

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

Neural networks: why is max operator important?

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the **activation function**.

Q: What if we try to build a neural network without one?

$$f = W_2 W_1 x$$

Neural networks: why is max operator important?

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the **activation function**.

Q: What if we try to build a neural network without one?


$$f = W_2 W_1 x \quad W_3 = W_2 W_1 \in \mathbb{R}^{C \times H}, f = W_3 x$$

A: We end up with a linear classifier again!

Activation functions


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$

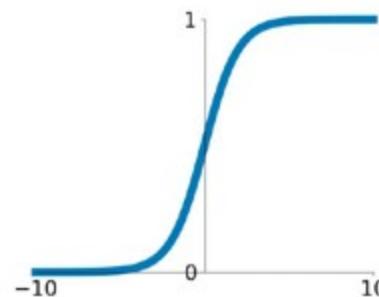


tanh

$$\tanh(x)$$

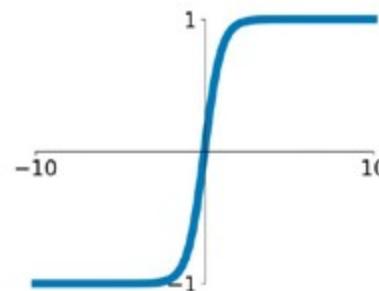


ReLU

$$\max(0, x)$$

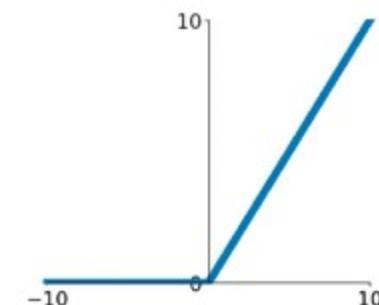

Leaky ReLU

$$\max(0.1x, x)$$

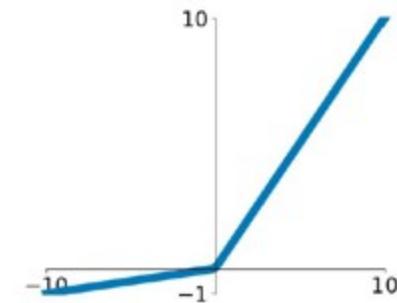


Maxout

$$\max(w_1^T x + b_1, w_2^T x + b_2)$$

ELU


$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$

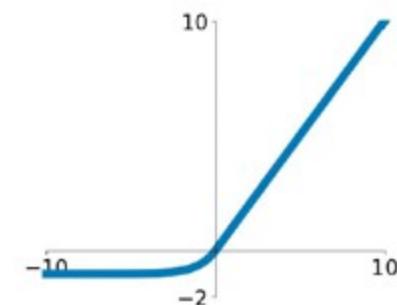

Activation functions


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$

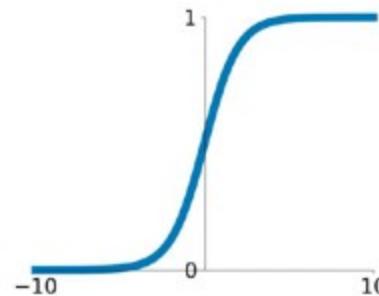


tanh

$$\tanh(x)$$

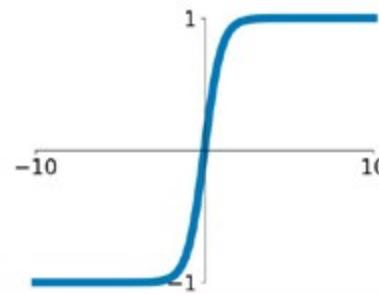

ReLU


$$\max(0, x)$$

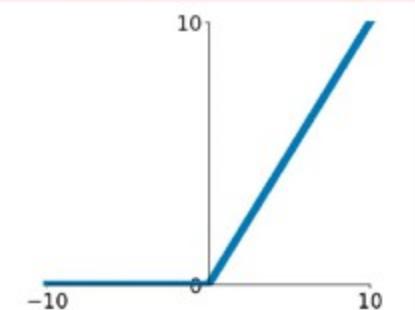

ReLU is a good default choice for most problems

Leaky ReLU

$$\max(0.1x, x)$$

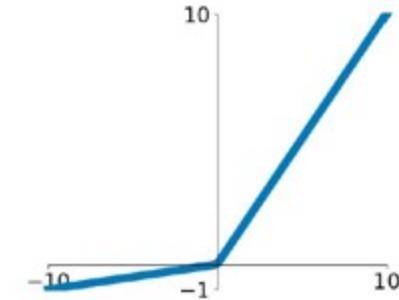


Maxout


$$\max(w_1^T x + b_1, w_2^T x + b_2)$$

ELU


$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$

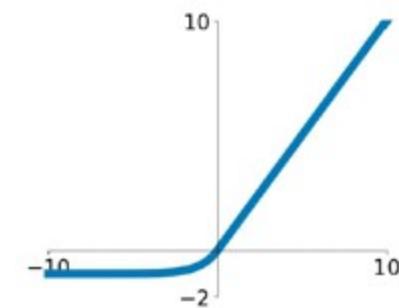

Neural networks: Architectures



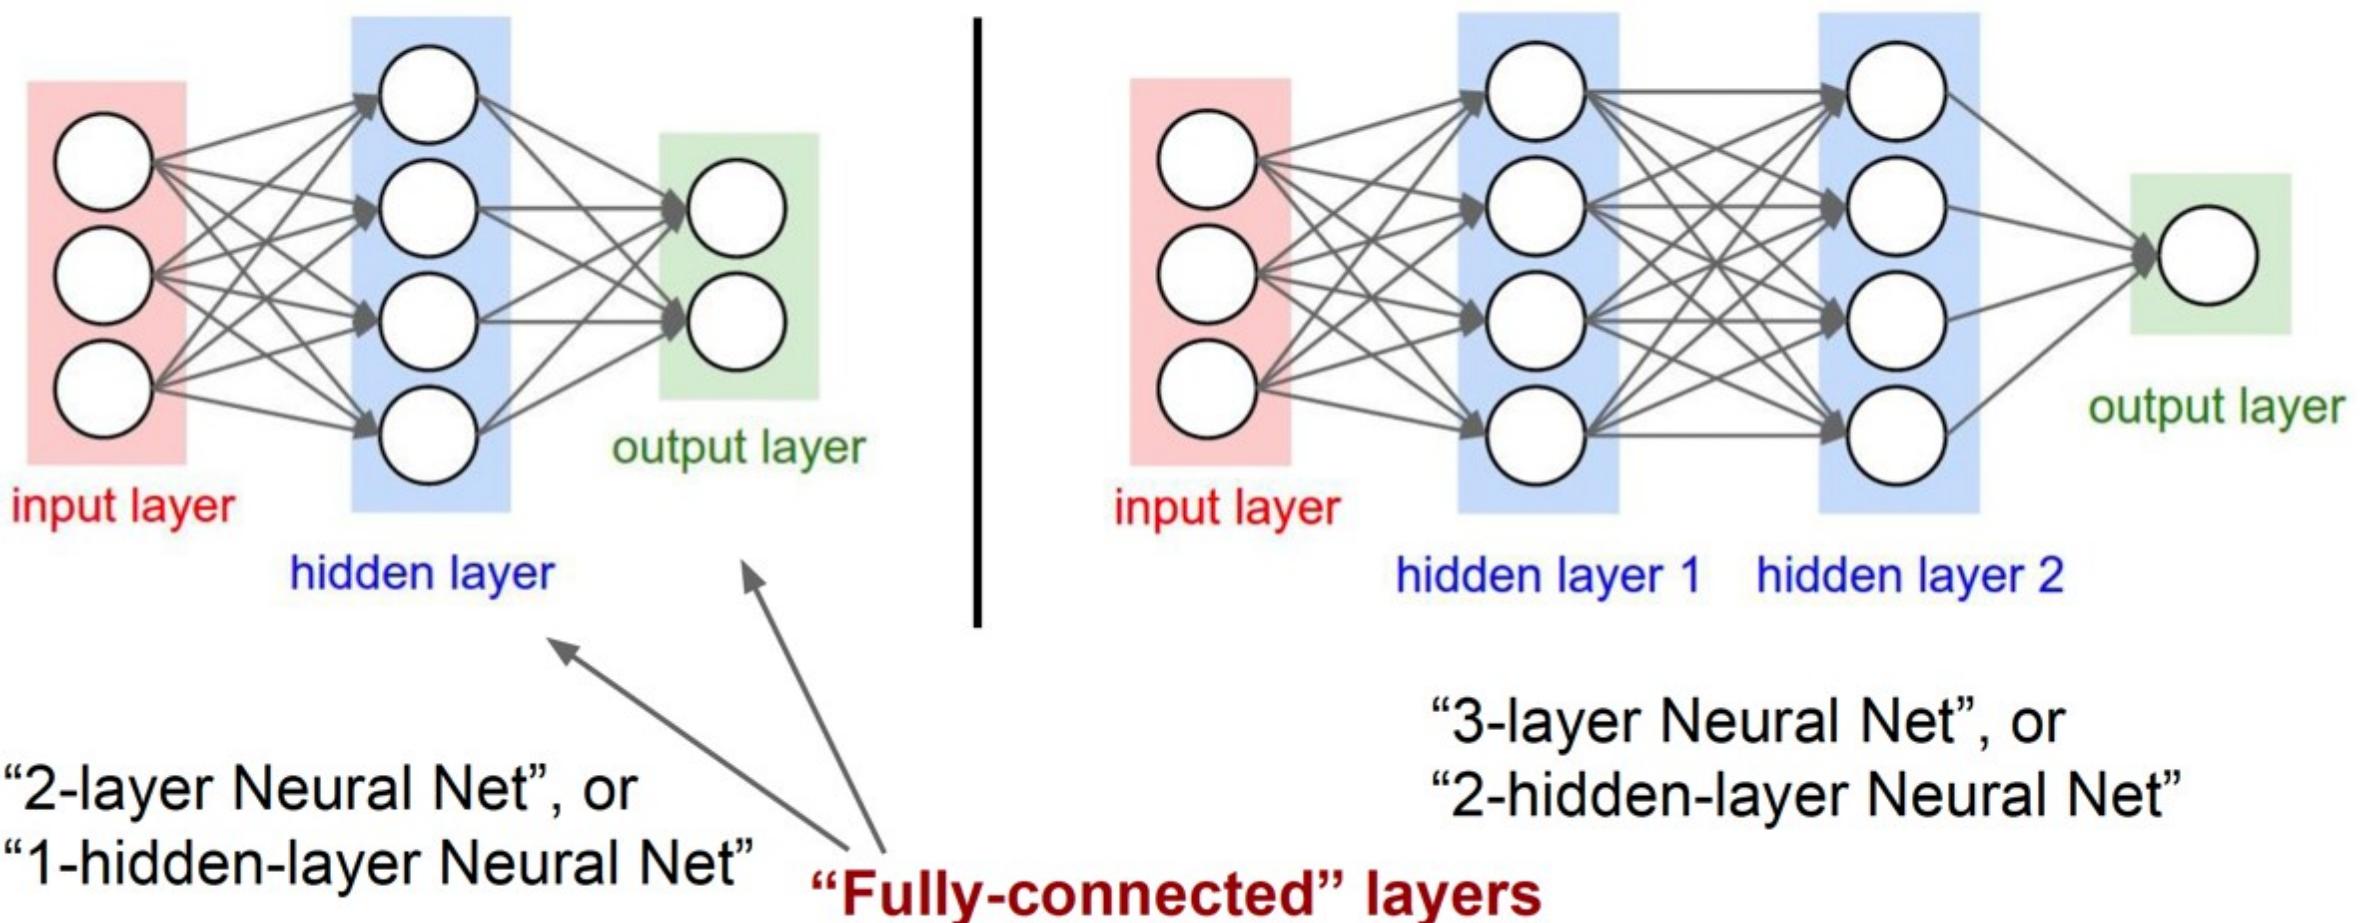


Example feed-forward computation of a neural network

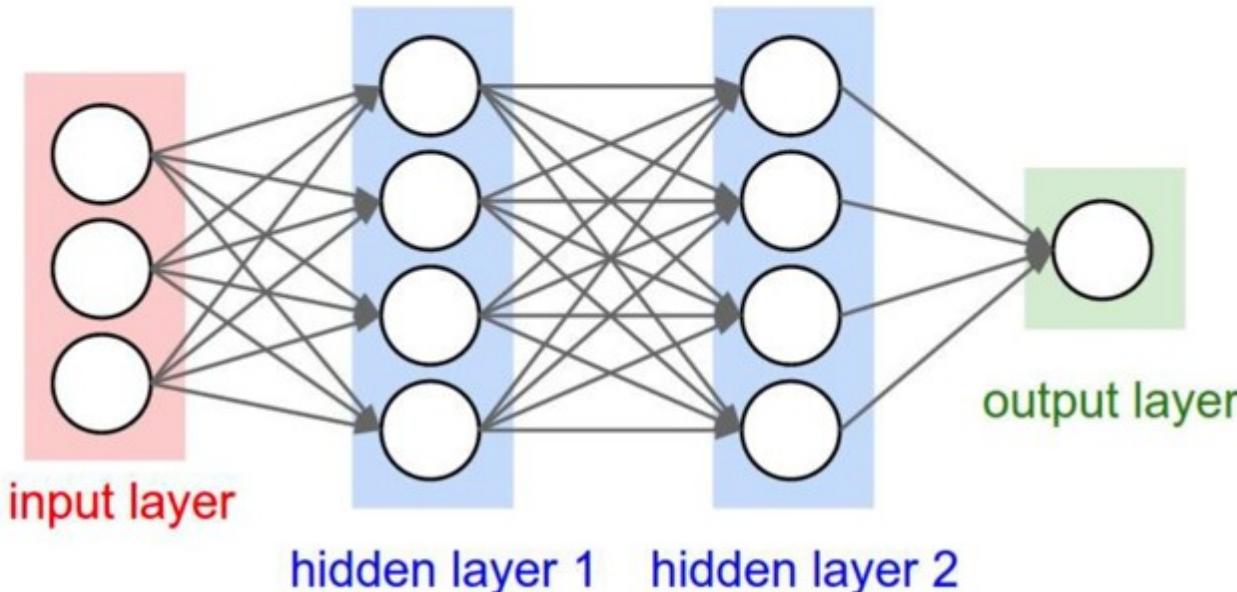


```
# forward-pass of a 3-layer neural network:  
f = lambda x: 1.0/(1.0 + np.exp(-x)) # activation function (use sigmoid)  
x = np.random.randn(3, 1) # random input vector of three numbers (3x1)  
h1 = f(np.dot(W1, x) + b1) # calculate first hidden layer activations (4x1)  
h2 = f(np.dot(W2, h1) + b2) # calculate second hidden layer activations (4x1)  
out = np.dot(W3, h2) + b3 # output neuron (1x1)
```

Setting the number of layers and their sizes

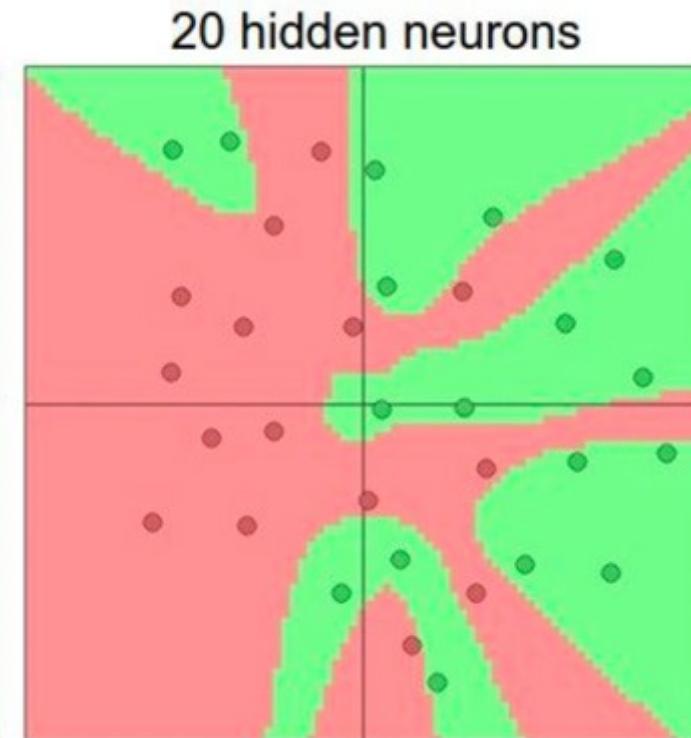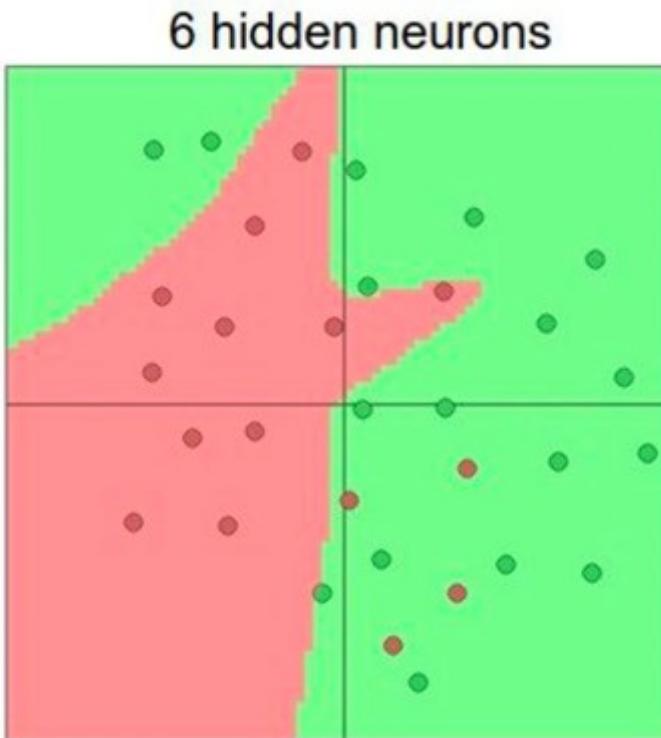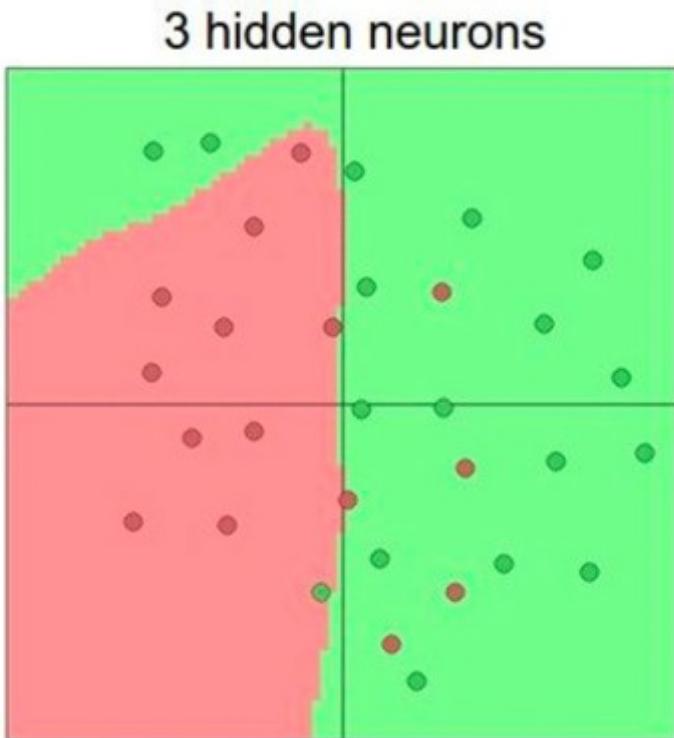


more neurons = more capacity

Impulses carried toward cell body

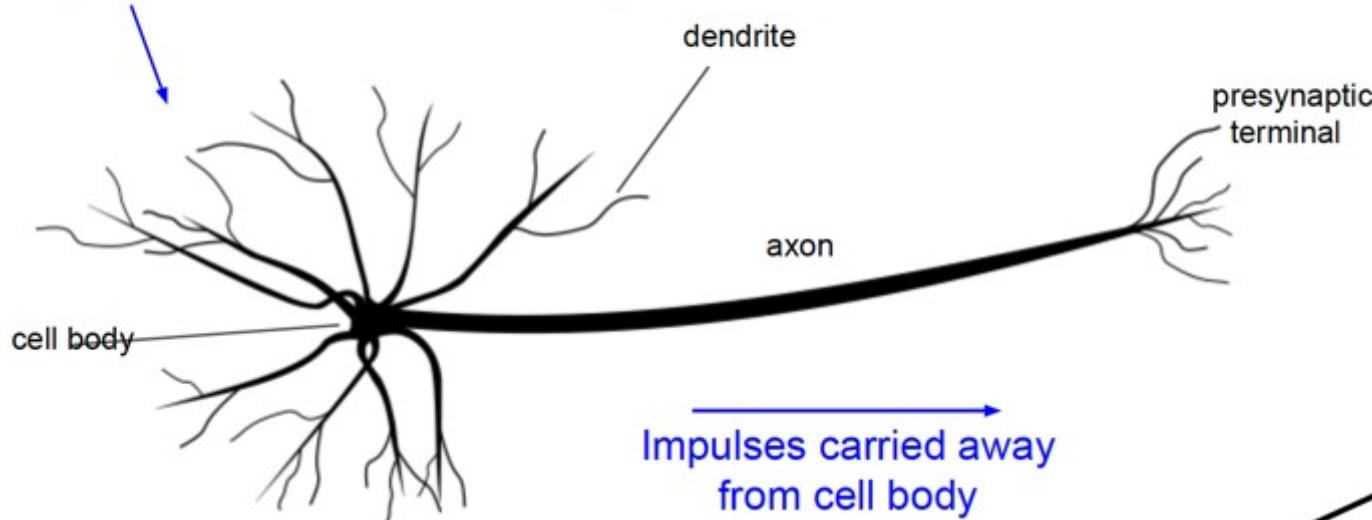


Impulses carried away
from cell body

This image by Felipe Pericho
is licensed under CC-BY 3.0

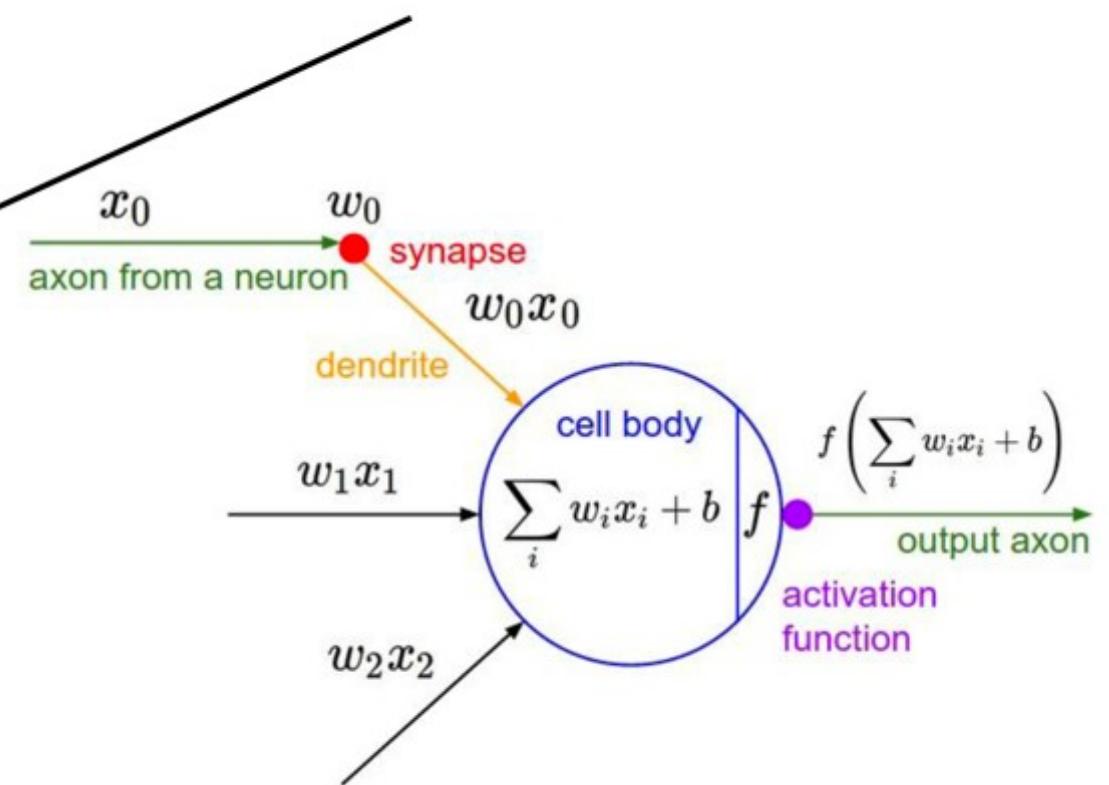


Biological Neurons: Complex connectivity patterns

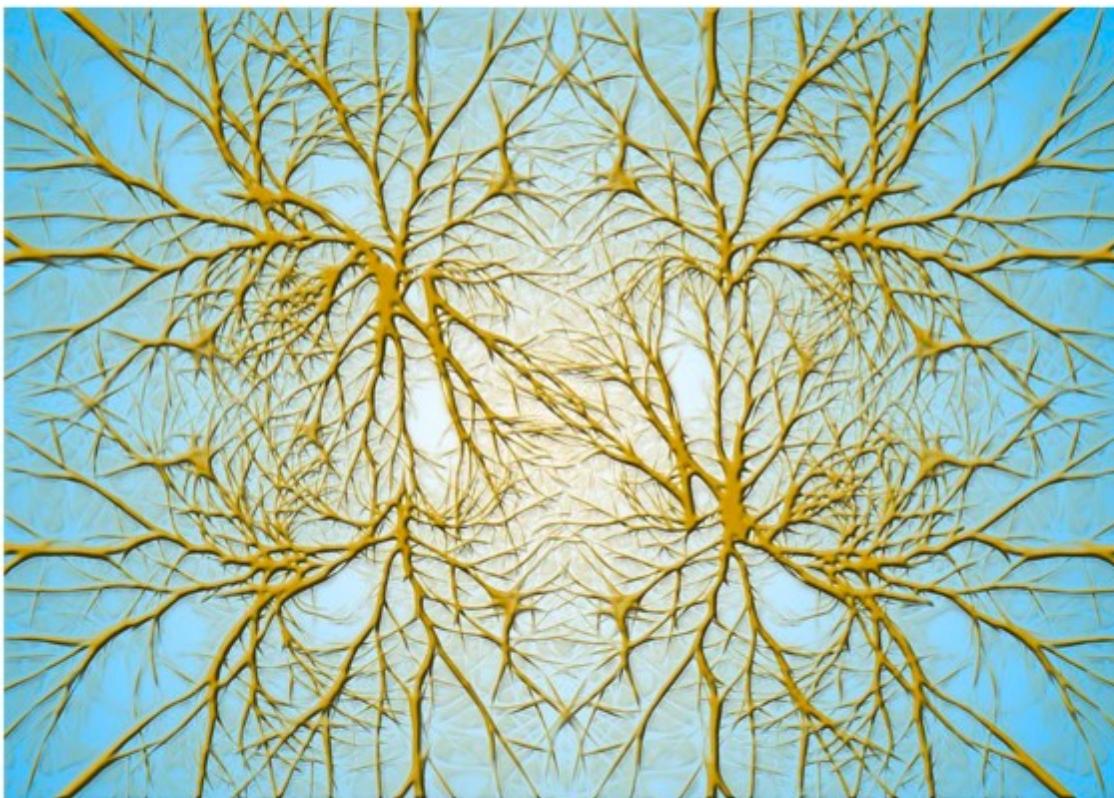

[This image](#) is CC0 Public Domain

Neurons in a neural network:
Organized into regular layers for
computational efficiency

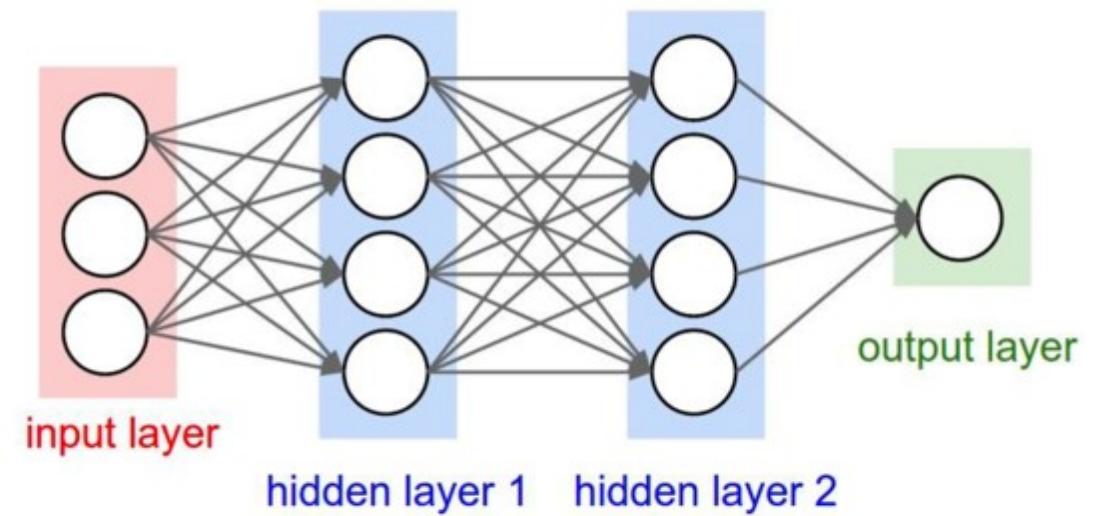

Plugging in neural networks with loss functions

$$s = f(x; W_1, W_2) = W_2 \max(0, W_1 x) \quad \text{Nonlinear score function}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM Loss on predictions}$$

$$R(W) = \sum_k W_k^2 \quad \text{Regularization}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda R(W_1) + \lambda R(W_2) \quad \text{Total loss: data loss + regularization}$$

Problem: How to compute gradients?

$$s = f(x; W_1, W_2) = W_2 \max(0, W_1 x) \quad \text{Nonlinear score function}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM Loss on predictions}$$

$$R(W) = \sum_k W_k^2 \quad \text{Regularization}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda R(W_1) + \lambda R(W_2) \quad \text{Total loss: data loss + regularization}$$

If we can compute $\frac{\partial L}{\partial W_1}, \frac{\partial L}{\partial W_2}$ then we can learn W_1 and W_2

(Bad) Idea: Derive $\nabla_W L$ on paper

$$s = f(x; W) = Wx$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$= \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1)$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda \sum_k W_k^2$$

$$= \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2$$


$$\nabla_W L = \nabla_W \left(\frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2 \right)$$

Problem: Very tedious: Lots of matrix calculus, need lots of paper

Problem: What if we want to change loss? E.g. use softmax instead of SVM? Need to re-derive from scratch =(

Problem: Not feasible for very complex models!


Better Idea: Computational graphs + Backpropagation

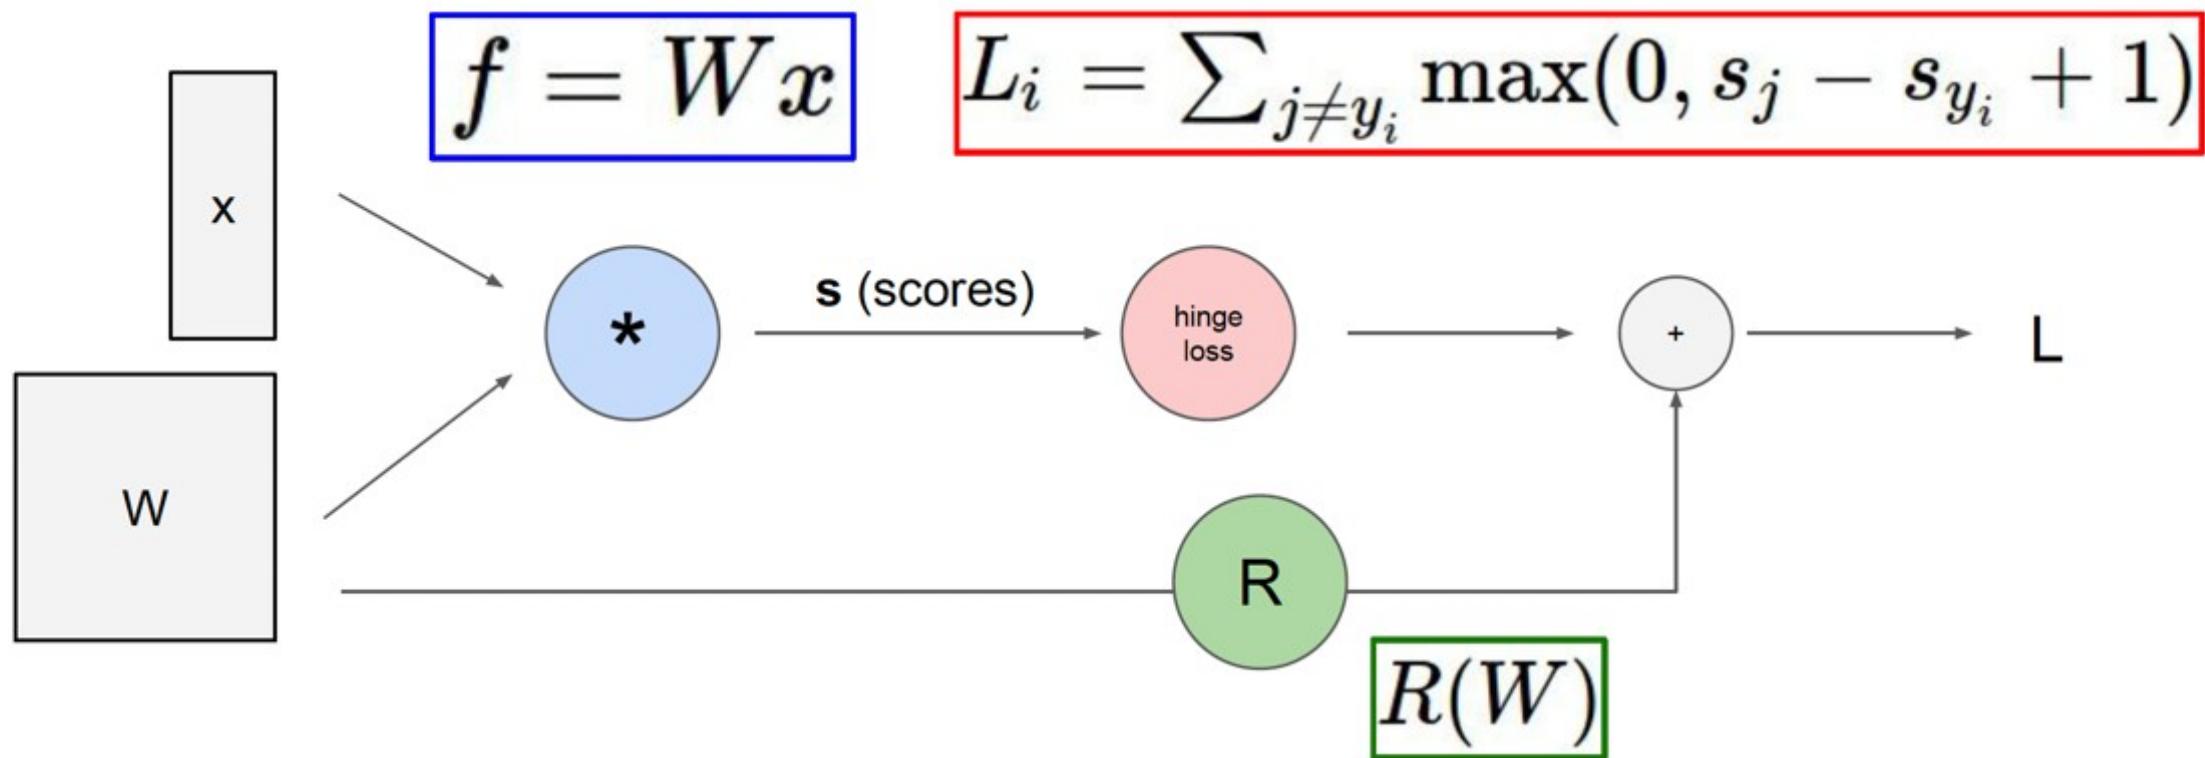

Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

e.g. $x = -2$, $y = 5$, $z = -4$

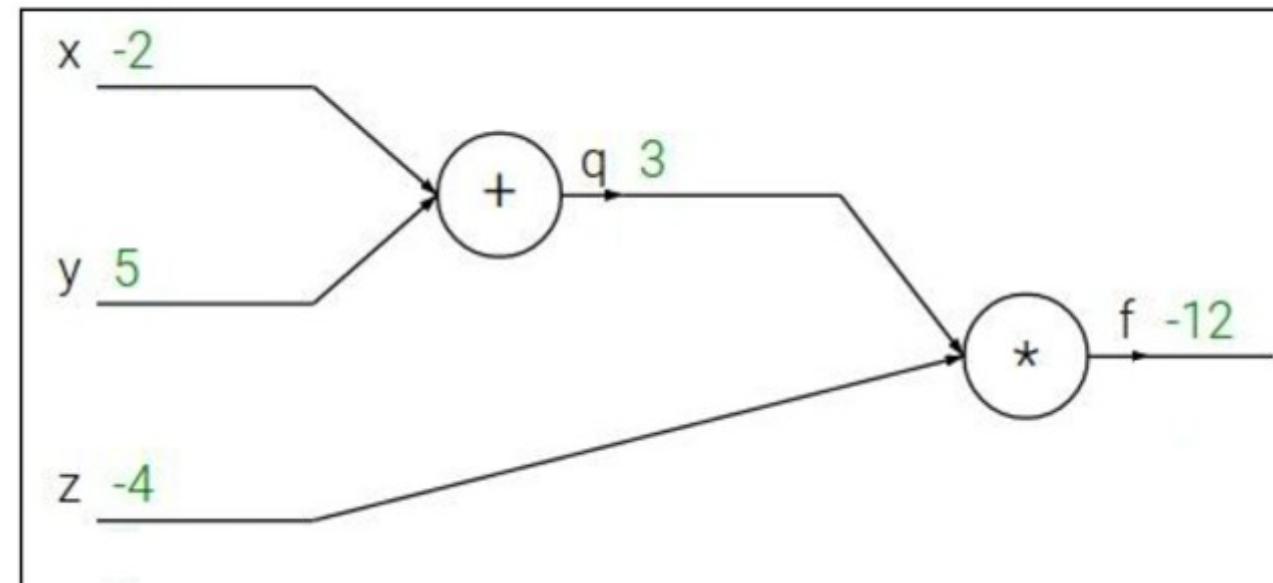

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

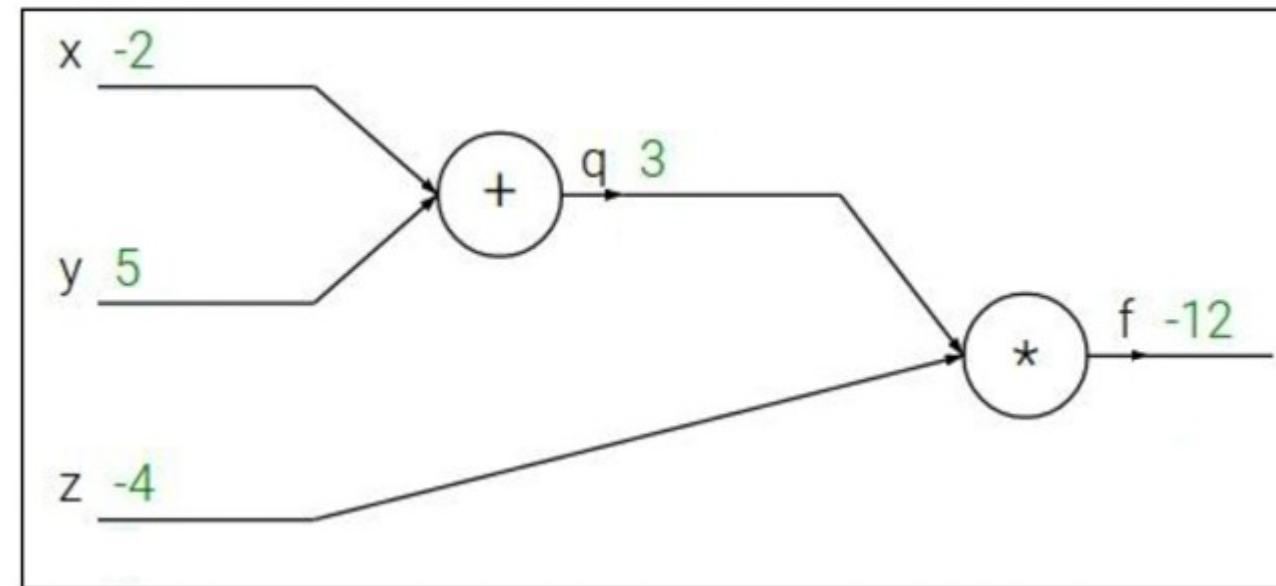

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

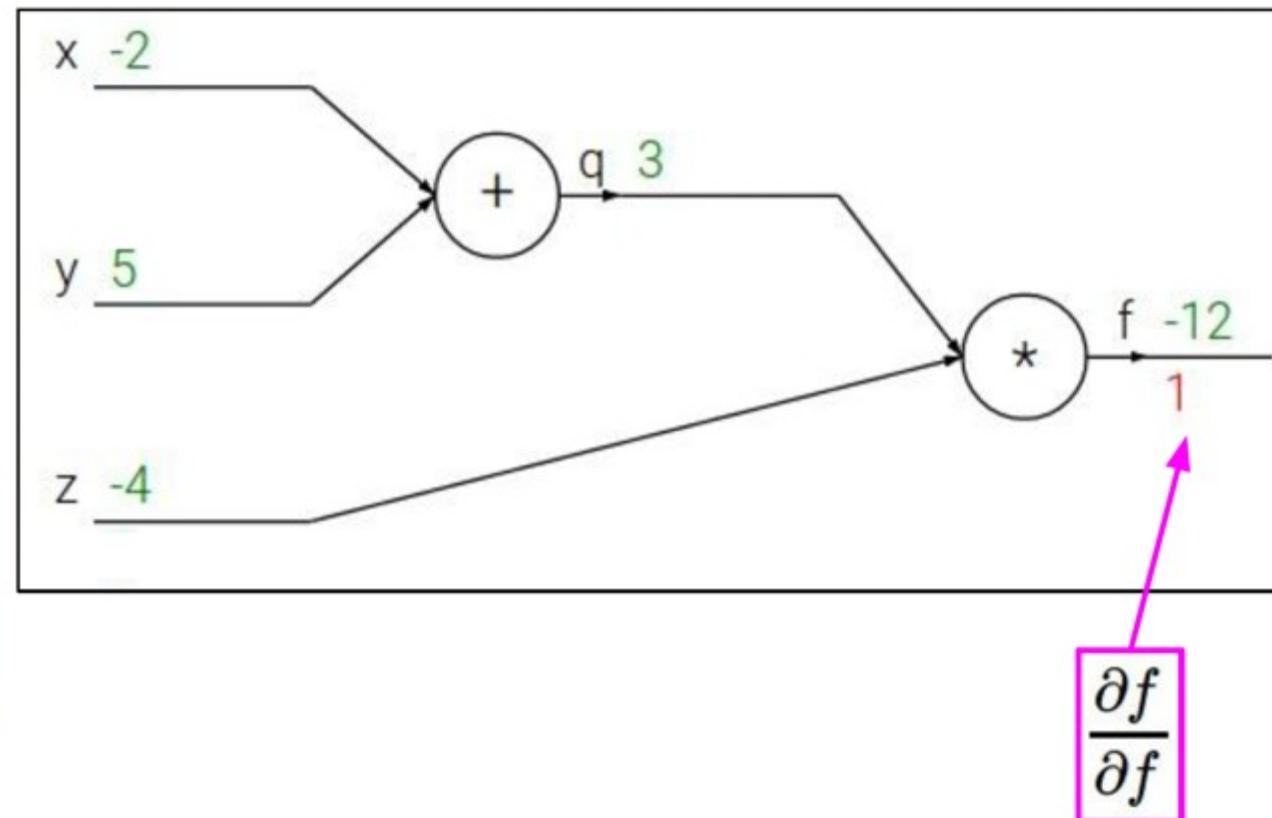

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

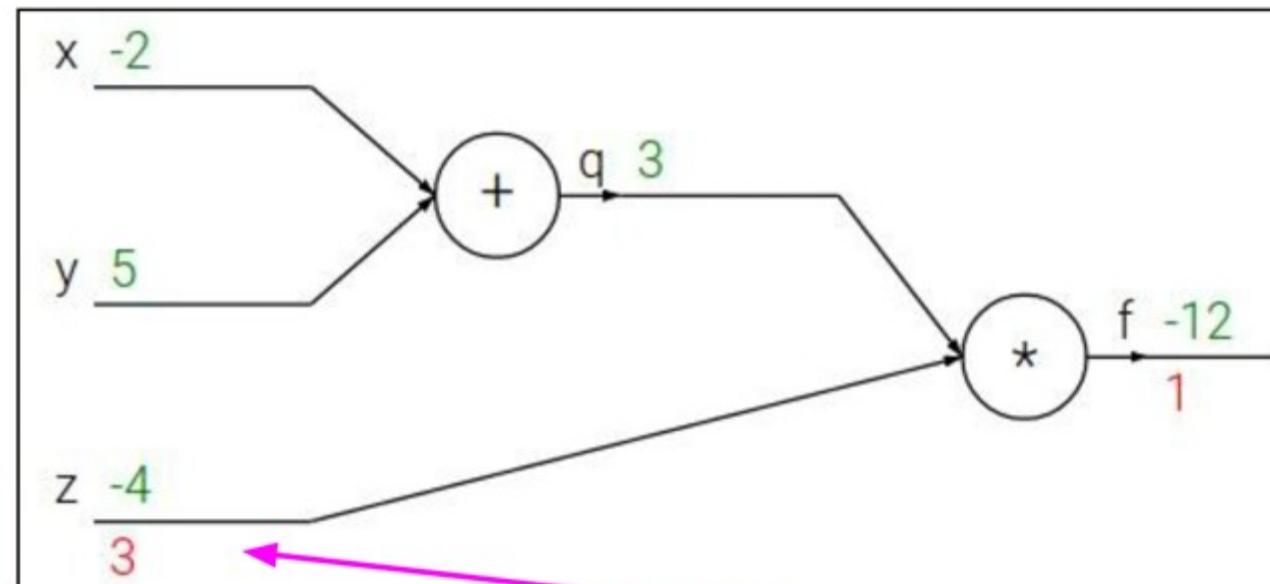

$$\frac{\partial f}{\partial z}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

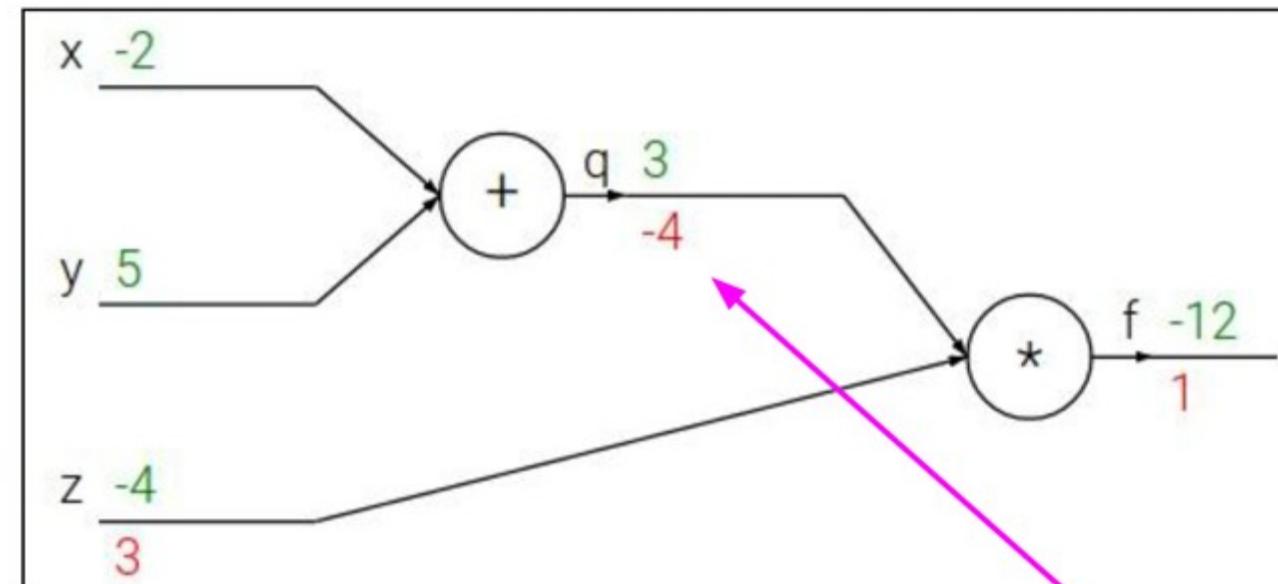

$$\frac{\partial f}{\partial q}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2$, $y = 5$, $z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

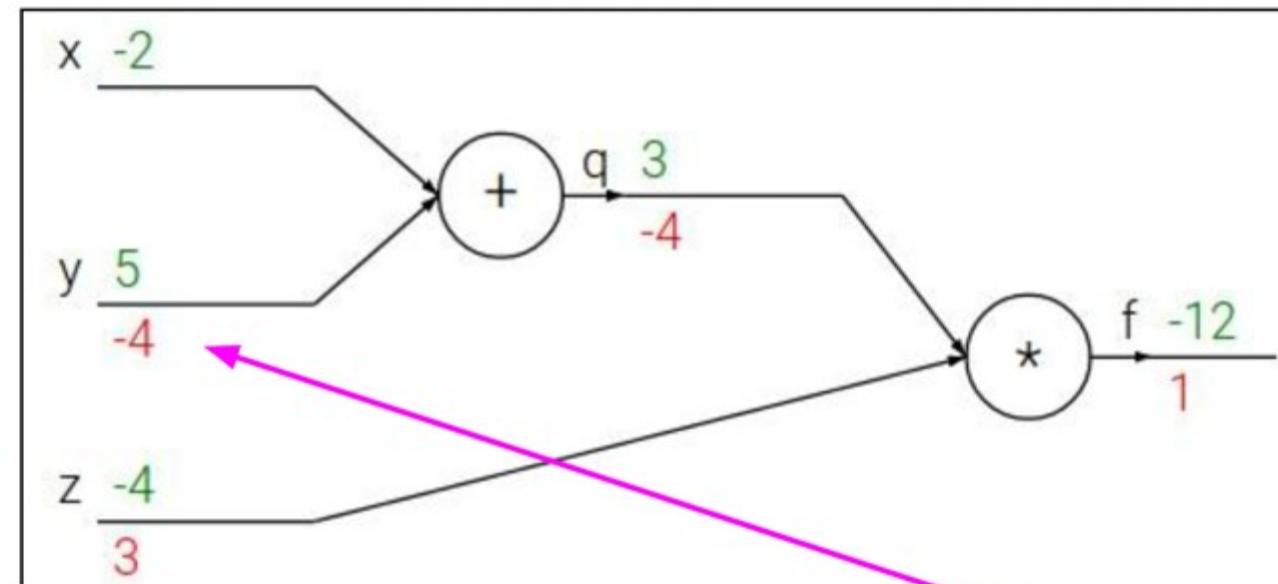

Chain rule:

$$\frac{\partial f}{\partial y} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial y}$$

Upstream gradient Local gradient

$$\frac{\partial f}{\partial y}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2$, $y = 5$, $z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$


Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

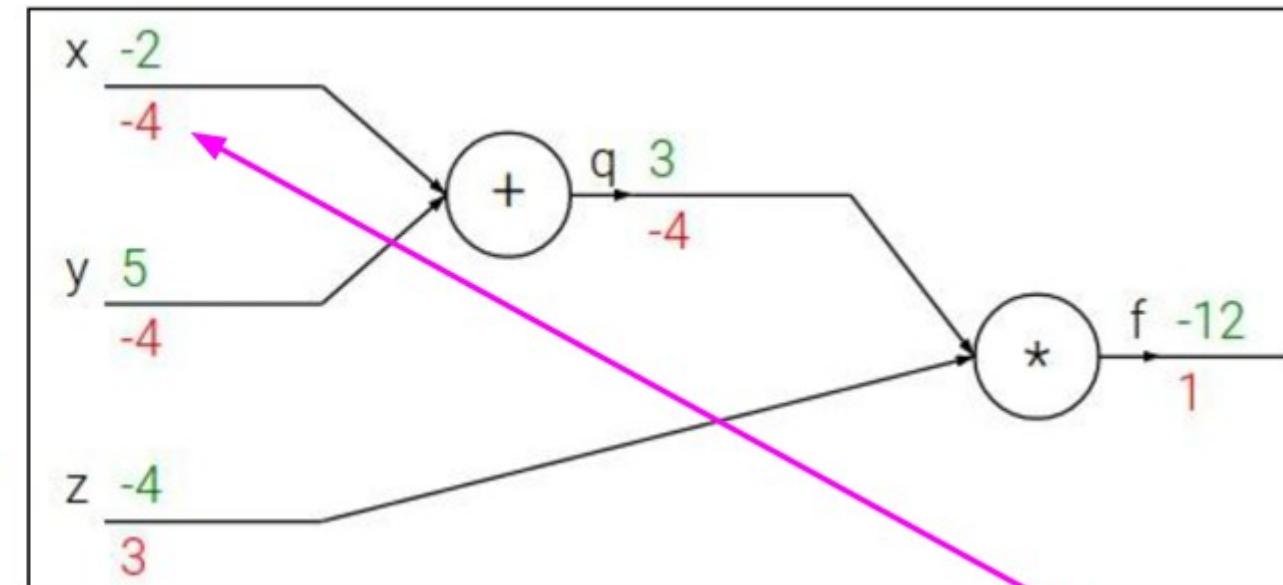


Chain rule:

$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial x}$$


Upstream gradient Local gradient

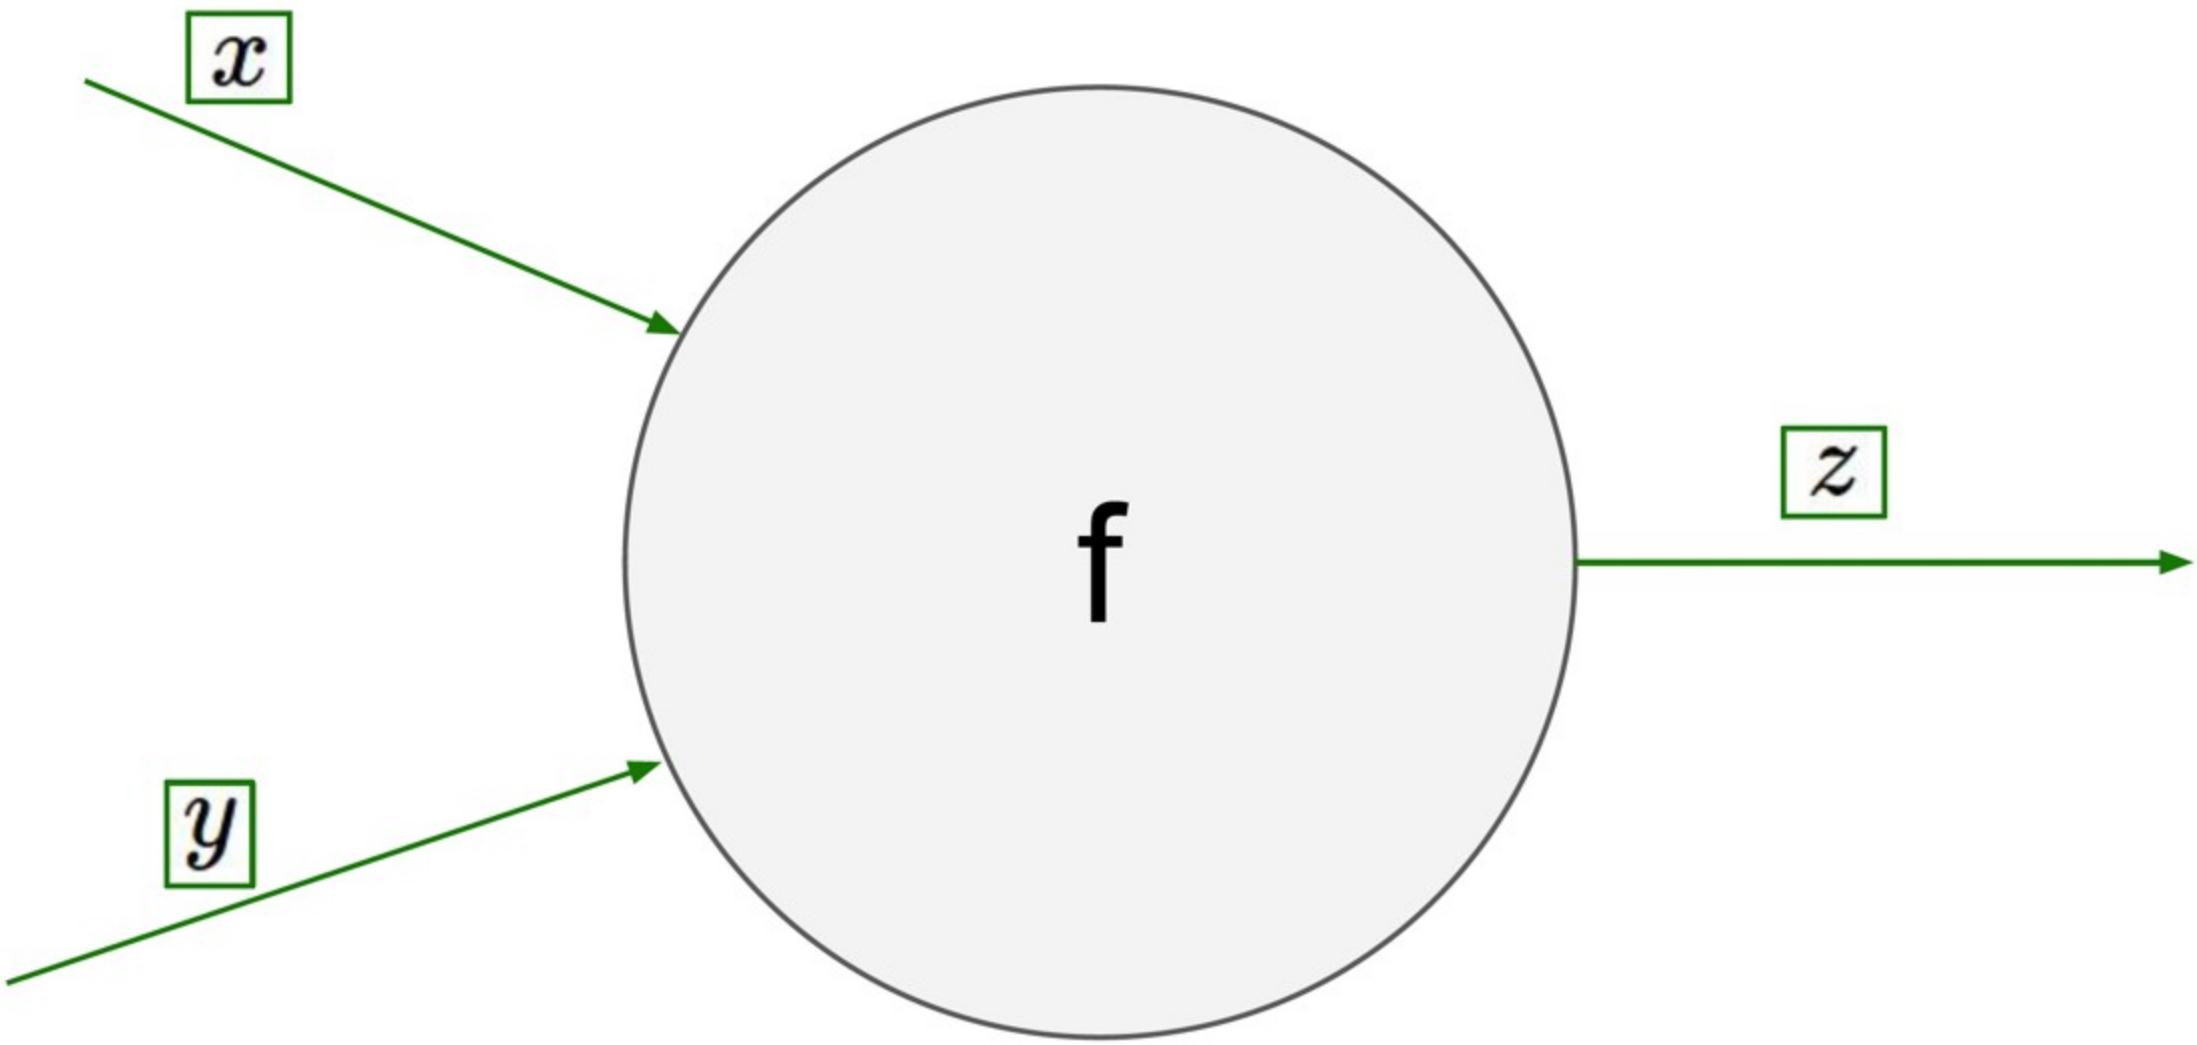

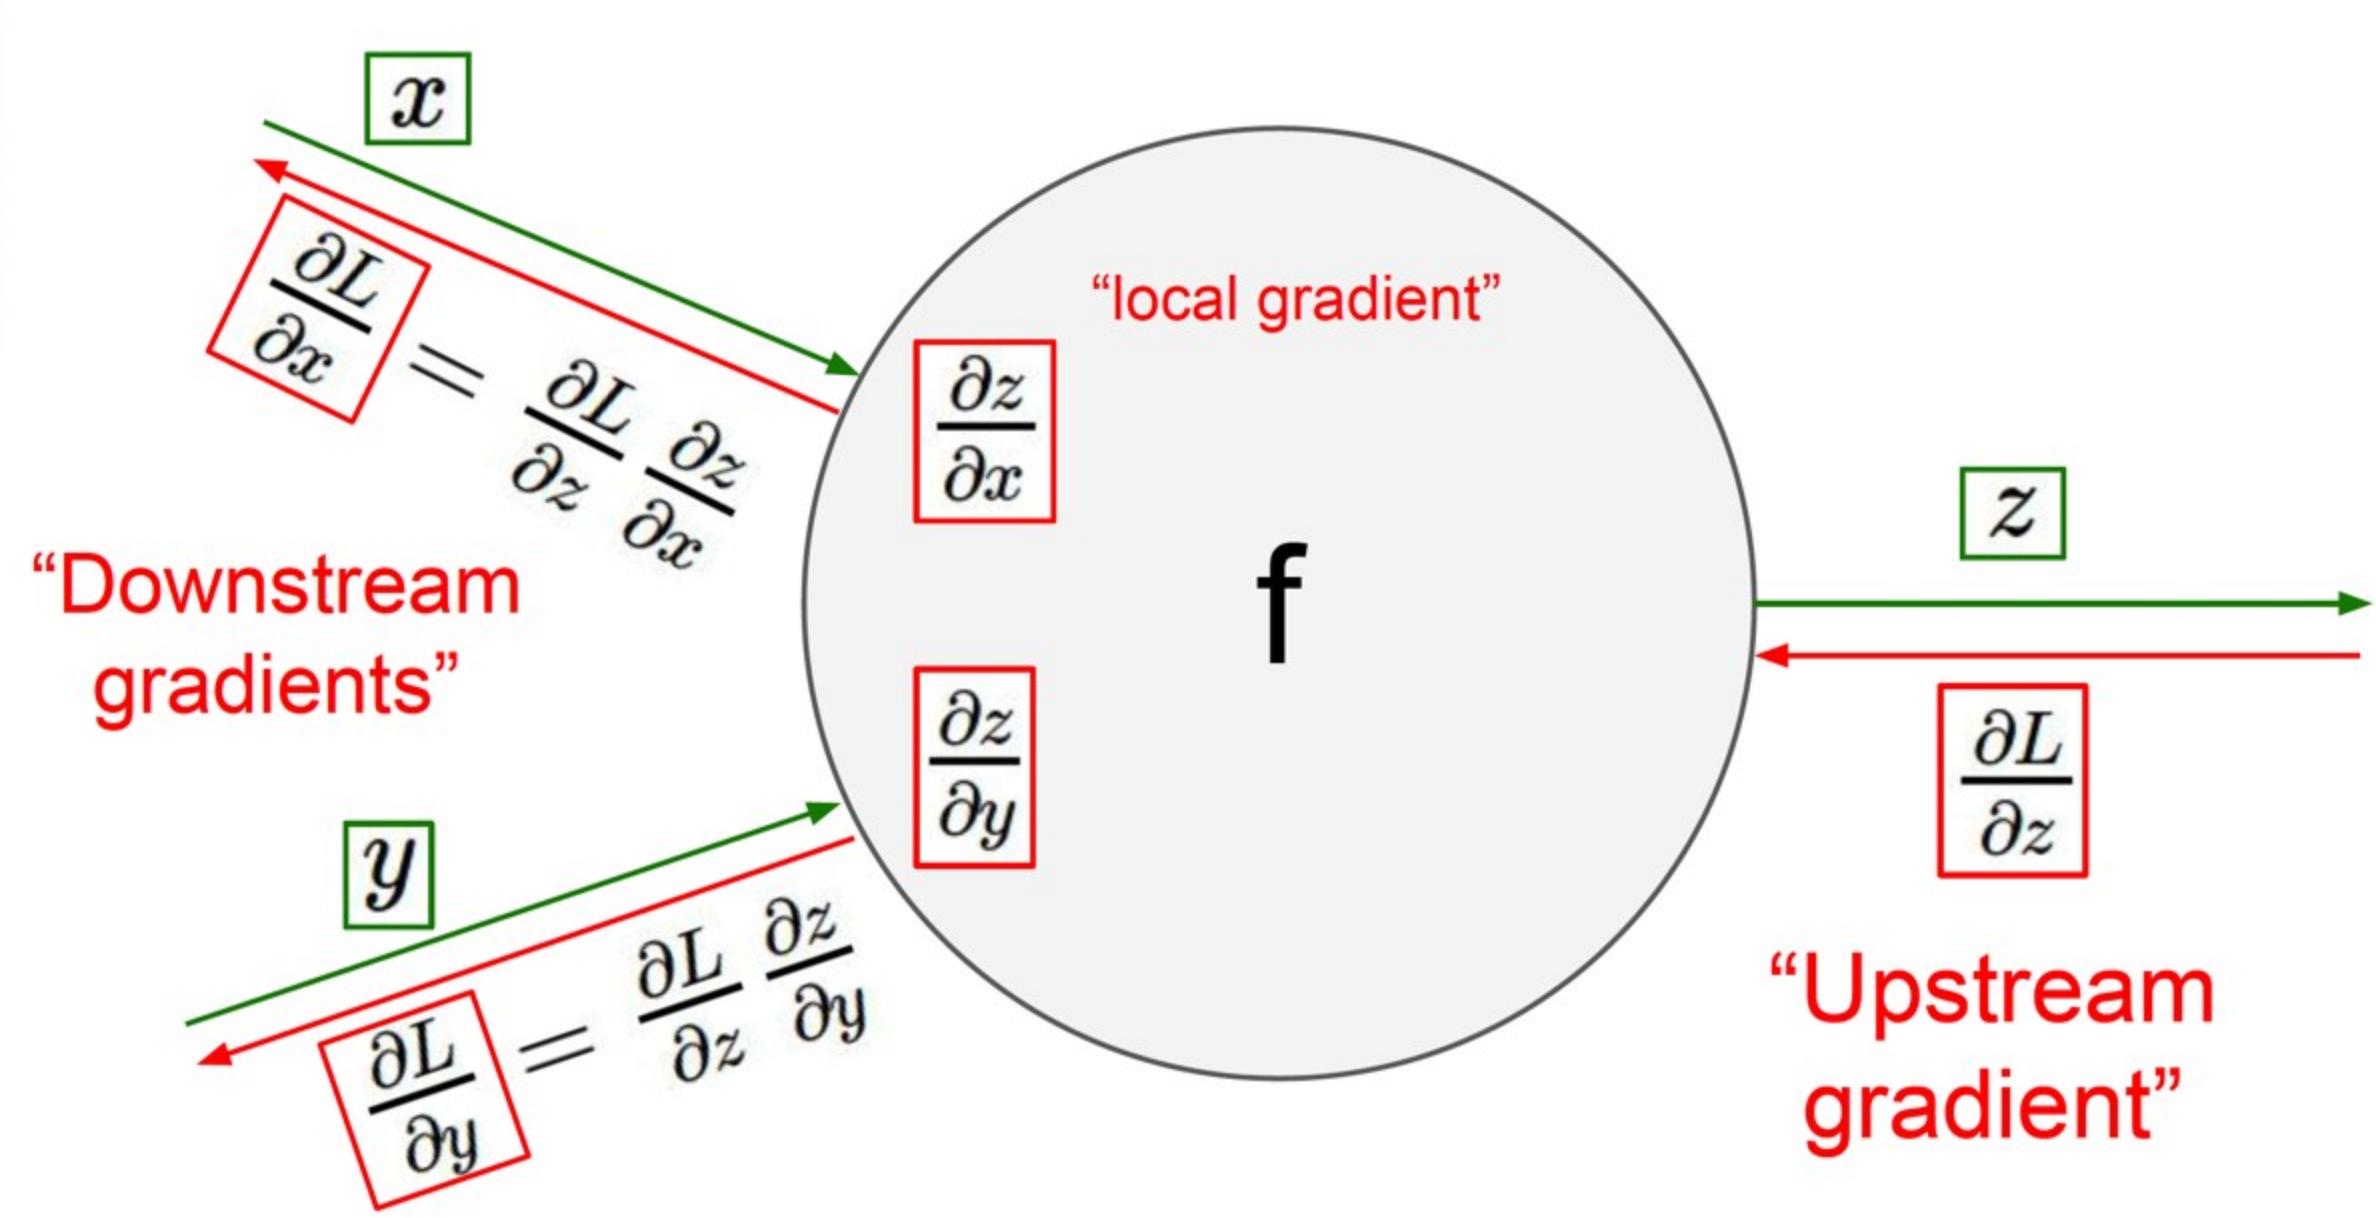


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

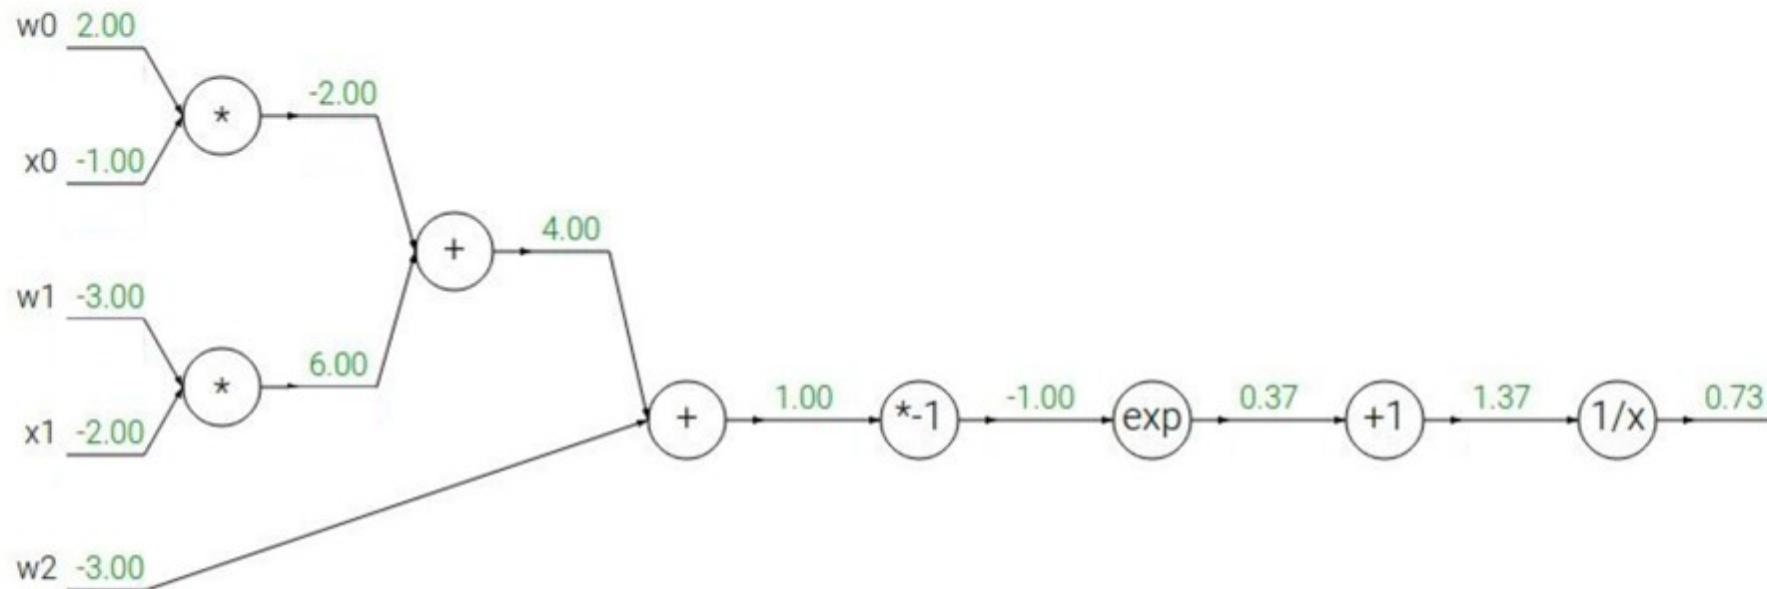

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

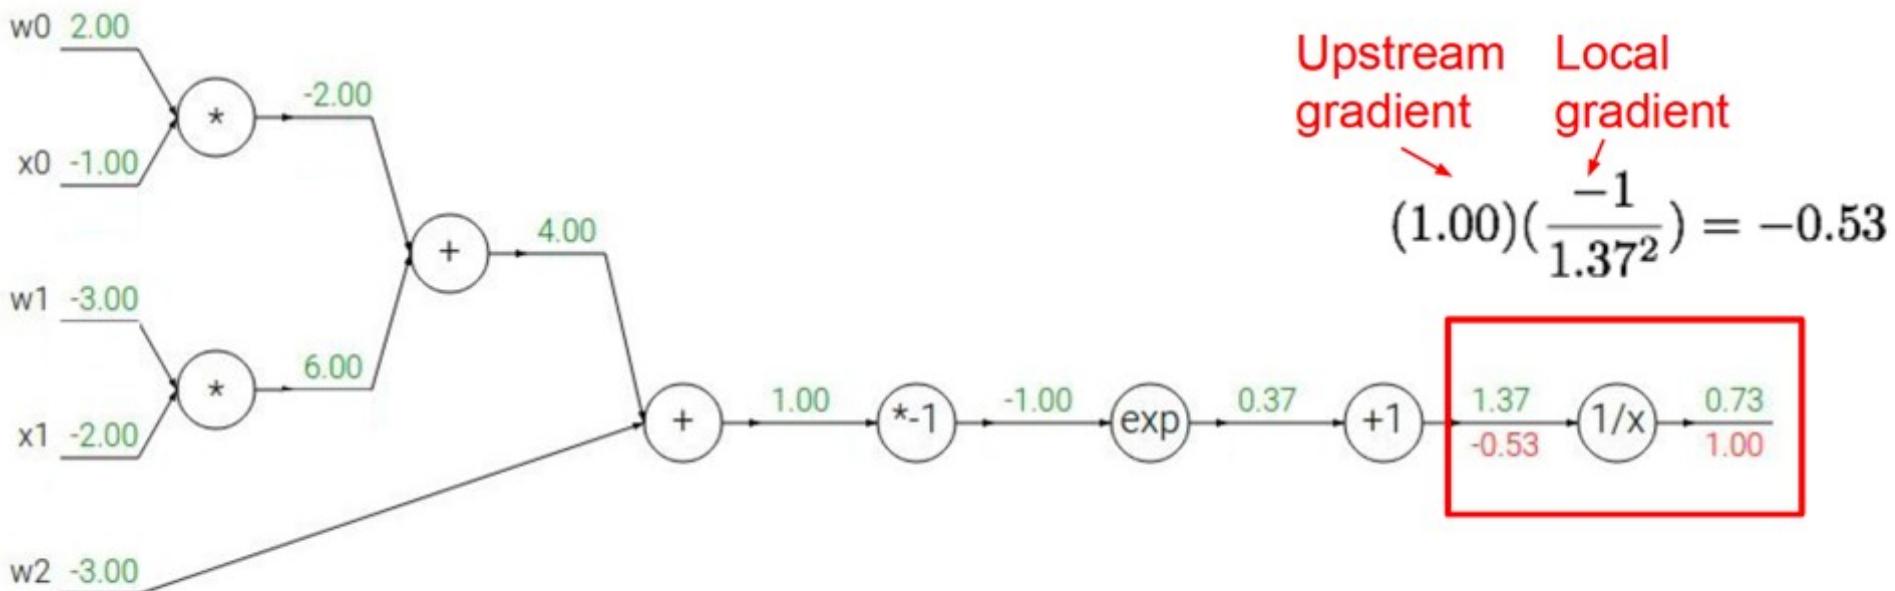

$$f(x) = e^x$$

\rightarrow

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

\rightarrow

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

\rightarrow

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

\rightarrow

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

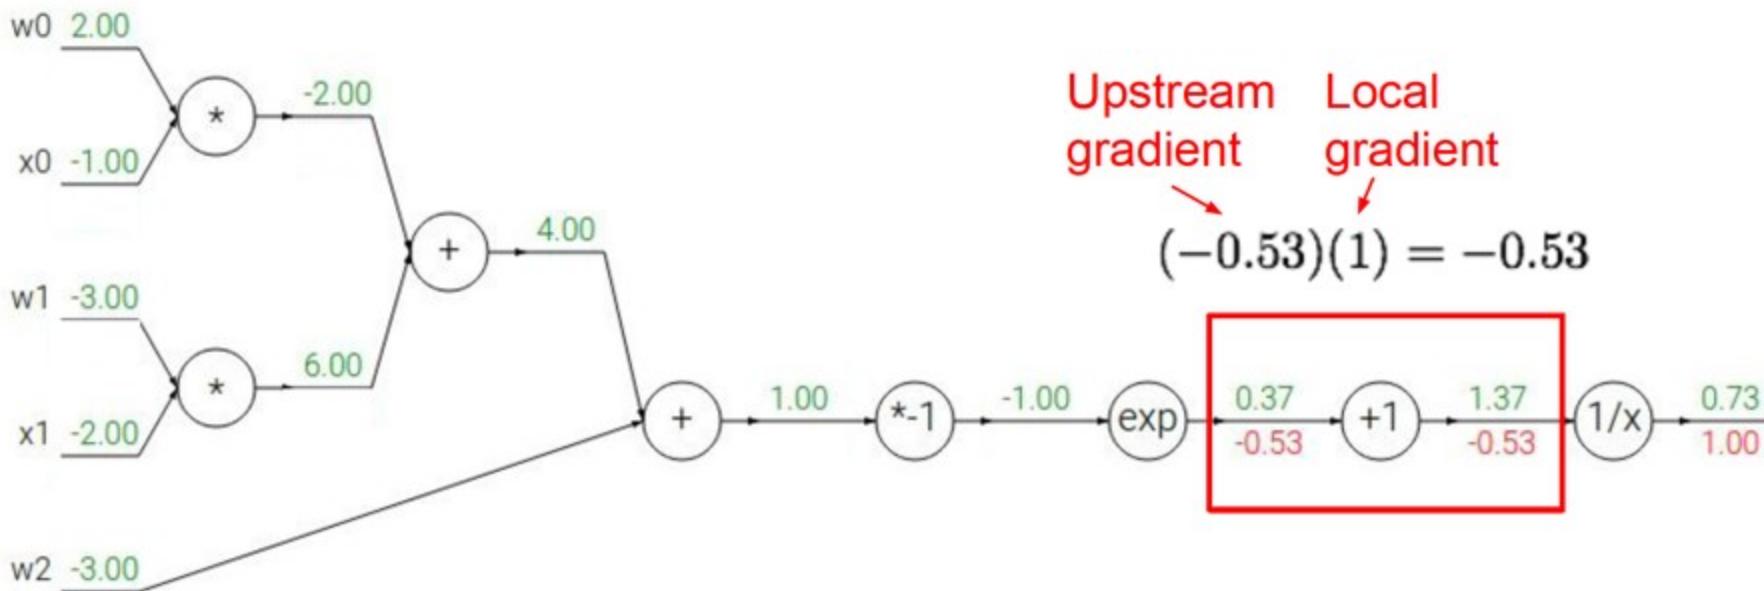

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

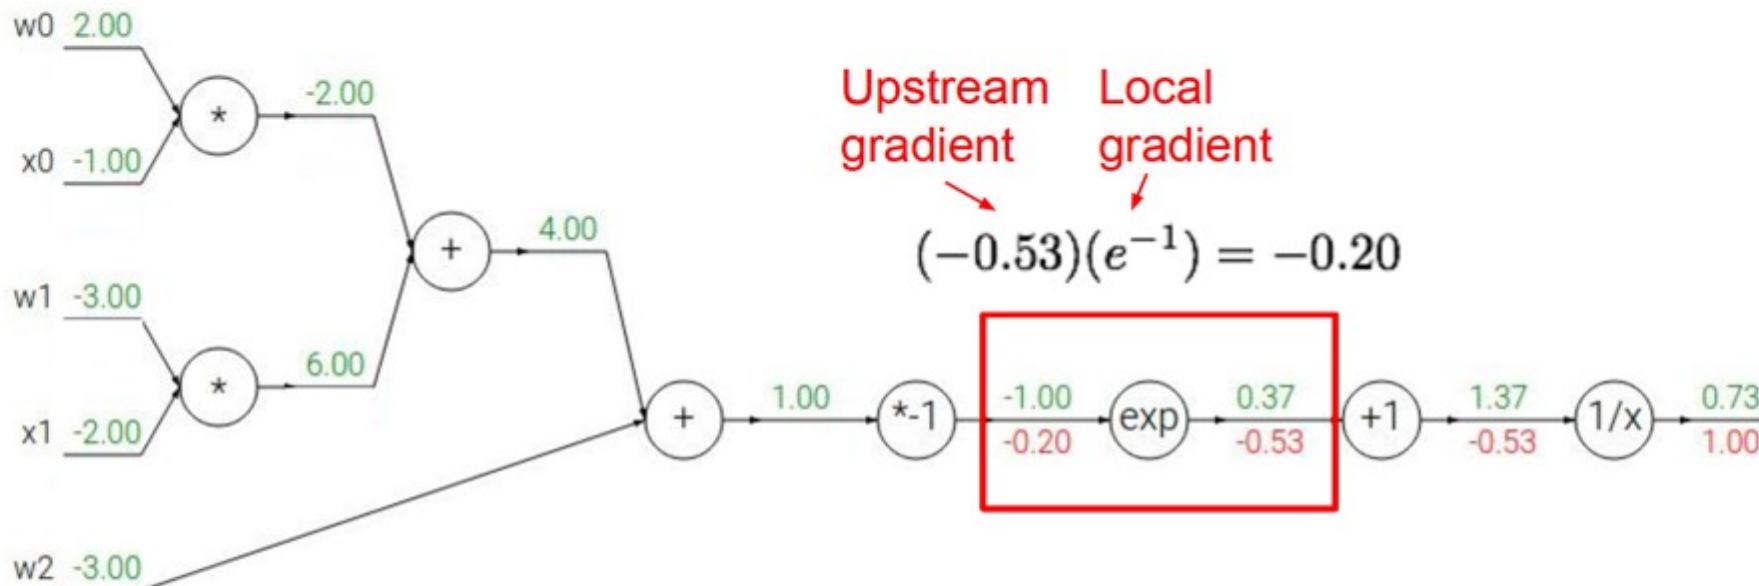

$$f(x) = e^x \rightarrow \frac{df}{dx} = e^x$$


$$f_a(x) = ax \rightarrow \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \rightarrow \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \rightarrow \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

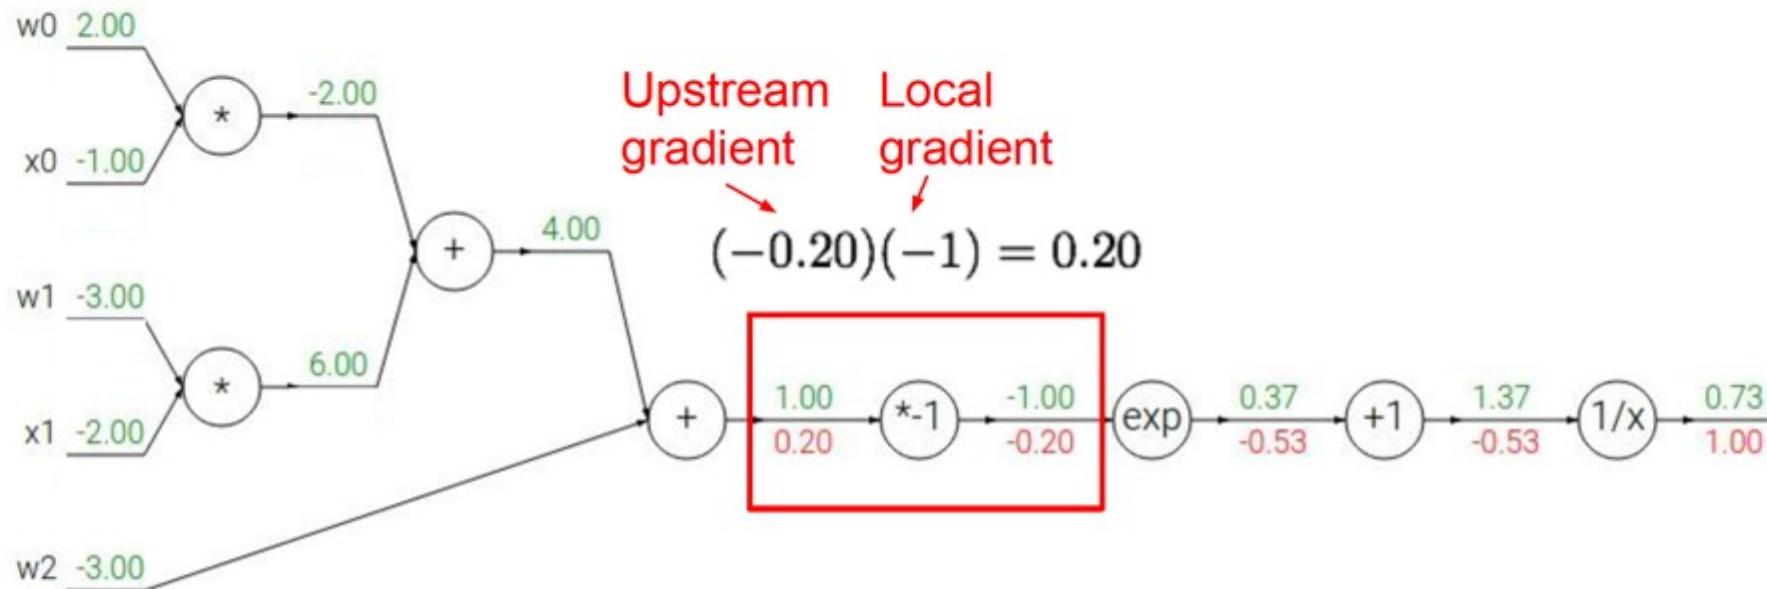

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

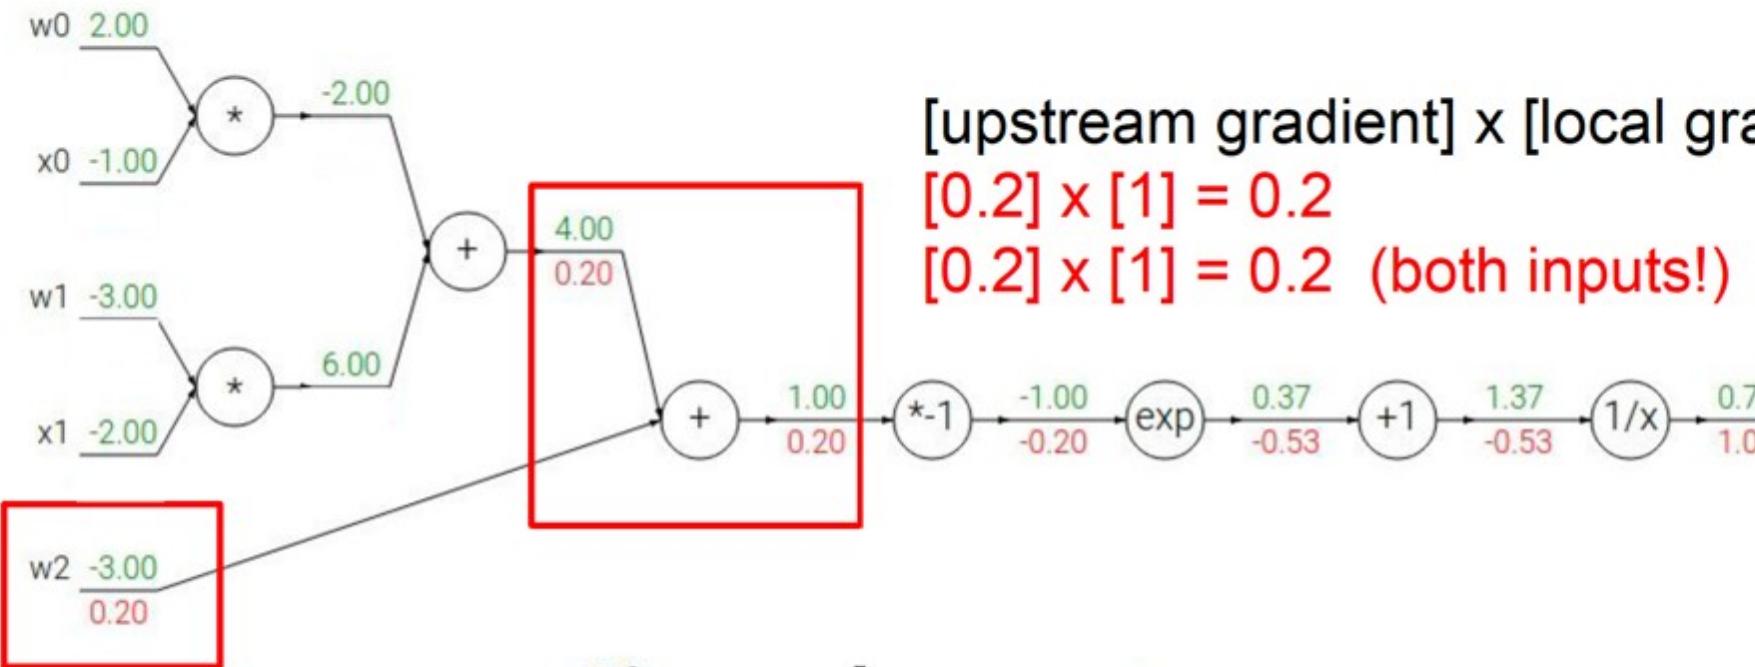

$$f(x) = e^x$$

\rightarrow

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

\rightarrow

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$


$$f_c(x) = c + x$$

$$\frac{df}{dx} = -1/x^2$$

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

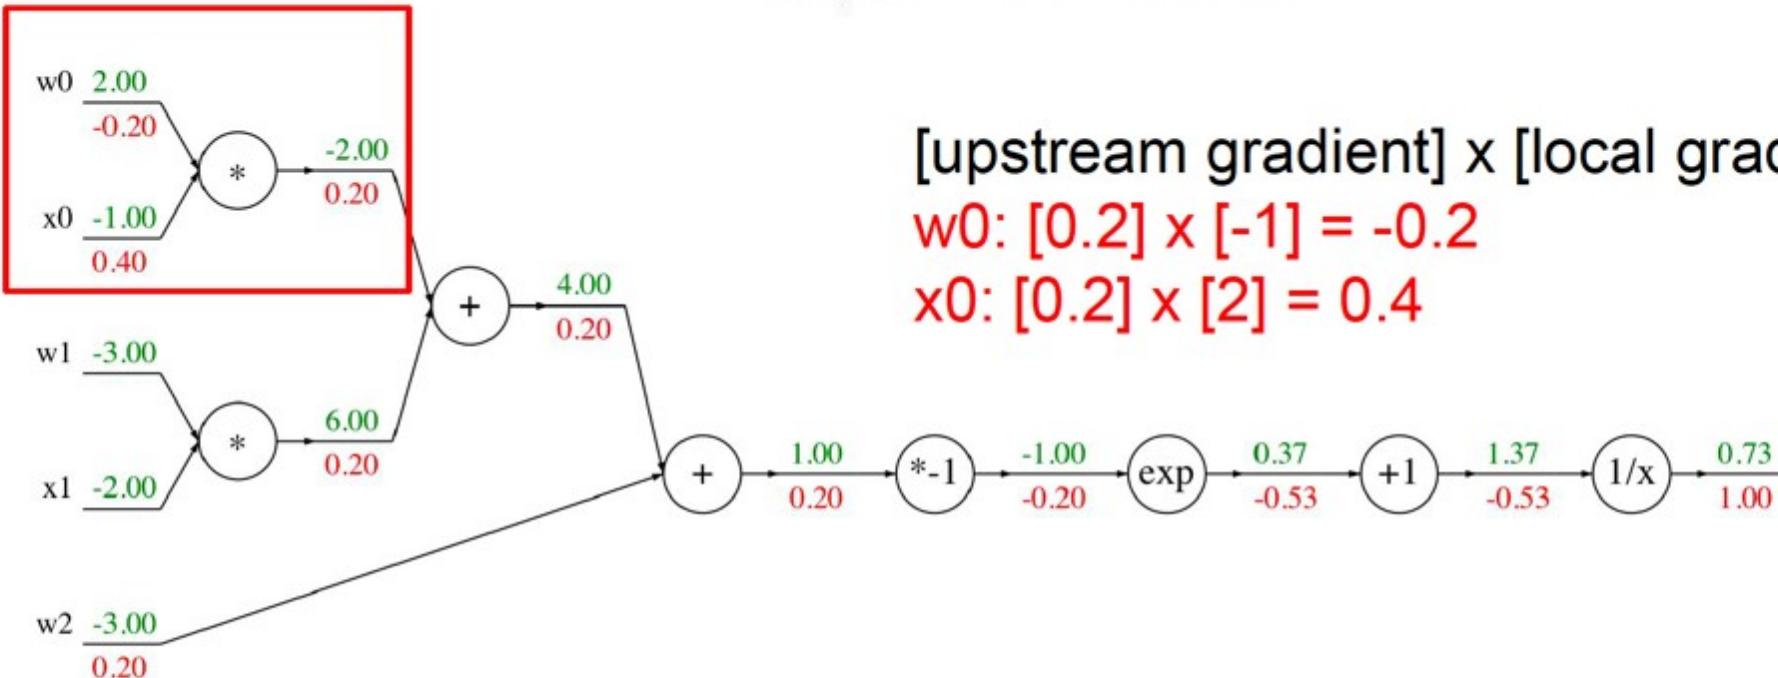

[upstream gradient] x [local gradient]

$$w_0: [0.2] \times [-1] = -0.2$$

$$x_0: [0.2] \times [2] = 0.4$$

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

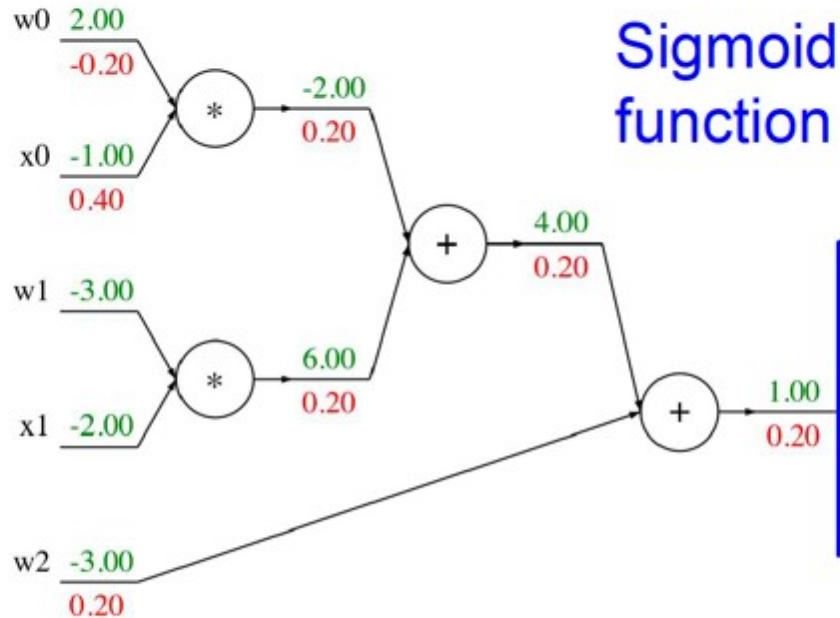

Sigmoid
function


$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

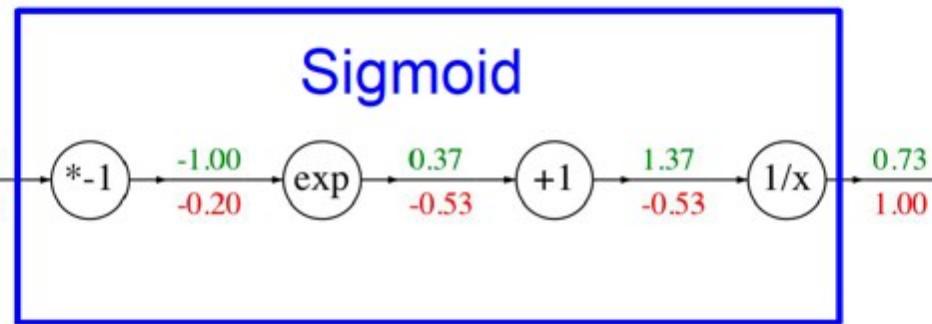

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

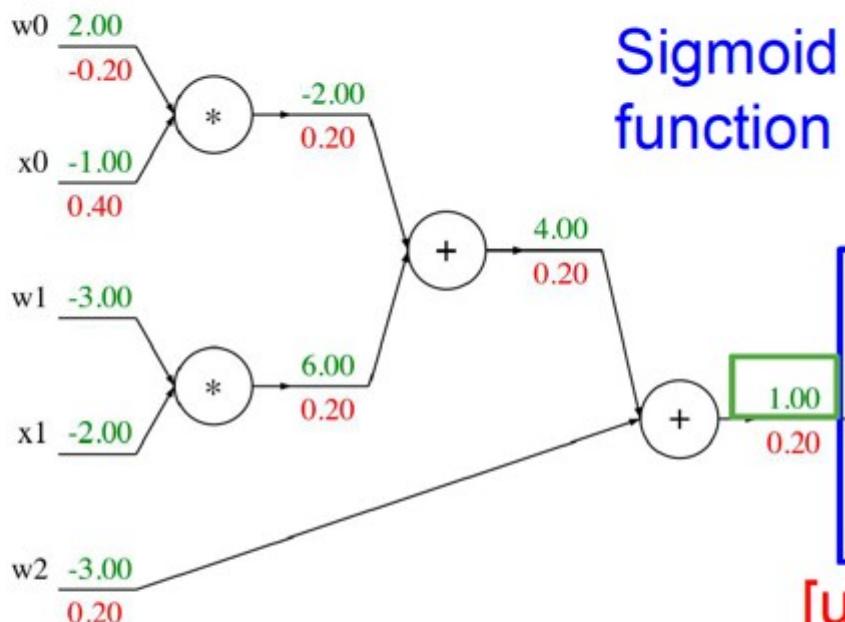

Sigmoid
function

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

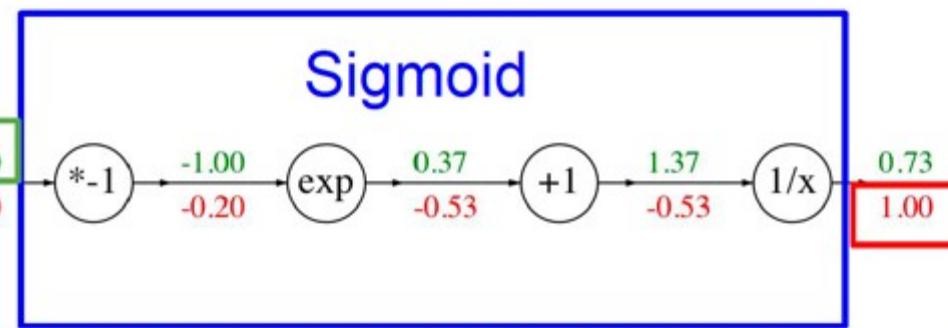

Sigmoid

$$\begin{aligned} &[\text{upstream gradient}] \times [\text{local gradient}] \\ &[1.00] \times [(1 - 1/(1+e^1)) (1/(1+e^1))] = 0.2 \end{aligned}$$


Sigmoid local
gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x)) \sigma(x)$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

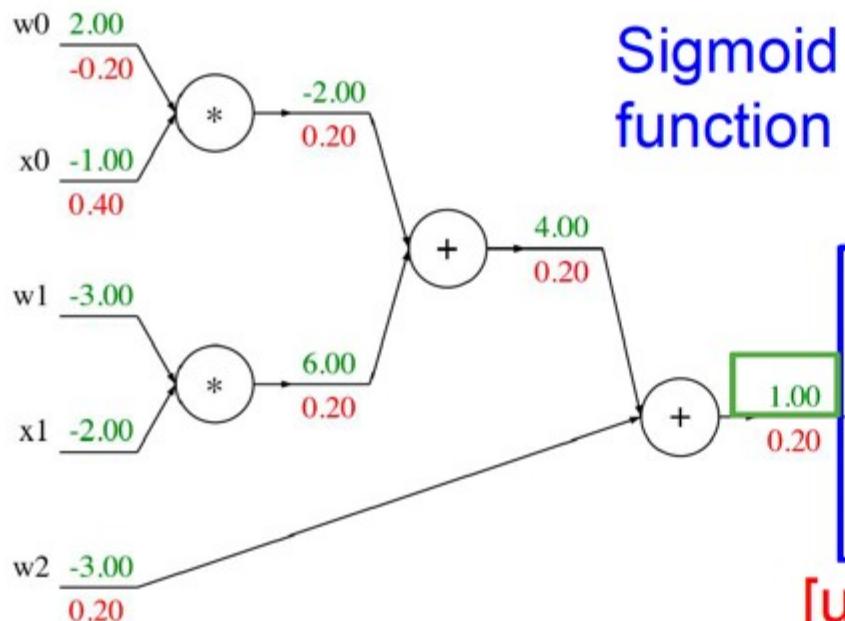

Sigmoid
function

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

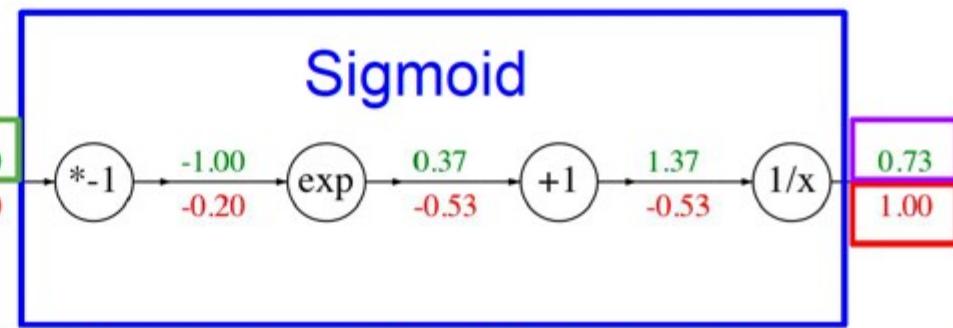

[upstream gradient] \times [local gradient]
[1.00] \times [(1 - 0.73) (0.73)] = 0.2


Sigmoid local
gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x))\sigma(x)$$


Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

Patterns in gradient flow


add gate: gradient distributor

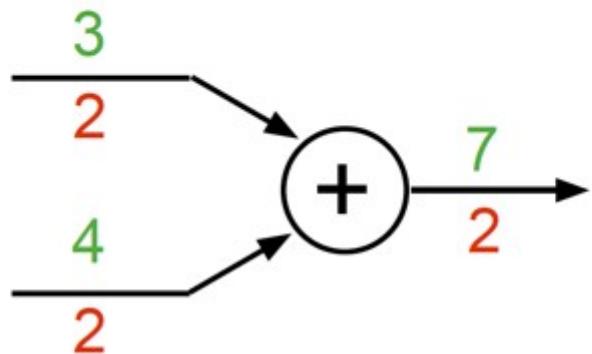


mul gate: “swap multiplier”

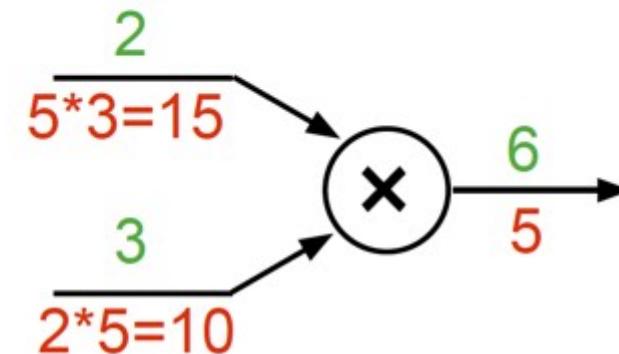


copy gate: gradient adder

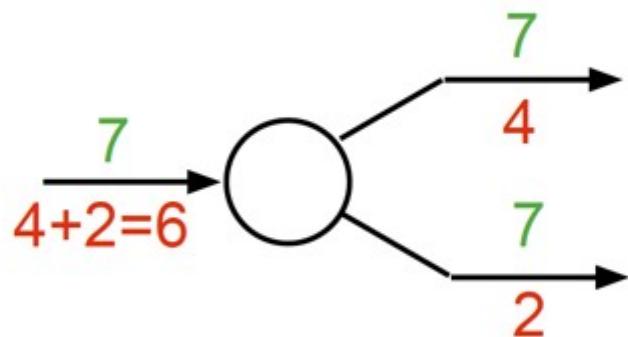

max gate: gradient router

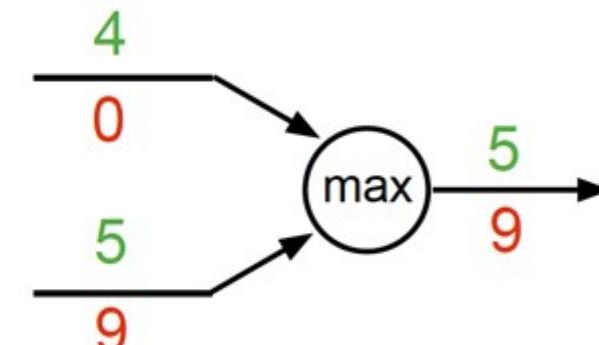

Backprop Implementation: “Flat” code

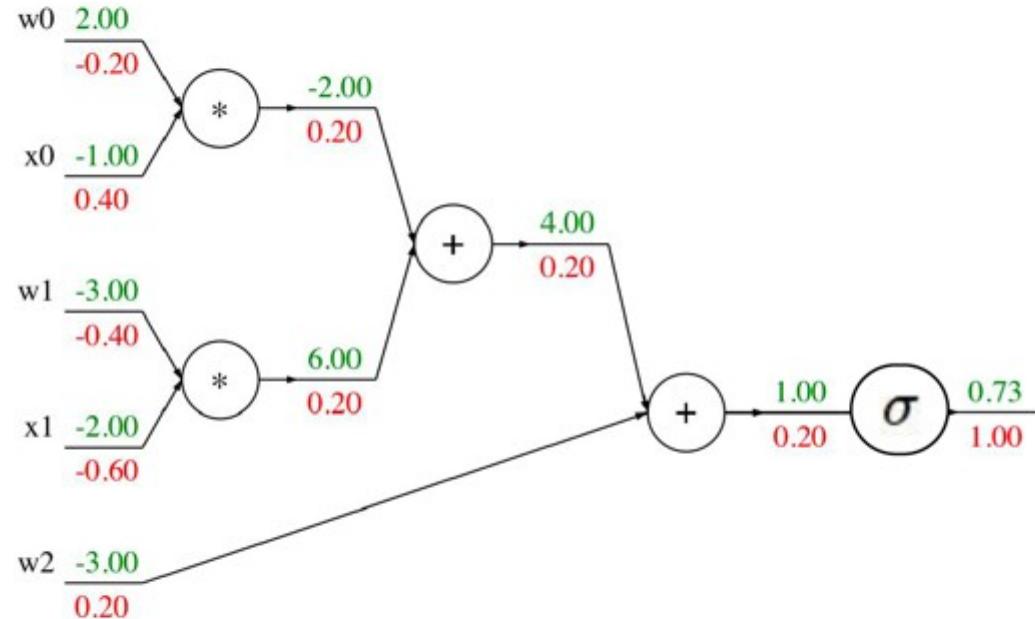


Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

Backward pass:
Compute grads

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

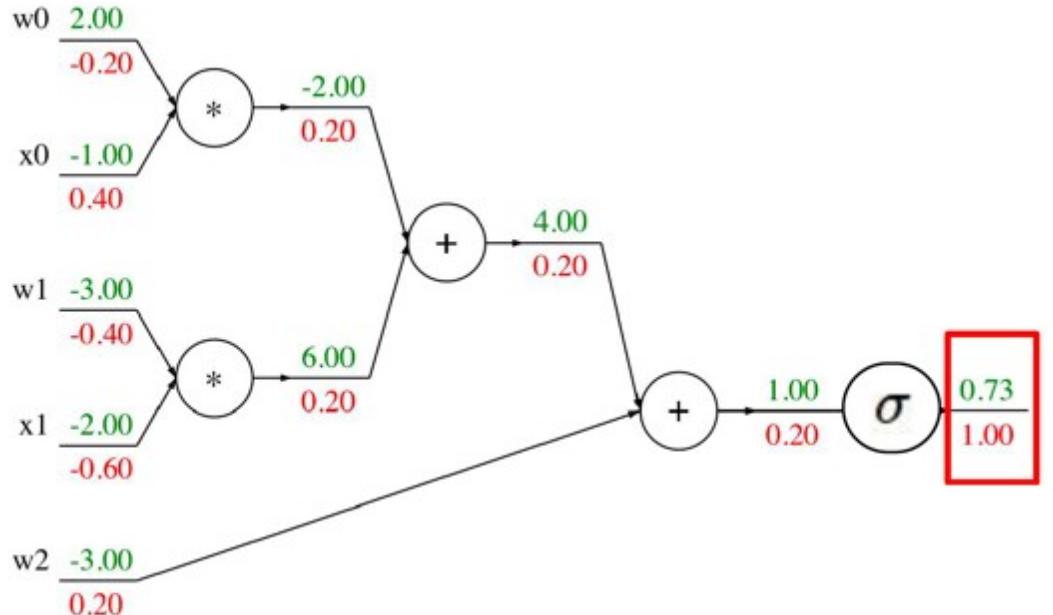

Forward pass:
Compute output


Base case

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

grad_L = 1.0

```
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

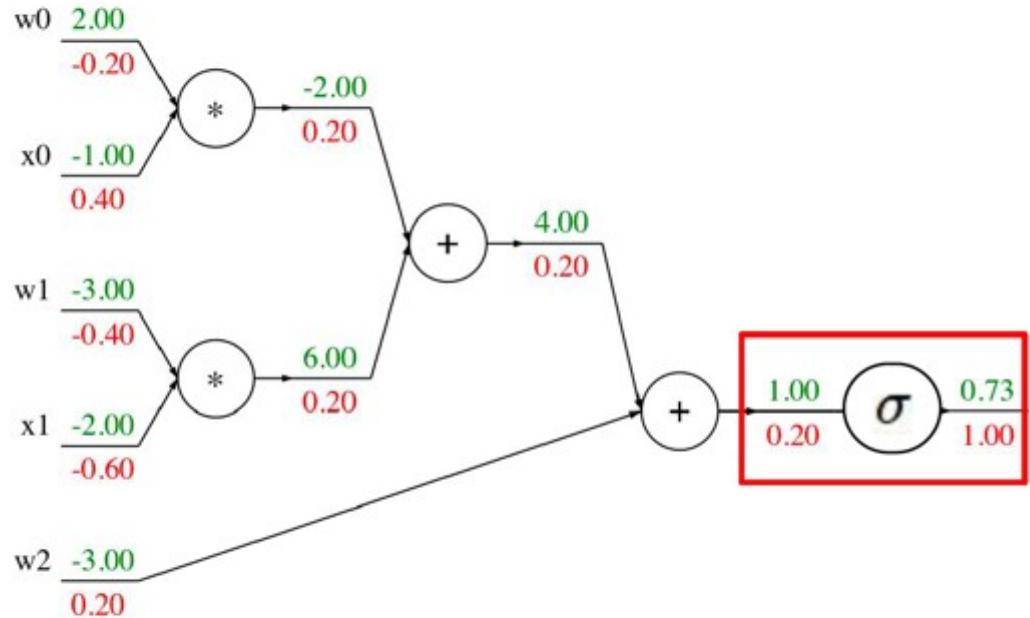


Forward pass:
Compute output

Sigmoid

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

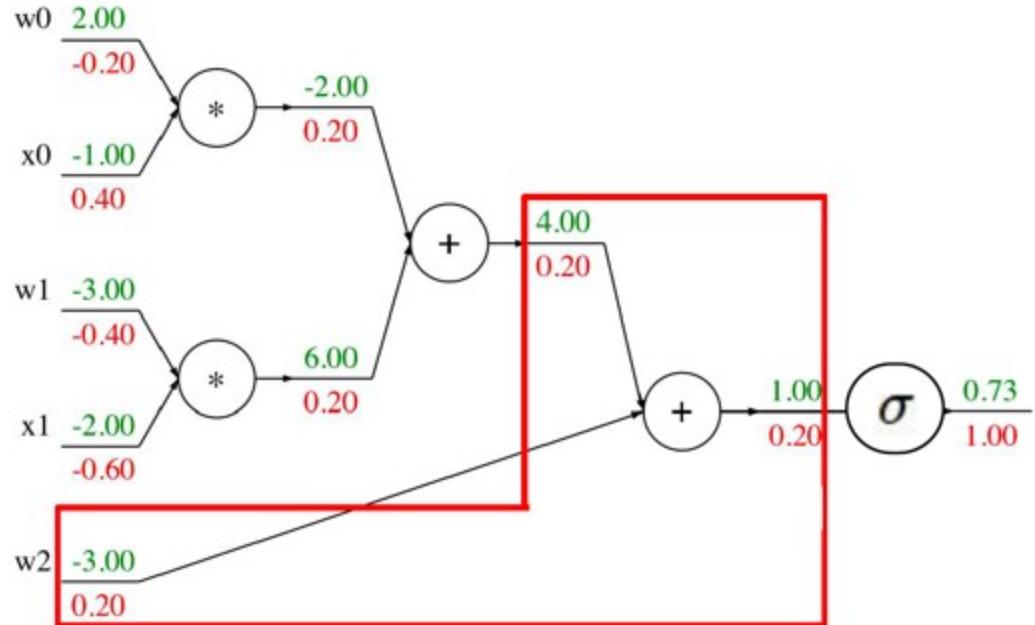


Forward pass:
Compute output

Add gate

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

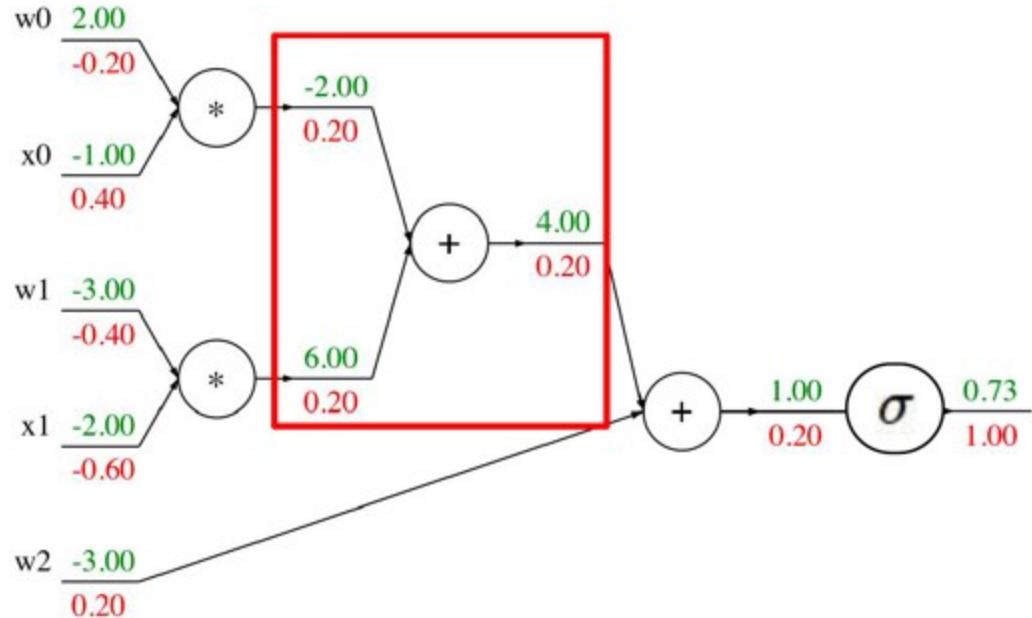


Forward pass:
Compute output

Add gate

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

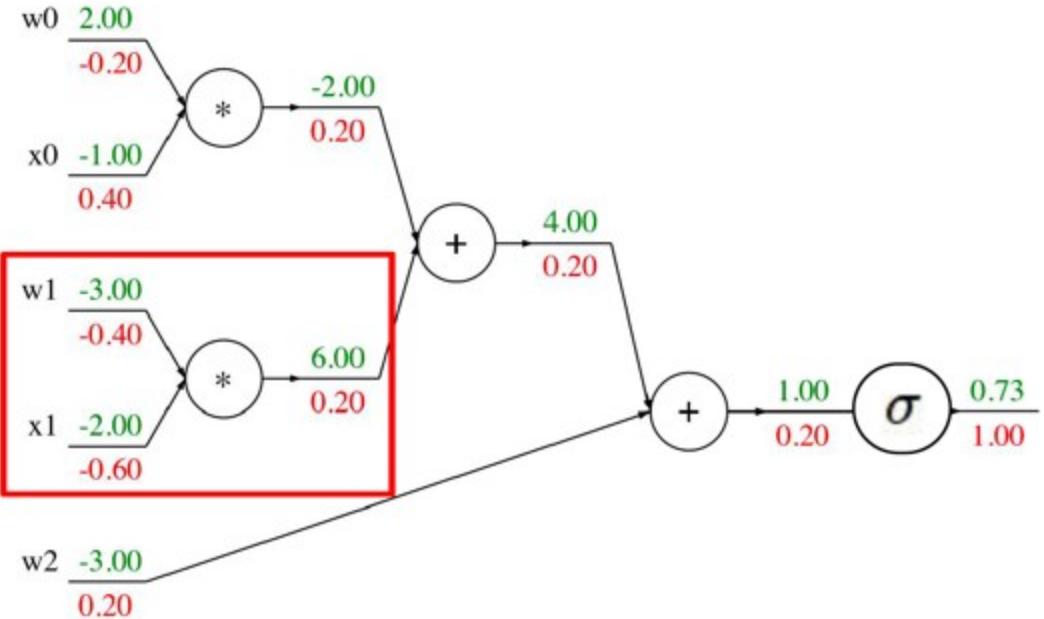


Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Multiply gate

Backprop Implementation: “Flat” code

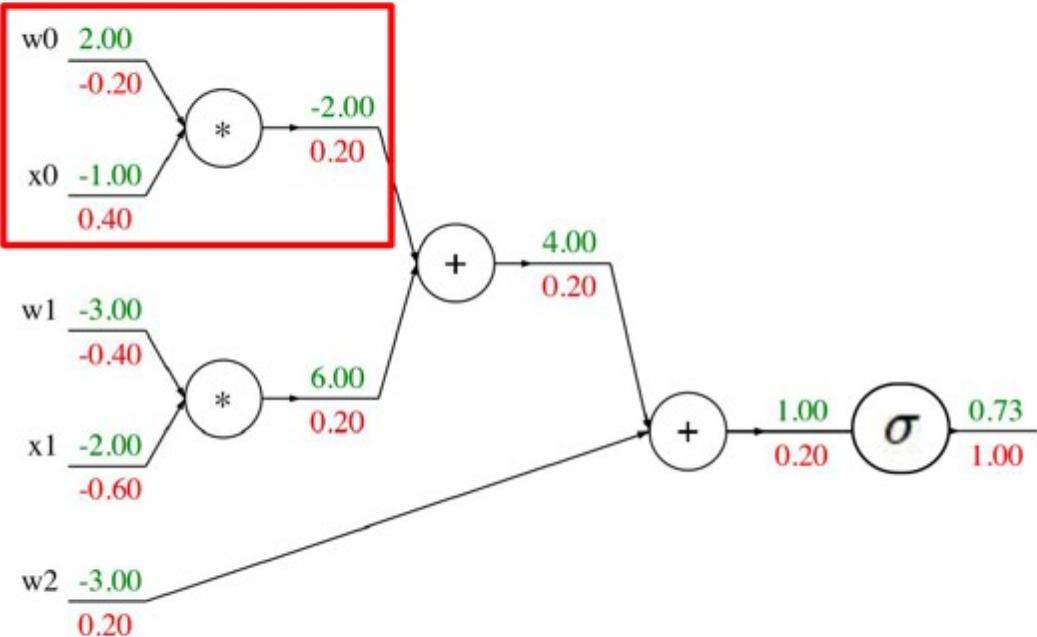

Forward pass:
Compute output

Multiply gate

```
def f(w0, x0, w1, x1, w2):  
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Vector to Scalar

$$x \in \mathbb{R}^N, y \in \mathbb{R}$$

Derivative is **Gradient**:

$$\frac{\partial y}{\partial x} \in \mathbb{R}^N \quad \left(\frac{\partial y}{\partial x} \right)_n = \frac{\partial y}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will y change?

Vector to Vector


$$x \in \mathbb{R}^N, y \in \mathbb{R}^M$$

Derivative is **Jacobian**:


$$\frac{\partial y}{\partial x} \in \mathbb{R}^{N \times M} \quad \left(\frac{\partial y}{\partial x} \right)_{n,m} = \frac{\partial y_m}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will each element of y change?

Backprop with Vectors

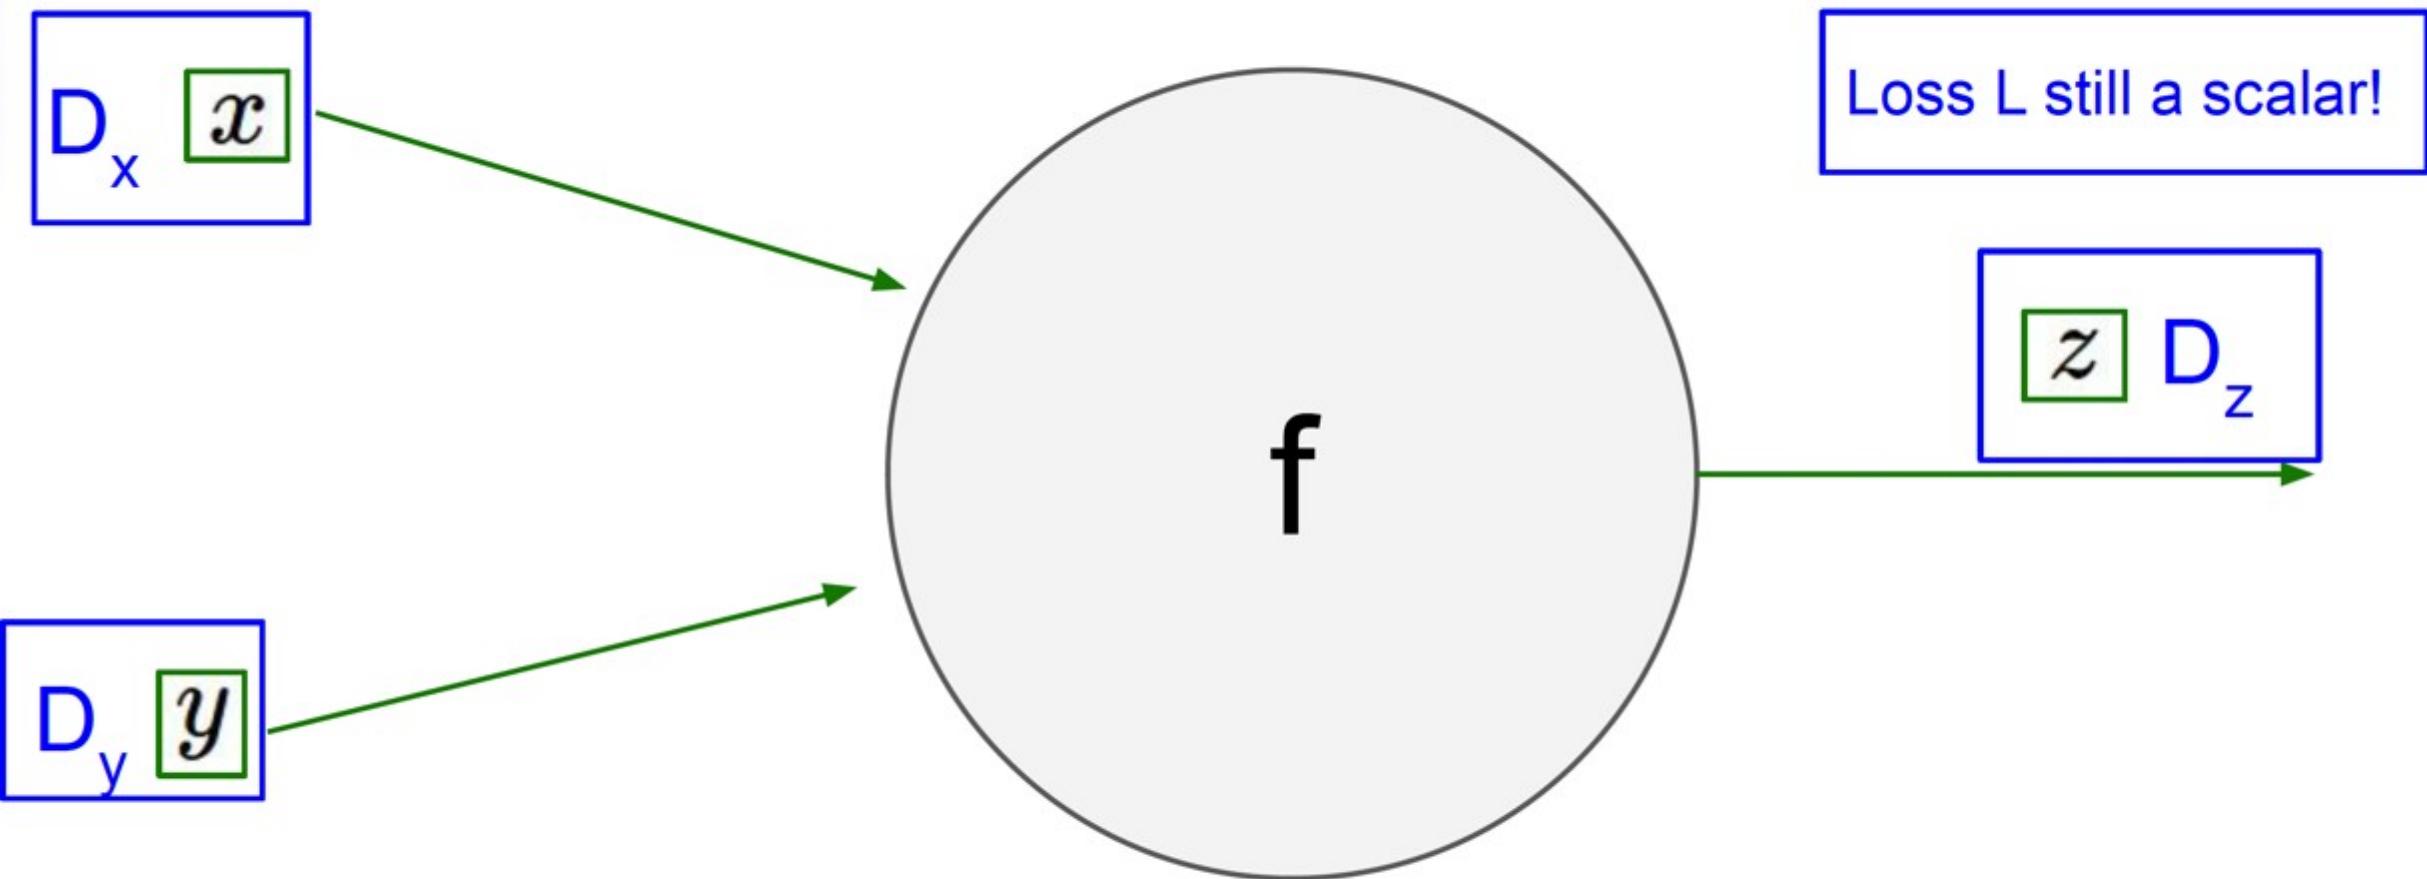


Backprop with Vectors

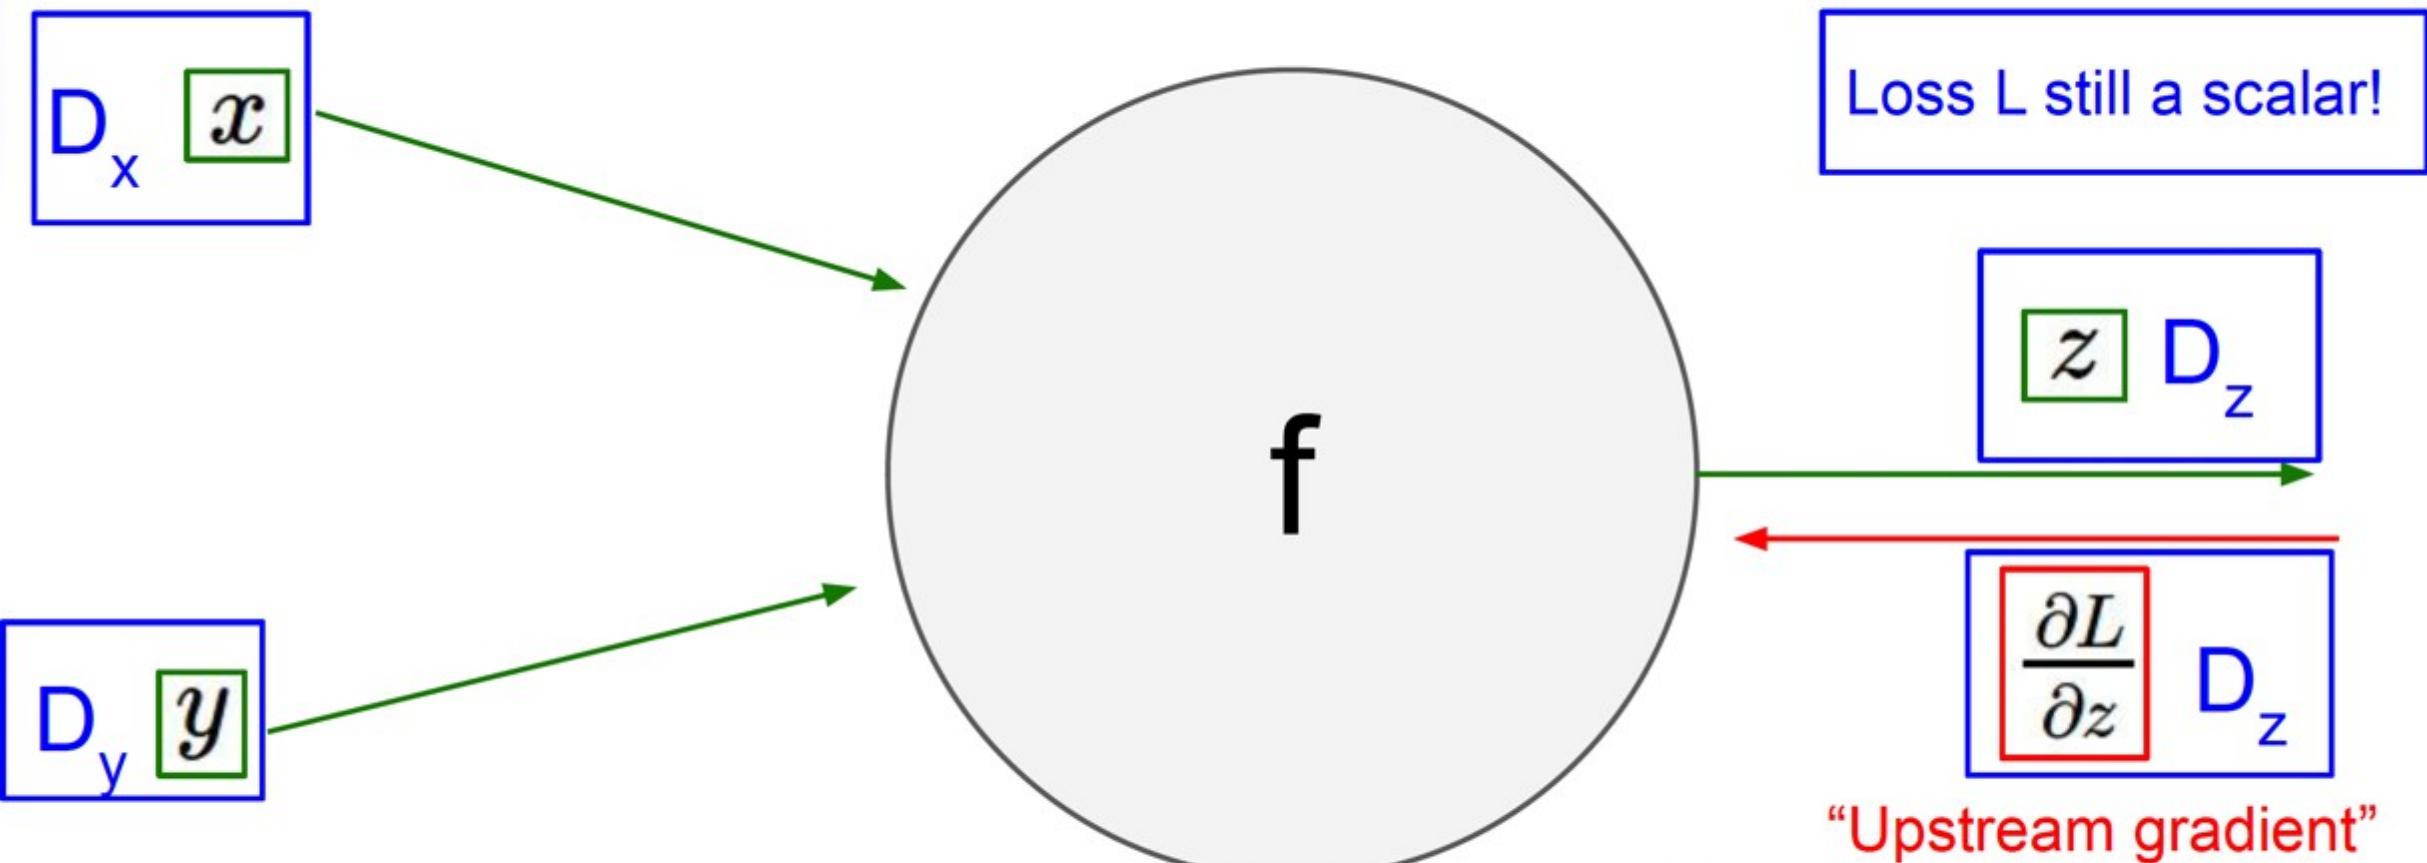


Loss L still a scalar!

“Upstream gradient”
For each element of z , how
much does it influence L ?


Backprop with Vectors

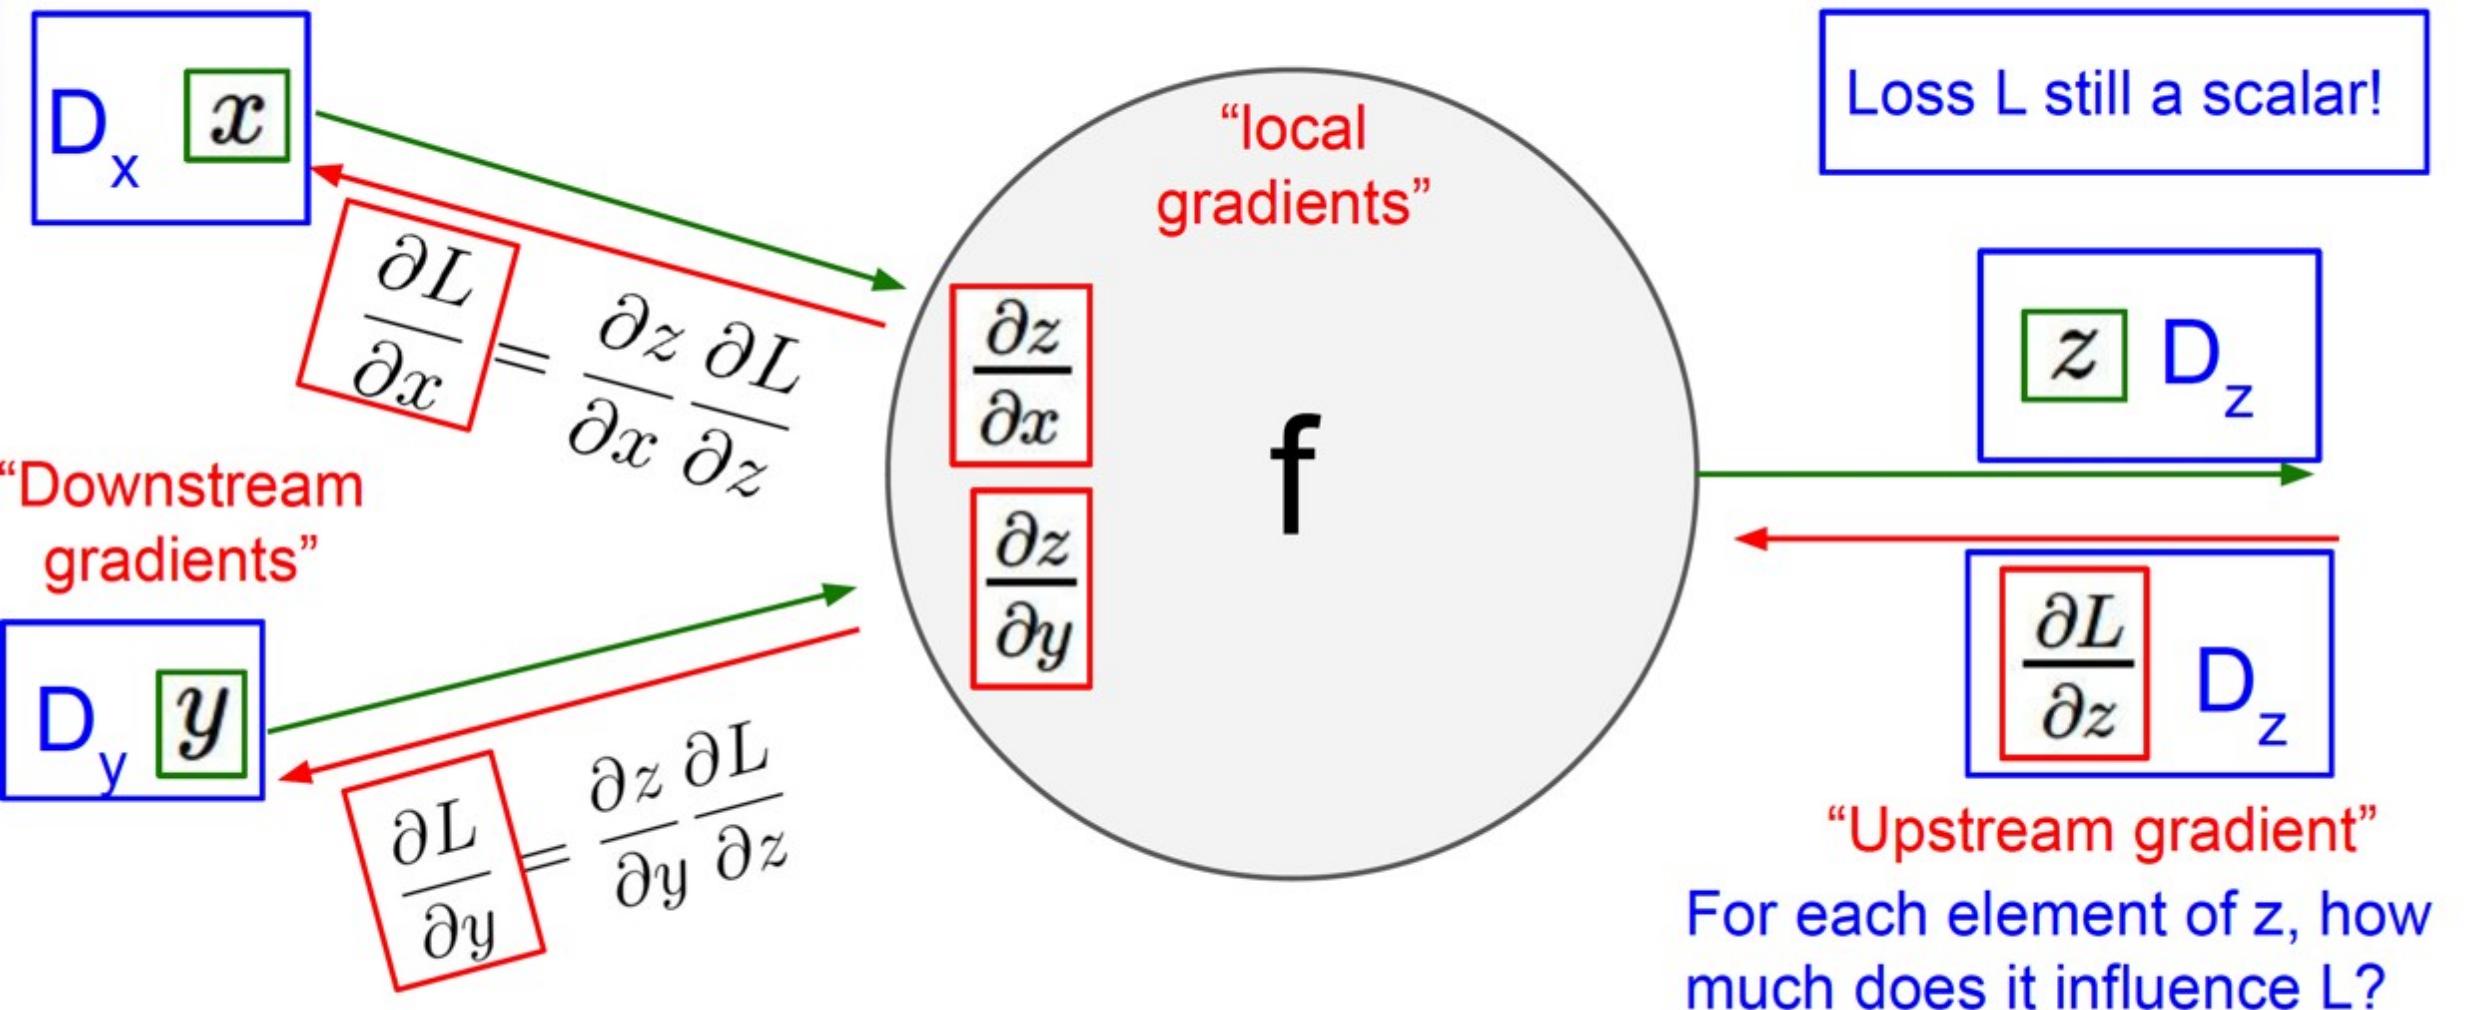


Backprop with Vectors

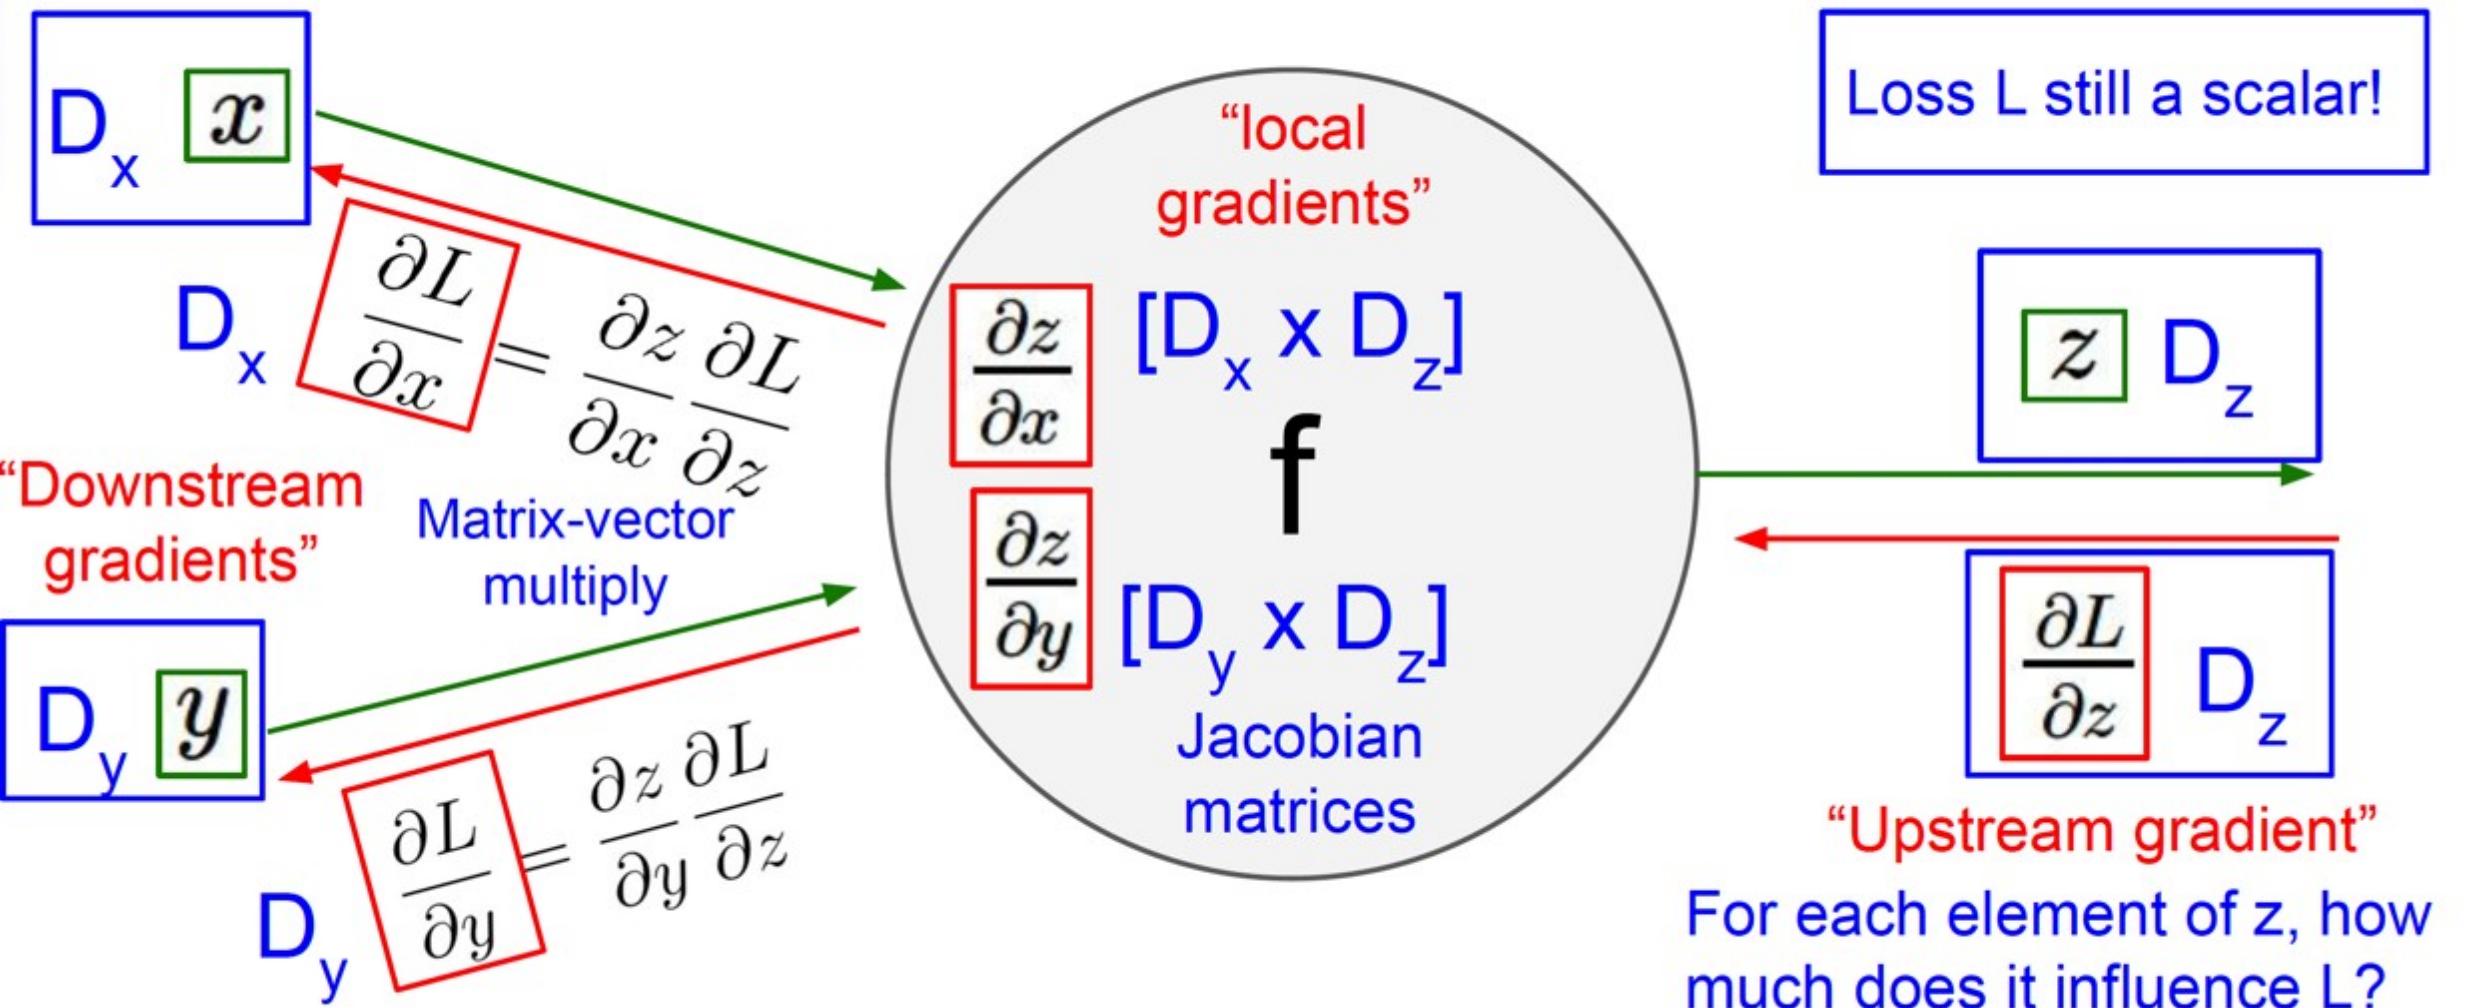

Gradients of variables wrt loss have same dims as the original variable

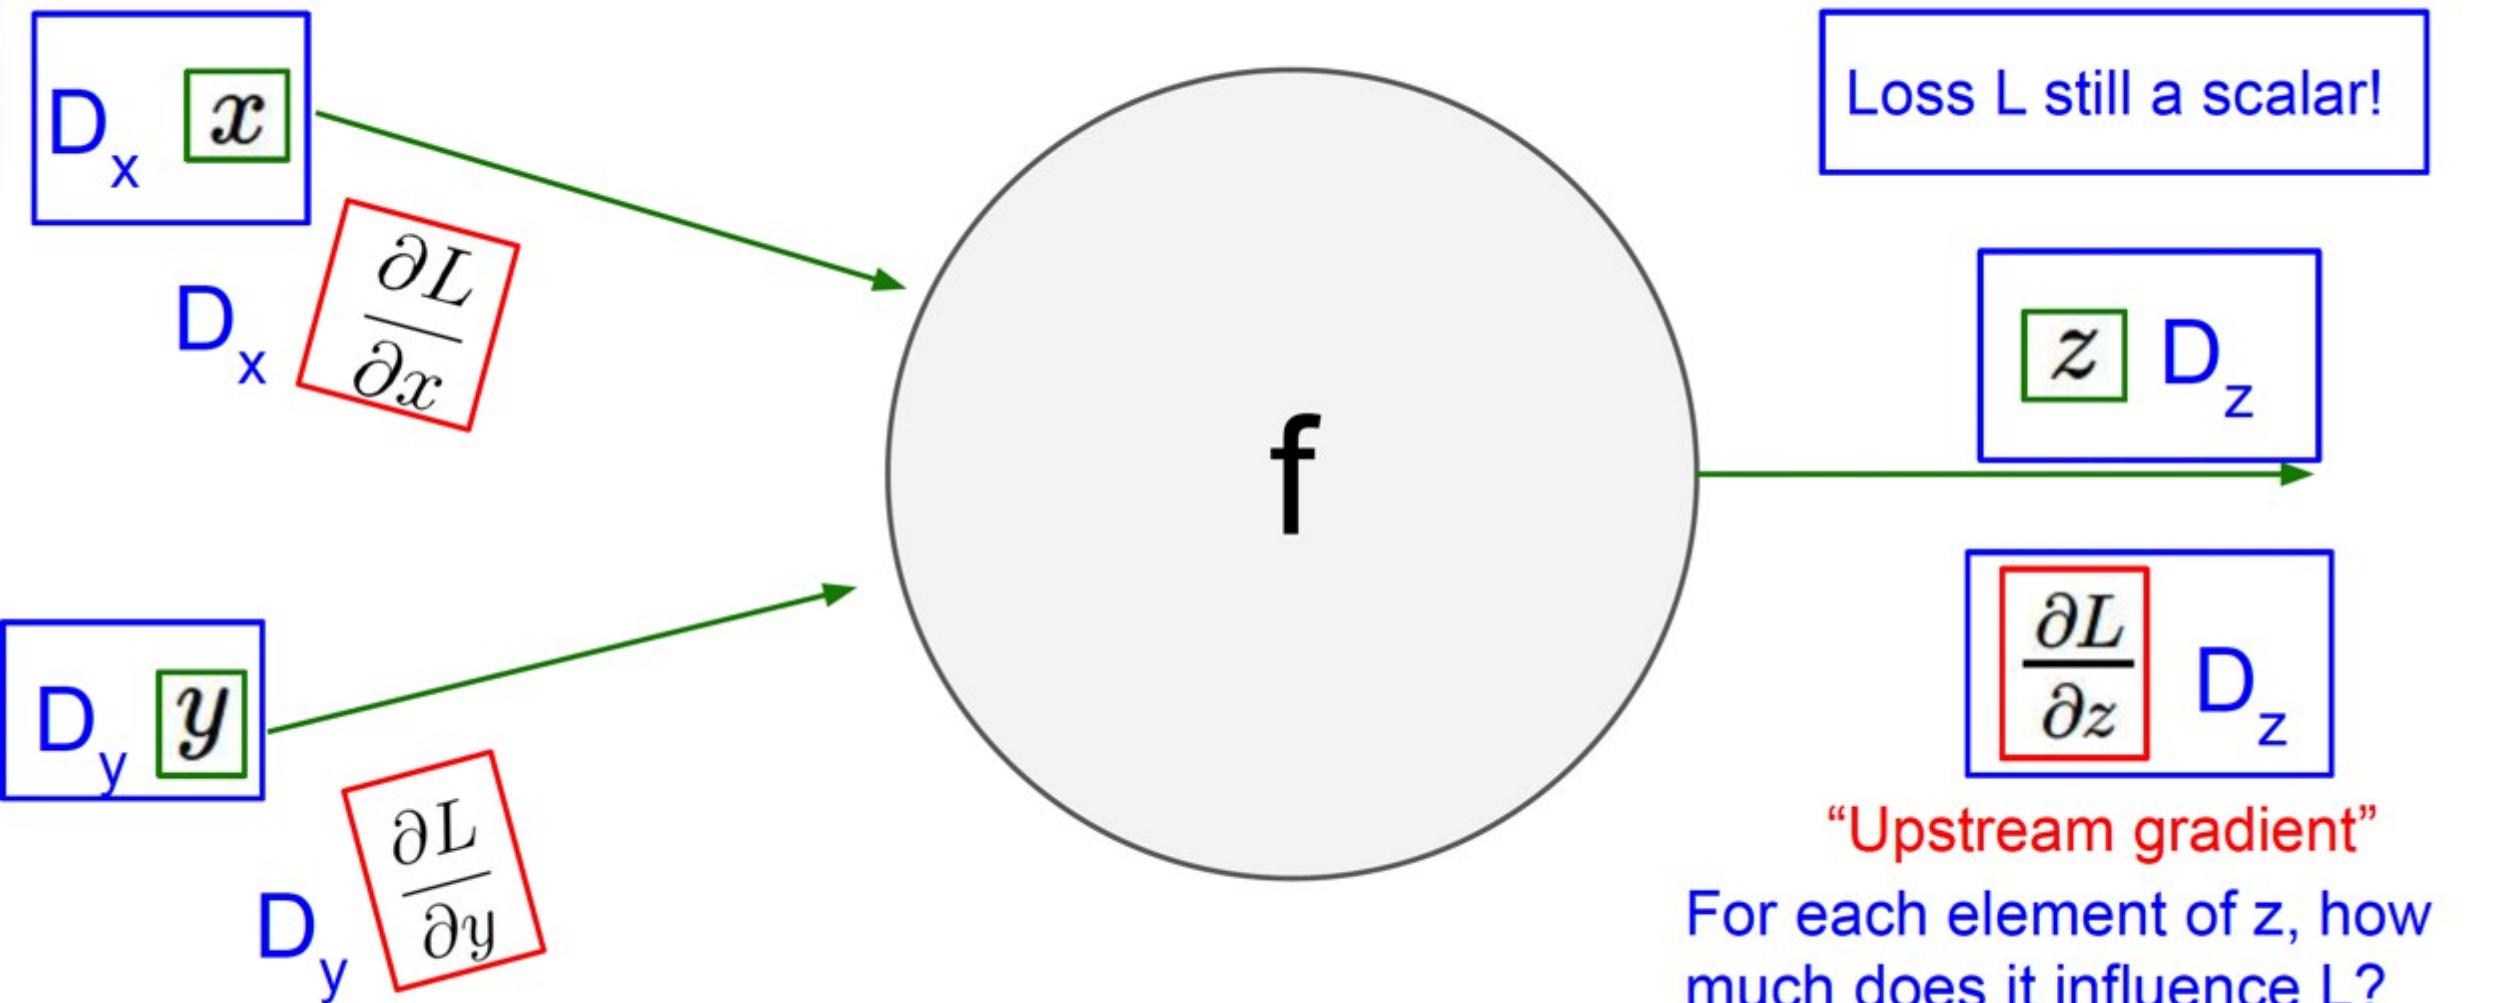


A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

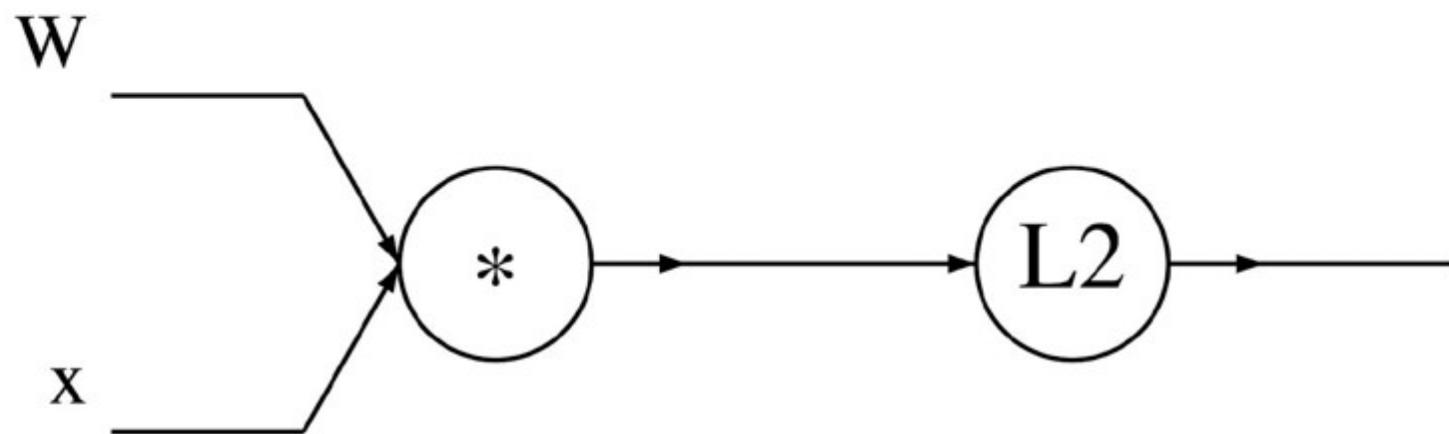

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} W$$

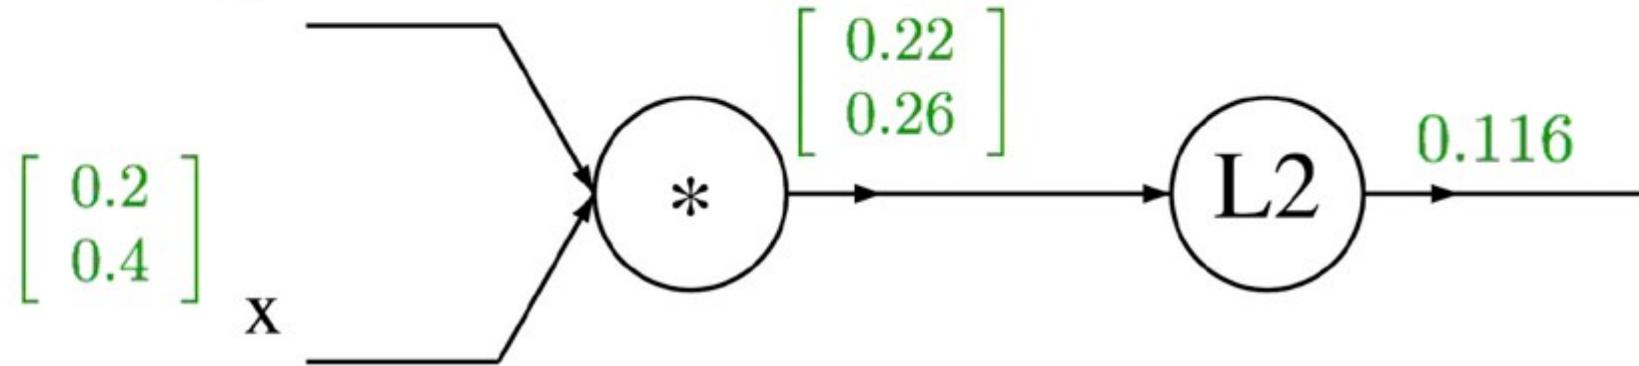


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} W$$

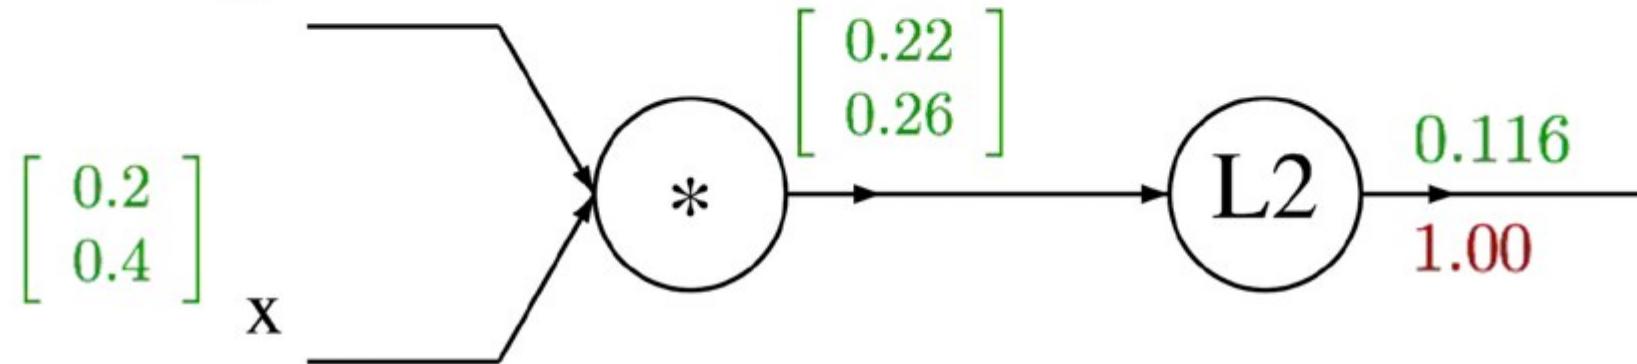


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} W$$

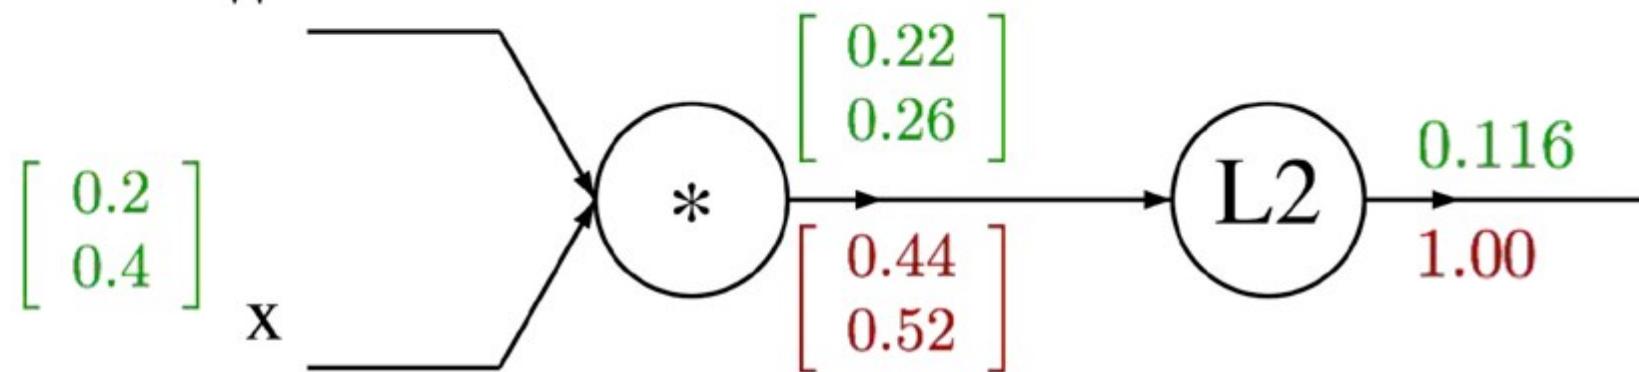

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$


$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial f}{\partial q_i} = 2q_i$$

$$\boxed{\nabla_q f = 2q}$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} W$$

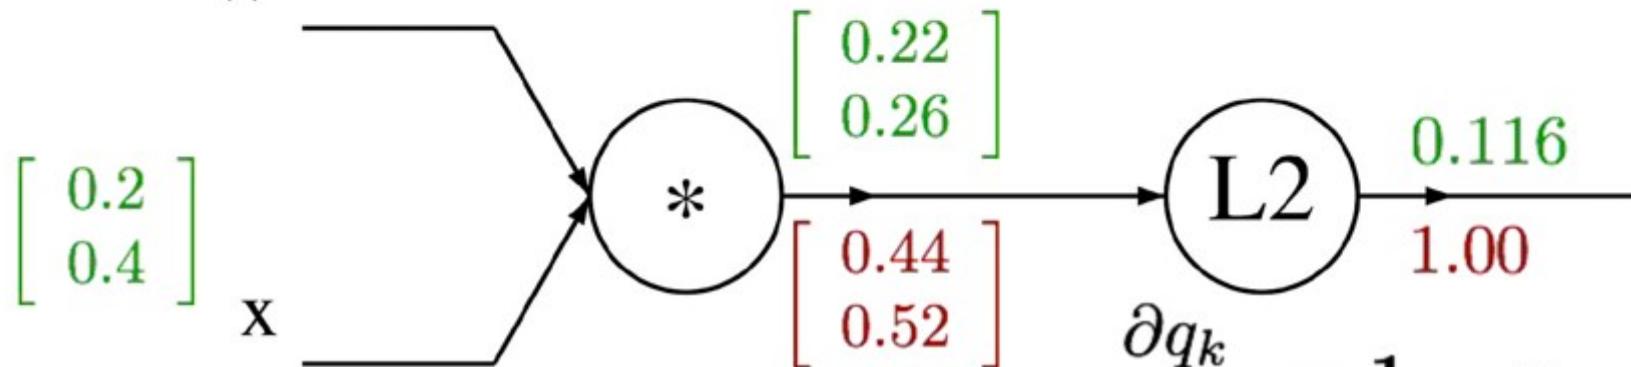


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial W_{i,j}} = \mathbf{1}_{k=i} x_j$$

$$\begin{aligned} \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k)(\mathbf{1}_{k=i} x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

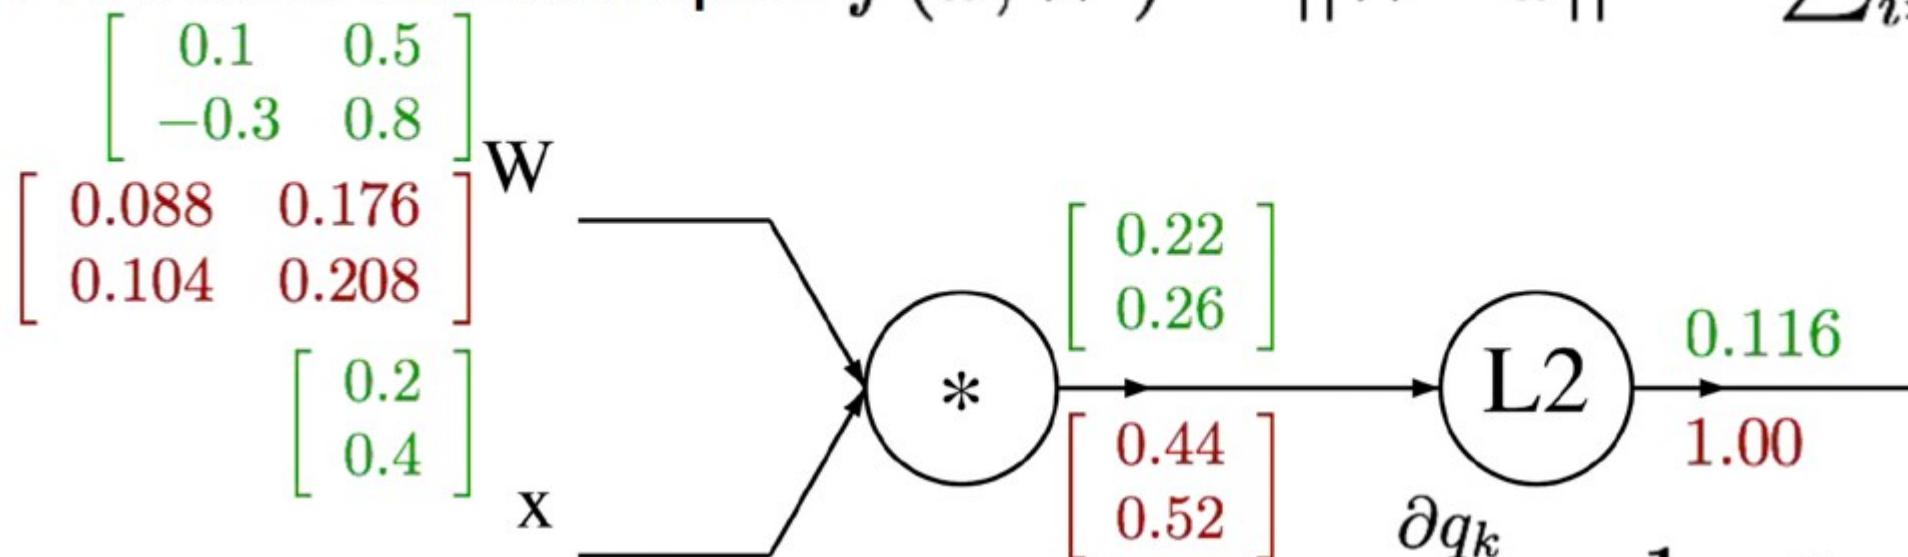


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial W_{i,j}} = \mathbf{1}_{k=i} x_j$$

$$\begin{aligned} \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k)(\mathbf{1}_{k=i} x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

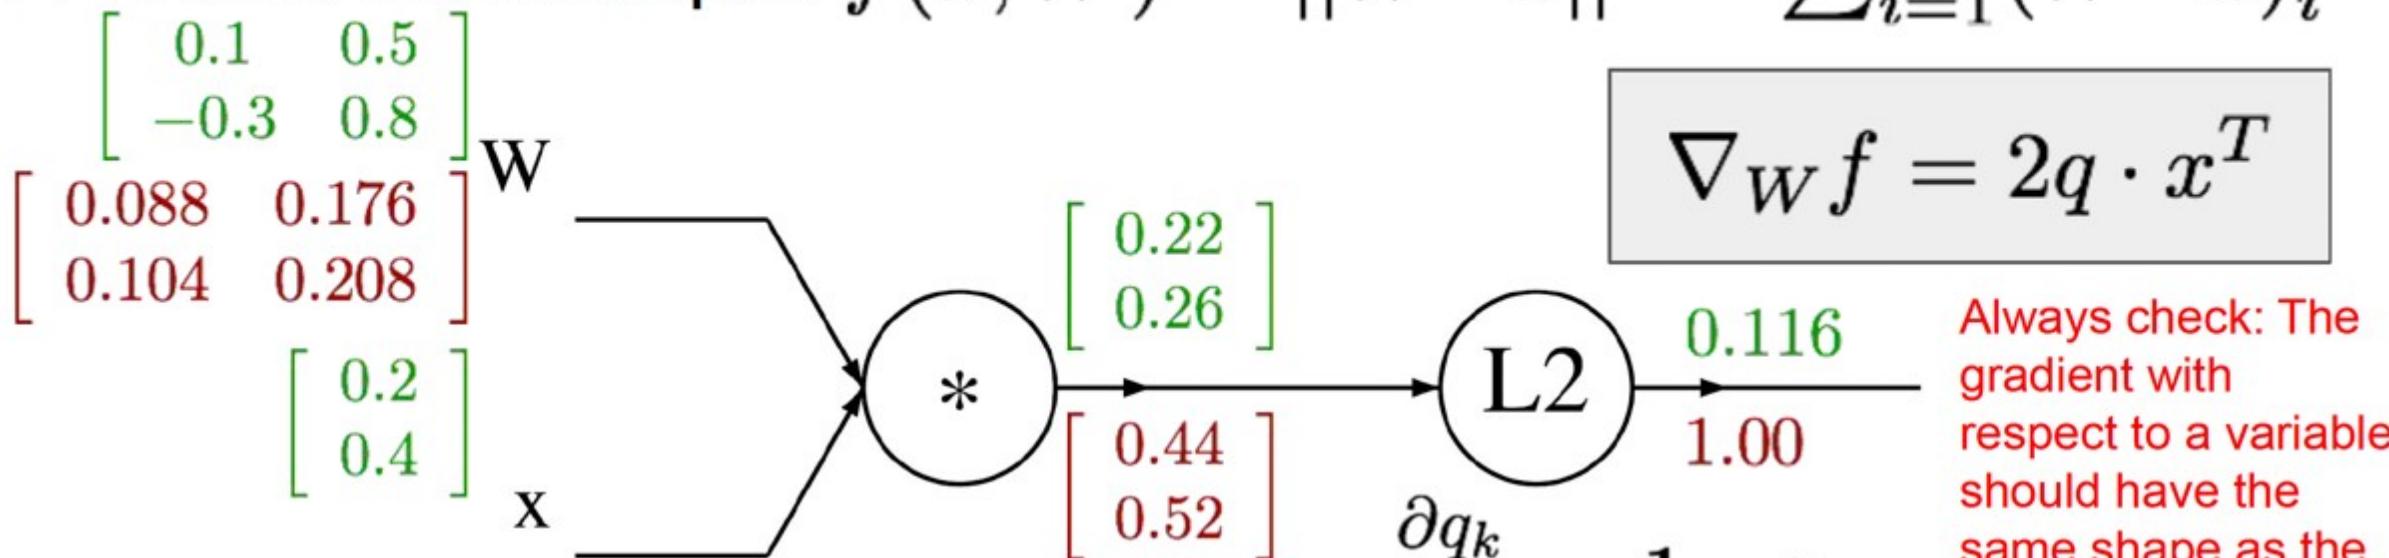


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial W_{i,j}} = \mathbf{1}_{k=i} x_j$$

$$\begin{aligned} \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k)(\mathbf{1}_{k=i} x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

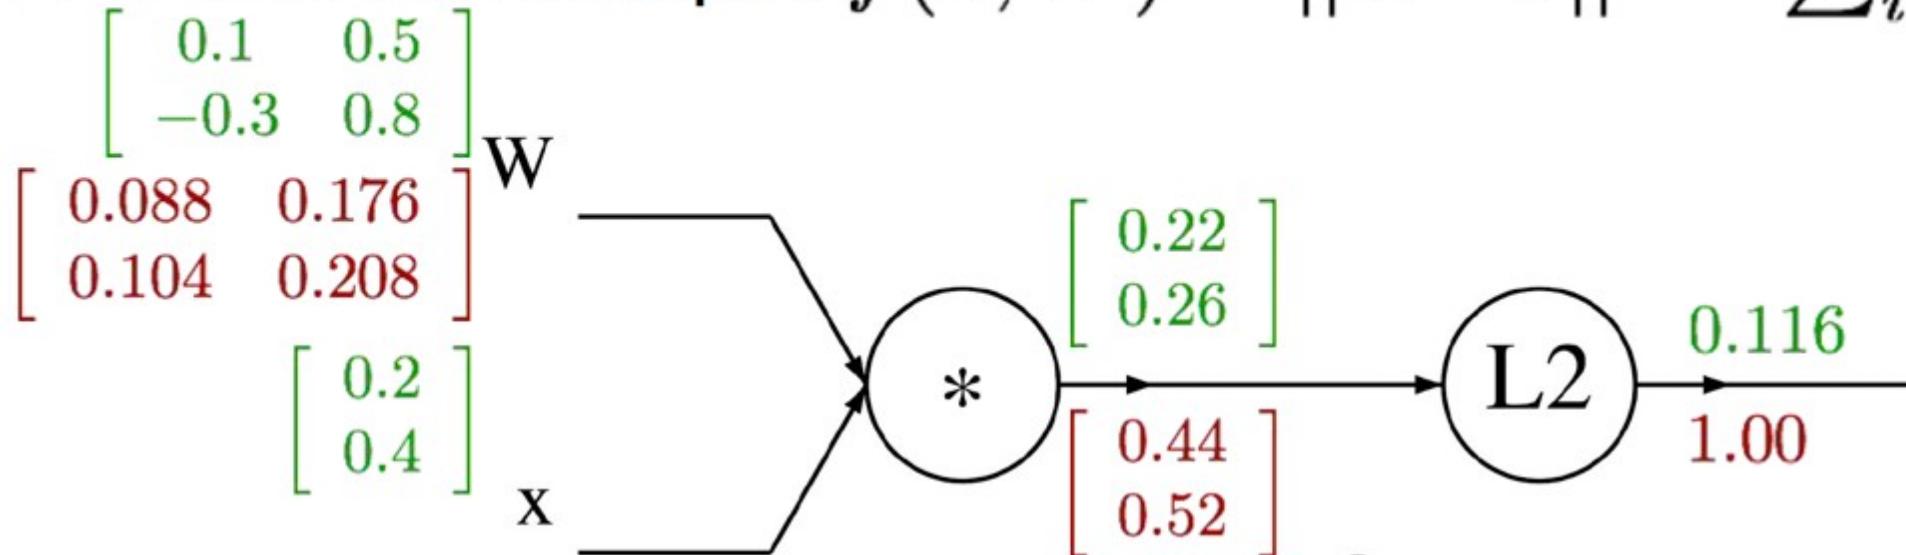


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial x_i} = W_{k,i}$$

$$\begin{aligned} \frac{\partial f}{\partial x_i} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial x_i} \\ &= \sum_k 2q_k W_{k,i} \end{aligned}$$

A vectorized example: $f(x, W) = \|W \cdot x\|^2 = \sum_{i=1}^n (W \cdot x)_i^2$

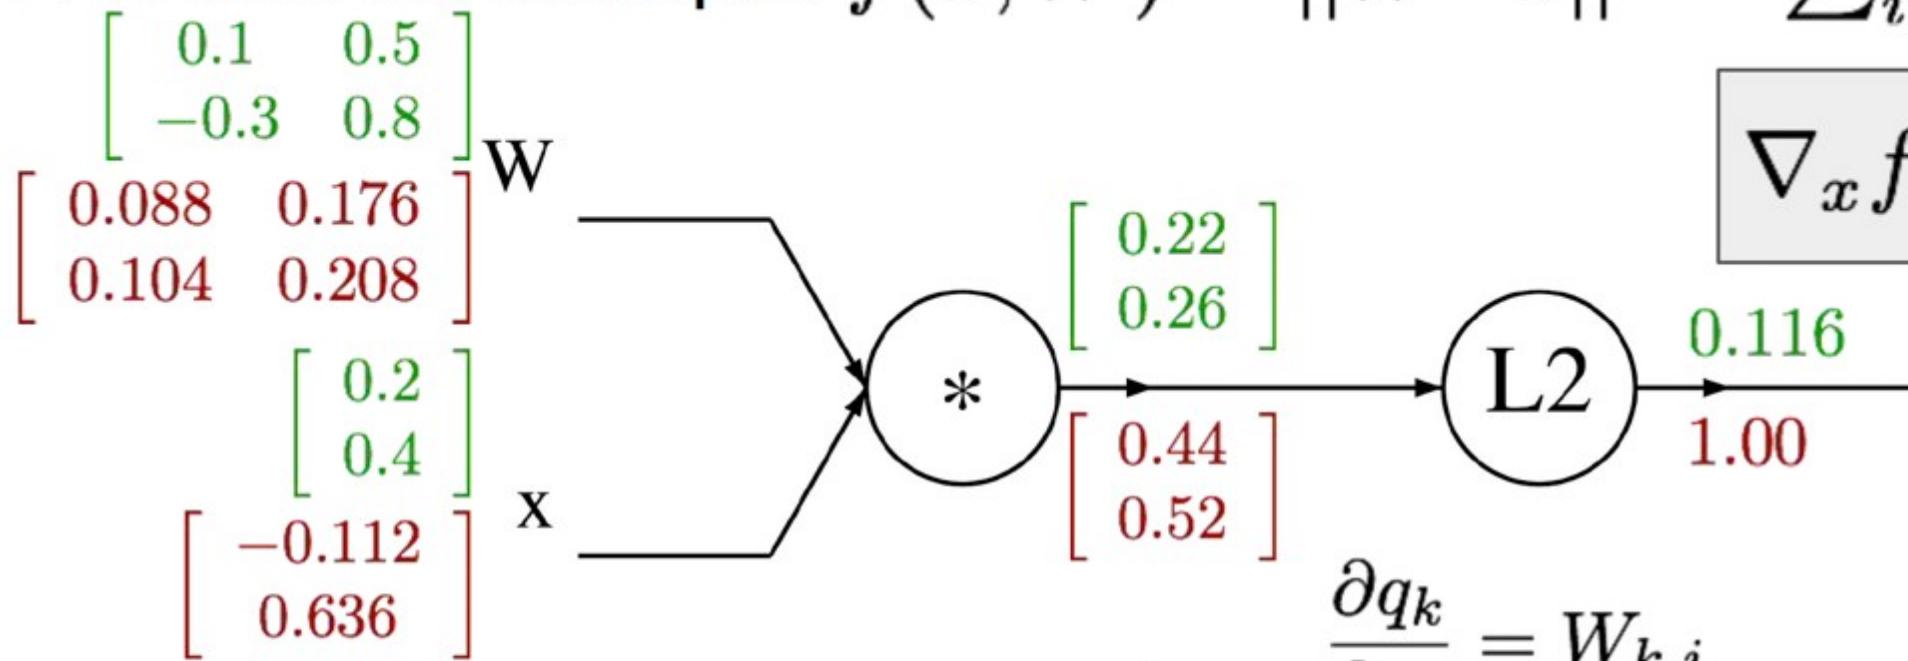

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = \|q\|^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial x_i} = W_{k,i}$$

$$\begin{aligned} \frac{\partial f}{\partial x_i} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial x_i} \\ &= \sum_k 2q_k W_{k,i} \end{aligned}$$

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Forward pass

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Forward pass

Calculate the analytical gradients

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Forward pass

Calculate the analytical gradients

Gradient descent