

Monitoring 101

with Prometheus 

and Grafana 



Table of content

- 01 What is monitoring ?
- 02 Introduction to Prometheus &
Grafana

01. What is monitoring ?

Life without monitoring


01. What is monitoring ?

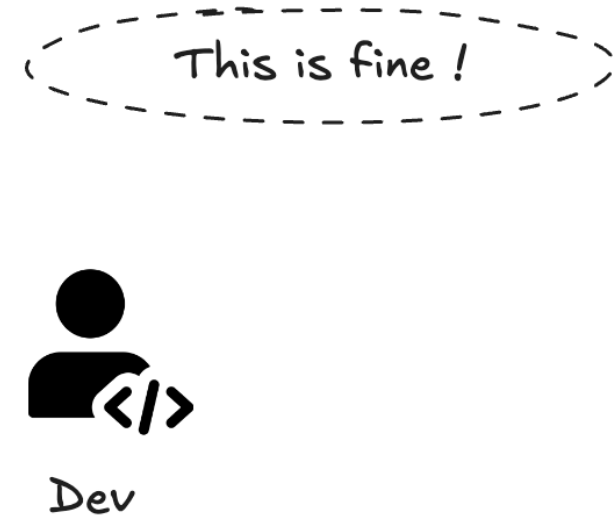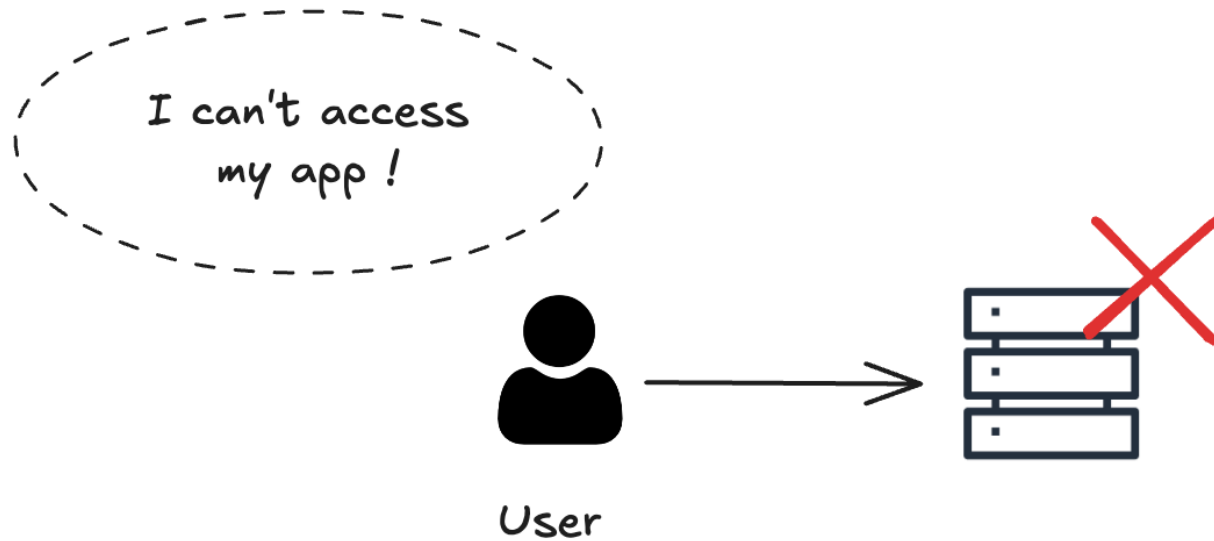

Definition


01. What is monitoring ?

«The monitoring process collects data about a system to check if the system is operating as expected» [AWS](#)

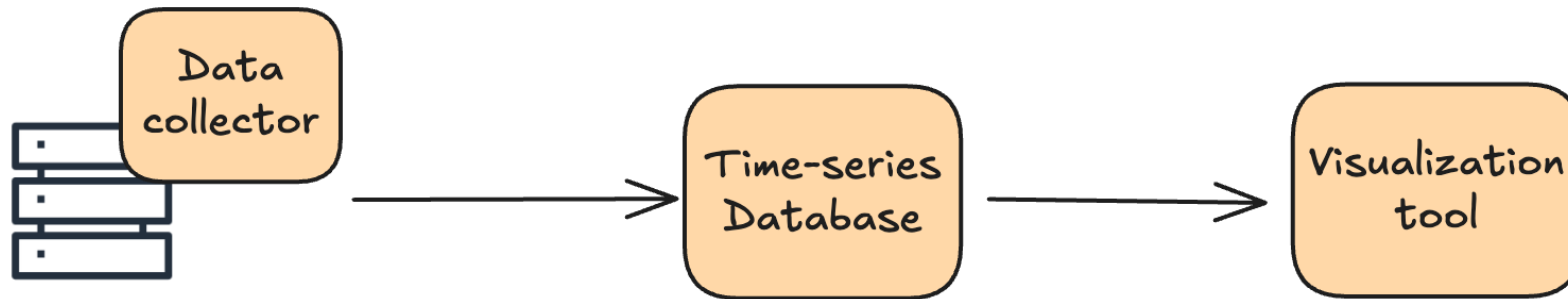

Life with monitoring


01. What is monitoring ?

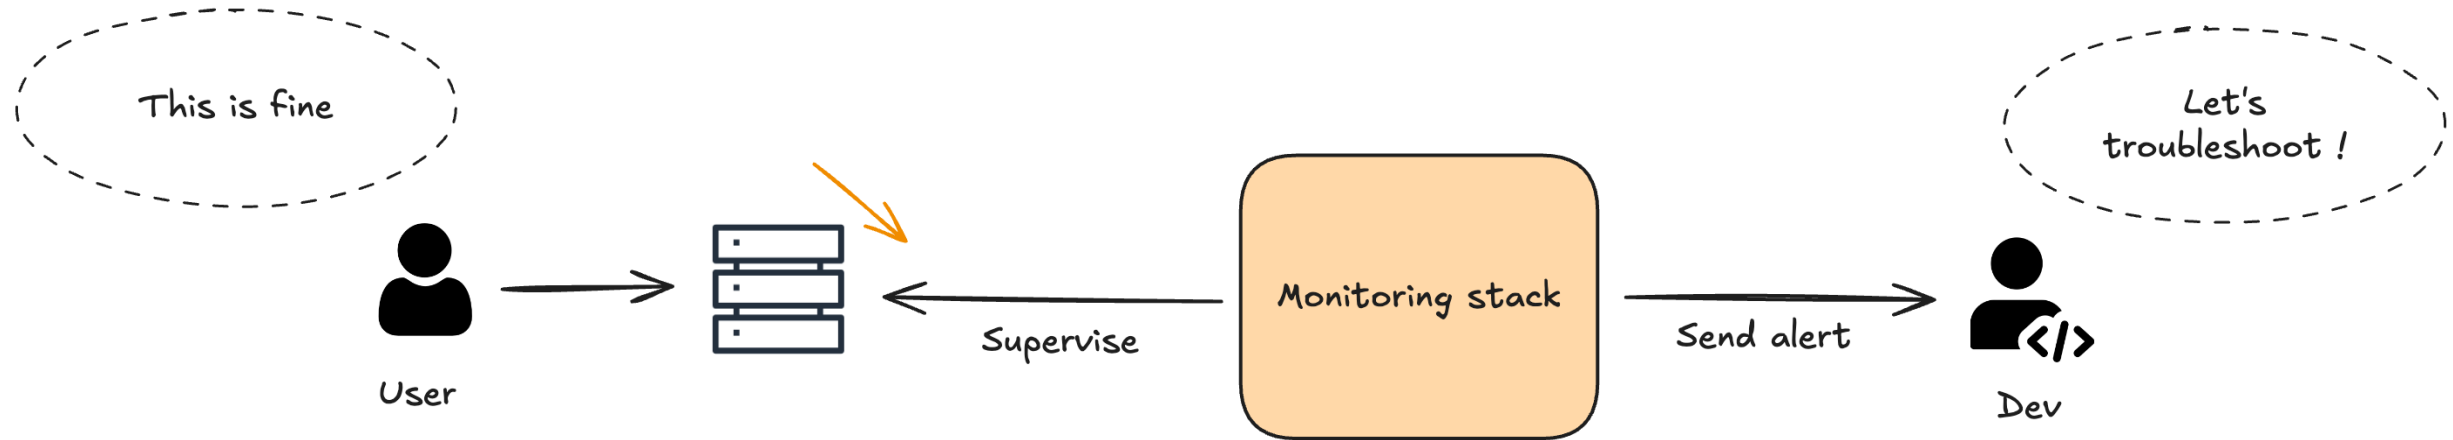

02. Introduction to Prometheus & Grafana

Concepts

02. Introduction to Prometheus & Grafana

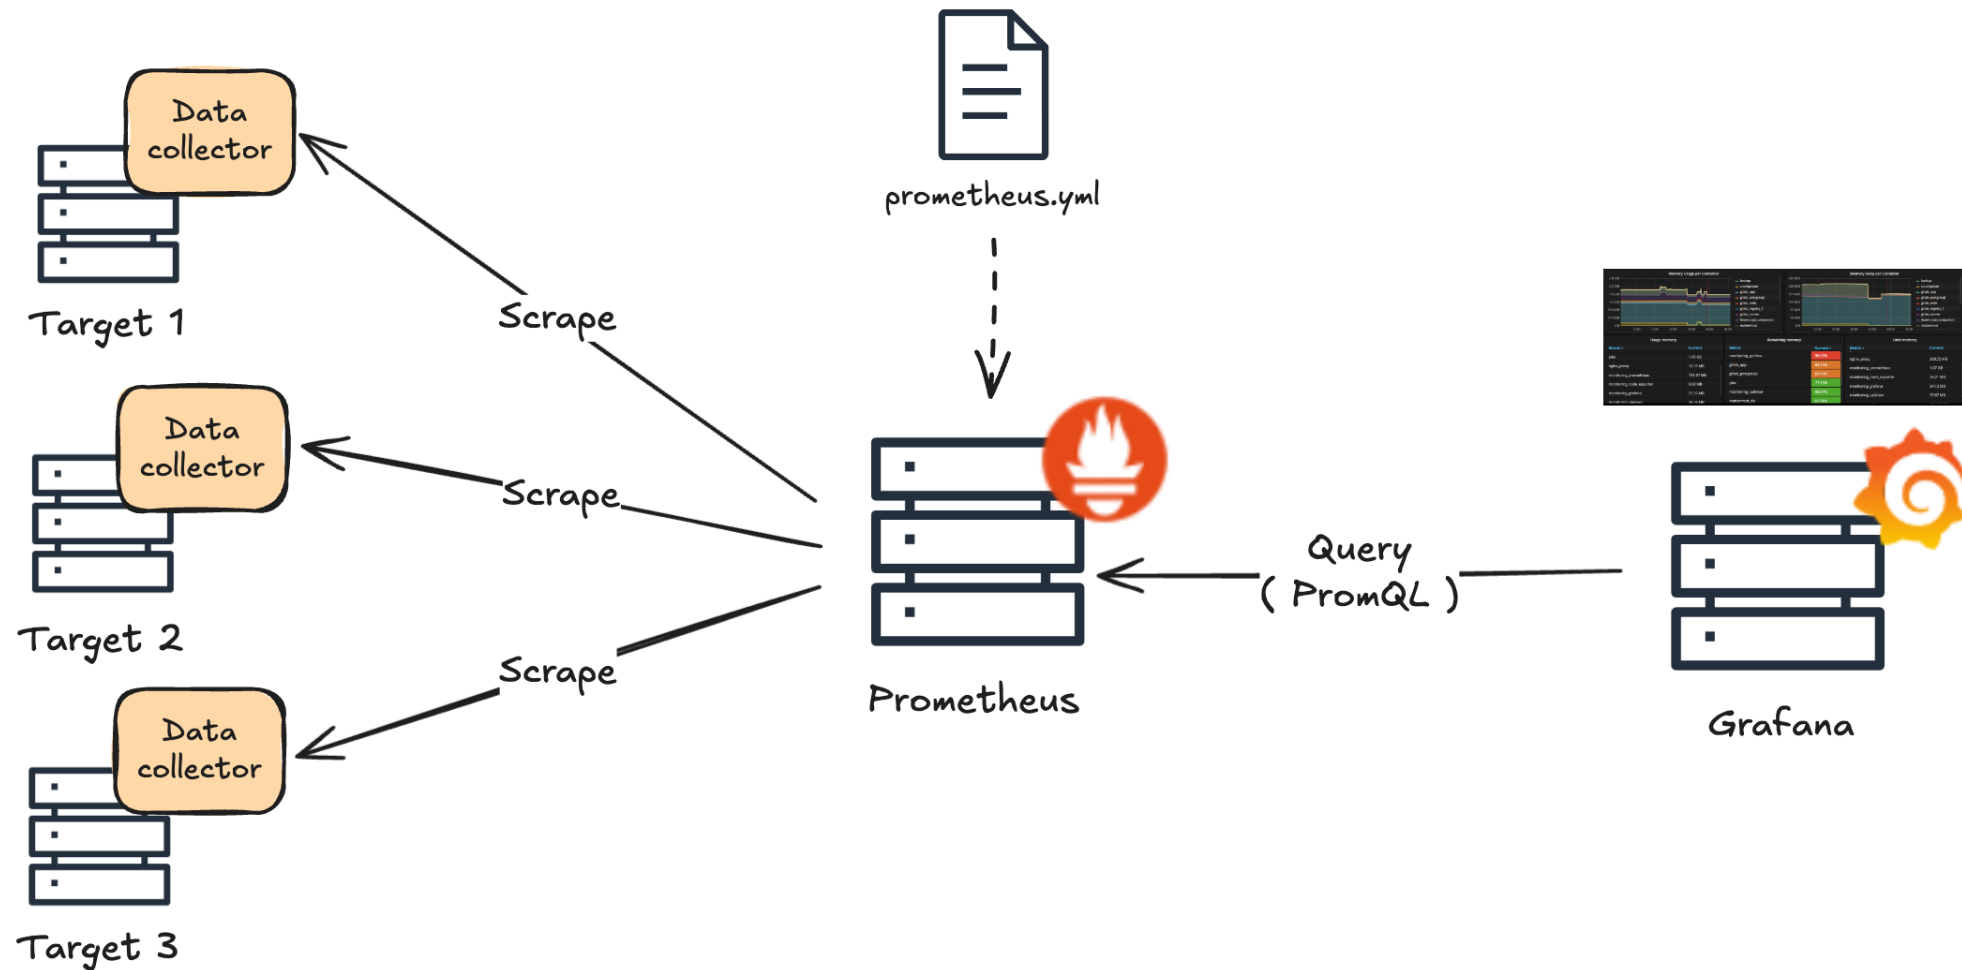

Configuration file

02. Introduction to Prometheus & Grafana

Global config →

```
global:
  scrape_interval:     15s # By default, scrape targets every 15 seconds.

  # Attach these labels to any time series or alerts when communicating with
  # external systems (federation, remote storage, Alertmanager).
  external_labels:
    monitor: 'codelab-monitor'
```

Targets to scrape
with related config →

```
# A scrape configuration containing exactly one endpoint to scrape:
# Here it's Prometheus itself.
scrape_configs:
  # The job name is added as a label `job=<job_name>` to any timeseries scraped from this config.
  - job_name: 'prometheus'

    # Override the global default and scrape targets from this job every 5 seconds.
    scrape_interval: 5s

  static_configs:
    - targets: ['localhost:9090']
```

Contact



Rayenn HAMROUNI
DevOps consultant

