


Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

1 DELIMITER //			
2 CREATE PROCEDU	RE UPDATE_LEADERS_SCORE(in_school_id INTEGER, in_leader_score INTEGER)		
3 BEGIN			
4			
5 END //			
			1

```
CREATE PROCEDURE UPDATE_LEADERS_SCORE(in_school_id INTEGER, in_leader_score INTEGER)
BEGIN
   UPDATE chicago_public_schools
   SET chicago_public_schools.Leaders_Score = in_leader_score
   WHERE chicago_public_schools.School_ID = in_school_id;
```

DELIMITER //

```
DELIMITER //
CREATE PROCEDURE UPDATE LEADERS SCORE(in school id INTEGER, in leader score INTEGER)
BEGIN
 UPDATE chicago public schools
    SET chicago public schools.Leaders Score = in leader score
    WHERE chicago public schools. School ID = in school id;
        IF in Leader Score > 0 AND in Leader Score < 20
        THEN
           UPDATE chicago public schools
                SET chicago public schools.Leaders Icon = 'Very Weak'
                WHERE chicago public schools. School ID = in school id;
        ELSEIF in Leader Score < 40 THEN
        UPDATE chicago_public_schools
           SET chicago public schools.Leaders Icon = 'Weak'
            WHERE chicago public schools. School ID = in school id;
        ELSEIF in Leader Score < 60 THEN
           UPDATE chicago public schools
                SET chicago public schools.Leaders Icon = 'Average'
                WHERE chicago_public_schools.School_ID = in school id;
        ELSEIF in Leader Score < 80 THEN
           UPDATE chicago public schools
                SET chicago public schools.Leaders Icon = 'Strong'
                WHERE chicago_public_schools.School_ID = in school id;
        ELSEIF in Leader Score < 100 THEN
           UPDATE chicago public schools
                SET chicago public schools.Leaders Icon = 'Very Strong'
                WHERE chicago public schools. School ID = in school id;
        END IF;
END //
```

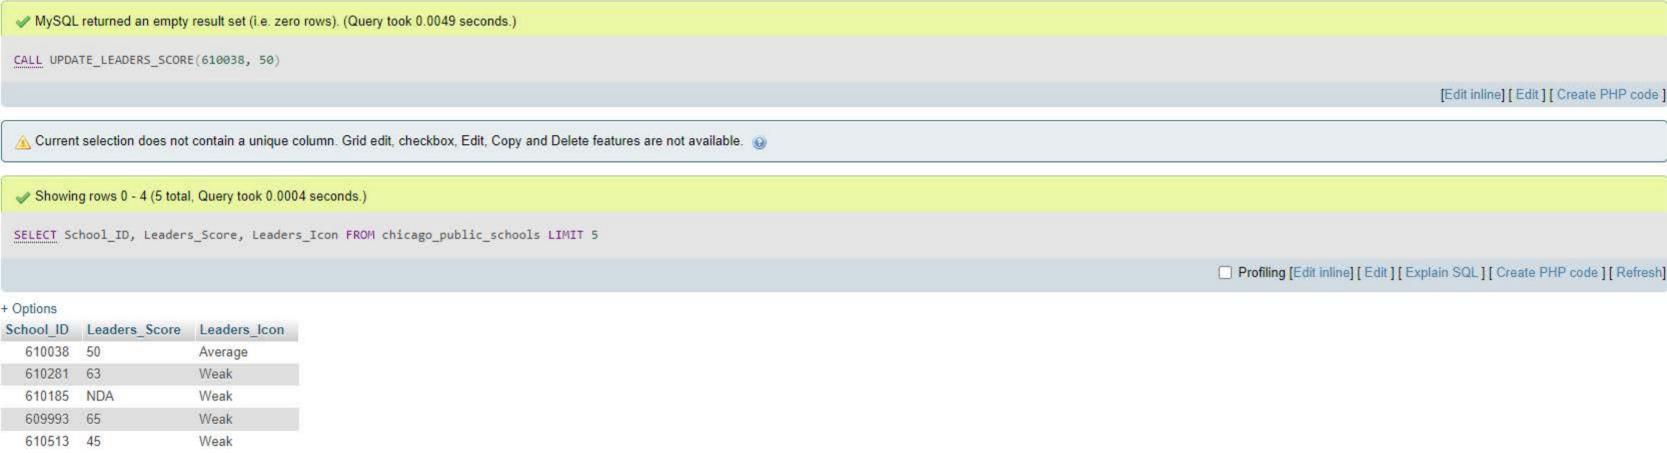

```
DROP PROCEDURE IF EXISTS UPDATE LEADERS SCORE;
DELIMITER //
CREATE PROCEDURE UPDATE_LEADERS_SCORE (IN in_school_id INTEGER, IN in_leader_score INTEGER)
    IF in_Leader_Score >= 100
    THEN
    ROLLBACK;
    ELSE
   START TRANSACTION;
   UPDATE chicago_public_schools
   SET chicago_public_schools.Leaders_Score = in_leader_score
   WHERE chicago_public_schools.School_ID = in_school_id;
   END IF;
       IF in_Leader_Score > 0 AND in_Leader_Score < 20
       THEN
       UPDATE chicago_public_schools
           SET chicago_public_schools.Leaders_Icon = 'Very Weak'
           WHERE chicago_public_schools.School_ID = in_school_id;
       ELSEIF in_Leader_Score < 40 THEN
       UPDATE chicago_public_schools
           SET chicago_public_schools.Leaders_Icon = 'Weak'
           WHERE chicago_public_schools.School_ID = in_school_id;
       ELSEIF in_Leader_Score < 60 THEN
           UPDATE chicago public schools
                SET chicago_public_schools.Leaders_Icon = 'Average'
               WHERE chicago_public_schools.School_ID = in_school_id;
       ELSEIF in Leader_Score < 80 THEN
           UPDATE chicago_public_schools
                SET chicago_public_schools.Leaders_Icon = 'Strong'
               WHERE chicago_public_schools.School_ID = in_school_id;
       ELSEIF in Leader Score < 100 THEN
           UPDATE chicago_public_schools
               SET chicago_public_schools.Leaders_Icon = 'Very Strong'
               WHERE chicago_public_schools.School_ID = in_school_id;
       END IF;
COMMIT;
END//
```



```
DELIMITER //
#SET TERMINATOR@
CREATE PROCEDURE UPDATE_LEADERS_SCORE (IN in_school_id INTEGER, IN in_leader_score INTEGER)
BEGIN
DELIMITER //
#TERMINATOR;
```

```
DELIMITER //
#SET TERMINATOR@
CREATE PROCEDURE UPDATE LEADERS SCORE (IN in school id INTEGER, IN in leader score INTEGER)
BEGIN
   UPDATE chicago_public_schools
   SET chicago_public_schools.Leaders_Score = in_leader_score
   WHERE chicago_public_schools.School_ID = in school id;
DELIMITER //
#TERMINATOR;
```

```
DELIMITER //
#SET TERMINATOR@
CREATE PROCEDURE UPDATE LEADERS SCORE (IN in school id INTEGER, IN in leader score INTEGER)
BEGIN
    UPDATE chicago_public_schools
    SET chicago public schools.Leaders Score = in_leader_score
    WHERE chicago public schools. School ID = in school id;
        IF in Leader Score > 0 AND in Leader Score < 20
       THEN
       UPDATE chicago public schools
            SET chicago public schools.Leaders Icon = 'Very Weak'
            WHERE chicago public schools. School ID = in school id;
        ELSEIF in Leader Score < 40 THEN
       UPDATE chicago public schools
            SET chicago public schools.Leaders Icon = 'Weak'
            WHERE chicago public schools. School ID = in school id;
        ELSEIF in Leader Score < 60 THEN
            UPDATE chicago public schools
               SET chicago public schools.Leaders Icon = 'Average'
               WHERE chicago_public_schools.School_ID = in school id;
        ELSEIF in Leader Score < 80 THEN
           UPDATE chicago public schools
               SET chicago_public_schools.Leaders_Icon = 'Strong'
               WHERE chicago_public_schools.School_ID = in_school_id;
        ELSEIF in Leader Score < 100 THEN
            UPDATE chicago public schools
               SET chicago public schools.Leaders Icon = 'Very Strong'
               WHERE chicago public schools. School ID = in school id;
        END IF;
END
DELIMITER //
#TERMINATOR:
```

```
DROP PROCEDURE IF EXISTS UPDATE LEADERS SCORE;
DELIMITER //
#SET TERMINATOR®
CREATE PROCEDURE UPDATE_LEADERS_SCORE (IN in_school_id INTEGER, IN in_leader_score INTEGER)
BEGIN
    IF in_Leader_Score >= 100
    THEN
    ROLLBACK;
    ELSE
    START TRANSACTION;
    UPDATE chicago_public_schools
    SET chicago_public_schools.Leaders_Score = in_leader_score
    WHERE chicago_public_schools.School_ID = in_school_id;
    END IF;
        IF in_Leader_Score > 0 AND in_Leader_Score < 20
        THEN
       UPDATE chicago_public_schools
            SET chicago_public_schools.Leaders_Icon = 'Very Weak'
            WHERE chicago_public_schools.School_ID = in_school_id;
        ELSEIF in_Leader_Score < 40 THEN
       UPDATE chicago_public_schools
            SET chicago_public_schools.Leaders_Icon = 'Weak'
            WHERE chicago_public_schools.School_ID = in_school_id;
        ELSEIF in_Leader_Score < 60 THEN
            UPDATE chicago public schools
               SET chicago_public_schools.Leaders_Icon = 'Average'
               WHERE chicago_public_schools.School_ID = in_school_id;
        ELSEIF in Leader_Score < 80 THEN
            UPDATE chicago public schools
               SET chicago_public_schools.Leaders_Icon = 'Strong'
               WHERE chicago_public_schools.School_ID = in_school_id;
        ELSEIF in Leader Score < 100 THEN
            UPDATE chicago public schools
                SET chicago_public_schools.Leaders_Icon = 'Very Strong'
               WHERE chicago_public_schools.School_ID = in_school_id;
        END IF:
COMMIT;
END
DELIMITER//
#TERMINATOR:
```