

Wavefront MAT: Design and Specification

Version 1.0 (approved baseline) · 9 October 2026 · michael

Revision history

Version	Date	Status	Changes
1.0	2026-10-09	approved baseline	content of 0.2 approved by michael as the implementation baseline; sources moved to docs/ in the wfmat repository, which is now the master copy; tagged spec-v1.0
0.2	2026-10-09	preliminary draft	requirement identifiers added to every normative statement; requirements index (appendix A); tests cite the IDs they verify
0.1	2026-10-09	preliminary draft	first complete draft; scope decisions of 2026-10-08 applied (single loop, interior MAT, C++20, bulge JSON input)

Requirement identifiers. Every normative statement carries an identifier of the form **[AREA-*nn*]**, where AREA is one of SC (scope), IN (input), OUT (output), ALG (algorithm), EV (events), KN (kernel), RB (robustness), PF (performance), API, LIB (libraries and build) and VER (verification). Identifiers are permanent: a withdrawn requirement keeps its number, marked withdrawn, and numbers are never reused. Every test names the identifiers it verifies as Catch2 tags, for example `[IN-04]`. Appendix A lists all identifiers.

1. Overview and scope

We compute the exact medial axis transform (MAT) of a planar region bounded by line segments and circular arcs by simulating the inward grassfire: the boundary offset front is propagated as a kinetic data structure, and every MAT edge is the trajectory of a front corner (a shock). Time equals offset distance, so the radius function falls out for free: a point traced at time t has radius $r = t$.

Goals

- **[SC-01]** Input: one closed loop of line segments and circular arcs bounding a simply connected region, as C++ objects or a JSON file.
- **[SC-02]** Output: the full interior MAT as a planar graph. Each edge is an exact conic arc (line, parabola, ellipse or hyperbola branch) with closed-form position $p(r)$, radius r , and the two boundary contact points as functions of r .
- **[SC-03]** Exact handling of the degeneracies that dominate CAD data: parallel lines, concentric arcs, tangent (G^1) joins, cocircular contacts and symmetric shapes.
- **[SC-04]** C++20, permissively licensed dependencies only, deterministic results, no global state.

Non-goals for v1

- Holes (planned for v2), the exterior MAT, free-form curves (splines, NURBS), external file readers such as DXF, 3D, and pruning or simplification of the axis (offered later as post-processing on the output graph).
- Exact (algebraic) arithmetic. We use double precision with tolerance-controlled topology and extended-precision refinement of event times (section 8).

Why wavefront. Unlike an incremental Voronoi construction, the front simulation yields MAT edges already ordered by radius, produces offset curves as a by-product, and handles arcs natively because offsets of lines and circles stay lines and circles. Its weak points are event detection for non-adjacent front pieces and simultaneous events; sections 6 to 8 address both.

2. Mathematical model

Every boundary piece becomes a site with a signed distance function that is linear (lines) or a shifted Euclidean norm (circles), so every bisector is a conic and every event is the root of at most a quadratic.

Region and MAT. Ω is a bounded open region with boundary $\partial\Omega$, and $d(x) = \text{dist}(x, \partial\Omega)$. The MAT is the pair (M, r) : M is the closure of the set of centres of maximal inscribed disks, and $r(x) = d(x)$ on M . M is a finite graph homotopy-equivalent to Ω , so for the simply connected regions of v1 it is a tree.

Sites. Each input segment is a site. Each reflex corner (a right turn when walking the boundary with Ω on the left) adds a point site at the corner. For x in a site's zone, its distance function is

$$d_L(x) = n \cdot x - c, \quad \|n\| = 1, \text{ } n \text{ pointing into } \Omega \quad (\text{line})$$

$$d_C(x) = \sigma (R - \|x - c\|), \quad \sigma = +1 \text{ convex, } \sigma = -1 \text{ concave} \quad (\text{circle})$$

A convex arc has its centre on the Ω side; a concave arc bulges into Ω ; a point site is a concave circle with $R = 0$.

Front. $F(t) = \{x \in \Omega : d(x) = t\}$. Each front element is the live part of an offset site: a line $n \cdot x = c + t$, or a circle of radius $R - \sigma t$ about the same centre. A convex circle element dies no later than $t = R$.

[ALG-01] Corner classification. At each junction of consecutive segments a and b , let φ be the signed turning angle from the end tangent of a to the start tangent of b , with Ω on the left.

Turning angle φ	Corner	Front vertex at $t = 0$
$\varphi > \varepsilon_{\text{ang}}$	convex	shock vertex; a MAT edge starts at the corner with $r = 0$
$ \varphi \leq \varepsilon_{\text{ang}}$	tangent (G^1)	regular vertex; moves along the shared normal, traces nothing
$\varphi < -\varepsilon_{\text{ang}}$	reflex	point site inserted between a and b , flanked by two regular vertices
$ \varphi \geq \pi - \varepsilon_{\text{ang}}$	cusp	excluded by the input contract; validation rejects it as a safeguard

Bisectors. A shock vertex between sites A and B traces the locus $d_A = d_B$, a conic:

Site pair	Bisector	Remarks
line, line	line	angle bisector; parallel facing lines give a plateau (constant r)
line, circle (any σ , incl. point)	parabola	focus at the circle centre
convex, concave circle	ellipse	foci at both centres, $\ x - c_1\ + \ x - c_2\ = R_1 + R_2$
convex, convex or concave, concave	hyperbola branch	$\ x - c_1\ - \ x - c_2\ = R_1 - R_2$; a line when $R_1 = R_2$
point, point	line	perpendicular bisector

Kinematics. Every regular point of the front moves along its normal at unit speed. A shock vertex whose front corner has interior angle α moves at speed $1/\sin(\alpha/2)$. Hence the front is 1-Lipschitz in time in the Hausdorff metric: two front pieces at distance δ at time t cannot meet before $t + \delta/2$. This bound drives non-local event scheduling (section 6).

MAT vertex kinds. Corner (degree 1, $r = 0$, at a convex boundary corner); curvature end (degree 1, $r = R$, at a convex arc centre); junction (degree ≥ 3 , three or more contacts); transition (degree 2, a contact passes from a site to its tangent or reflex neighbour, so the conic type changes); extremum (degree 2, a local minimum of r where two fronts first touch, or a local maximum where two shocks annihilate).

3. Input specification

The input is a region given as a single closed chain of lines and arcs in bulge form; it is validated, oriented and normalised before any propagation starts.

[IN-01] Representation. A loop is a cyclic list of vertices (x, y, β) with bulge β . The segment from vertex i to $i + 1$ is a line when $\beta = 0$, otherwise a circular arc with $\beta = \tan(\theta/4)$, θ the signed sweep (the DXF LWPOLYLINE convention). Bulge form guarantees closure and G^0 continuity by construction. A single full circle is a loop of two half-arcs ($\beta = \pm 1$ each). An explicit (centre, radius, start angle, sweep) form is also accepted and converted.

[IN-02] JSON schema (v1)

```
{
  "units": "mm",
  "outer": [[0,0,0],[100,0,0],[100,40,1],[60,40,0],[0,40,0]]
}
```

Validation rules (reject with a diagnostic naming the loop and segment)

1. **[IN-03]** Every segment has length $> \varepsilon_{\text{len}}$; every arc has $|\theta| \in (\varepsilon_{\text{ang}}, 2\pi)$.
2. **[IN-04]** The loop is simple: no segment pair intersects except consecutive segments at their shared vertex. Checked with an R-tree broad phase and exact line/arc intersection tests.
3. **[IN-05]** Exactly one loop; input with holes is rejected with a diagnostic saying holes arrive in v2.

4. **[IN-06]** No cusp corners (section 2 table). The data contract excludes them; the check is a safeguard.

Normalisation

1. **[IN-07]** Translate the bounding-box centre to the origin and scale by $1/L$, L the half-diagonal, so all coordinates lie in $[-1, 1]$. All tolerances are relative to this unit frame; output is mapped back by the inverse transform, radii by L .
2. **[IN-08]** Orient the loop counter-clockwise (signed area via the shoelace formula plus the arc segment areas), so Ω is on the left.
3. **[IN-09]** Merge consecutive collinear lines and consecutive co-circular arcs (same centre and radius within $\varepsilon_{\text{geom}}$). This removes spurious transition vertices.
4. **[IN-10]** Snap near-tangent joins ($|\varphi| \leq \varepsilon_{\text{ang}}$) to exact tangency and record them as G^1 .

[IN-11] Tolerances (defaults, unit frame, all configurable)

Name	Default	Meaning
$\varepsilon_{\text{geom}}$	10^{-10}	coincidence of points and of site parameters
ε_{len}	10^{-9}	minimum segment length
ε_{ang}	10^{-9} rad	tangent and cusp detection
ε_t	10^{-11}	event-time clustering

4. Output specification

The MAT is returned as an embedded graph whose edges are parametrised by radius: every edge is the trajectory of one shock over a time interval, so r increases monotonically along it from its birth vertex to its death vertex, and $r(p)$ is exact everywhere.

Graph

- **[OUT-01]** Vertices: position p , radius r , kind (section 2), and the list of contacts (site id plus foot point). Incident edges are stored in counter-clockwise order.
- **[OUT-02]** Edges: birth vertex v_0 at r_0 , death vertex v_1 at $r_1 > r_0$, and the two sites (left, right) seen from the direction of travel. Plateau edges ($r_0 = r_1$) are flagged and parametrised by arc length instead.
- **[OUT-03]** Global: the site table (original segment index, kind, geometry), the normalisation transform, and per-run statistics (event counts by type, clusters resolved, maximum residual).

[OUT-04] Edge geometry. Each edge stores its conic type, the data needed to evaluate it in closed form, and a branch selector fixed at birth:

$$p(r) = \text{shock}(A, B, r), \quad r \in [r_0, r_1], \quad f_A(r) = p(r) - r \nabla d_A(p(r))$$

f_A and f_B are the contact (foot) points on the two sites; the inscribed disk of radius r at $p(r)$ touches the boundary exactly there.

[OUT-05] Evaluation API. For every edge: position, radius, unit tangent, both feet at a given r ; arc-length sampling; adaptive flattening to a polyline within a chord tolerance; and exact export as a rational quadratic Bézier (every conic arc has one), with r supplied as a separate per-edge function since it is not polynomial in the Bézier parameter.

[OUT-06] Formats. C++ object graph (primary), JSON (vertices, edges, conic parameters, sampled polylines), and SVG for inspection, showing the boundary, MAT edges coloured by r and optional inscribed disks.

Guarantees (checked by the validator in section 12)

- **[OUT-07]** For every sampled point p on an edge, $|d(p) - r| \leq \varepsilon_{\text{res}}$ and at least two distinct feet exist, except at degree-1 vertices.
- **[OUT-08]** The graph is a tree: connected, with no cycles.
- **[OUT-09]** The union of the inscribed disks reproduces Ω to within the sampling tolerance.
- **[OUT-10]** Same input, same output, bit for bit, on the same platform and build.

5. Algorithm: wavefront propagation

The front is a set of cyclic doubly linked lists of elements and vertices, advanced from event to event by a priority queue keyed on time; between events nothing changes combinatorially and every vertex moves on a known conic, so the simulation is exact up to root evaluation.

[ALG-02] Front data structure

- **Element:** the site it offsets, prev and next vertex, and a version counter bumped whenever either neighbour changes. Its live part at time t is the arc of the offset between its two vertices.
- **Vertex:** kind (shock or regular), left and right element, birth time and point, branch selector, and for shocks the id of the MAT edge being traced.
- **Loop:** entry element and element count. A loop with no vertices (a full circle offset) is allowed.
- **Pools:** elements, vertices and events live in index-addressed vectors with free lists; ids are stable 32-bit integers, which keeps the structure cache-friendly and makes runs deterministic.

[ALG-03] Initialisation

1. Build sites from the normalised loop; classify each corner (section 2).
2. Create one element per site in boundary order, inserting a zero-length point-site element at every reflex corner.
3. Create a vertex at every junction: a shock at convex corners (its MAT edge starts at a corner vertex, $r = 0$), a regular vertex at tangent and reflex joins.
4. Schedule the local event of every element and seed non-local candidates (section 6).

[ALG-04] Main loop

```
while (auto ev = queue.pop_valid()) {           // skips events whose version stamps are stale
    Cluster c = gather_cluster(*ev, queue);     // all valid events within eps_t and eps_geom of ev
    if (c.size() == 1) handle_simple(*ev);      // section 6 handlers
```

```

else          resolve_cluster(c);    // section 8, generic topological resolution
for (Element e : touched_elements) // only elements whose neighbourhood changed
    reschedule(e);                  // local event plus non-local candidates
}
finalize_open_edges();              // all loops empty; every MAT edge has both ends

```

[ALG-05] Termination. Every event creates at least one MAT vertex and the MAT has $O(n)$ vertices, so there are $O(n)$ events. The simulation ends when every loop is empty, at $t = \max r$, the radius of the largest inscribed disk.

[ALG-06] By-product. Snapshotting the front at any t yields the exact inward offset curve of Ω at distance t as lines and arcs, at no extra cost.

6. Events and handlers

Three generic event types produce every MAT vertex: a local collapse, a non-local split, and a non-local contact; everything else (loop annihilation, high-degree junctions, plateaus) is a coincidence of these and goes to cluster resolution in section 8. Below, $A \mid B$ denotes the front vertex between elements A and B .

Event	Trigger	Time from	MAT vertex	Front update
[EV-01] E1a collapse, shock + shock	element B between $A \mid B$ and $B \mid C$ shrinks to a point	3-site solve (A, B, C)	junction, 3 contacts	remove B ; new vertex $A \mid C$
[EV-02] E1b collapse, shock + regular	shock $A \mid B$ reaches the junction of B with its tangent or reflex neighbour C	bisector (A, B) meets the junction's normal ray	transition	remove B ; shock continues as $A \mid C$, edge changes conic
[EV-03] E1c collapse, regular + regular	convex arc B shrinks to its centre ($t = R$)	closed form	curvature end	remove B ; new shock $A \mid C$, edge born with $r = R$
[EV-04] E2 split	shock $A \mid B$ reaches the interior of a non-adjacent element C	3-site solve (A, B, C)	junction, 3 contacts	split C into C_1, C_2 ; new shocks $A \mid C_2$ and $C_1 \mid B$; split the loop
[EV-05] E3 contact	non-adjacent elements A and C become tangent	common normal; t = half the gap	extremum (min of r)	split A and C ; two new shocks moving apart; split the loop

Rules shared by all handlers

- **[EV-06]** A new vertex between elements X and Y is a shock if X and Y meet at a corner, and regular if they meet tangentially (only possible when they are original G^1 neighbours).
- **[EV-07]** Every shock that dies closes its MAT edge at the event vertex; every new shock opens one there.

- **[EV-08]** A loop that drops to two elements both shrinking to one point, or to one element with no vertices (a circle reaching zero radius), is annihilated: its last vertex is an extremum (max of r) or a curvature end.
- **[EV-09]** Without holes, E2 and E3 always split a loop and never merge two, which is why the v1 MAT is a tree. Loop merges arrive with holes in v2.

[EV-10] Local event scheduling. Each element keeps at most one pending collapse event, recomputed in $O(1)$ whenever its version changes. Stale events are not removed from the heap; they are discarded at pop time by comparing version stamps (lazy deletion).

[EV-11] Non-local event scheduling. Split and contact candidates come from a windowed broad phase that relies on the Lipschitz bound of section 2: a live front piece at time $t + \Delta$ lies within Δ of the same piece at time t .

1. At window start t_k , insert the bounding box of every live element, inflated by Δ_k , into an R-tree.
2. For each overlapping pair of non-adjacent elements, compute exact E2 and E3 candidates in $[t_k, t_k + \Delta_k]$ with the kernel, and enqueue the valid ones.
3. Choose Δ_k adaptively (initially the median distance between nearest non-adjacent elements) and rebuild when the window expires or after a split changes many pieces.
4. When a handler creates or reshapes an element inside the window, query the current R-tree for it immediately, so no candidate is missed.

[EV-12] A debug mode replaces the broad phase with all pairs; the two must produce identical event sequences, which is a standing regression test.

[EV-13] Validity at pop time. A candidate is accepted only if every involved element and vertex still has the version it was computed with and every contact foot lies inside the live part of its element at the event time (closed intervals, $\varepsilon_{\text{geom}}$ slack). Feet that land exactly on a vertex are handed to cluster resolution.

7. Geometric kernel

All event and trajectory computations reduce to one small solver in the unknowns $z = (x, y, t)$. Line sites give linear equations and circle sites give quadratics that share the same quadratic form, so any three sites reduce to two linear equations plus one quadratic in one parameter.

Site equations. Squaring the circle equation gives

$$\|x\|^2 - t^2 - 2c \cdot x + 2\sigma R t + \|c\|^2 - R^2 = 0 \quad (\text{circle}), \quad n \cdot x - t - c = 0 \quad (\text{line})$$

Every circle shares the quadratic part $Q(z) = x^2 + y^2 - t^2$ (the Minkowski form of Laguerre geometry), so the difference of two circle equations is linear in z .

[KN-01] Three-site solve (E1a, E2). Pick one circle as the pivot (if any) and subtract it from the other circle equations; with the line equations this gives a 2×3 linear system. Its solutions form a line $z = z_0 + s w$, with w the cross product of the two rows. Substituting into the pivot gives

$$Q(w) s^2 + b s + c = 0,$$

solved with the cancellation-free quadratic formula (linear when $Q(w) \approx 0$). With three lines the 3×3 system has a unique solution. Each root is accepted only if:

- $t \geq t_{\text{now}} - \varepsilon_t$, and $R - \sigma t \geq -\varepsilon_{\text{geom}}$ for every circle (squaring admits negative radii);
- the point is on the correct side of each site ($d_i(x) = t$ with the original sign);
- every foot lies inside the live part of its element at t .

[KN-02] The earliest accepted root wins. A rank-deficient system (parallel lines, concentric circles, collinear centres with equal radii) is reported as degenerate and routed to section 8.

[KN-03] Shock position (two sites, fixed t). The two offset curves intersect in at most two points, symmetric about the pair's axis (the centre line, or the perpendicular from a centre to a line). A branch selector, the sign of $u \times (p - o)$ with u the axis direction and o the axis origin, is fixed at the shock's birth. Both roots coincide only at a tangency, which is always an E3 or annihilation event, so the selector never changes along an edge. Line-line shocks are affine in t .

[KN-04] Regular vertices. $q(t) = q_0 + t m$, where m is the inward normal at the tangent join. The E1b time solves $d_A(q_0 + t m) = t$: linear for a line A , quadratic for a circle A .

[KN-05] Contact (E3). Two elements first touch along a common normal (a double normal):

Pair	Common normal	Contact time
line, line	exists only if antiparallel	$t^* = g/2$ along the whole overlap: plateau
line, circle	perpendicular from the centre to the line	$t^* = g/2$ along that perpendicular; up to two candidates
circle, circle	the centre line	$t^* = g/2$ along it; concentric circles give a plateau

Here g is the gap between the two sites measured along the common normal. A candidate is valid if both feet are live at t^* and the fronts approach each other just before t^* (their normals are opposed along the common normal).

[KN-06] Precision. All solves run in double. When the discriminant is small relative to its terms (near-tangency) or the 2×3 system is ill-conditioned, the root is refined by Newton iteration on the original unsquared equations in binary128, and its condition estimate is stored with the event for the clustering logic.

8. Robustness and degeneracies

Degenerate configurations are the normal case in CAD data (rectangles, slots, regular polygons), so they are not perturbed away; simultaneous events are merged into clusters and resolved by one generic topological procedure that subsumes every special case.

[RB-01] Event ordering. The queue orders by $(t, \text{kind}, \text{smallest involved id})$. Ties are therefore deterministic, and no hash-ordered container is ever iterated on a path that affects

output.

[RB-02] Cluster formation. When an event is popped at (t^*, p^*) , every other valid event with $|t - t^*| \leq \varepsilon_t$ whose point lies within $\varepsilon_{\text{geom}}$ of a point already in the cluster joins it (union-find over event points). A plateau contributes its whole overlap segment or arc instead of a point.

[RB-03] Cluster resolution

1. Region. Take the cluster's points, or plateau segment, and grow it by $\varepsilon_{\text{geom}}$ into a small region D .
2. Kill. Every element whose live part at t^* lies inside D dies. Every shock with its position in D dies and closes its MAT edge at the cluster vertex.
3. Chains. The surviving front near D falls into k chains; each enters D through a last surviving element e_{in} and leaves through a first surviving element e_{out} .
4. Relink. Sort the chains by the angle of their entry points around D in front orientation, and link e_{in} of each chain to e_{out} of the next. Each link is a new vertex, shock or regular by the corner rule, and a shock opens a new MAT edge.
5. Emit. One MAT vertex at the mean of the event points with $r = t^*$, its contacts the union of all involved sites. For a plateau, one vertex at each end and a constant-radius edge between them.
6. Rebuild loops by walking the relinked lists: $k = 0$ annihilates a loop.

[RB-04] The simple handlers in section 6 are the special cases $k = 1$ (collapse) and $k = 2$ (split, contact); in debug builds they are cross-checked against this procedure.

Typical clusters

Shape	What coincides	Result
Rectangle	two corner shocks per end and the long-side contact	two junctions joined by a plateau edge
Regular n -gon	n collapses at the centre	one vertex of degree n
Disk	a loop with no vertices	one point
Slot (two semicircles, two lines)	both arcs reach their centres as the lines meet	plateau edge between two curvature ends

[RB-05] Near-degeneracy. Events closer than ε_t in time but farther than $\varepsilon_{\text{geom}}$ apart are processed separately, in order. They can emit very short edges; those are kept, since they are correct, and an optional post-processing step can contract edges shorter than a user threshold.

[RB-06] Invariants checked after every event (all in debug builds, the $O(1)$ local ones in release): loops are closed and consistently oriented; every element has a non-negative live length ($\geq -\varepsilon_{\text{geom}}$); every shock has a finite speed; MAT edges are opened and closed in pairs. A violation aborts the run with a diagnostic dump of the front (JSON and SVG) and the event history. The library never returns a MAT it knows to be inconsistent.

9. Complexity and performance targets

[PF-01] With n input segments the MAT has $O(n)$ vertices and edges, so the simulation processes $O(n)$ events; local work is $O(\log n)$ per event, and the expected total is $O(n \log n)$ for typical inputs, with an $O(n^2)$ worst case confined to the non-local broad phase.

Part	Cost	Notes
Validation	$O(n \log n)$ expected	R-tree broad phase, exact pair tests
Local events	$O(n \log n)$	$O(1)$ kernel solve plus a heap operation each
Non-local candidates	$O(n \log n)$ typical, $O(n^2)$ worst	windowed R-tree; worst case is many long, nearly parallel fronts
Cluster resolution	$O(m \log m)$ per cluster of m events	sum over clusters is $O(n \log n)$
Memory	$O(n)$	pools of elements, vertices and events; stale events bounded by a periodic heap compaction

[PF-02] Targets (single thread, release build, a current desktop CPU)


Input size	Target time
1,000 segments	under 5 ms
10,000 segments	under 60 ms
100,000 segments	under 1 s

The targets are budgets for v1 to be measured against, not results; the benchmark suite in section 12 tracks them. Parallelism is out of scope for v1, because the event order is inherently sequential; batch processing of many shapes is parallel by construction, since runs share no state.

10. Software architecture and C++ API

[API-01] The library, `wfmat`, is a layered set of small modules with one public entry point, `compute_mat`; the geometric kernel is pure and stateless, and all mutable state lives in one engine object per run.

One engine run turns validated loops into the MAT graph

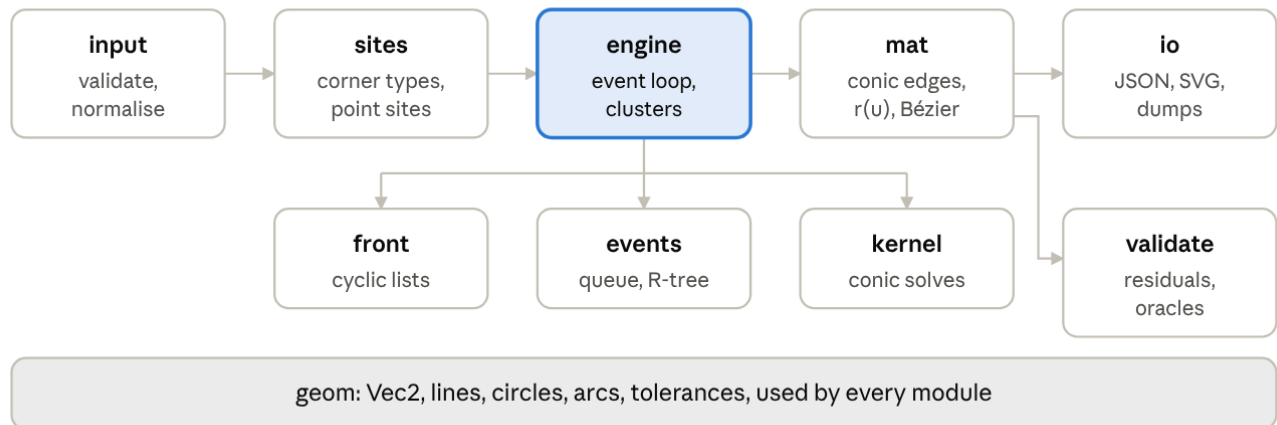

wfmat modules: pipeline left to right, engine internals below

Data flows left to right; the engine owns the front and the event queue and calls the kernel for every event time and trajectory, which mat reuses for exact edge evaluation.

[API-02] Public API (sketch)

```

namespace wfmat {

struct Vec2 { double x, y; };
struct BulgeVertex { Vec2 p; double bulge; }; // bulge = tan(sweep / 4)
struct Loop { std::vector<BulgeVertex> vertices; };
struct Region { Loop outer; }; // holes: v2

struct Tolerances { double geom = 1e-10, len = 1e-9, ang = 1e-9, time = 1e-11; };
enum class BroadPhase { windowed_rtree, all_pairs };
struct Options {
    Tolerances tol;
    BroadPhase broad_phase = BroadPhase::windowed_rtree;
    bool debug_checks = false; // full invariants after every event
};

enum class VertexKind { corner, curvature_end, junction, transition, extremum_min, extremum_max };
enum class ConicKind { line, parabola, ellipse, hyperbola, plateau_line, plateau_arc };

using SiteId = std::uint32_t; using VertexId = std::uint32_t; using EdgeId = std::uint32_t;
struct Contact { SiteId site; Vec2 foot; };
struct MatVertex { Vec2 p; double r; VertexKind kind;
    std::vector<Contact> contacts; std::vector<EdgeId> edges; }; // edges CCW

class MatEdge {
public:
    VertexId v0() const; VertexId v1() const; // birth, death; r(v0) <= r(v1)
    SiteId left() const; SiteId right() const;
    ConicKind kind() const;
    double r0() const; double r1() const;
    Vec2 point(double r) const; // not for plateau edges
    Vec2 point_at(double u) const; // u in [0, 1], all edges
    double radius_at(double u) const;
    Vec2 tangent_at(double u) const;
    std::pair<Vec2, Vec2> feet_at(double u) const; // contact points on left, right
    RationalQuadBezier bezier() const; // exact conic arc
    void flatten(double chord_tol, std::vector<Vec2>& out) const;
};
}

```

```

class MedialAxis {
public:
    std::span<const MatVertex> vertices() const;
    std::span<const MatEdge> edges() const;
    std::span<const Site> sites() const;           // maps back to input segments
    const RunStats& stats() const;

};

Result<MedialAxis> compute_mat(const Region&, const Options& = {});
Result<std::vector<Loop>> inward_offset(const Region&, double distance, const Options& = {});

} // namespace wfmat

```

[API-03] `Result<T>` is `tl::expected<T, Error>`, keeping the C++20 baseline (it maps directly onto `std::expected` if the project later moves to C++23); `Error` carries a code (`invalid_input`, `numerical_failure`, `invariant_violation`), the offending loop and segment, and the path of the diagnostic dump if one was written. All output coordinates and radii are in the caller's units; normalisation is internal. A command-line tool, `wfmat-cli`, wraps `compute_mat` for JSON in, JSON and SVG out.

11. Libraries and licensing

[LIB-01] The core needs only the C++20 standard library plus three header-only Boost components; everything else is confined to I/O, tests and benchmarks, and every dependency is public domain or permissively licensed (BSL-1.0, MIT, Apache-2.0).

Library	License	Used for	Scope
C++20 standard library	n/a	containers, span, variant, <numbers>	core
Boost.Geometry (<code>index::rtree</code>)	BSL-1.0	broad phase, input validation	core
Boost.Multiprecision (<code>cpp_bin_float_quad</code>)	BSL-1.0	binary128 root refinement, portable across compilers	core
Boost.Math (<code>toms748_solve</code>)	BSL-1.0	bracketed root fallback when Newton stalls	core
<code>tl::expected</code>	CC0 (public domain)	<code>Result</code> type on the C++20 baseline	core
nlohmann/json	MIT	JSON input and output	io
Catch2 v3	BSL-1.0	unit and property tests	tests
Boost.Polygon (<code>voronoi</code>)	BSL-1.0	independent oracle for polygonal inputs	tests
Google Benchmark	Apache-2.0	performance suite	bench

[LIB-02] Deliberately not used. CGAL's Segment Delaunay Graph and Apollonius Graph packages are GPL-3.0 or commercial; OpenVoronoi is LGPL-2.1; VRONI and ArcVRONI are not openly licensed. Eigen (MPL-2.0) is unnecessary for 2×3 systems.

[LIB-03] Build. CMake 3.25 or newer, dependencies through a `vcpkg` manifest with a `FetchContent` fallback, tested on GCC 12+, Clang 15+ and MSVC 19.36+. The library

compiles with `-ffp-contract=off` (and `/fp:precise` on MSVC) and never with `fast-math`, because fused multiply-add changes rounding and would break bit-for-bit determinism.

12. Verification and test plan

Every test cites the requirement identifiers it verifies. Correctness is established at three levels: the kernel against closed-form answers, whole MATs against shapes with known axes and against an independent oracle, and every run against the defining property of the MAT.

[VER-01] Kernel unit tests. Every site pair and triple type (line, convex arc, concave arc, point) for the three-site solve, shock trajectories and contact times, compared with symbolic results (generated once in Maple and stored as fixtures). Near-tangent and ill-conditioned cases check the binary128 refinement.

[VER-02] Canonical shapes with known MAT

Shape	Expected axis
Disk	one point, $r = R$
Rectangle $a \times b$	four 45° segments and a plateau of length $a - b$ at $r = b/2$
Equilateral triangle, regular n -gon	n segments meeting at the centre, degree n
Slot (stadium)	one plateau edge between the arc centres, $r = R$
L-shape	reflex corner gives two parabolic edges
Rectangle with one filleted corner	the corner branch ends at the fillet centre, a curvature end with $r = R$

[VER-03] Oracle comparison. For polygonal inputs, Boost.Polygon's Voronoi diagram of the segments, restricted to the interior and with reflex-corner spokes removed, must match our axis to within 10^{-9} of the shape size. For inputs with arcs, a dense sampling oracle (Voronoi of fine polylines) must converge to our axis as the sampling refines.

[VER-04] Property checks run on every test output (the validator in section 4)

- Residual: $|d(p) - r|$ along each edge, with d computed by brute force over all sites.
- Topology: a tree, with degrees matching vertex kinds.
- Reconstruction: the union of inscribed disks matches Ω within the sampling tolerance.
- Invariance: translating, rotating, scaling, and reversing the input loop order give the same axis up to the transform.

[VER-05] Randomised testing. Random star-shaped polygons with filleted corners, and random arc chains, at 10^4 shapes per CI run with fixed seeds. Any failure is minimised automatically and stored as a regression fixture.

[VER-06] Degeneracy suite. Families built to hit clusters: rectangles and slots, regular polygons up to $n = 1024$, cocircular point sets, gears, and shapes with exact symmetry along both axes.

[VER-07] Benchmarks. Google Benchmark on scaled families (gear outlines, random fillets, a font glyph set) at 10^3 to 10^5 segments, tracked against the targets in section 9.

13. Milestones

Implementation proceeds in seven v1 increments (M4, holes, moves to v2), each closed by an exit test, so that the hardest parts (arcs, clusters) land on a validated base; no dates are set yet.

- 1. **M0 Scaffold.** CMake project, geom, input validation and normalisation, JSON reader, SVG writer, brute-force distance validator. Exit: all canonical shapes load, validate and render.
- 2. **M1 Kernel.** Site equations, three-site solve, trajectories, contact times, binary128 refinement. Exit: kernel unit tests pass against the Maple fixtures.
- 3. **M2 Polygons.** Lines and reflex point sites, events E1a, E1b, E2, E3, all-pairs broad phase. Exit: matches the Boost.Polygon oracle on 10^4 random polygons.
- 4. **M3 Arcs.** Convex and concave arcs, tangent joins, E1c. Exit: canonical arc shapes and the sampling oracle.
- 5. **M4 Holes (v2).** Multiple loops and loop merges. Exit: Betti-number check and annulus tests.
- 6. **M5 Degeneracies.** Cluster resolution and plateau edges. Exit: degeneracy suite passes; simple handlers agree with cluster resolution.
- 7. **M6 Performance.** Windowed R-tree broad phase, heap compaction. Exit: identical event sequences to all-pairs mode; section 9 targets met.
- 8. **M7 Release.** Bézier export, flattening, inward offsets, CLI, API documentation. Exit: v1.0 tag.

14. Decisions and risks

All six scope decisions were confirmed on 8 October 2026; four technical risks have named mitigations.

Decisions

Topic	Decision
Licensing	permissive licences (BSL-1.0, MIT, Apache-2.0) are acceptable; strict public domain is not required
Holes	deferred to v2; v1 accepts a single loop
Exterior MAT	out of scope
Language level	C++20 baseline
Input formats	bulge JSON and the C++ API only; no external readers
Cusps	absent from the data; validation still rejects them

Risks

Risk	Effect	Mitigation
Near-degenerate inputs just outside ε	wrong local topology in a cluster	degeneracy and randomised suites; debug cross-check of simple handlers against cluster resolution; diagnostic dumps
Missed non-local event in the broad phase	missing MAT branch	Lipschitz-based window inflation; all-pairs mode as a standing regression oracle
Ill-conditioned roots near tangency	event time or position error	binary128 refinement with condition estimates feeding the clustering
$O(n^2)$ non-local candidates on adversarial shapes	slow runs	adaptive window size; measured in the benchmark suite

15. References

Cited from memory, not re-checked online for this draft.

- H. Blum, “A transformation for extracting new descriptors of shape”, 1967: the grassfire definition of the medial axis.
- H.-I. Choi, S.-W. Choi, H.-P. Moon, “Mathematical theory of medial axis transform”, *Pacific J. Math.*, 1997: structure and finiteness of the MAT for piecewise-analytic boundaries.
- M. Held, “VRONI: An engineering approach to the reliable and efficient computation of Voronoi diagrams of points and line segments”, *Computational Geometry*, 2001; and Held and Huber on circular arcs, *Computer-Aided Design*, 2009: robustness lessons for line and arc sites.
- D. T. Lee, “Medial axis transformation of a planar shape”, *IEEE PAMI*, 1982: the classical $O(n \log n)$ result for polygons.
- O. Aichholzer, F. Aurenhammer et al., “A novel type of skeleton for polygons”, 1995, and Eppstein and Erickson, 1999: wavefront and event structure of the straight skeleton, the polygonal analogue of this design.
- Boost.Polygon Voronoi documentation (A. Sydoruk): the oracle used in section 12.

Appendix A. Requirements index

ID	Section	Requirement
SC-01	1	Single closed loop of lines and arcs as input
SC-02	1	Full interior MAT with exact conic edges and radius
SC-03	1	Exact handling of CAD degeneracies
SC-04	1	C++20, permissive dependencies, determinism, no global state
ALG-01	2	Corner classification by turning angle
IN-01	3	Bulge-form loop representation
IN-02	3	JSON input schema

ID	Section	Requirement
IN-03	3	Minimum segment length and arc sweep
IN-04	3	Simple loop
IN-05	3	Exactly one loop; holes rejected
IN-06	3	Cusp corners rejected
IN-07	3	Normalisation to the unit frame
IN-08	3	Counter-clockwise orientation
IN-09	3	Merge collinear and co-circular neighbours
IN-10	3	Snap near-tangent joins to G1
IN-11	3	Configurable tolerances with defaults
OUT-01	4	Vertex record
OUT-02	4	Edge record and plateau parametrisation
OUT-03	4	Global data: site table, transform, statistics
OUT-04	4	Closed-form edge geometry and feet
OUT-05	4	Edge evaluation API
OUT-06	4	Output formats: C++, JSON, SVG
OUT-07	4	Distance residual and two feet
OUT-08	4	MAT is a tree
OUT-09	4	Disk union reproduces the region
OUT-10	4	Bit-for-bit determinism
ALG-02	5	Front data structure
ALG-03	5	Initialisation
ALG-04	5	Main event loop
ALG-05	5	Termination
ALG-06	5	Inward offset by-product
EV-01	6	E1a collapse, shock + shock
EV-02	6	E1b collapse, shock + regular
EV-03	6	E1c collapse at curvature centre
EV-04	6	E2 split
EV-05	6	E3 contact
EV-06	6	Shock or regular vertex rule
EV-07	6	MAT edges opened and closed by shocks
EV-08	6	Loop annihilation
EV-09	6	No loop merges in v1

ID	Section	Requirement
EV-10	6	Local event scheduling with lazy deletion
EV-11	6	Windowed non-local broad phase
EV-12	6	All-pairs debug mode equivalence
EV-13	6	Validity check at pop time
KN-01	7	Three-site solve and root acceptance
KN-02	7	Earliest root; degenerate systems routed to section 8
KN-03	7	Shock position and branch selector
KN-04	7	Regular vertex trajectory and E1b time
KN-05	7	Contact times along common normals
KN-06	7	Binary128 refinement of ill-conditioned roots
RB-01	8	Deterministic event ordering
RB-02	8	Cluster formation
RB-03	8	Generic cluster resolution
RB-04	8	Simple handlers cross-checked against clusters
RB-05	8	Near-degenerate events processed separately
RB-06	8	Invariant checks and diagnostic abort
PF-01	9	Complexity bounds
PF-02	9	Performance targets
API-01	10	Single entry point, stateless kernel
API-02	10	Public API types and functions
API-03	10	Result and Error types, caller units, CLI
LIB-01	11	Permissively licensed dependencies
LIB-02	11	Excluded libraries
LIB-03	11	Build toolchain and floating-point flags
VER-01	12	Kernel unit tests
VER-02	12	Canonical shapes with known MAT
VER-03	12	Oracle comparison
VER-04	12	Property checks on every output
VER-05	12	Randomised testing
VER-06	12	Degeneracy suite
VER-07	12	Benchmarks