

ISTA 130 Zoo I: Animal and Food Worksheet

Define a class called `Animal`. `Animal`'s initializer takes four arguments corresponding to the instance variables `name`, `species`, `food`, and `amount`. `amount` is a float, the others are strings. `food` is the type of food the Animal eats, `amount` is the amount in kilograms of one meal. Initialize a fifth instance variable called `notes` to `None`.

An `Animal` prints like this (this means make a `repr` method):

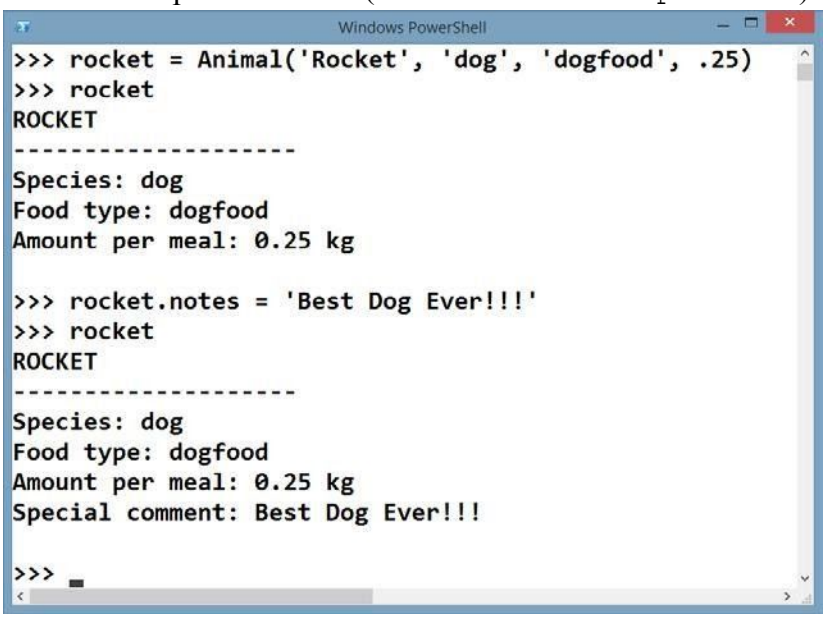


The `add_appt` method takes four arguments, the name of a doctor, a date string, a time string, and a string with the reason for the appointment. It creates a string in the following format and assigns it to the `notes` instance variable.

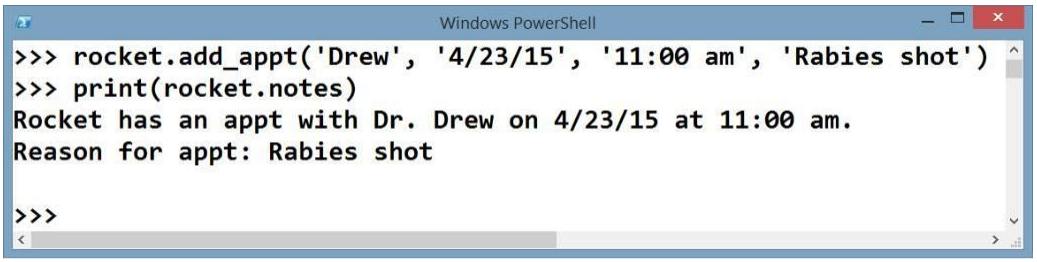

The `clear_notes` method sets the notes instance variable to `None`.

Define a class called Food. `Food`'s initializer takes three arguments corresponding to the instance variables `name`, `price`, and `qoh` (short for quantity on hand). `price` and `qoh` are floats, name is a string.

A `Food` object prints like this:

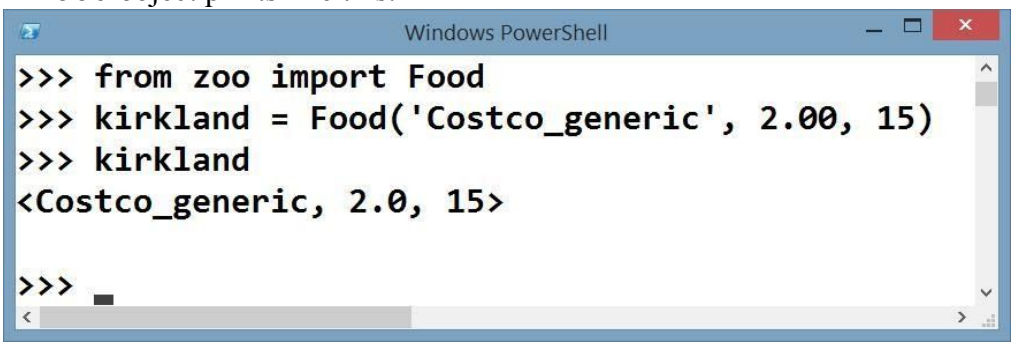

The `monthly_cost` method takes one argument, an `Animal` object. It returns a float containing the cost of feeding the `Animal` for 30 days (animals eat twice a day).