
ISTA 130 Returning, Traversing Strings, and Boolean Expressions Extra Credit Worksheet

Bird watchers assist biologists by going out together in groups and counting the number of birds they see in a study area. Write a function called `bluebird_count` that takes one integer argument representing the number of bird watchers. The function asks the user for the number of birds each observer has spotted. When the data from all observers has been accumulated, the function returns the total number of bluebirds spotted. Here is a sample call:

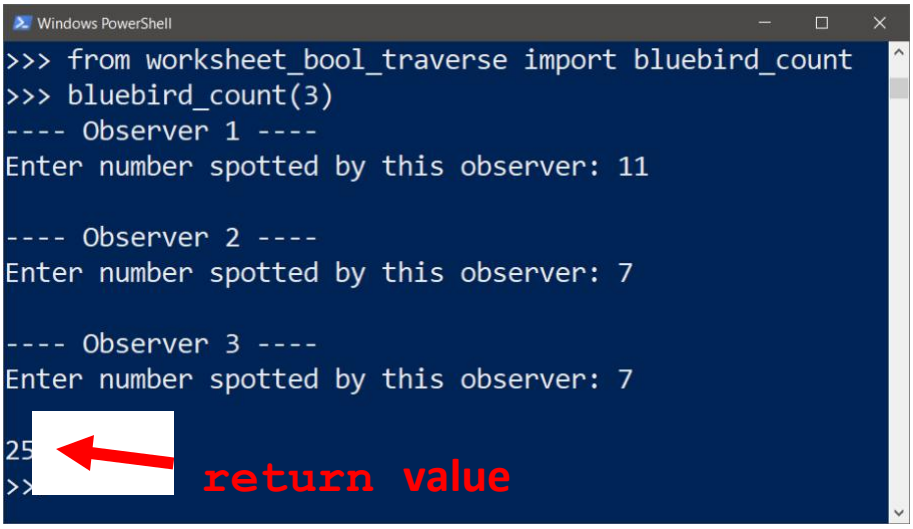

Write a function called `bluebirds_all_teams` that takes no arguments. Get the number of teams from the user. For each team, get the number of observers from the user and use `bluebird_count` to get the total number of bluebirds for that team. Accumulate all of the team totals into a regional total and return this value.

Write a function called `number_of_odds` that takes an integer and returns the number of odd numbers between zero and the integer, inclusive. Some example calls (`-->` indicates a `return` value):

```
number_of_odds(6)  -->  3
number_of_odds(7)  -->  4
```

Write a function called `reverse_str` that takes a string argument and returns a new string that is the argument reversed.

```
reverse_str('pickle')  -->  'elkcip'
```

Open a Python shell (type python/python3 at the command line) and enter these instructions to see what happens:

```
>>> a_string = 'Rocket'
>>> x = 55
>>> y = 11.0
>>> x > y
>>> x // y == 5
>>> 'Rock' in a_string
>>> 't' in a_string
>>> 'z' in a_string
```