

# class09

Ryan Bench (PID: A69038034)

```
##PDB Statistics
```

```
library(readr)
```

Warning: package 'readr' was built under R version 4.3.3

```
data <- read_csv("Data_Export_Summary.csv")
```

Rows: 6 Columns: 9

-- Column specification -----

Delimiter: ","

chr (1): Molecular Type

dbl (4): Integrative, Multiple methods, Neutron, Other

num (4): X-ray, EM, NMR, Total

i Use `spec()` to retrieve the full column specification for this data.

i Specify the column types or set `show\_col\_types = FALSE` to quiet this message.

```
data
```

# A tibble: 6 x 9

`Molecular Type` <chr>	`X-ray` <dbl>	EM <dbl>	NMR <dbl>	Integrative <dbl>	`Multiple methods` <dbl>	Neutron <dbl>
1 Protein (only)	176378	20438	12709	342	221	83
2 Protein/Oligosacch~	10284	3396	34	8	11	1
3 Protein/NA	9007	5931	287	24	7	0
4 Nucleic acid (only)	3077	200	1554	2	15	3
5 Other	174	13	33	3	0	0
6 Oligosaccharide (o~	11	0	6	0	1	0

# i 2 more variables: Other <dbl>, Total <dbl>

```
n.total <- sum(data$Total)
n.xray <- sum(data$`X-ray`)

round(n.xray/n.total * 100, 2)
```

```
[1] 81.43
```

```
n.em <- sum(data$EM)

round(n.em/n.total * 100, 2)
```

```
[1] 12.27
```

Q1: What percentage of structures in the PDB are solved by X-Ray and Electron Microscopy.

81.43% of structures in PDB are solved by X-Ray, and 12.27% are made through EM

```
n.protein <- c(176378, 20438, 12709, 342, 221, 83, 32)
n.protein2 <- sum(n.protein)
round(n.protein2/n.total)
```


```
[1] 1
```

Q2: What proportion of structures in the PDB are protein only?

```
library(ggplot2)

# Can use the `` marks for columns with subtypes like "Molecular Weight"

ggplot(data, aes(x = reorder(`Molecular Type`, Total), y = Total)) + geom_col()
```

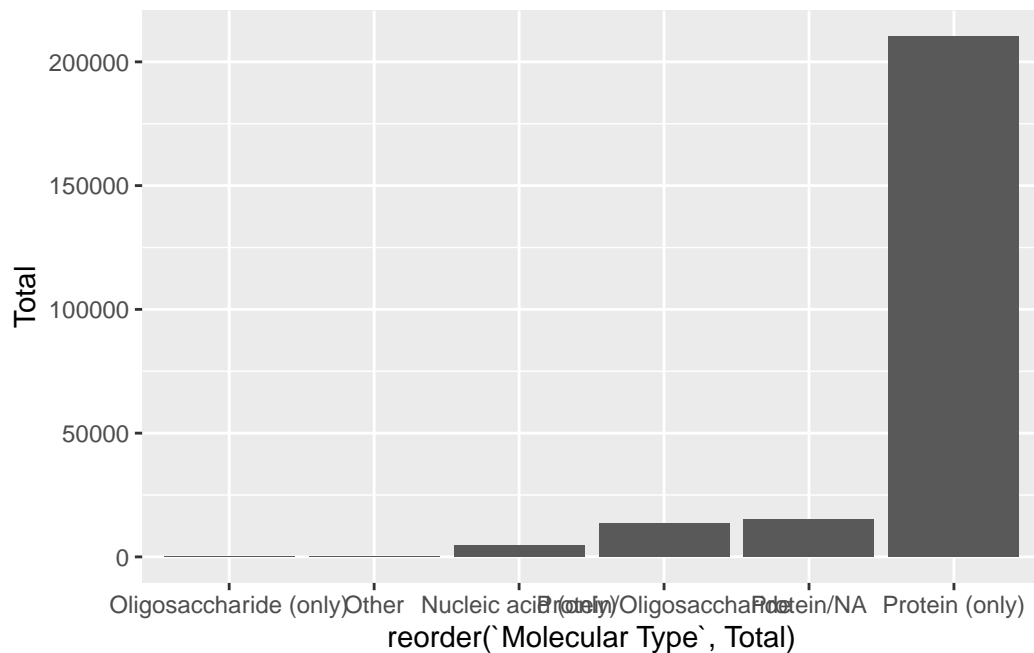


Q3: Type HIV in the PDB website search box on the home page and determine how many HIV-1 protease structures are in the current PDB?


There are 4,866 structures in the search.


##Visualizing structure data

The Mol\* viewer is embedded in many bioinformatics websites. The homepage is <https://molstar.org/>

I can insert any figure or image file using markdown format

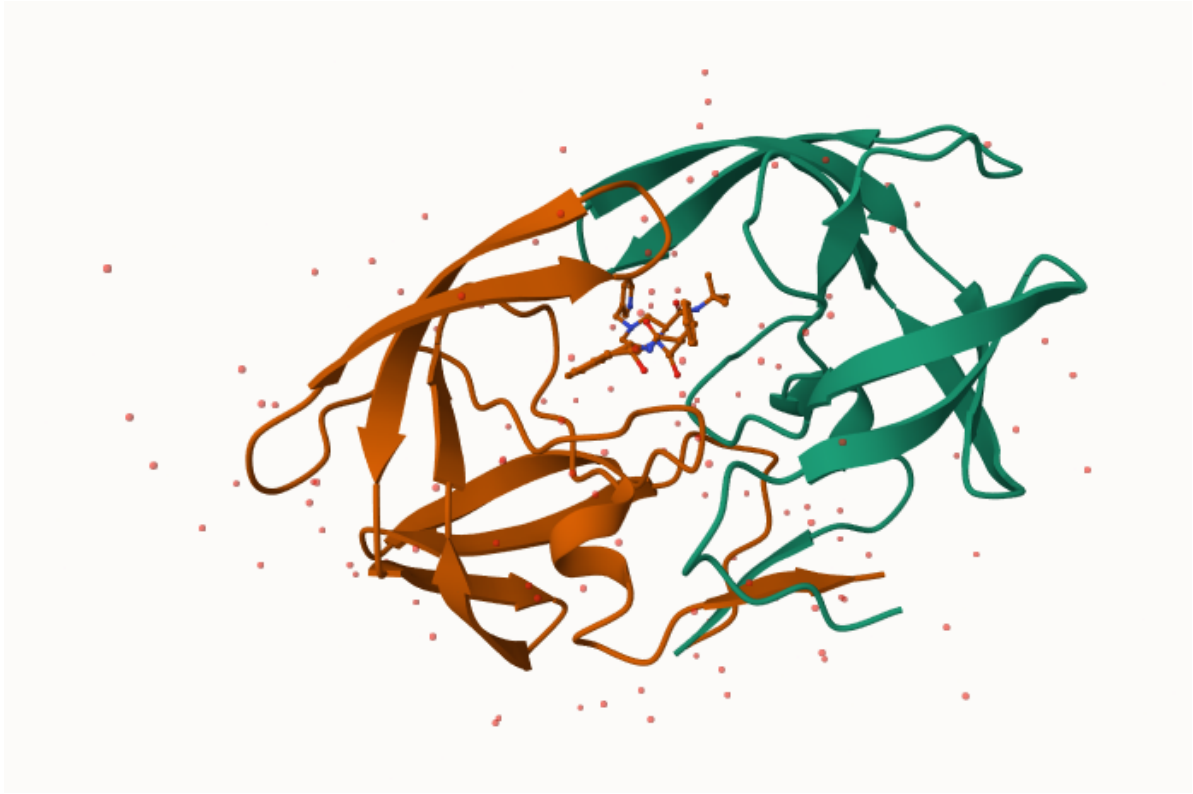

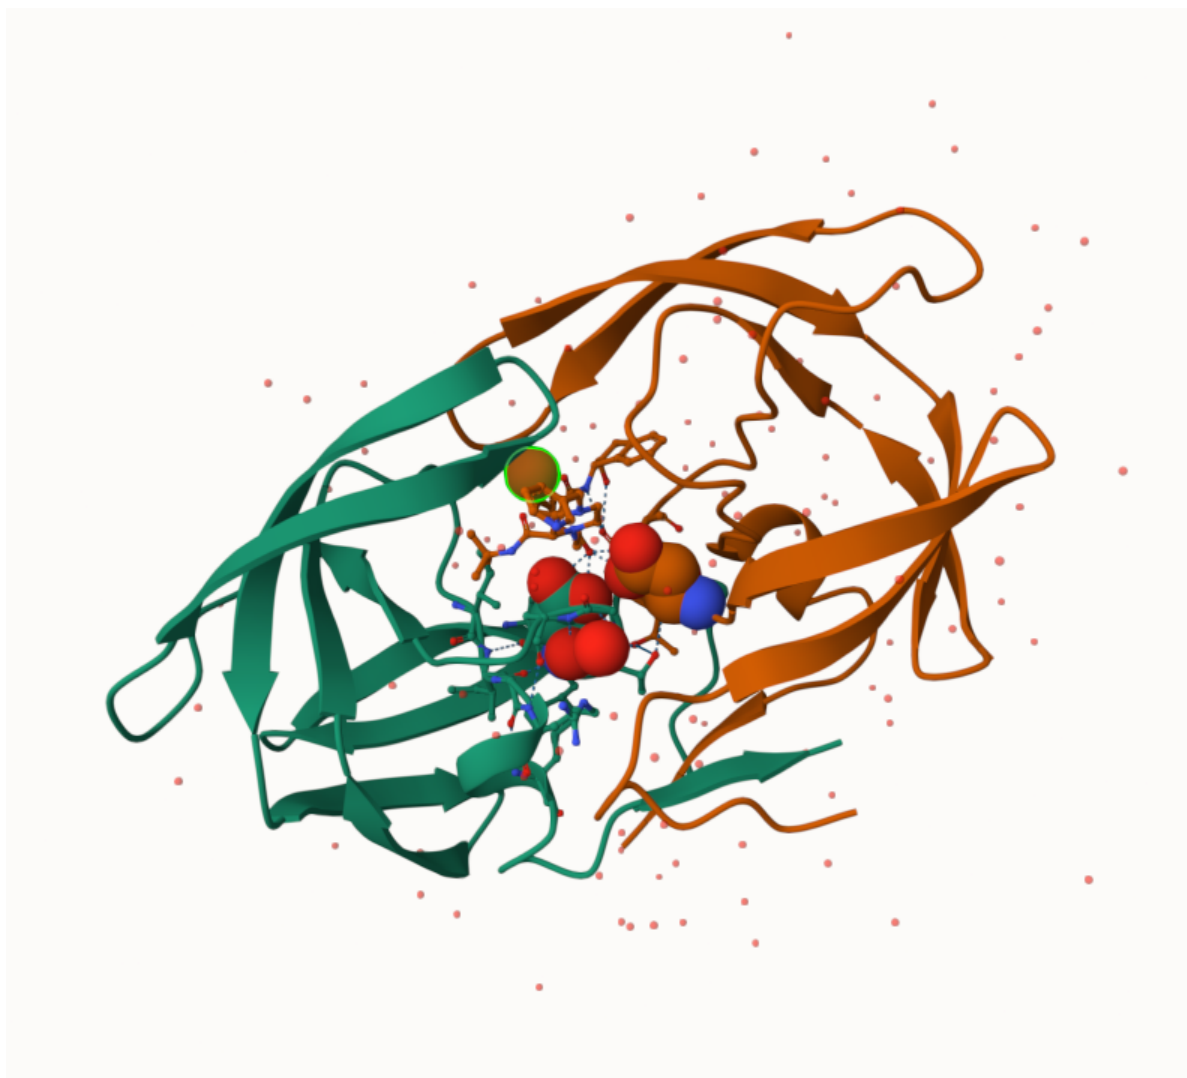

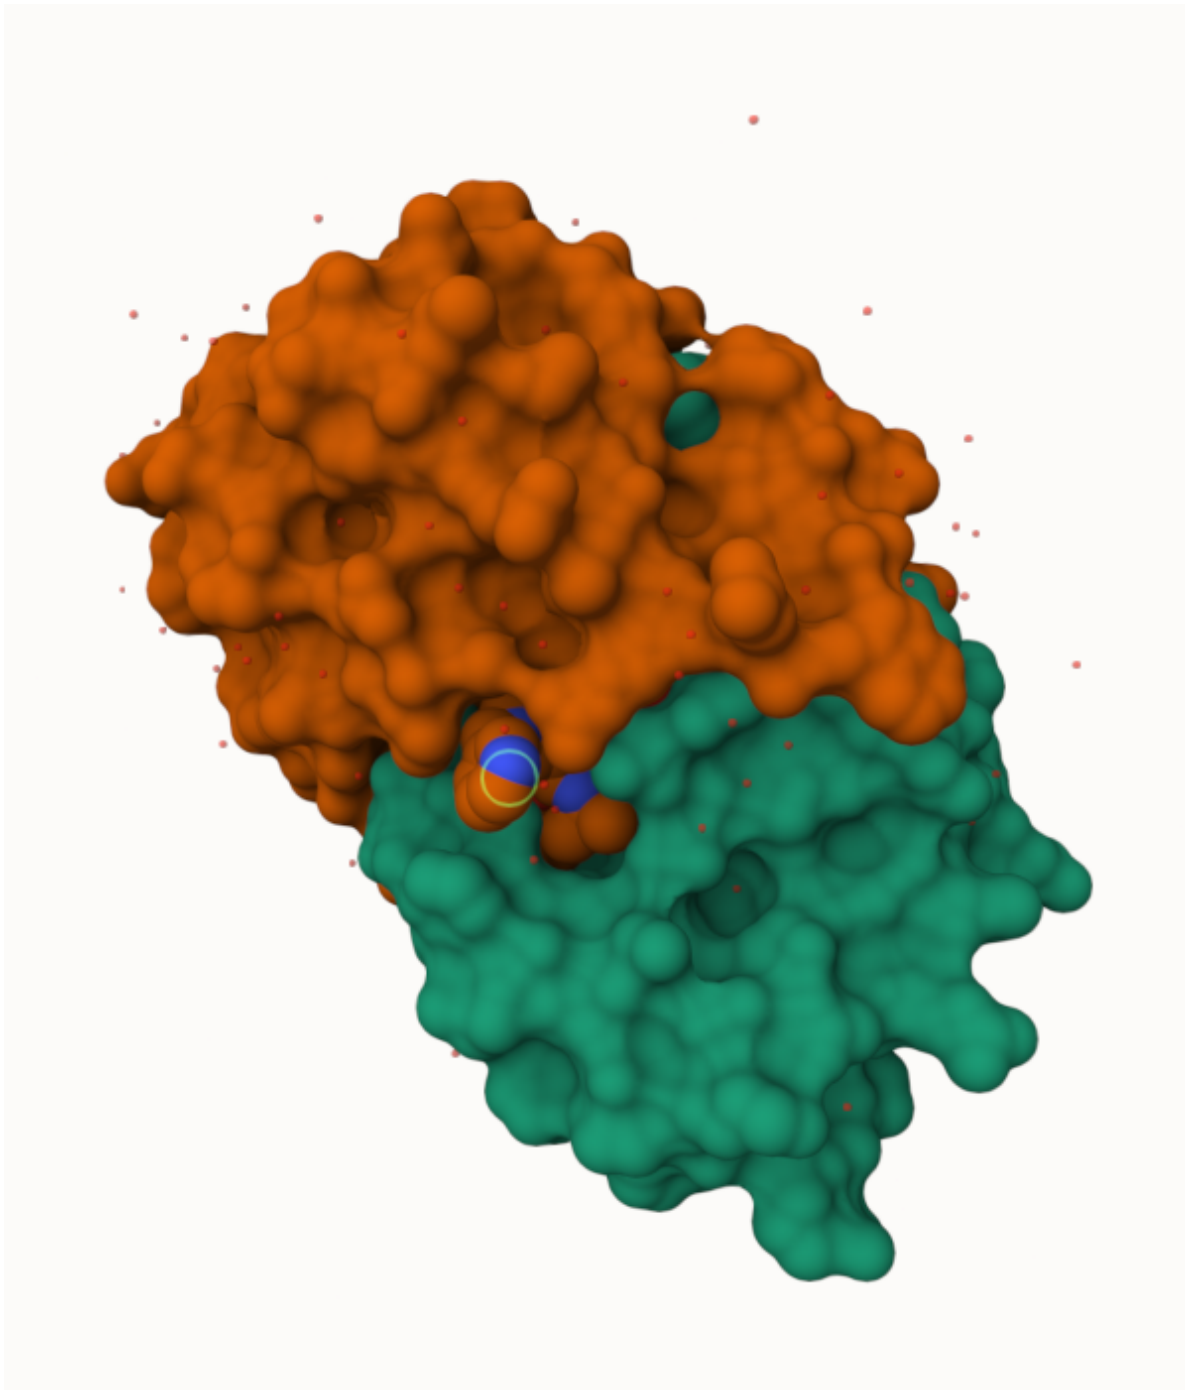

Q4: Water molecules normally have 3 atoms. Why do we see just one atom per water molecule in this structure?

We see one atom (oxygen) to represent water in these structures because X-ray crystallography

usually does not detect hydrogen because of low electron density.

Q5: There is a critical “conserved” water molecule in the binding site. Can you identify this water molecule? What residue number does this water molecule have

This water molecule is number 308.

Q6: Generate and save a figure clearly showing the two distinct chains of HIV-protease along with the ligand. You might also consider showing the catalytic residues ASP 25 in each chain and the critical water (we recommend “Ball & Stick” for these side-chains). Add this figure to your Quarto document.

See 1HSG 2.png above.

## Bio3D package for structural bioinformatics

We can use the bio3d package to read and analyze biomolecular data in R:

```
library(bio3d)
```

Warning: package 'bio3d' was built under R version 4.3.3

```
hiv <- read.pdb("1hsg")
```

Note: Accessing on-line PDB file

```
hiv
```

```
Call: read.pdb(file = "1hsg")
```

```
Total Models#: 1
```

```
Total Atoms#: 1686, XYZs#: 5058 Chains#: 2 (values: A B)
```

```
Protein Atoms#: 1514 (residues/Calpha atoms#: 198)
```

```
Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)
```

```
Non-protein/nucleic Atoms#: 172 (residues: 128)
```

```
Non-protein/nucleic resid values: [ HOH (127), MK1 (1) ]
```

```
Protein sequence:
```

```
PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYD
QILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFPQITLWQRPLVTIKIGGQLKE
ALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYDQILIEICGHKAIGTVLVGPTP
VNIIGRNLLTQIGCTLNF
```

```
+ attr: atom, xyz, seqres, helix, sheet,
      calpha, remark, call
```

Q7: How many amino acid residues are there in this pdb object?

There are 198 amino acid residues in this pdb object.

Q8: Name one of the two non-protein residues?

Water is one of the two non-protein residues.

Q9: How many protein chains are in this structure?

There are 2 chains in the structure.

```
head(hiv$atom)
```

	type	eleno	elety	alt	resid	chain	resno	insert	x	y	z	o	b
1	ATOM	1	N	<NA>	PRO	A	1	<NA>	29.361	39.686	5.862	1	38.10
2	ATOM	2	CA	<NA>	PRO	A	1	<NA>	30.307	38.663	5.319	1	40.62
3	ATOM	3	C	<NA>	PRO	A	1	<NA>	29.760	38.071	4.022	1	42.64
4	ATOM	4	O	<NA>	PRO	A	1	<NA>	28.600	38.302	3.676	1	43.40
5	ATOM	5	CB	<NA>	PRO	A	1	<NA>	30.508	37.541	6.342	1	37.87
6	ATOM	6	CG	<NA>	PRO	A	1	<NA>	29.296	37.591	7.162	1	38.40
	segid	elesy	charge										
1	<NA>	N	<NA>										
2	<NA>	C	<NA>										
3	<NA>	C	<NA>										
4	<NA>	O	<NA>										
5	<NA>	C	<NA>										
6	<NA>	C	<NA>										

Let's get the sequence

```
pdbseq( hiv )
```



```

 1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20
"P" "Q" "I" "T" "L" "W" "Q" "R" "P" "L" "V" "T" "I" "K" "I" "G" "G" "Q" "L" "K"
21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40
"E" "A" "L" "L" "D" "T" "G" "A" "D" "D" "T" "V" "L" "E" "E" "M" "S" "L" "P" "G"
41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60
"R" "W" "K" "P" "K" "M" "I" "G" "G" "I" "G" "G" "F" "I" "K" "V" "R" "Q" "Y" "D"
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
"Q" "I" "L" "I" "E" "I" "C" "G" "H" "K" "A" "I" "G" "T" "V" "L" "V" "G" "P" "T"
81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99  1
"P" "V" "N" "I" "I" "G" "R" "N" "L" "L" "T" "Q" "I" "G" "C" "T" "L" "N" "F" "P"
 2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21
"Q" "I" "T" "L" "W" "Q" "R" "P" "L" "V" "T" "I" "K" "I" "G" "G" "Q" "L" "K" "E"
22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41
"A" "L" "L" "D" "T" "G" "A" "D" "D" "T" "V" "L" "E" "E" "M" "S" "L" "P" "G" "R"
42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61
"W" "K" "P" "K" "M" "I" "G" "G" "I" "G" "G" "F" "I" "K" "V" "R" "Q" "Y" "D" "Q"
62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
"I" "L" "I" "E" "I" "C" "G" "H" "K" "A" "I" "G" "T" "V" "L" "V" "G" "P" "T" "P"
82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99
"V" "N" "I" "I" "G" "R" "N" "L" "L" "T" "Q" "I" "G" "C" "T" "L" "N" "F"

```

Let's trim to chain A and get just it's sequence:

```

chainA <- trim.pdb( hiv, chain = "A")
chainA.seq <- pdbseq(chainA)

```

Let's blast

```

blast <- blast.pdb(chainA.seq)

```

Searching ... please wait (updates every 5 seconds) RID = GB02ZHZF014

..

Reporting 249 hits

```

head(blast$hit.tbl)

```

	queryid	subjectids	identity	alignmentlength	mismatches	gapopens	q.start
1	Query_7763163	1W5V_A	100.00	99	0	0	1
2	Query_7763163	2FDE_A	100.00	99	0	0	1
3	Query_7763163	1AJV_A	100.00	99	0	0	1

4	Query_7763163	2R38_A	98.99	99	1	0	1
5	Query_7763163	2R3T_A	98.99	99	1	0	1
6	Query_7763163	1HXB_A	98.99	99	1	0	1


	q.end	s.start	s.end	evalue	bitscore	positives	mlog.evalue	pdb.id	acc
1	99	12	110	1.38e-67	199	100	153.9511	1W5V_A	1W5V_A
2	99	2	100	1.70e-67	198	100	153.7426	2FDE_A	2FDE_A
3	99	1	99	1.99e-67	198	100	153.5851	1AJV_A	1AJV_A
4	99	1	99	2.50e-67	198	100	153.3569	2R38_A	2R38_A
5	99	1	99	2.50e-67	198	100	153.3569	2R3T_A	2R3T_A
6	99	1	99	2.50e-67	198	100	153.3569	1HXB_A	1HXB_A

Plot a quick overview of blast results

```
hits <- plot(blast)
```

```
* Possible cutoff values: 135 110 69 -2
    Yielding Nhits:      186 238 244 249

* Chosen cutoff value of: 69
    Yielding Nhits:      244
```

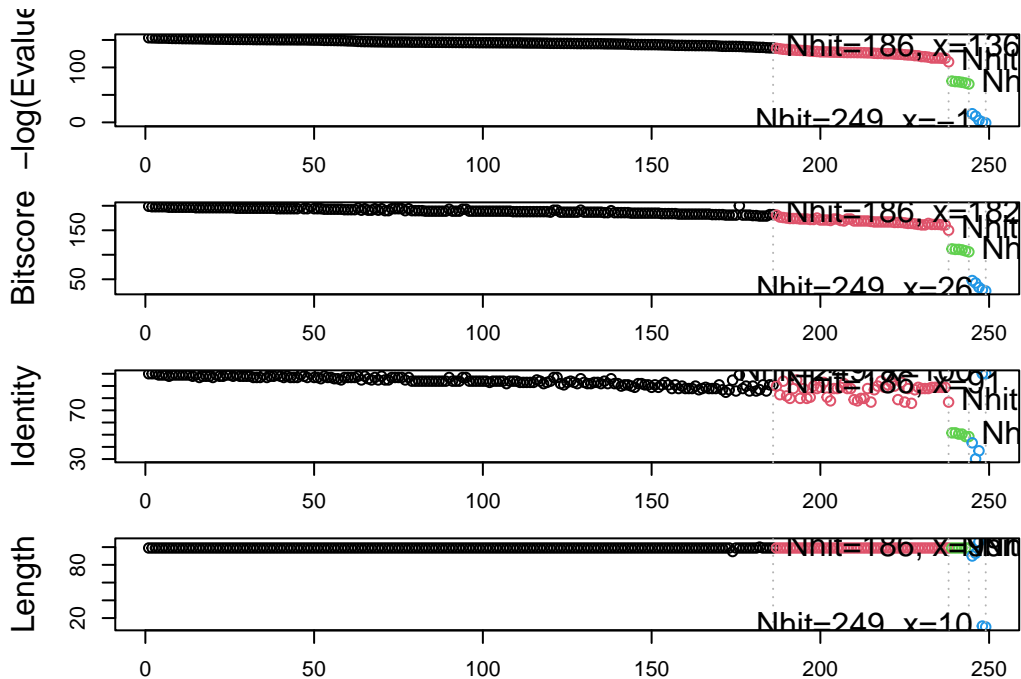

hits\$ pdb.id

```
[1] "1W5V_A" "2FDE_A" "1AJV_A" "2R38_A" "2R3T_A" "1HXB_A" "1BV9_A" "1AAQ_A"
[9] "1AXA_A" "1HVS_A" "1ZP8_A" "2QHC_A" "1A8G_A" "204L_A" "5COK_A" "1TCX_A"
[17] "2Z54_A" "1D4S_A" "1BV7_A" "1BWA_A" "1A9M_A" "2FLE_A" "1ODY_A" "1GNN_A"
[25] "1GNM_A" "5YRS_B" "1HEF_E" "1ODX_A" "4QGI_A" "1BVE_A" "2AZ8_A" "1A30_A"
[33] "6DH6_A" "6DH0_A" "2I4D_A" "600S_A" "1RL8_A" "5YRS_A" "1ZSF_A" "2Q64_A"
[41] "6DH3_A" "2NPH_A" "2Q63_A" "1LZQ_A" "1FB7_A" "1G6L_A" "1HIV_A" "600U_A"
[49] "1HVC_A" "2I4V_A" "2AZ9_A" "600T_A" "2P3B_B" "5KAO_A" "2WLO_A" "60PT_A"
[57] "1IZI_A" "1MRX_A" "2PYM_A" "2PYN_A" "1DMP_A" "4K4P_A" "1LV1_A" "1AID_A"
[65] "1LV1_A" "1ZBG_A" "3TKG_A" "1HVC_A" "5YOK_A" "1G6L_A" "1FGC_C" "3K4V_A"
[73] "3KT5_A" "3KT5_A" "4QLH_A" "4QLH_A" "2F3K_A" "4Q5M_A" "2AOC_A" "3B80_A"
[81] "3VF5_A" "2AVQ_A" "1DW6_C" "1KZK_A" "2HS1_A" "1K6C_A" "1MTB_A" "4Q1X_A"
[89] "4Q1W_A" "4Q5M_A" "3D1X_A" "2AVM_A" "3PWM_A" "3KT2_A" "3KT2_A" "1SDV_A"
[97] "3JVV_A" "3OY4_A" "1A94_A" "2HS2_A" "4EJ8_A" "2FGU_A" "2AVV_A" "3JW2_A"
[105] "3BVA_A" "1FFF_C" "3S43_B" "2NXD_A" "1FG6_C" "1EBK_C" "4Q1Y_A" "3EL4_A"
[113] "1F7A_A" "1K2B_A" "2FGV_A" "1Z8C_A" "2G69_A" "3EL9_A" "30XV_A" "1BDR_A"
[121] "3N3I_A" "3N3I_A" "30XW_A" "3S43_A" "3EM3_A" "3CYW_A" "5KQX_A" "2B60_A"
[129] "7DOZ_A" "1K2C_A" "1MT7_A" "3EM4_A" "4QJ9_A" "1BDL_A" "3LZS_A" "5T84_A"
[137] "4DQB_A" "7DOZ_A" "4QJ2_A" "3LZV_A" "1SGU_A" "2FXE_A" "1BDQ_A" "3U71_A"
[145] "2R5P_A" "40BD_A" "7MAS_A" "3IXO_A" "3D3T_A" "5Y0J_A" "3LZU_A" "4NJS_A"
[153] "3EKP_A" "1B6J_A" "3EKQ_A" "2RKF_A" "1C6X_A" "7MAR_A" "4DQF_A" "1RPI_A"
[161] "3OU1_B" "3PJ6_A" "2P3A_A" "60GQ_A" "30Q7_A" "5KR1_A" "30QD_A" "4RVI_A"
[169] "3OQA_A" "1B6K_A" "3OUD_B" "6MK9_A" "3S09_A" "1Q9P_A" "6I45_A" "7SEP_A"
[177] "4NJT_A" "3BXR_A" "4YOA_A" "4DQC_A" "2FDD_A" "2RKG_A" "4DQH_A" "2P3C_A"
[185] "4EP2_A" "4EP2_A" "4EQ0_A" "4NPT_A" "60PU_A" "4NPU_A" "3U7S_A" "3HAW_A"
[193] "2AZB_A" "3TTP_A" "3HBO_A" "3GGU_A" "7N6T_A" "60PV_A" "4EQ0_A" "60PX_A"
[201] "204N_A" "5T2E_A" "3UCB_A" "3KA2_A" "3FSM_A" "60PW_A" "2AZC_A" "3FSM_A"
[209] "3HLO_A" "2P3D_A" "3T3C_A" "7MYP_A" "6054_X" "60PY_A" "4Z4X_A" "60PZ_A"
[217] "2JE4_A" "1DAZ_C" "7MAP_A" "7MAQ_A" "1K1U_A" "2B7Z_A" "3MWS_A" "1K1T_A"
[225] "8DCH_A" "3I2L_A" "6P9A_A" "2FXD_A" "2J9J_A" "3DCK_A" "2J9J_B" "3NXE_A"
[233] "2040_A" "2040_A" "3NXE_A" "3KA2_A" "3HLO_A" "5B18_A" "1SIP_A" "2SAM_A"
[241] "1AZ5_A" "1SIV_A" "1HII_A" "1IVP_A"
```

##Prediction of functional motions

We can run a Normal Mode Analysis (NMA) to predict large scale motions/flexibility/dynamics of any biomolecule that we can read into R

Let's look at ADK and chain A only!

```
adk <- read.pdb("1ake")
```

Note: Accessing on-line PDB file

PDB has ALT records, taking A only, rm.alt=TRUE

```
adk_A <- trim.pdb(adk, chain = "A")
adk_A
```

Call: trim.pdb(pdb = adk, chain = "A")

Total Models#: 1

Total Atoms#: 1954, XYZs#: 5862 Chains#: 1 (values: A)

Protein Atoms#: 1656 (residues/Calpha atoms#: 214)

Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)

Non-protein/nucleic Atoms#: 298 (residues: 242)

Non-protein/nucleic resid values: [ AP5 (1), HOH (241) ]

Protein sequence:

MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMLRAAVKSGSELGKQAKDIMDAGKLV  
DELVIALVKERIAQEDCRNGFLLDGFPRTPQADAMKEAGINVDYVLEFDVPDELIVDRI  
VGRRVHAPSGRVYHVKNPPKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG  
YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG


+ attr: atom, helix, sheet, seqres, xyz,  
calpha, call

```
m <- nma(adk_A)
```

Building Hessian... Done in 0.02 seconds.

Diagonalizing Hessian... Done in 0.22 seconds.

```
plot(m)
```

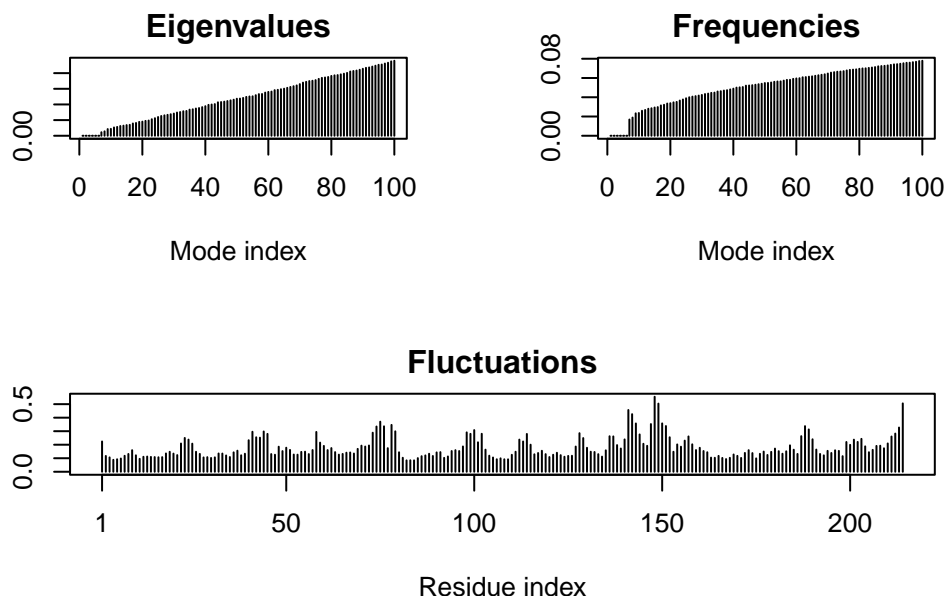

Let's write out a "trajectory" of predicted motion:

```
mktrj(m, file = "adk_nma.pdb")
```

## Play with 3D viewing in R

We can use the new **bio3dview** package, which is not yet on CRAN, to render interactive 3D views in R and HTML quarto output reports

To install from GitHub we can use the **pak** package.

```
#library(bio3dview)
#view.pdb(adk)
```

Q10. Which of the packages above is found only on BioConductor and not CRAN?

msa is found only on BioConductor and not CRAN

Q11. Which of the above packages is not found on BioConductor or CRAN?:

The package bio3d-view is not found on BioConductir or CRAN.

Q12. True or False? Functions from the devtools package can be used to install packages from GitHub and BitBucket?

True

##Search and retrieve ADK structures

```
library(bio3d)
aa <- get.seq("lake_A")
```

Warning in get.seq("lake\_A"): Removing existing file: seqs.fasta

Fetching... Please wait. Done.

aa

```
      1      .      .      .      .      .      .      60
pdb|1AKE|A  MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMRLAAVKSGSELGKQAKDIMDAGKLV
      1      .      .      .      .      .      .      60

      61      .      .      .      .      .      .      120
pdb|1AKE|A  DELVIALVKERIAQEDCRNGFLLDGFPRTIPQADAMKEAGINVDYVLEFDVPDELIVDRI
      61      .      .      .      .      .      .      120

      121      .      .      .      .      .      .      180
pdb|1AKE|A  VGRRVHAPSGRVYHVKNPPKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG
      121      .      .      .      .      .      .      180

      181      .      .      .      214
pdb|1AKE|A  YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
      181      .      .      .      214
```

Call:

```
read.fasta(file = outfile)
```

Class:

```
fasta
```

Alignment dimensions:

```
1 sequence rows; 214 position columns (214 non-gap, 0 gap)
```

+ attr: id, ali, call

Q13. How many amino acids are in this sequence, i.e. how long is this sequence?

There are 214 amino acids in this sequence.


```
b <- blast.pdb(aa)
```

```
Searching ... please wait (updates every 5 seconds) RID = GB03J9GP014
.....
Reporting 94 hits
```

```
hits <- plot(b)
```

```
* Possible cutoff values: 260 3
    Yielding Nhits:      18 94
```

```
* Chosen cutoff value of: 260
    Yielding Nhits:      18
```

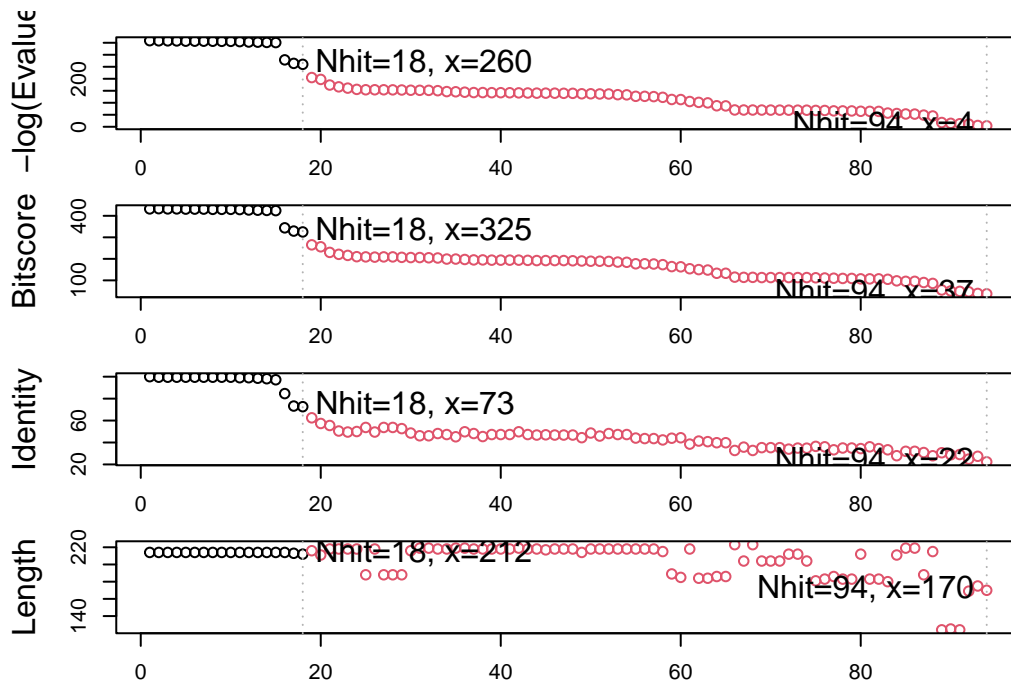

```
# List out some 'top hits'
head(hits$pdb.id)
```

```
[1] "1AKE_A" "8BQF_A" "4X8M_A" "6S36_A" "8Q2B_A" "8RJ9_A"
```

```
hits <- NULL
hits$pdb.id <- c('1AKE_A','6S36_A','6RZE_A','3HPR_A','1E4V_A','5EJE_A','1E4Y_A','3X2S_A','6HAP_A','6HAM_A','4K46_A')

files <- get.pdb(hits$pdb.id, path="pdbs", split=TRUE, gzip=TRUE)
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1AKE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6S36.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6RZE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3HPR.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4V.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/5EJE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4Y.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3X2S.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAP.pdb exists. Skipping download
```


```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAM.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4K46.pdb exists. Skipping download
```



```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/3GMT.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/4PZL.pdb exists. Skipping download
```

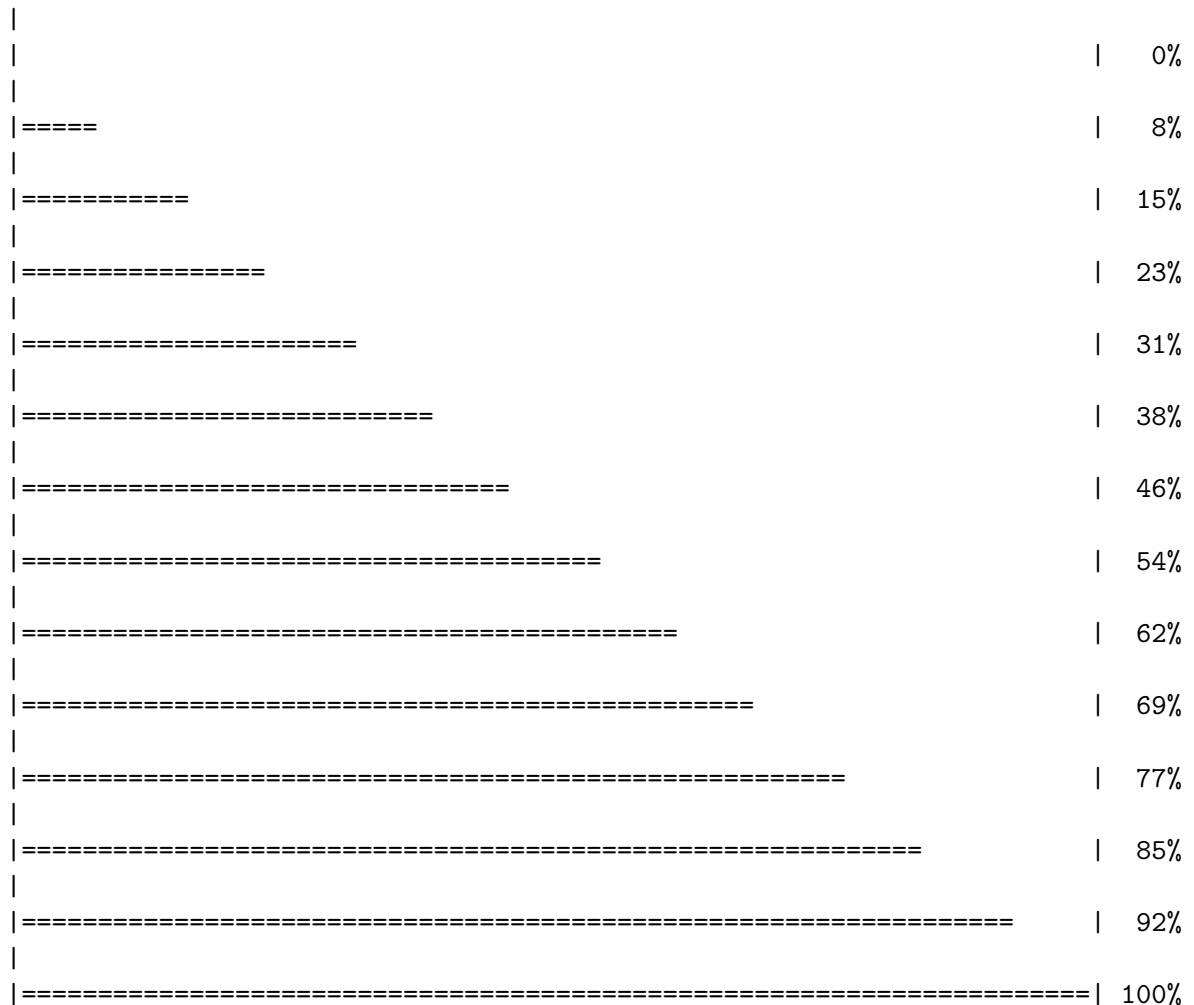

```
pdbs <- pdbaln(files, fit = TRUE, exefile="msa")
```

```
Reading PDB files:  
pdbs/split_chain/1AKE_A.pdb  
pdbs/split_chain/6S36_A.pdb
```

```

pdbc/split_chain/6RZE_A.pdb
pdbc/split_chain/3HPR_A.pdb
pdbc/split_chain/1E4V_A.pdb
pdbc/split_chain/5EJE_A.pdb
pdbc/split_chain/1E4Y_A.pdb
pdbc/split_chain/3X2S_A.pdb
pdbc/split_chain/6HAP_A.pdb
pdbc/split_chain/6HAM_A.pdb
pdbc/split_chain/4K46_A.pdb
pdbc/split_chain/3GMT_A.pdb
pdbc/split_chain/4PZL_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
.    PDB has ALT records, taking A only, rm.alt=TRUE
.    PDB has ALT records, taking A only, rm.alt=TRUE
.    PDB has ALT records, taking A only, rm.alt=TRUE
..   PDB has ALT records, taking A only, rm.alt=TRUE
....  PDB has ALT records, taking A only, rm.alt=TRUE
.    PDB has ALT records, taking A only, rm.alt=TRUE
...

```


#### Extracting sequences

```

pdb/seq: 1    name: pdbc/split_chain/1AKE_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 2    name: pdbc/split_chain/6S36_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 3    name: pdbc/split_chain/6RZE_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 4    name: pdbc/split_chain/3HPR_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 5    name: pdbc/split_chain/1E4V_A.pdb
pdb/seq: 6    name: pdbc/split_chain/5EJE_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 7    name: pdbc/split_chain/1E4Y_A.pdb
pdb/seq: 8    name: pdbc/split_chain/3X2S_A.pdb
pdb/seq: 9    name: pdbc/split_chain/6HAP_A.pdb
pdb/seq: 10   name: pdbc/split_chain/6HAM_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 11   name: pdbc/split_chain/4K46_A.pdb
    PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 12   name: pdbc/split_chain/3GMT_A.pdb
pdb/seq: 13   name: pdbc/split_chain/4PZL_A.pdb

```

```
ids <- basename.pdb(pdb$id)
plot(pdb, labels=ids)
```

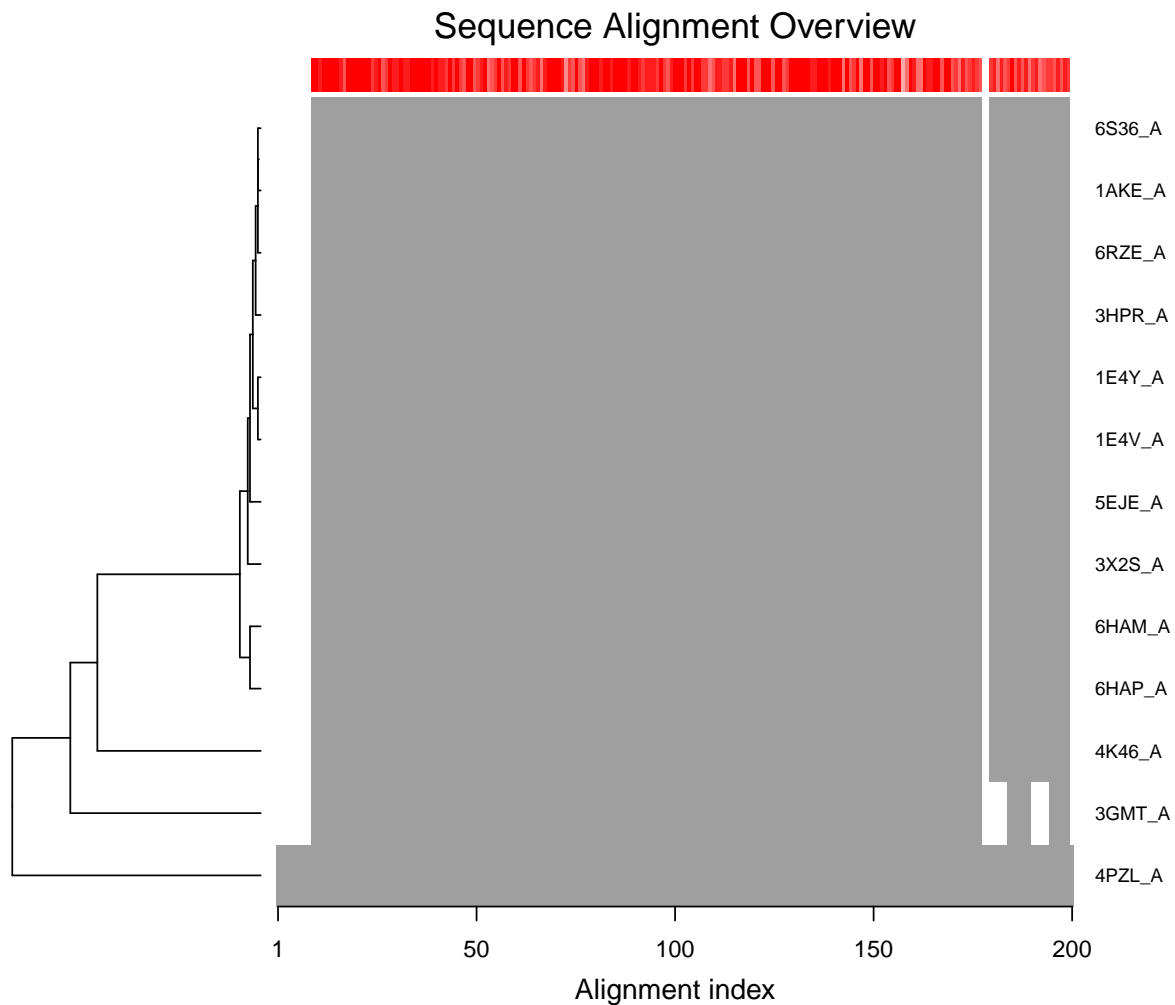


```
anno <- pdb.annotate(ids)
unique(anno$source)
```

```
[1] "Escherichia coli"
[2] "Escherichia coli K-12"
[3] "Escherichia coli 0139:H28 str. E24377A"
[4] "Escherichia coli str. K-12 substr. MDS42"
[5] "Photobacterium profundum"
```

```
[6] "Burkholderia pseudomallei 1710b"
[7] "Francisella tularensis subsp. tularensis SCHU S4"
```

```
pc.xray <- pca(pdbbs)
plot(pc.xray)
```

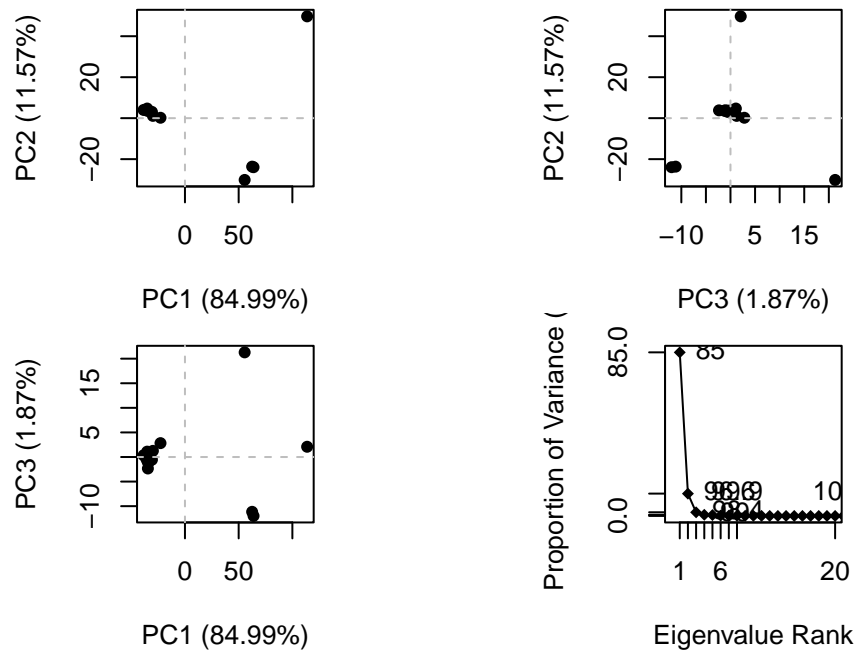

```
rd <- rmsd(pdbbs)
```

Warning in rmsd(pdbbs): No indices provided, using the 204 non NA positions

```
hc.rd <- hclust(dist(rd))
grps.rd <- cutree(hc.rd, k=3)

plot(pc.xray, 1:2, col="grey50", bg=grps.rd, pch=21, cex=1)
```

