




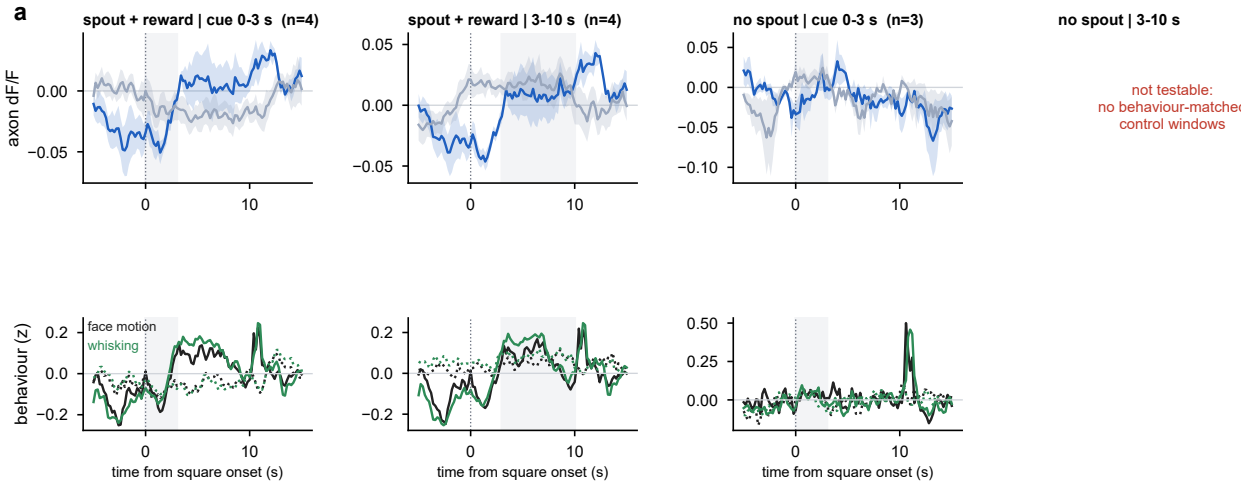


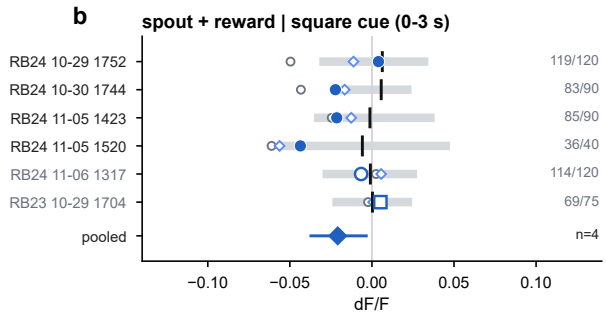

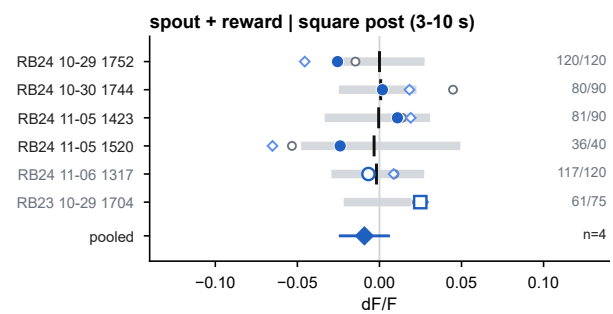

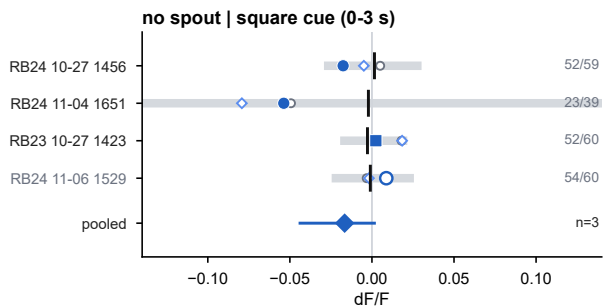

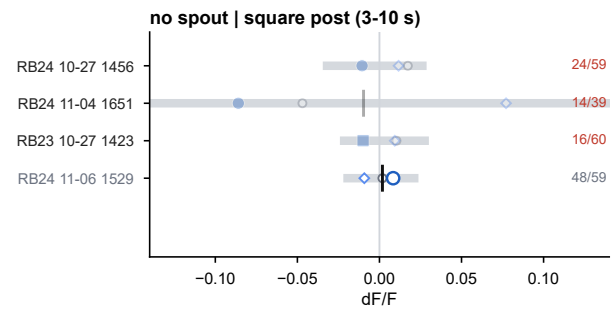

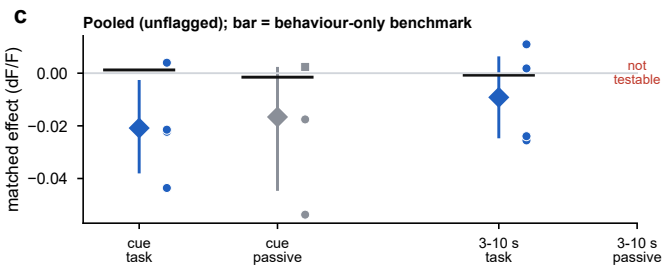

square cue (0-3 s): task - passive = +0.002 dF/F (4 vs 3 sessions,
exact permutation p = 0.89, smallest possible p 0.029)
square post (3-10 s): task - passive not testable (passive has too few matched windows)
task cue: -0.021 [-0.038, -0.003]; 4 session(s), 1 animal(s); p vs shift null = 0.040,
p vs behaviour-only benchmark = 0.040; 94% of windows matched
passive cue: -0.017 [-0.045, +0.002]; 3 session(s), 2 animal(s); p vs shift null = 0.45,
p vs behaviour-only benchmark = 0.64; 78% of windows matched
task post: -0.009 [-0.025, +0.006]; 4 session(s), 1 animal(s); p vs shift null = 0.30,
p vs behaviour-only benchmark = 0.65; 92% of windows matched

naive: event - all controls · regression, no matching · matched (filled = unflagged, hollow = flagged) · behaviour-only benchmark · shift null 95%