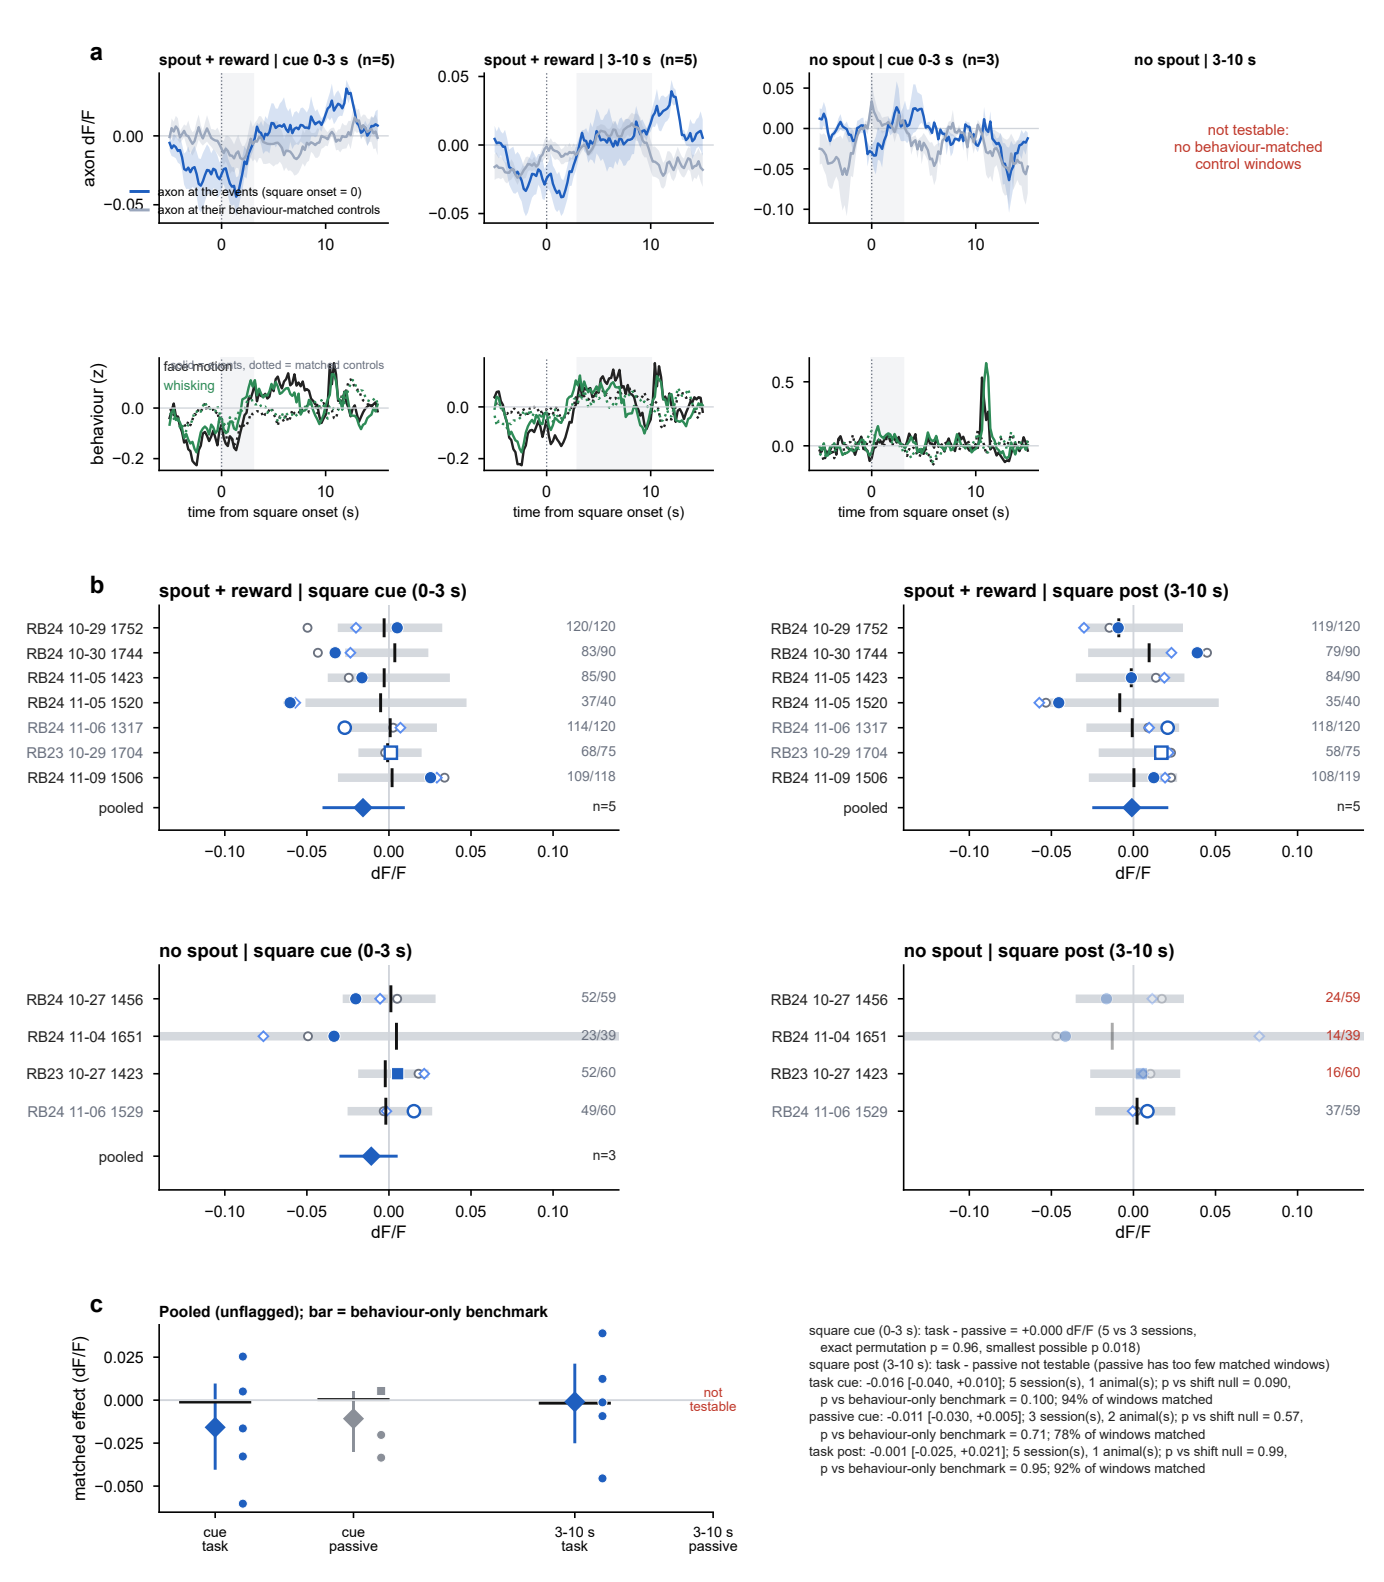

a
spout + reward | cue 0-3 s (n=5)
spout + reward | 3-10 s (n=5)
no spout | cue 0-3 s (n=3)
no spout | 3-10 s
not testable:
no behaviour-matched
control windows
axon dF/F
axon at the events (square onset = 0)
axon at their behaviour-matched controls
behaviour (z)
face motion
whisking
time from square onset (s)
b
spout + reward | square cue (0-3 s)
spout + reward | square post (3-10 s)
RB24 10-29 1752
RB24 10-30 1744
RB24 11-05 1423
RB24 11-05 1520
RB24 11-06 1317
RB23 10-29 1704
RB24 11-09 1506
pooled
120/120
83/90
85/90
37/40
114/120
68/75
109/118
n=5
119/120
79/90
84/90
35/40
118/120
58/75
108/119
n=5
dF/F
no spout | square cue (0-3 s)
no spout | square post (3-10 s)
RB24 10-27 1456
RB24 11-04 1651
RB23 10-27 1423
RB24 11-06 1529
52/59
23/39
52/60
49/60
n=3
24/59
14/39
16/60
37/59
c
Pooled (unflagged); bar = behaviour-only benchmark
matched effect (dF/F)
not
testable
cue
task
cue
passive
3-10 s
task
3-10 s
passive
square cue (0-3 s): task - passive = +0.000 dF/F (5 vs 3 sessions,
exact permutation p = 0.96, smallest possible p 0.018)
square post (3-10 s): task - passive not testable (passive has too few matched windows)
task cue: -0.016 [-0.040, +0.010]; 5 session(s), 1 animal(s); p vs shift null = 0.090,
p vs behaviour-only benchmark = 0.100; 94% of windows matched
passive cue: -0.011 [-0.030, +0.005]; 3 session(s), 2 animal(s); p vs shift null = 0.57,
p vs behaviour-only benchmark = 0.71; 78% of windows matched
task post: -0.001 [-0.025, +0.021]; 5 session(s), 1 animal(s); p vs shift null = 0.99,
p vs behaviour-only benchmark = 0.95; 92% of windows matched
naive: event - all controls
regression, no matching
matched (filled = unflagged, hollow = flagged)
behaviour-only benchmark
shift null 95%