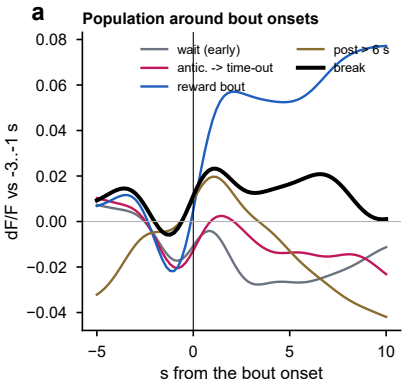
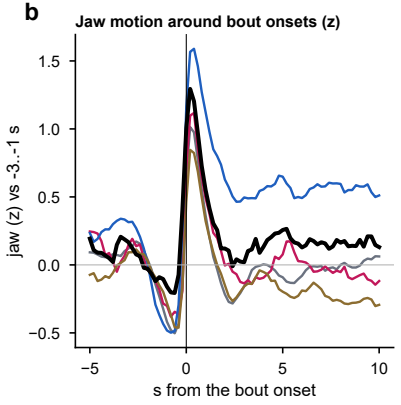
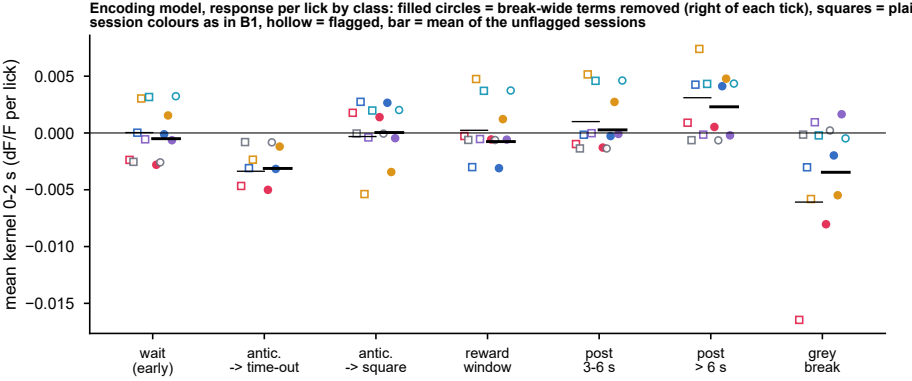
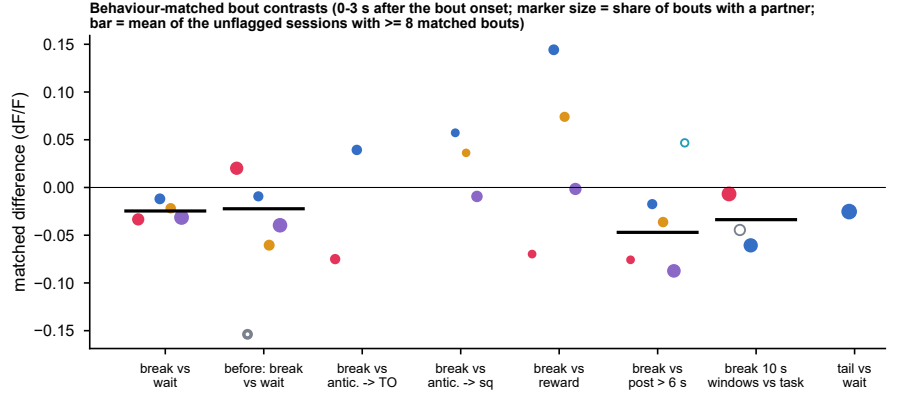

a
Population around bout onsets
wait (early)
antic. -> time-out
reward bout
post > 6 s
break
dF/F vs -3..-1 s
0.08
0.06
0.04
0.02
0.00
−0.02
−0.04
−5
0
5
10
s from the bout onset


b
Jaw motion around bout onsets (z)
jaw (z) vs -3..-1 s
1.5
1.0
0.5
0.0
−0.5
−5
0
5
10
s from the bout onset


c
Encoding model, response per lick by class: filled circles = break-wide terms removed (right of each tick), squares = plain model (left);
session colours as in B1, hollow = flagged, bar = mean of the unflagged sessions
mean kernel 0-2 s (dF/F per lick)
0.005
0.000
−0.005
−0.010
−0.015
wait (early)
antic. -> time-out
antic. -> square
reward window
post 3-6 s
post > 6 s
grey break


d
Behaviour-matched bout contrasts (0-3 s after the bout onset; marker size = share of bouts with a partner;
bar = mean of the unflagged sessions with >= 8 matched bouts)
matched difference (dF/F)
0.15
0.10
0.05
0.00
−0.05
−0.10
−0.15
break vs wait
before: break vs wait
break vs antic. -> TO
break vs antic. -> sq
break vs reward
break vs post > 6 s
break 10 s windows vs task
tail vs wait