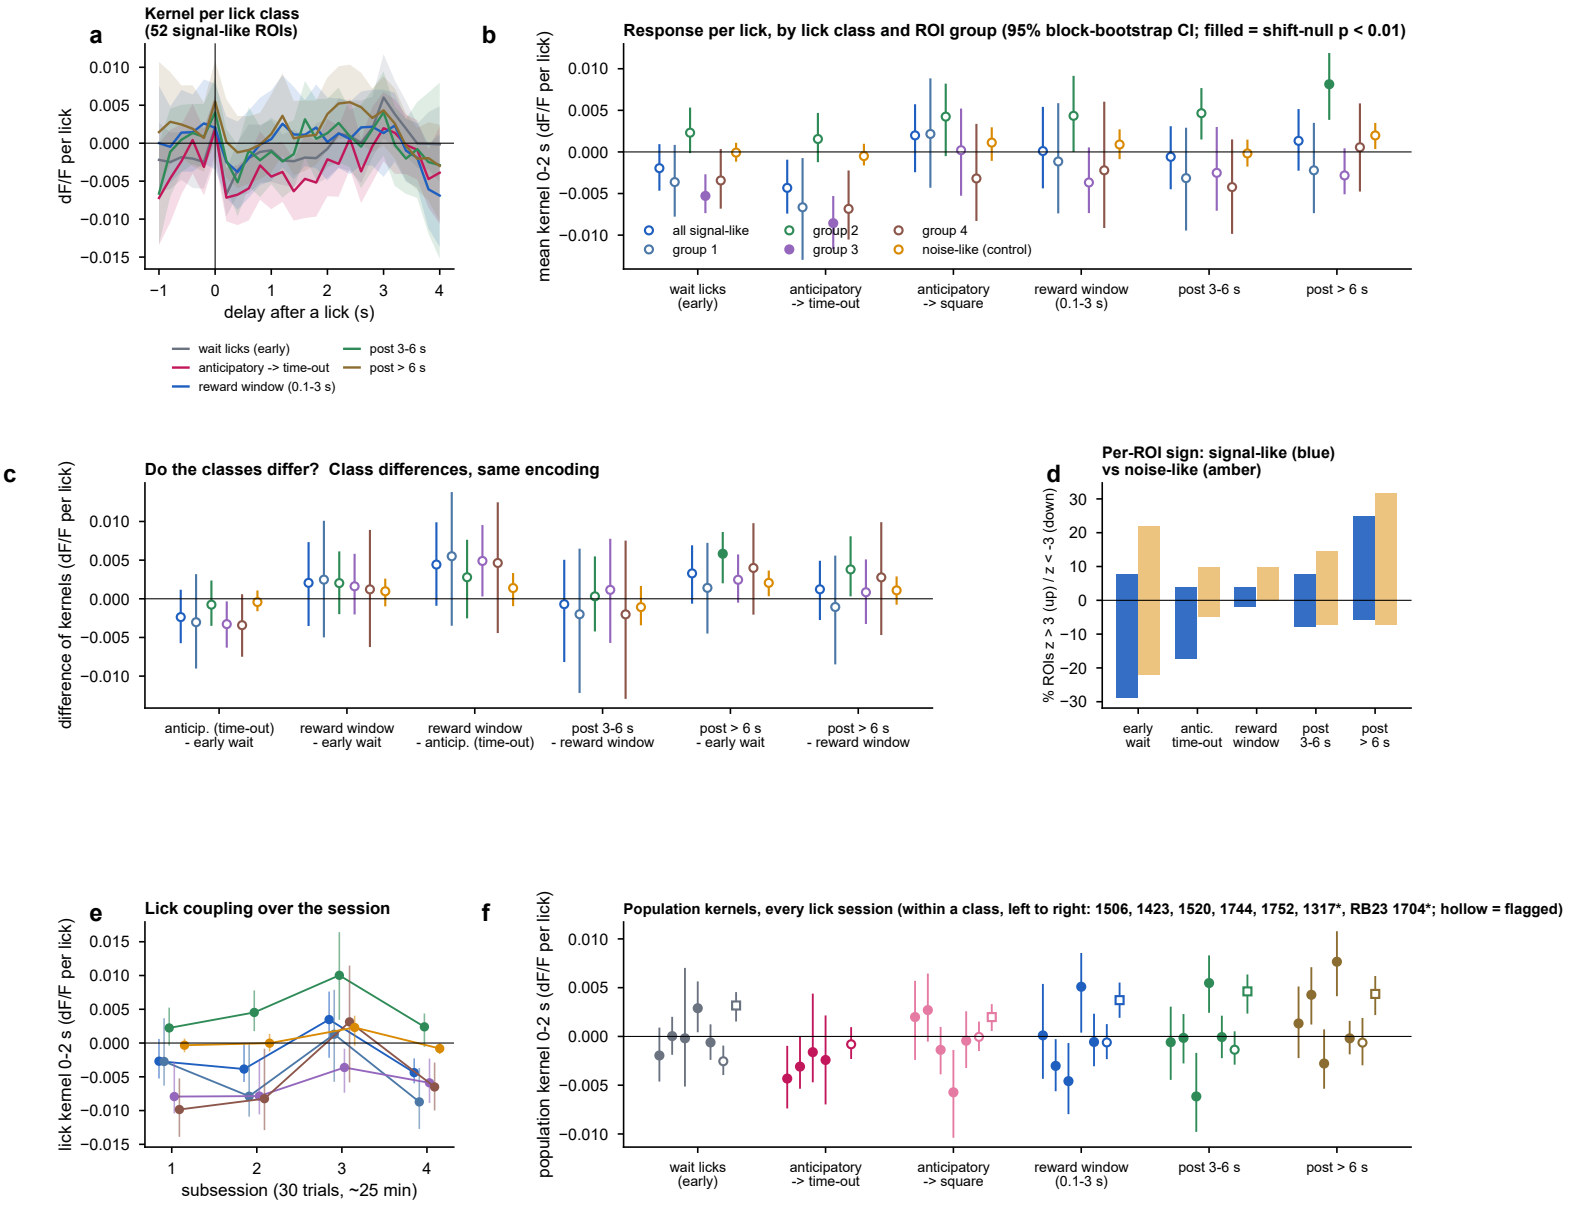

a
Kernel per lick class
(52 signal-like ROIs)
dF/F per lick
delay after a lick (s)
wait licks (early)
anticipatory -> time-out
reward window (0.1-3 s)
post 3-6 s
post > 6 s
b
Response per lick, by lick class and ROI group (95% block-bootstrap CI; filled = shift-null p < 0.01)
mean kernel 0-2 s (dF/F per lick)
all signal-like
group 1
group 2
group 3
group 4
noise-like (control)
wait licks (early)
anticipatory -> time-out
anticipatory -> square
reward window (0.1-3 s)
post 3-6 s
post > 6 s
c
Do the classes differ? Class differences, same encoding
difference of kernels (dF/F per lick)
anticip. (time-out) - early wait
reward window - early wait
reward window - anticip. (time-out)
post 3-6 s - reward window
post > 6 s - early wait
post > 6 s - reward window
d
Per-ROI sign: signal-like (blue) vs noise-like (amber)
% ROIs z > 3 (up) / z < -3 (down)
early wait
antic. time-out
reward window
post 3-6 s
post > 6 s
e
Lick coupling over the session
lick kernel 0-2 s (dF/F per lick)
subsession (30 trials, ~25 min)
f
Population kernels, every lick session (within a class, left to right: 1506, 1423, 1520, 1744, 1752, 1317*, RB23 1704*; hollow = flagged)
population kernel 0-2 s (dF/F per lick)
wait licks (early)
anticipatory -> time-out
anticipatory -> square
reward window (0.1-3 s)
post 3-6 s
post > 6 s