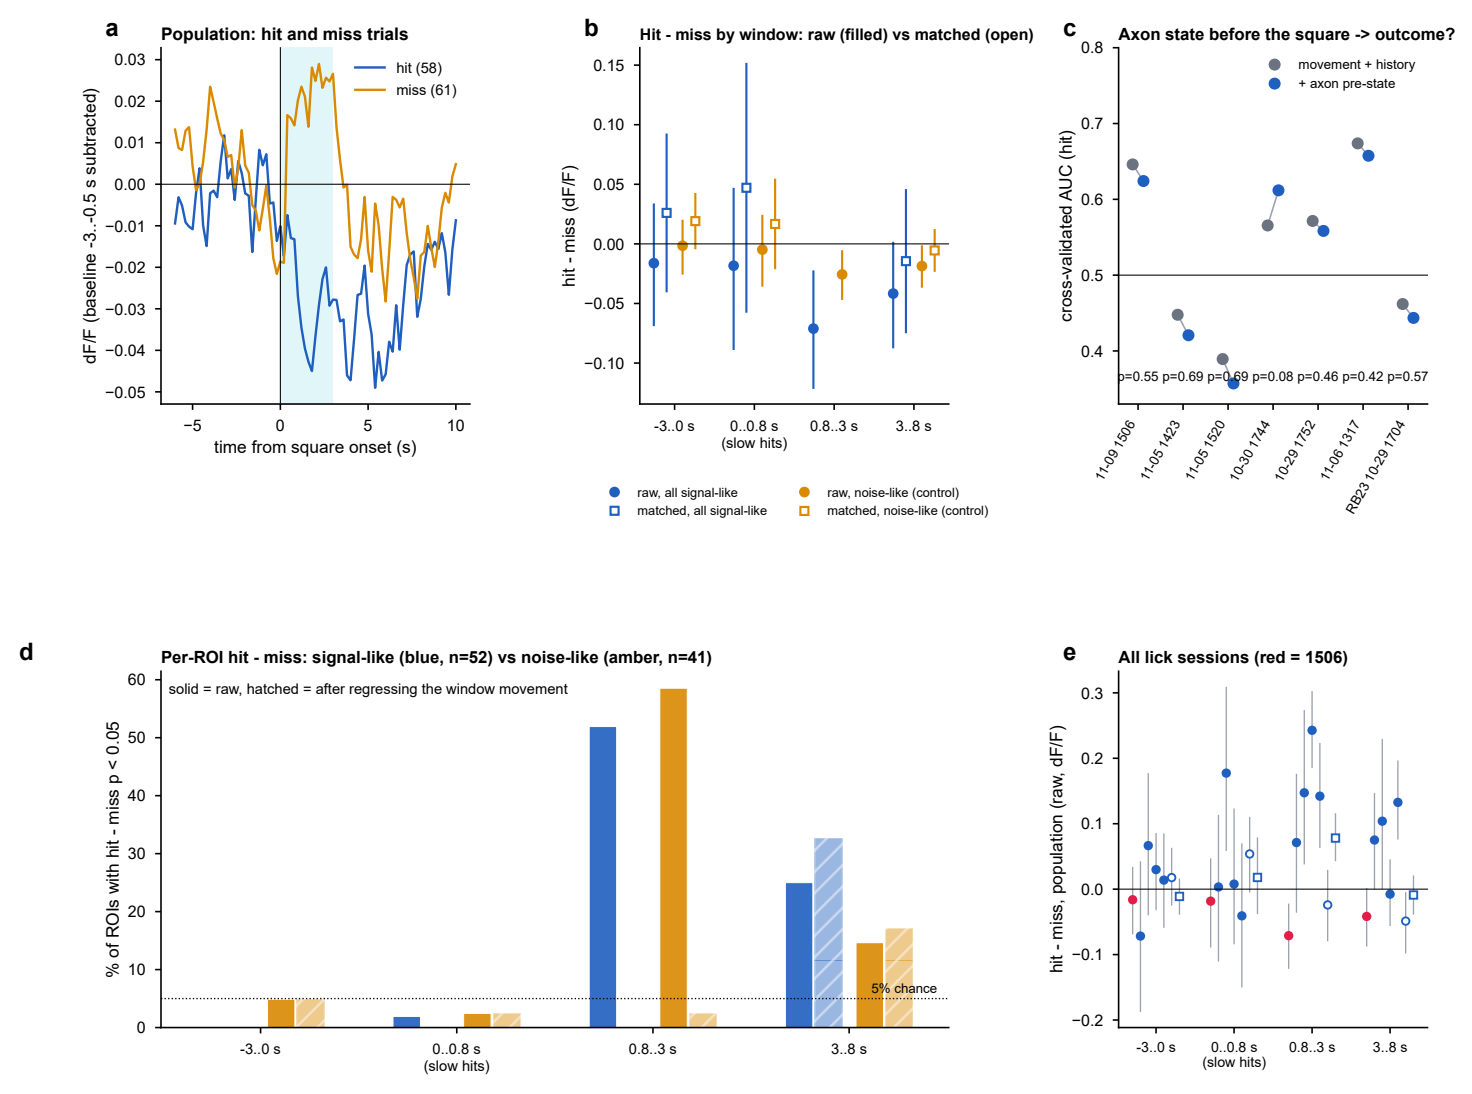

a
Population: hit and miss trials
hit (58)
miss (61)
dF/F (baseline -3..-0.5 s subtracted)
time from square onset (s)
b
Hit - miss by window: raw (filled) vs matched (open)
hit - miss (dF/F)
-3..0 s
0..0.8 s
(slow hits)
0.8..3 s
3..8 s
raw, all signal-like
matched, all signal-like
raw, noise-like (control)
matched, noise-like (control)
c
Axon state before the square -> outcome?
movement + history
+ axon pre-state
cross-validated AUC (hit)
p=0.55 p=0.69 p=0.69 p=0.08 p=0.46 p=0.42 p=0.57
11-09 1506
11-05 1423
11-05 1520
10-30 1744
10-29 1752
11-06 1317
RB23 10-29 1704
d
Per-ROI hit - miss: signal-like (blue, n=52) vs noise-like (amber, n=41)
solid = raw, hatched = after regressing the window movement
% of ROIs with hit - miss p < 0.05
5% chance
-3..0 s
0..0.8 s
(slow hits)
0.8..3 s
3..8 s
e
All lick sessions (red = 1506)
hit - miss, population (raw, dF/F)
-3..0 s
0..0.8 s
(slow hits)
0.8..3 s
3..8 s