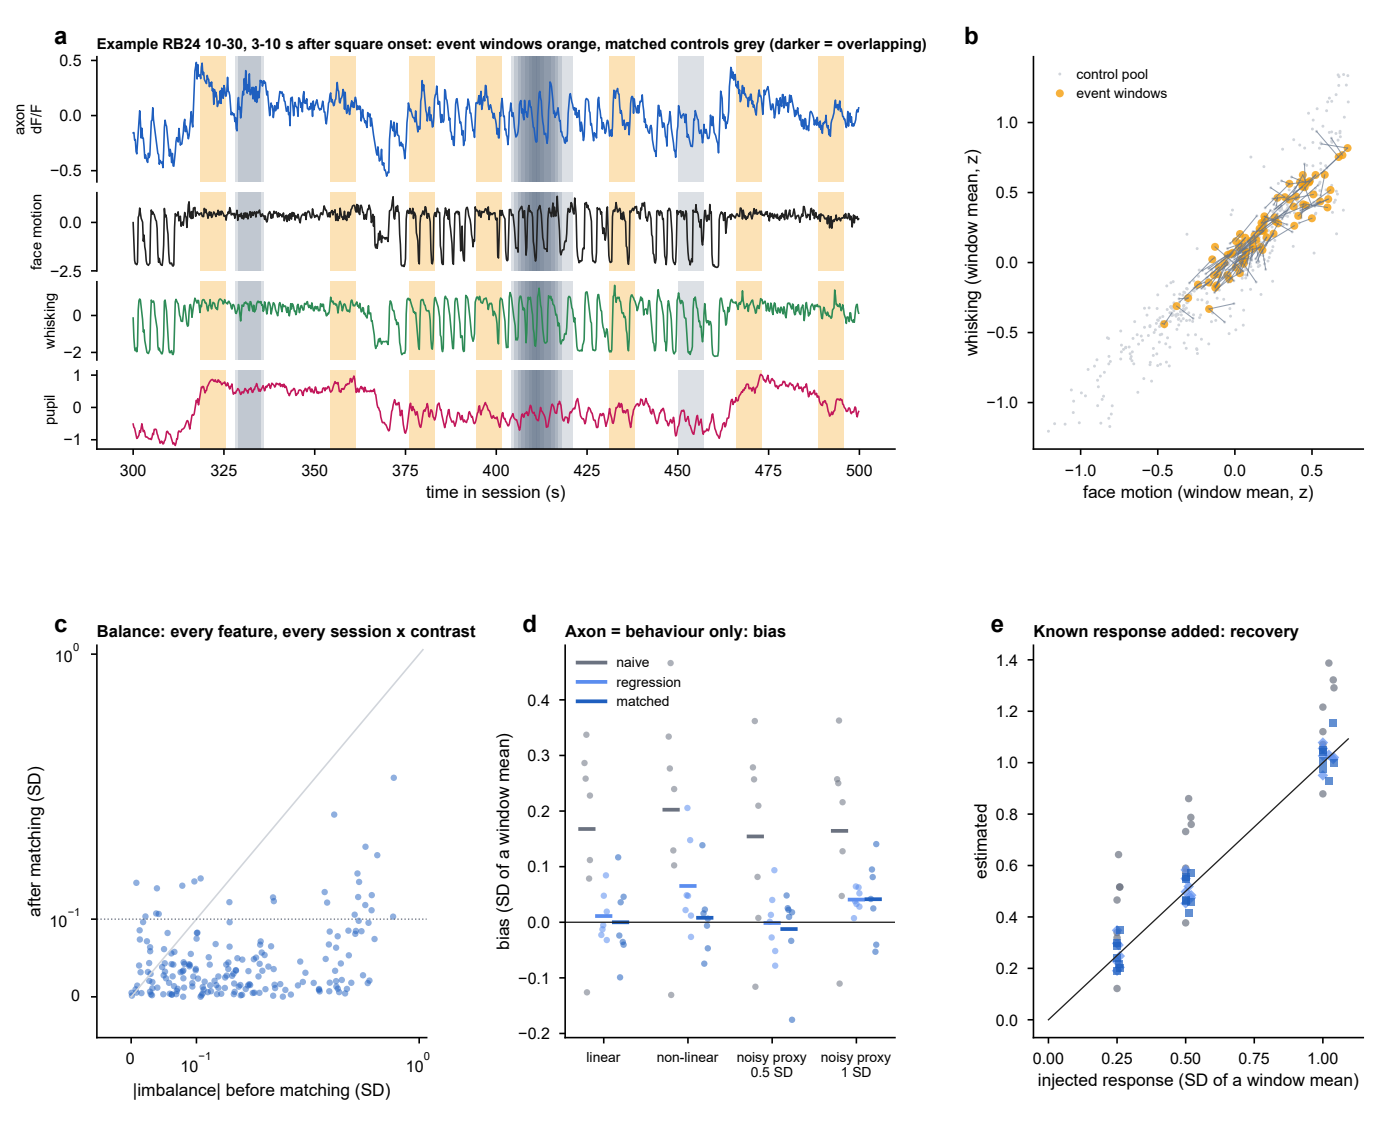

a
Example RB24 10-30, 3-10 s after square onset: event windows orange, matched controls grey (darker = overlapping)
axon dF/F
face motion
whisking
pupil
time in session (s)
b
control pool
event windows
whisking (window mean, z)
face motion (window mean, z)
c
Balance: every feature, every session x contrast
after matching (SD)
|imbalance| before matching (SD)
d
Axon = behaviour only: bias
naive
regression
matched
bias (SD of a window mean)
linear
non-linear
noisy proxy 0.5 SD
noisy proxy 1 SD
e
Known response added: recovery
estimated
injected response (SD of a window mean)