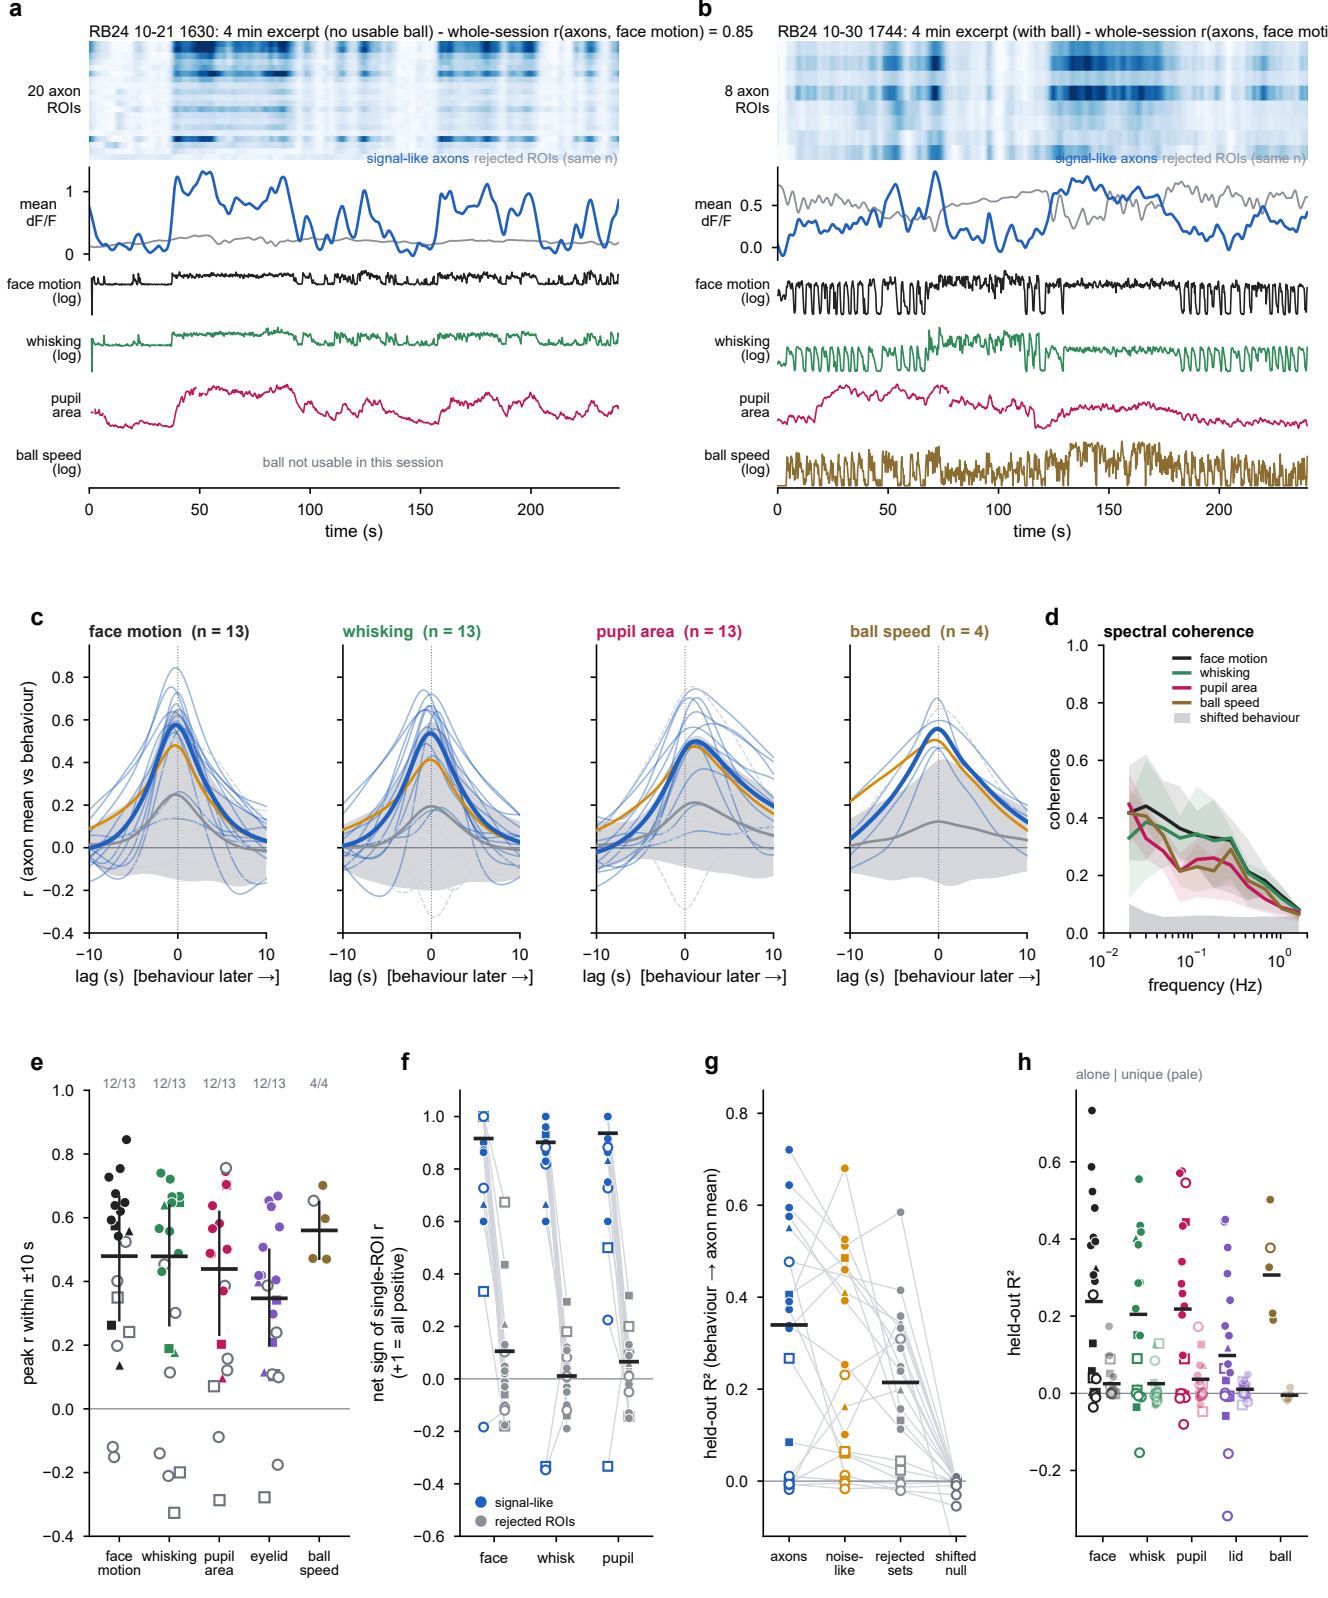


c: thin blue = sessions (dashed grey = flagged), thick blue = mean of unflagged sessions; grey = random sets of rejected ROIs (mean +- 2 SD over sessions); amber = noise-like ROIs; ball: 4 unflagged sessions.
e: n/N above each column = unflagged sessions with $p < 0.01$ against circularly shifted data. Marker shape = animal (circle RB24, square RB23, triangle RB22); filled = unflagged session (pooled), hollow = flagged (never
Black bars = mean of the per-animal means, +- 95% hierarchical bootstrap CI (sessions within animal, then animals); n = 13 unflagged sessions from 3 mice (ball: 4 sessions, 1 mouse).