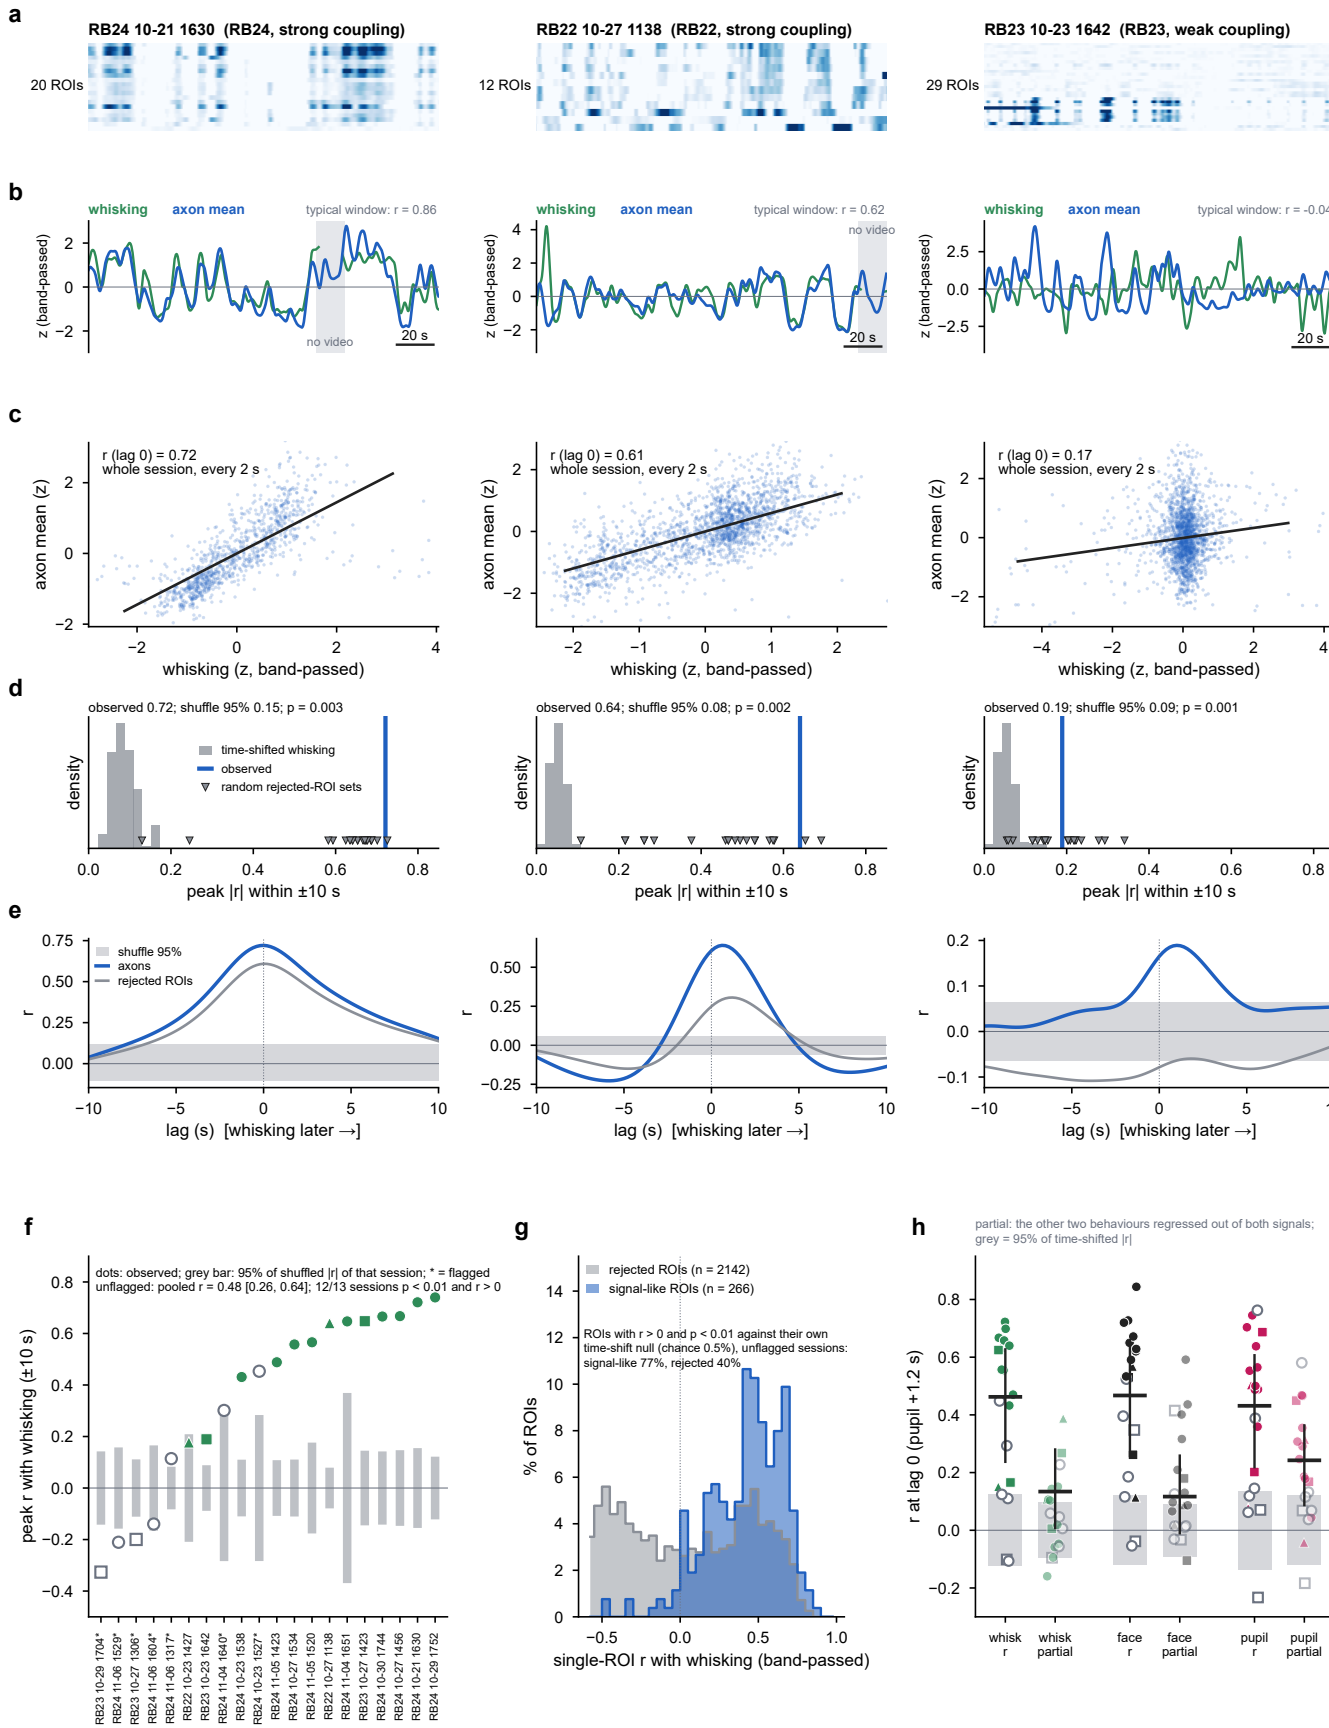


Axon mean = mean best dF/F of the signal-like ROIs; both signals band-passed 1-30 s (slow drift and fast noise removed) for all statistics. a, b: ROI raster (band-passed dF/F, white = 0, sorted by r with whisking) and overlaid z-scored traces of a typical 3 min window (median windowed r among windows with >= 85% valid whisking samples, not the best); grey band = camera not recording (10-16 s between stimulus blocks), the axon trace is continuous. c-e: whole session. d: null = whisking circularly shifted by >= 120 s (348 offsets; same statistic: peak |r| within +-10 s); triangles = the same statistic for 20 random sets of rejected ROIs of equal size (they share part of the signal: common-mode, see Figs 2g, 7f). f-h: marker shape = animal (circle RB24, square RB23, triangle RB22), filled = unflagged (pooled), hollow = flagged (*). Black = mean of per-animal means with 95% hierarchical bootstrap CI. Examples: one session per animal; RB23 1642 is a weak session shown on purpose.