Transformation



A transformation f
maps any input of type A
to the output of type B.

Composition

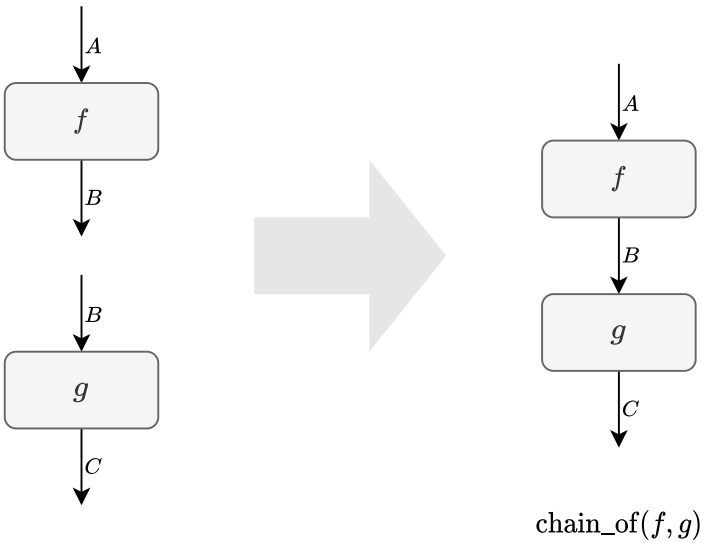

$\text{chain\_of}(f, g)$

Transformations with compatible input and output can be composed.

Composition is a Transformation

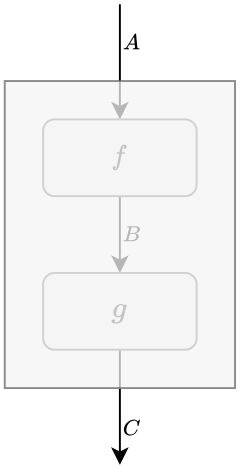

Crucially, composition of transformations is again a transformation.

Composition Combinator

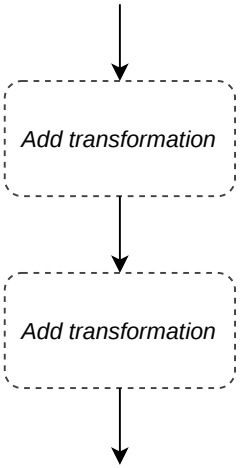

Composition $\mathrm{chain\_of}(\square, \square)$
is a transformation combinator
with two arguments.

Example: Composition

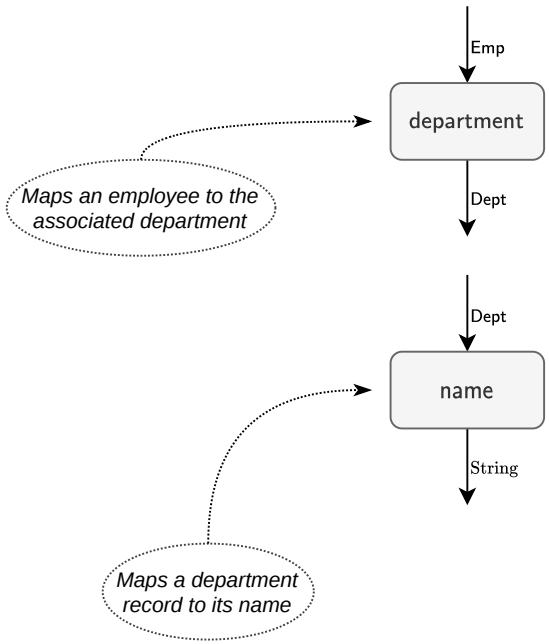

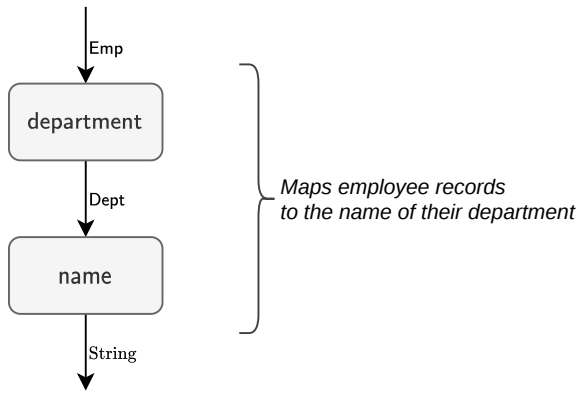

$\mathrm{chain\_of}(\mathsf{department}, \mathsf{name})$

Counter-example: Plural Component

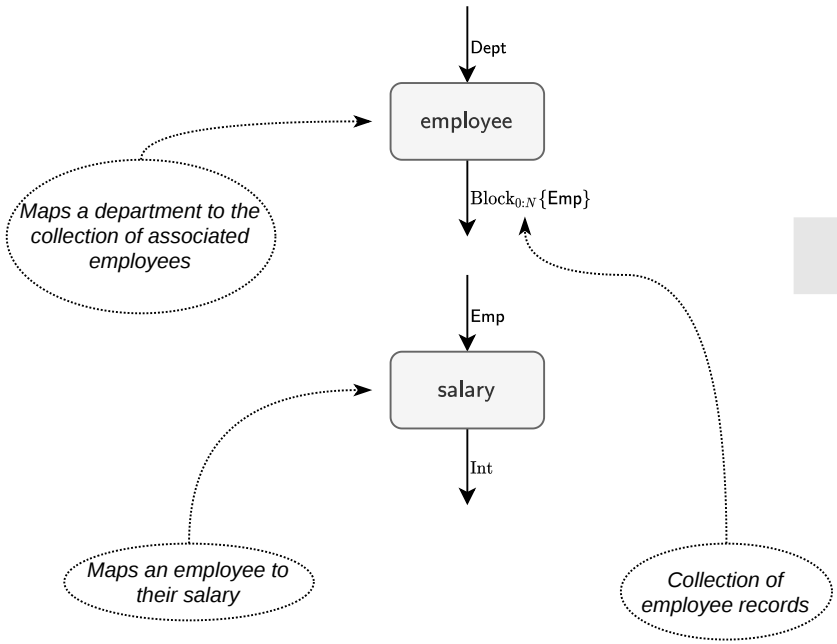

We cannot compose these transformations because their input and output do not quite match.

Counter-example: Optional Component

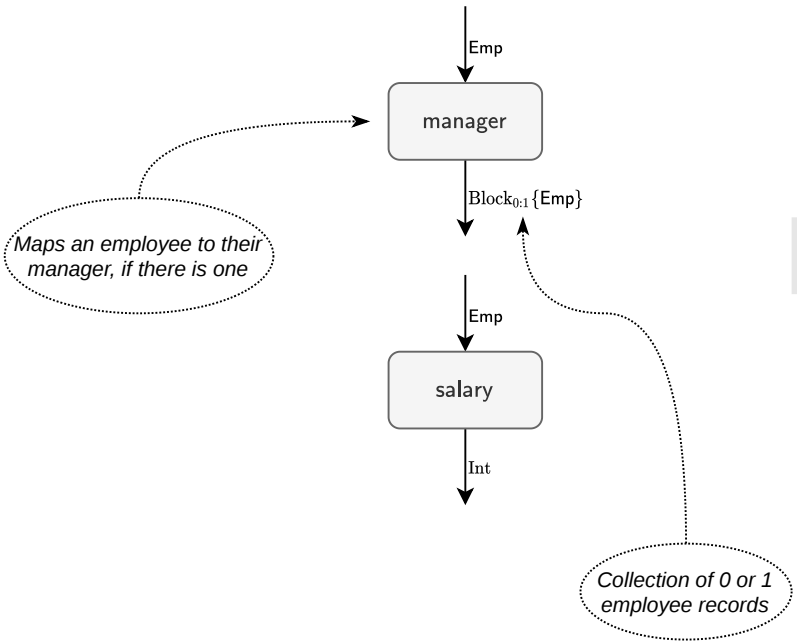

Even so, the input and the output share a common component,
which suggests there should be a way to compose these transformations.

Idea: Unbundle the Wire

Unbundle the composite wire.

Compose using the object wire.

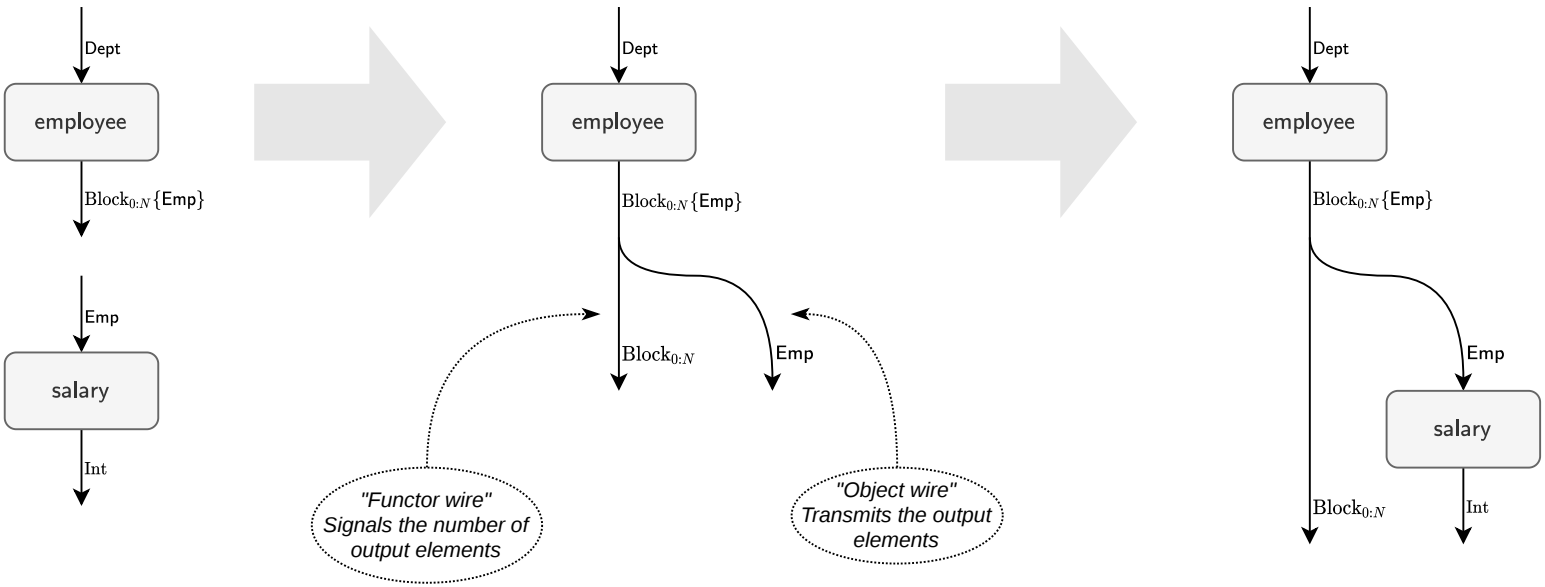

Attaching a transformation to the object wire indicates that the transformation is applied to all element of the collection.

Block Type

A block is a collection
of homogeneous elements.

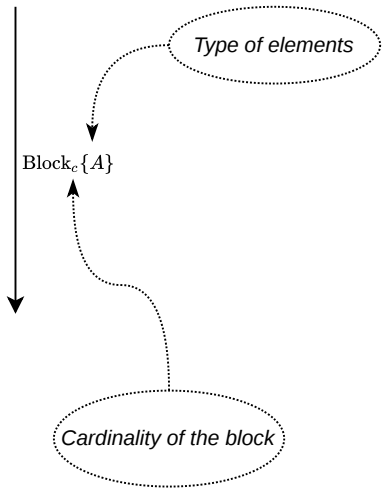

Cardinality is a constraint
on the number of elements in a block.

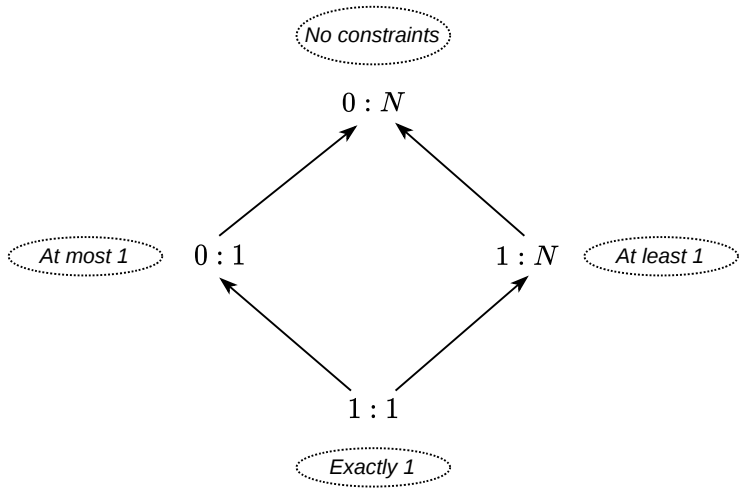

Unbundling

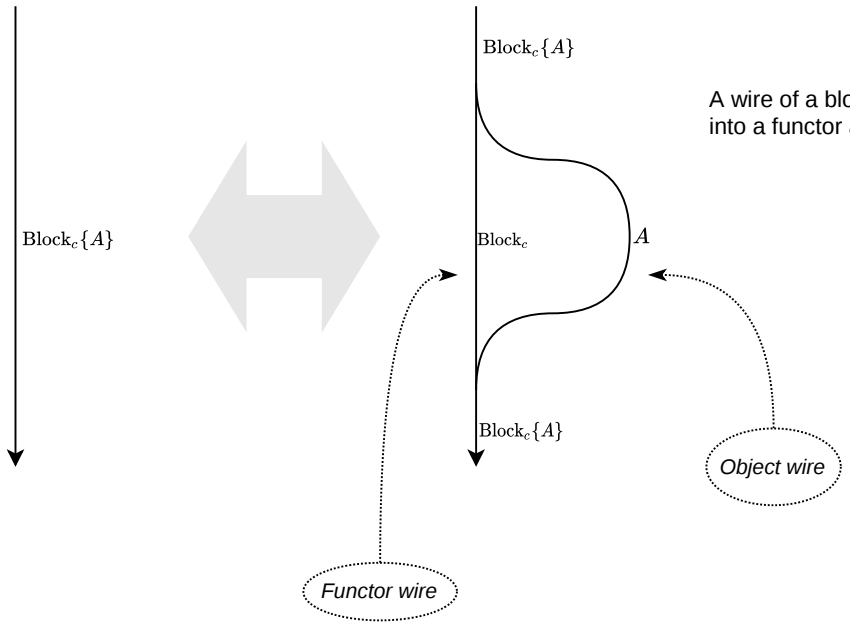

A wire of a block type can be unbundled into a functor and object components.

Object Transformation

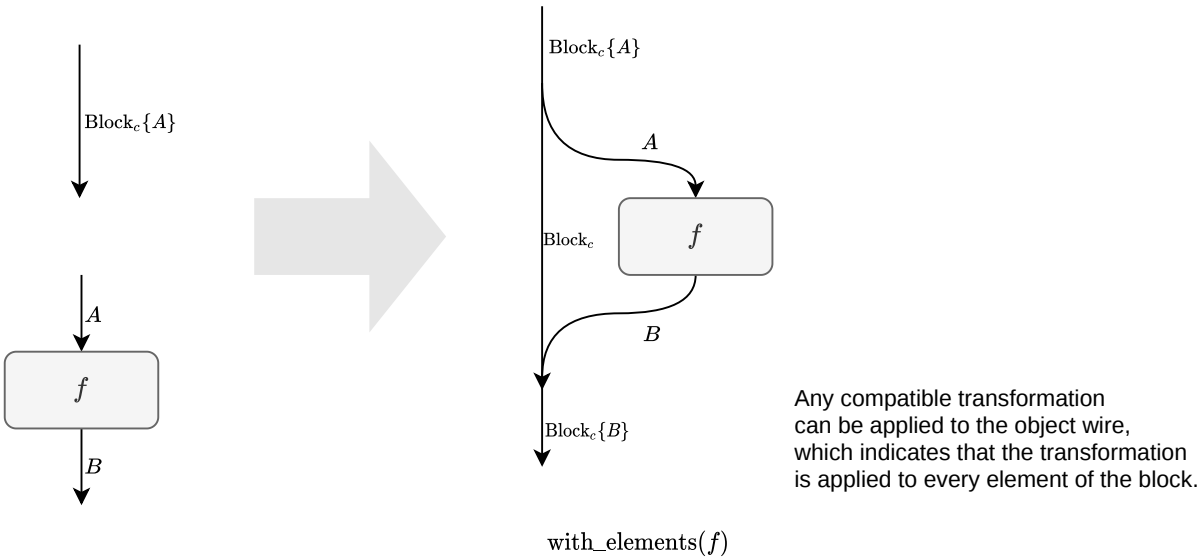

$\mathrm{with\_elements}(f)$

Any compatible transformation
can be applied to the object wire,
which indicates that the transformation
is applied to every element of the block.

Multiwired Transformations

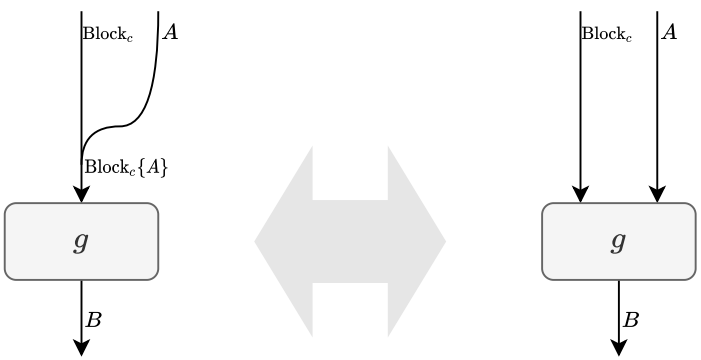

1. Transformation



A transformation f
with input of type A
and output of type B

2. Composition

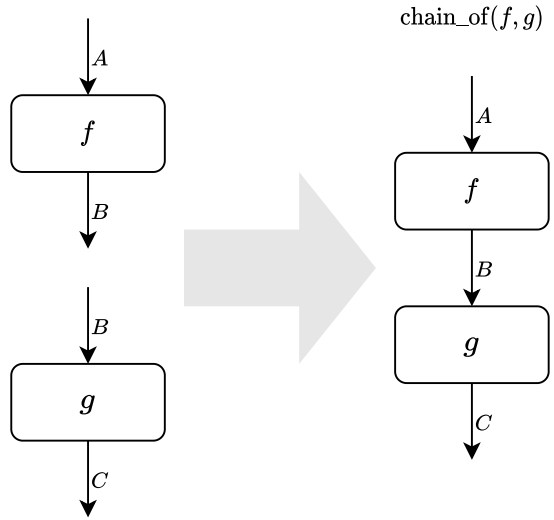

Transformations with
compatible input and output
can be composed

3. Composition is a Transformation

4. Composition Combinator

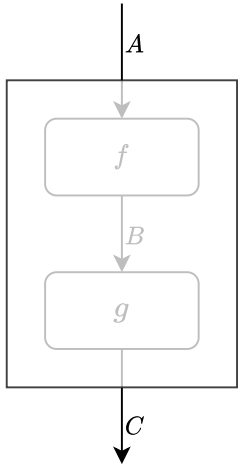

Trivially (but crucially),
a composition of transformations
is again a transformation

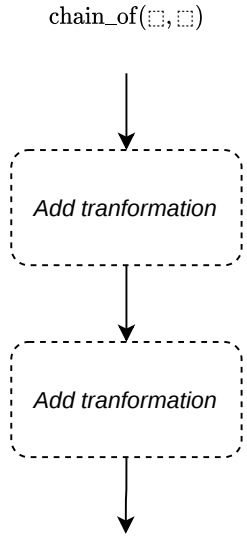

Composition is a transformation combinator
with two placeholders

5. Example: Components of a Composition



Maps an employee to

6. Example: Composition



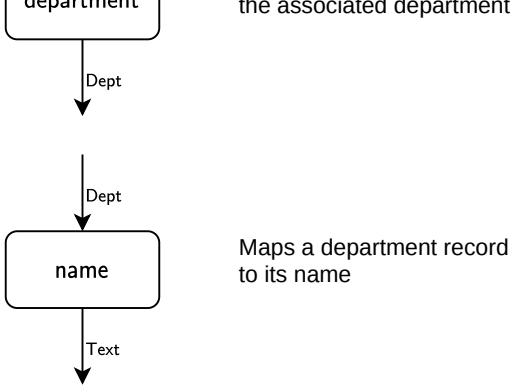

Maps a department record
to its name



Maps an employee record
to the name of their departmer

$\mathrm{chain\_of}(\mathsf{department}, \mathsf{name})$

7. Counter-example: Plural Component



Maps a department to the collection
of associated employees

Collection of employee records

8. Counter-example: Optional



Maps an employee to their manager,
if there is one

Collection of 0 or 1 employee records

nt

Component



Maps an employee to their salary

Cannot compose because
input and output do not quite match



Can we represent composition of these transformations with an intuitive diagrammatic notation?

9. Idea: Unbundle the Wire

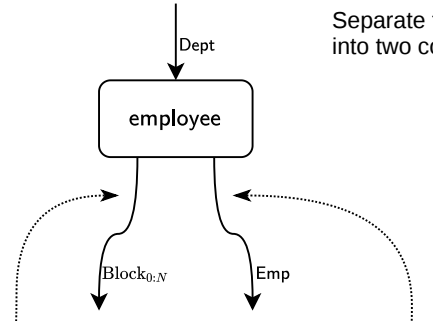

Separate the output wire into two components

Functor wire
Intuitively, it signals the number

Object wire
Transmits the output elements

10. Idea: Compose Using the

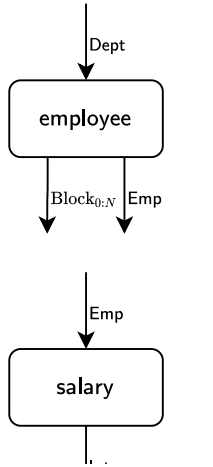

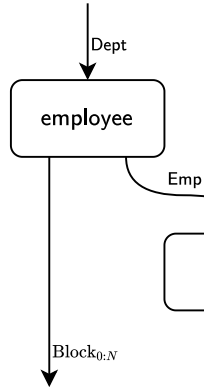

Object Wire



of output elements

transmits the output elements

Int

Attaching a transformation to the object wire indicates that the transformation is applied to each element of the collection

11. Block Type

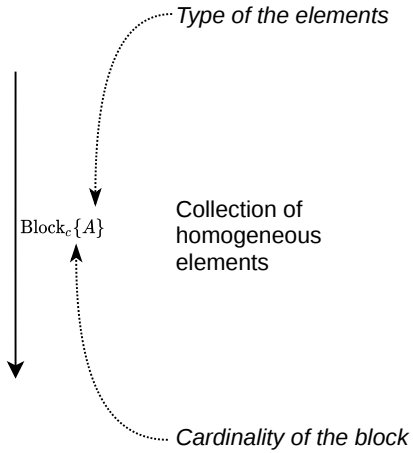

12. Cardinality

Cardinality is a constraint on the number of elem

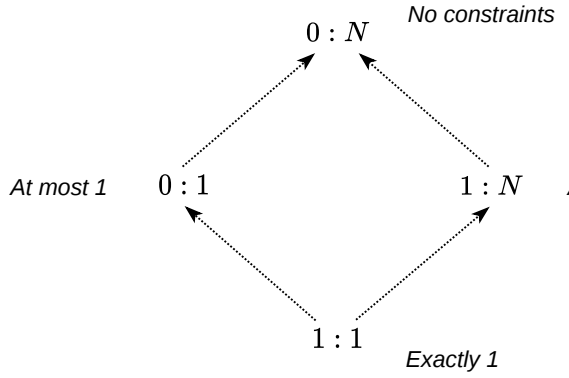

ents in a block

At least 1

13. Unbundling

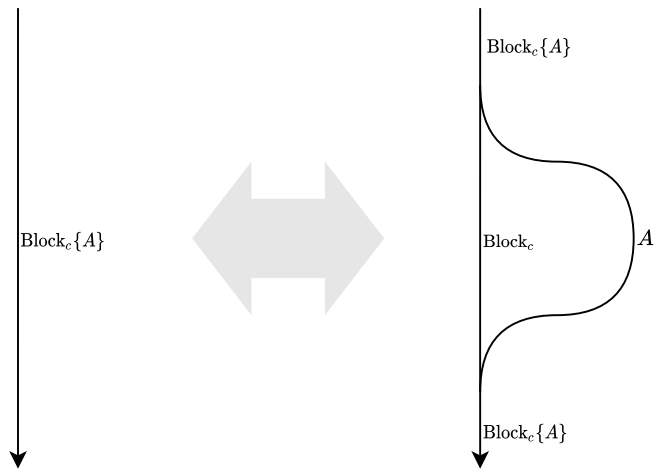

We can unbundle a wire of a block type into a functor and object components

14. Object Transformation

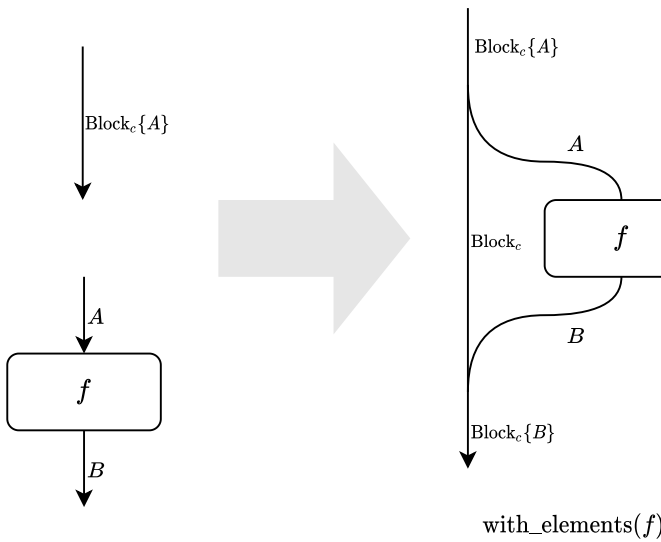

Then any compatible transformation can be applied to the object
which indicates that the transformation is applied to every eleme
of the block

t wire,
ent

13. Multiwired transformations

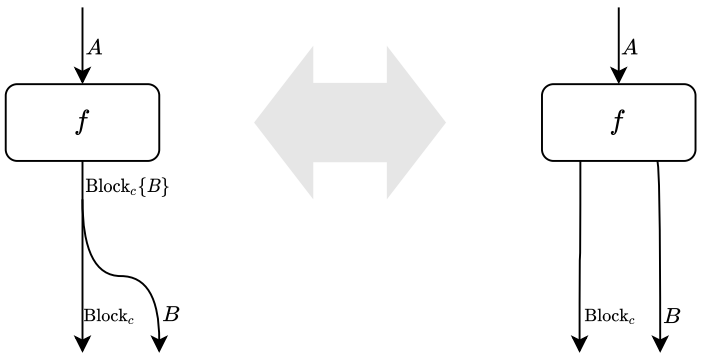

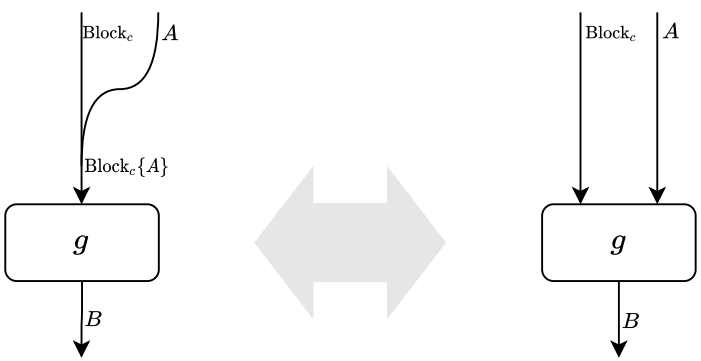

14. Example: Multiwired Trans



Maps a department to the collection of associated employees



Produces the sum of a collection of intege

sformations

ers

14. Example: Multiwired Composition

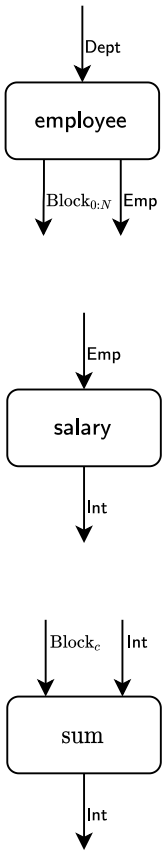

Total sum of salaries in a given department

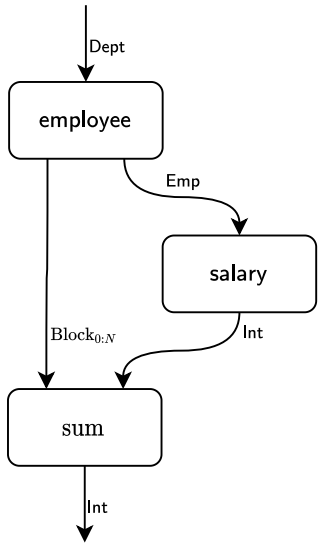

chain_of(employee, with_elements(salary), sum)

15. Example: Details

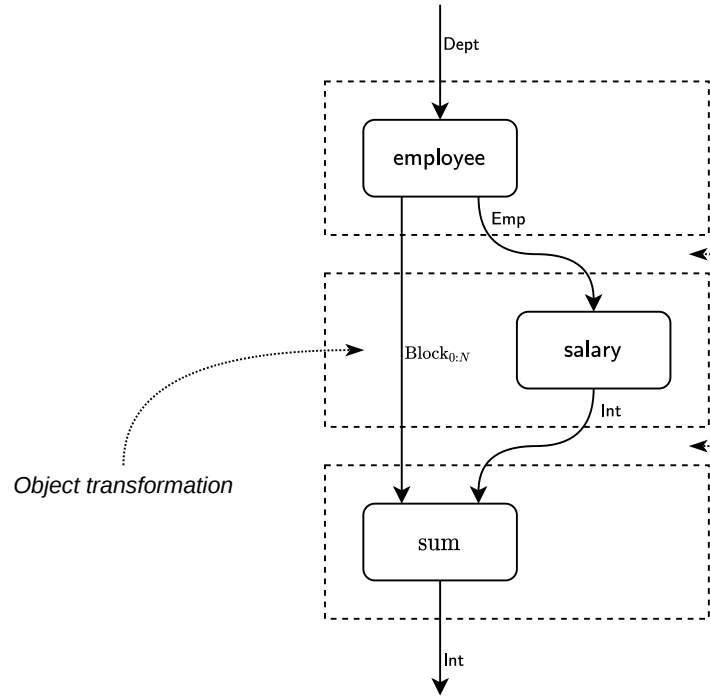

chain_of(employee, with_elements(salary),



sum)