FunSQL A library for compositional construction

of SQL queries

https://github.com/MechanicalRabbit/FunSQL.jl

Clark C. Evans, Kyrylo Simonov



SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970



```
function find_patients(conn)
    sql = """
    SELECT p.person_id
    FROM person p
    WHERE p.year_of_birth >= 1970
    """

    DBInterface.execute(conn, sql)
end
```



SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970



```
function find_patients(conn)
    sql = """
    SELECT p.person_id
    FROM person p
    WHERE p.year_of_birth >= 1970
    """

    DBInterface.execute(conn, sql)
end
```




SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970



```
function find_patients(conn)
    sql = """
    SELECT p.person_id
    FROM person p
    WHERE p.year_of_birth >= 1970
    """
    DBInterface.execute(conn, sql)
end
```

```
function find_patients(conn; start_year = nothing, end_year = nothing)
    sql =
    SELECT p.person_id
    FROM person p
    predicates = String[]
    if start year !== nothing
        push!(predicates, "p.year_of_birth >= $start_year")
    end
    if end_year !== nothing
        push!(predicates, "p.year_of_birth <= $end_year")</pre>
    end
    if !isempty(predicates)
        sql *= "\nWHERE " * join(predicates, " AND ")
    end
    DBInterface.execute(conn, sql)
end
```

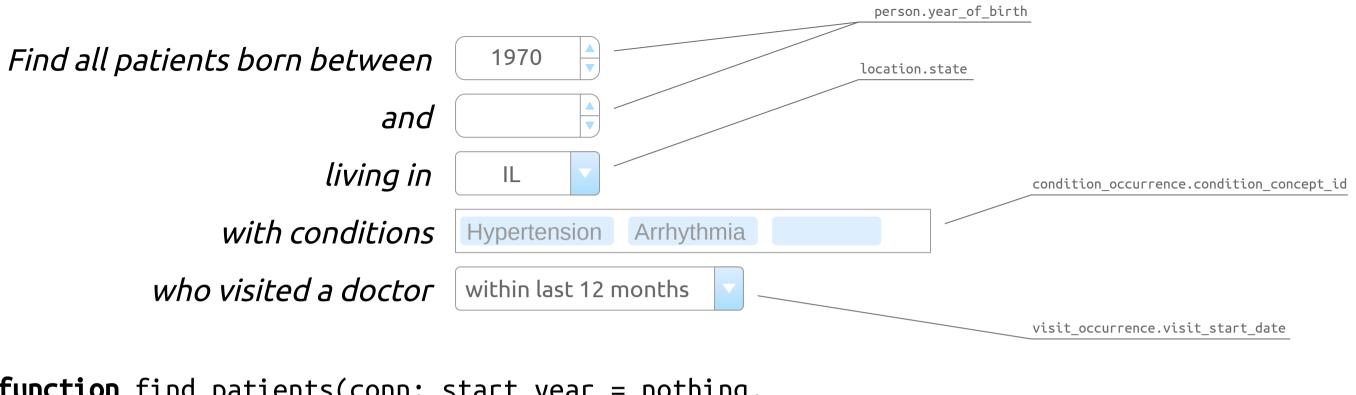



```
location
using FunSQL: SQLTable
                                                                                      person
const person =
    SQLTable(name = :person,
                                                                          condition occurrence
             columns = [:person_id, :year_of_birth, :location_id])
const location =
                                                                            visit occurrence
    SQLTable(name = :location,
             columns = [:location id, :city, :state, :zip])
const condition_occurrence =
    SQLTable(name = :condition_occurrence,
             columns = [:condition_occurrence_id, :person_id, :condition_concept_id,
                        :condition_start_date, :condition_end_date])
const visit_occurrence =
    SQLTable(name = :visit_occurrence,
             columns = [:visit_occurrence_id, :person_id, :visit_concept_id,
                        :visit_start_date, :visit_end_date])
```

using FunSQL: From, Get, Select, Where, render

FROM person p



FROM person p
WHERE p.year_of_birth >= 1970



SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970

q = From(person)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970) |>
 Select(Get.person_id)

sql = render(q, dialect = :postgresql)

using FunSQL: From, Get, Select, Where, render

FROM person p



FROM person p
WHERE p.year_of_birth >= 1970



SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970

q = From(person)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970) |>
 Select(Get.person_id)

sql = render(q, dialect = :postgresql)

using FunSQL: From, Get, Select, Where, render

FROM person p



FROM person p

WHERE p.year_of_birth >= 1970




SELECT p.person_id
FROM person p
WHERE p.year_of_birth >= 1970

q = From(person)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970)



q = From(person) |>
 Where(Get.year_of_birth .>= 1970) |>
 Select(Get.person_id)

sql = render(q, dialect = :postgresql)