
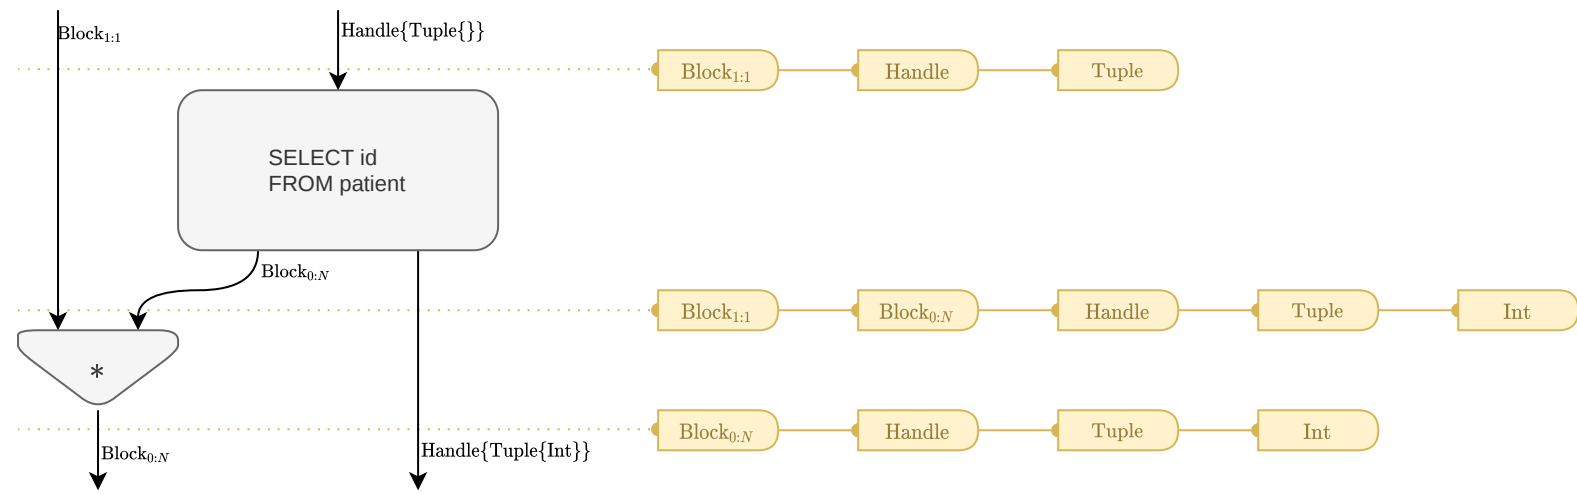



@query db patient

```
chain_of(with_elements(load_postgres_table(("public", "patient"), ["id"], [Int32])), flatten())
```

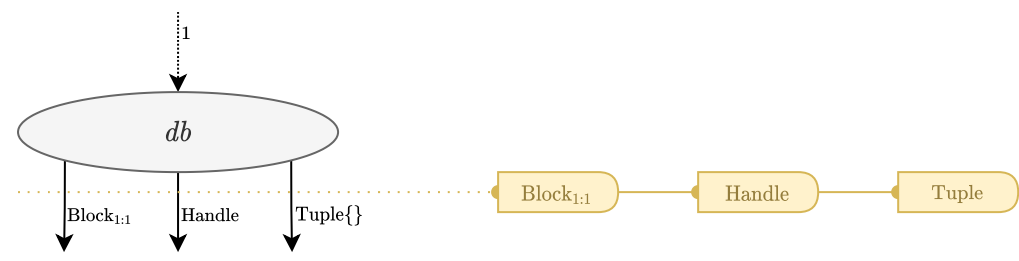


@query db patient{mrn,sex}

```
chain_of(with_elements(load_postgres_table(("public", "patient"), ["id"], [Int32])),
  flatten(),
  with_elements(tuple_of(:mrn => chain_of(load_postgres_table(("public", "patient"), ["mrn"], [String], ["id"]),
    block_cardinality(x1toi),
    with_elements(chain_of(output(), column(1)))),
  :sex => chain_of(load_postgres_table(("public", "patient"), ["sex"], [String], ["id"]),
    block_cardinality(x1toi),
    with_elements(chain_of(output(), column(1)))))))
```

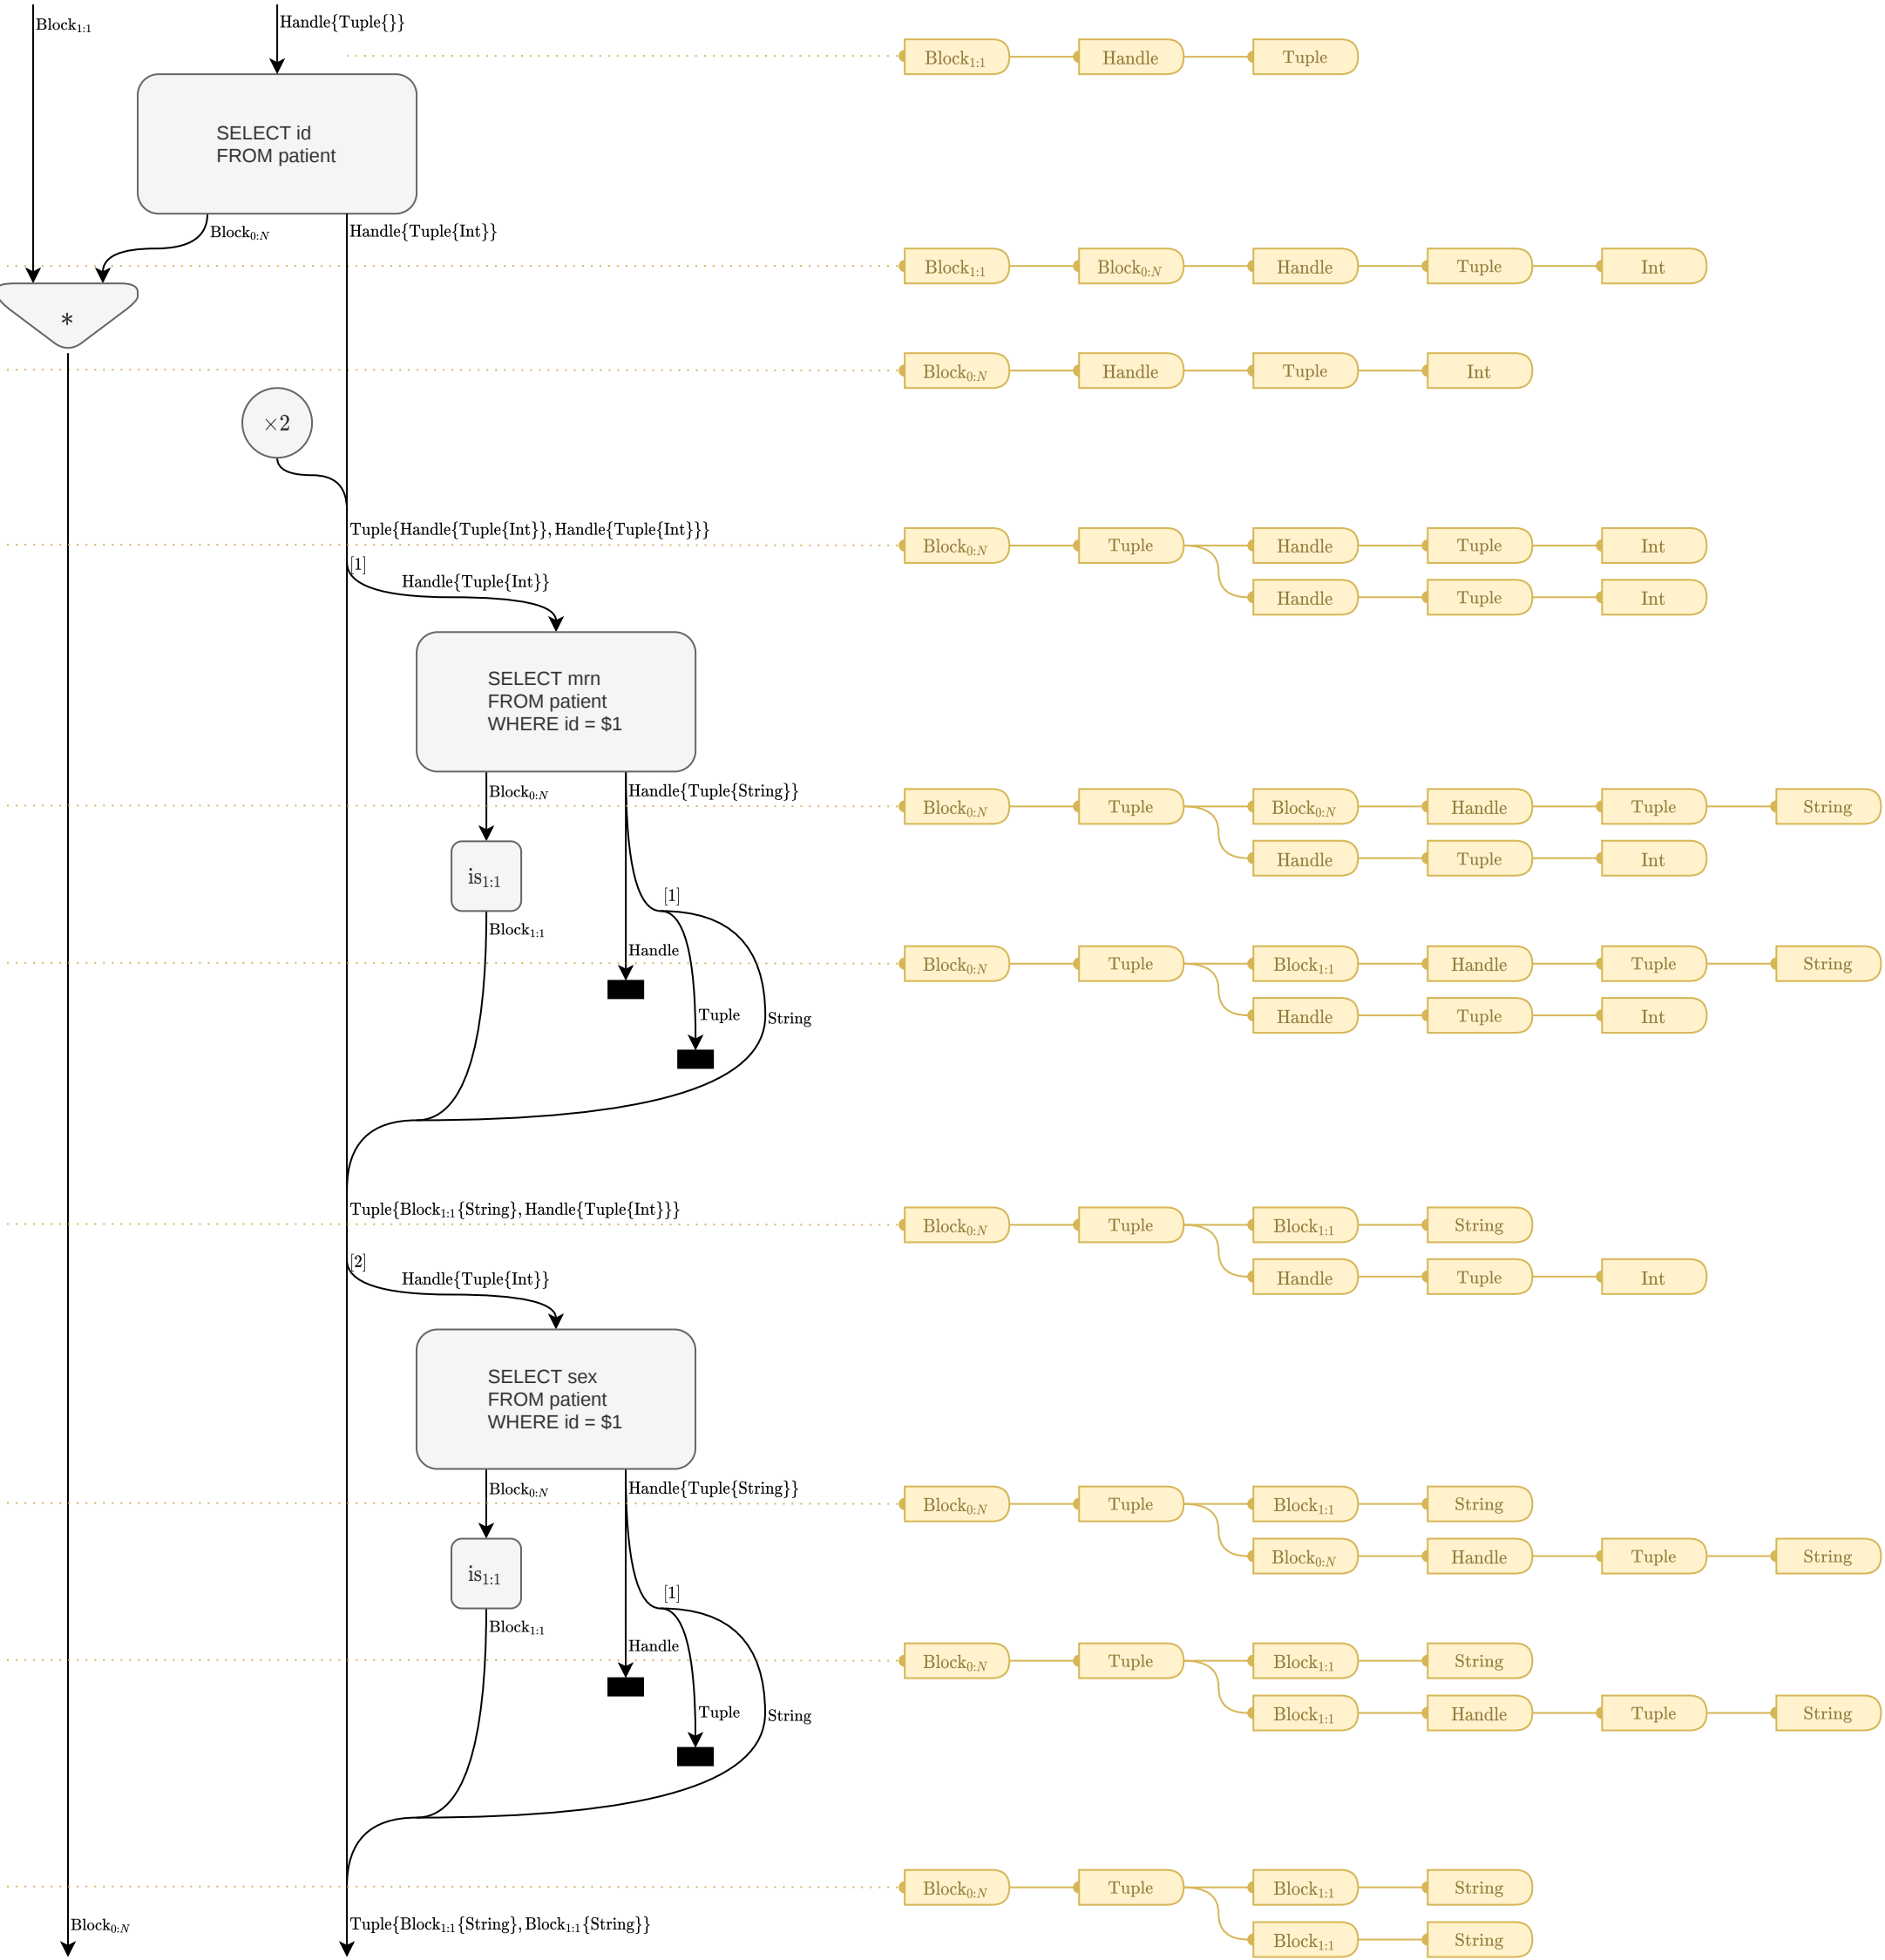

```
@query db patient{mrn,sex}
```

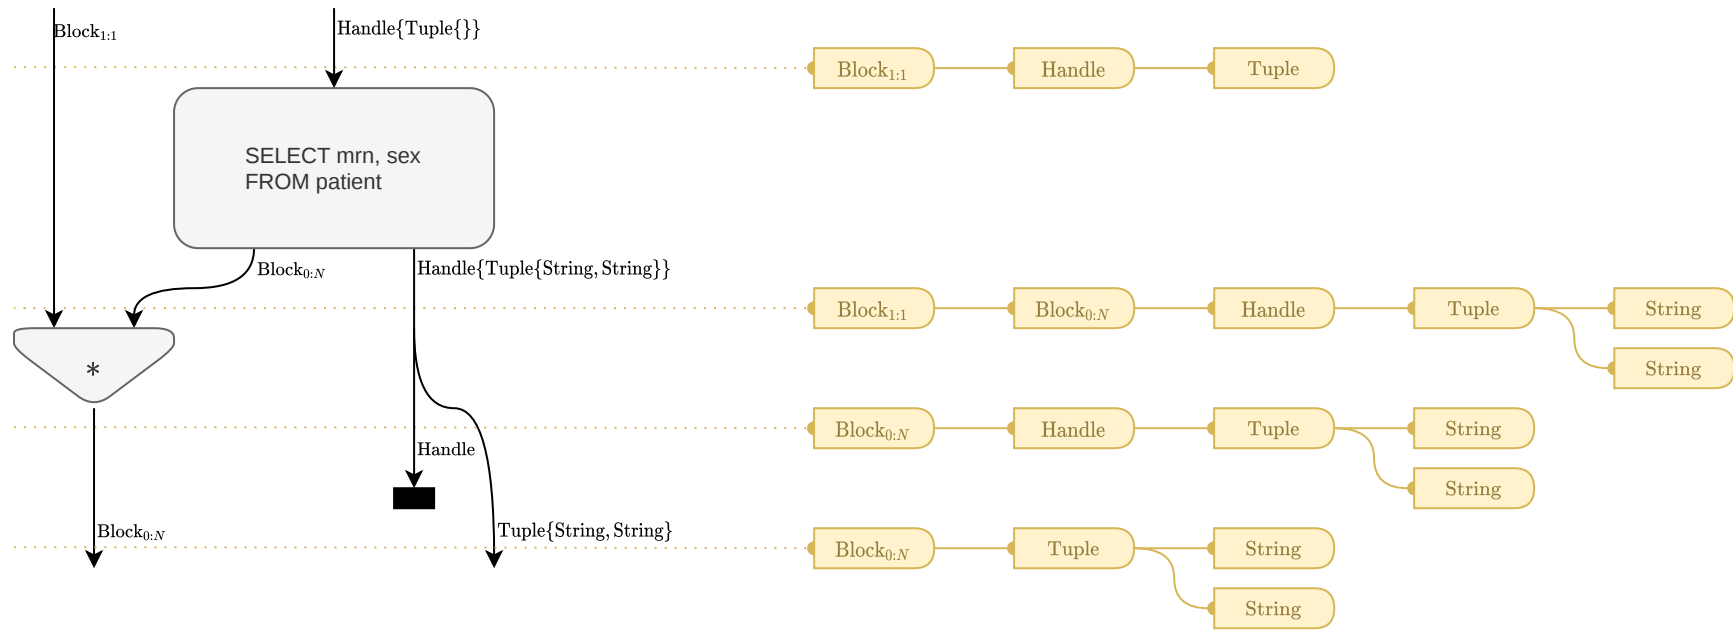

```
struct EvalNode
  p::Pipeline
  i::NodeRef
end

Nothing

struct SlotNode
  n::NodeRef
  k::Int
end

struct HeadNode
  n::NodeRef
end

struct JoinNode
  head::NodeRef
  slots::Vector{NodeRef}
end

struct InputNode
end

mutable struct NodeRef
  node::Union{Nothing,Node}
end
```

