


The diagram illustrates the transformation of a flat table into a hierarchical tree structure through a series of steps:

- Initial State:** A flat table with two columns: an index (1) and a value ("Hello World").
- Step 1:** The value is converted to a JSON string: `String["Hello", "World"]`.
- Step 2:** The string is parsed into a hierarchical tree structure. The root node has two children:
 - Node 1: A table with index 1 and value 1.
 - Node 2: A table with index 1 and value "Hello", and index 2 and value "World".
- Step 3:** The tree structure is further processed, resulting in a more complex hierarchy. The root node has two children:
 - Node 1: A table with index 1 and value 1, and index 2 and value 3.
 - Node 2: A table with index 1 and value "HELLO", and index 2 and value "WORLD".
- Step 4:** The tree structure is further processed, resulting in a more complex hierarchy. The root node has two children:
 - Node 1: A table with index 1 and value 1, and index 2 and value 2.
 - Node 2: A table with index 1 and value "HELLO".
- Step 5:** The tree structure is further processed, resulting in a more complex hierarchy. The root node has two children:
 - Node 1: A table with index 1 and value 1, and index 2 and value 3.
 - Node 2: A table with index 1 and value 1, and index 2 and value 2.
- Step 6:** The tree structure is further processed, resulting in a more complex hierarchy. The root node has two children:
 - Node 1: A table with index 1 and value 1, and index 2 and value 2.
 - Node 2: A table with index 1 and value 1.



wrap()

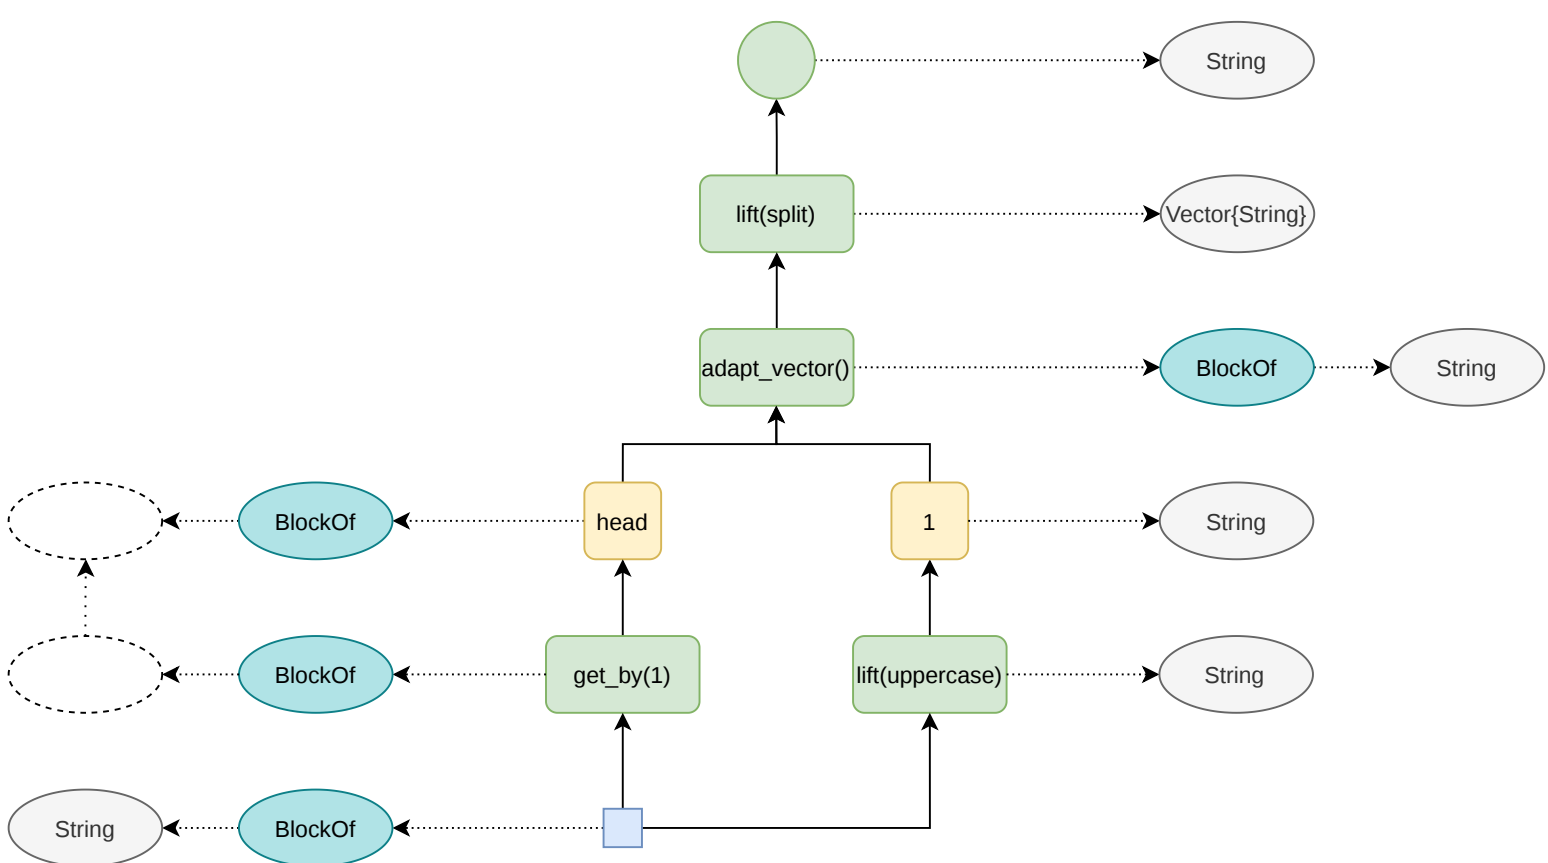

chain_of(tuple_of(2), column(1))



sieve_by()



chain_of(wrap(), block_length())



@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(
    chain_of(
      wrap(),
      lift(split),
      adapt_vector()),
    flatten())
```







untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}





@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(
    chain_of(
      wrap(),
      lift(split),
      adapt_vector()),
    flatten())
```

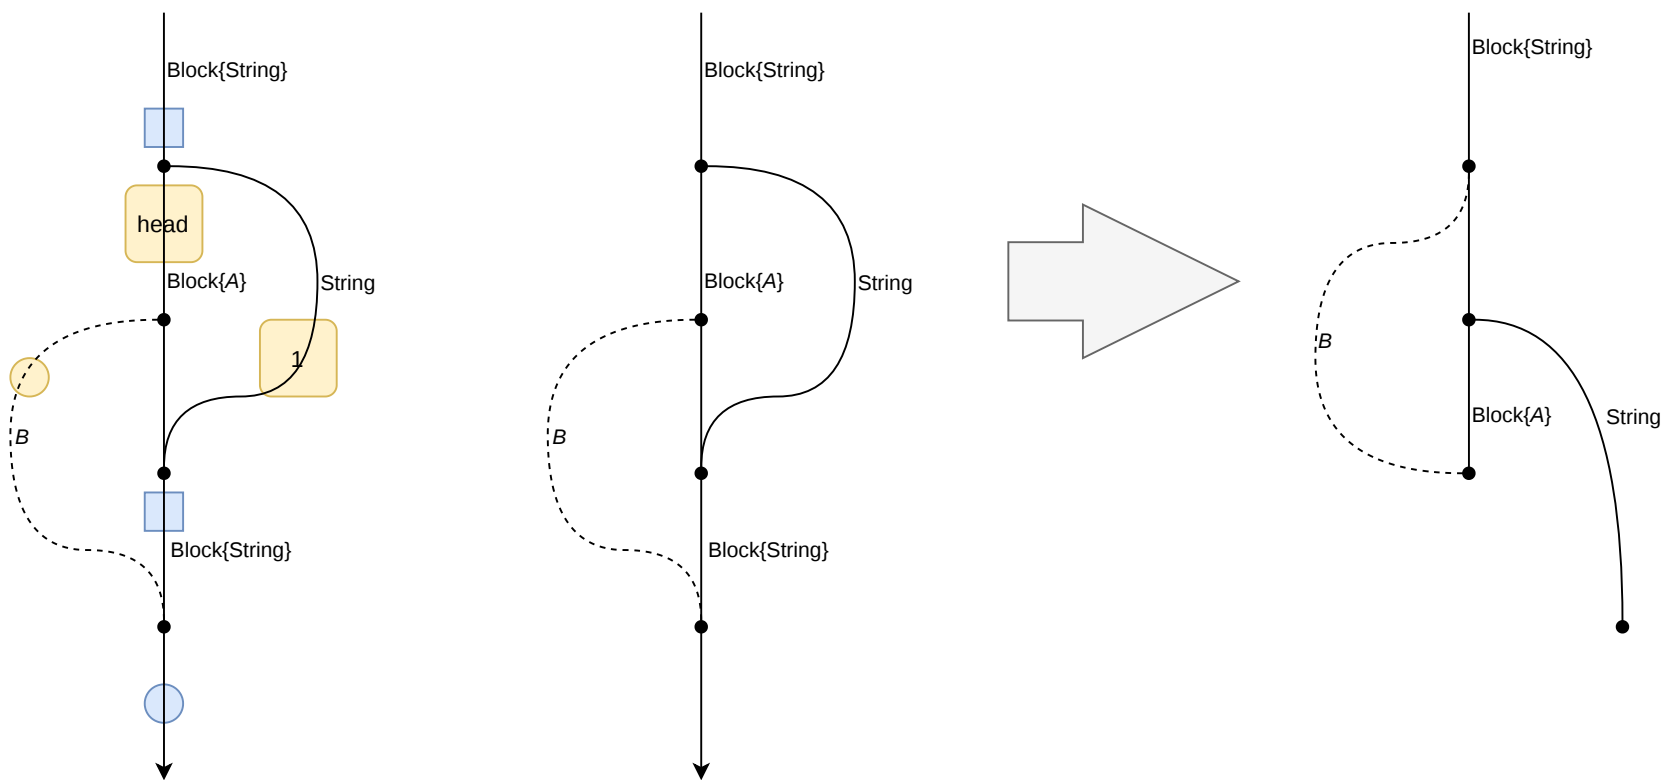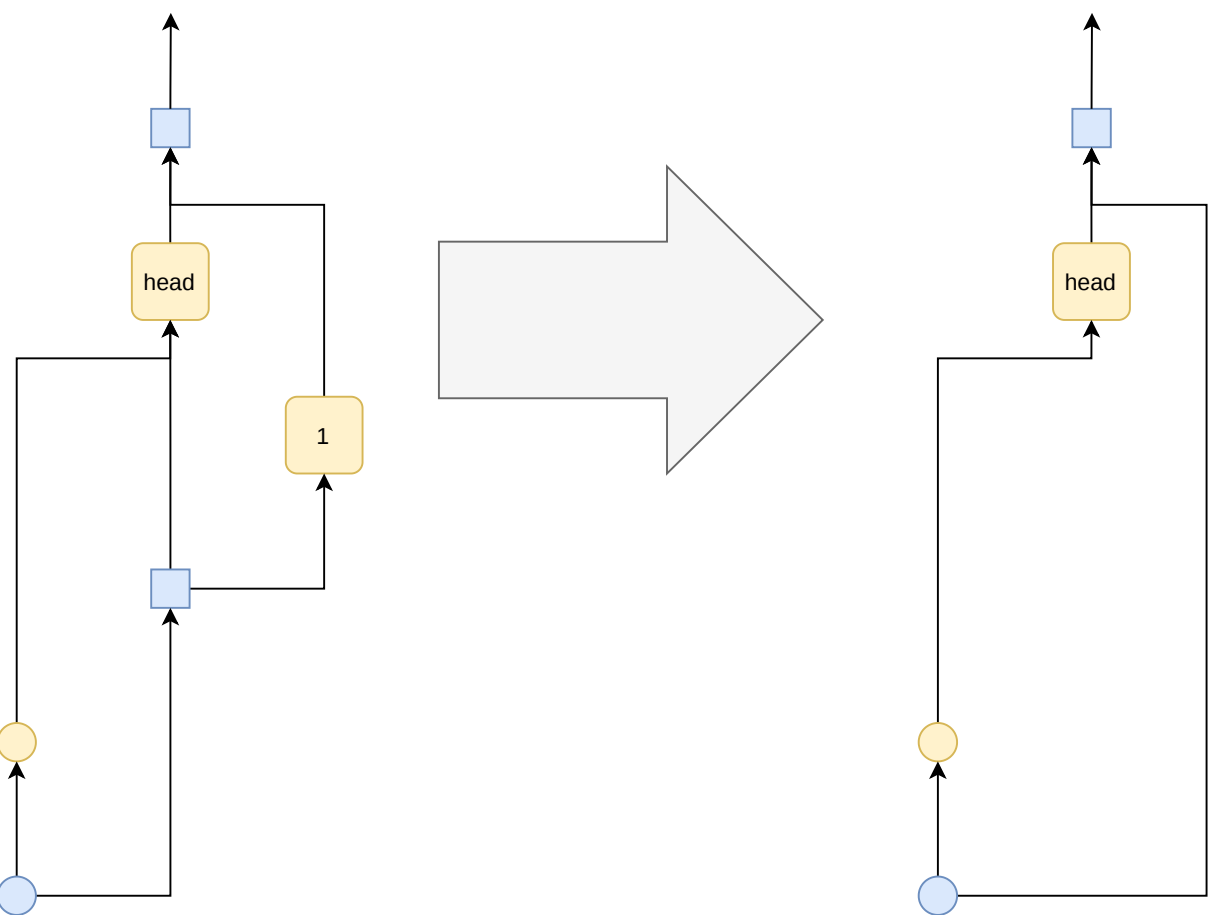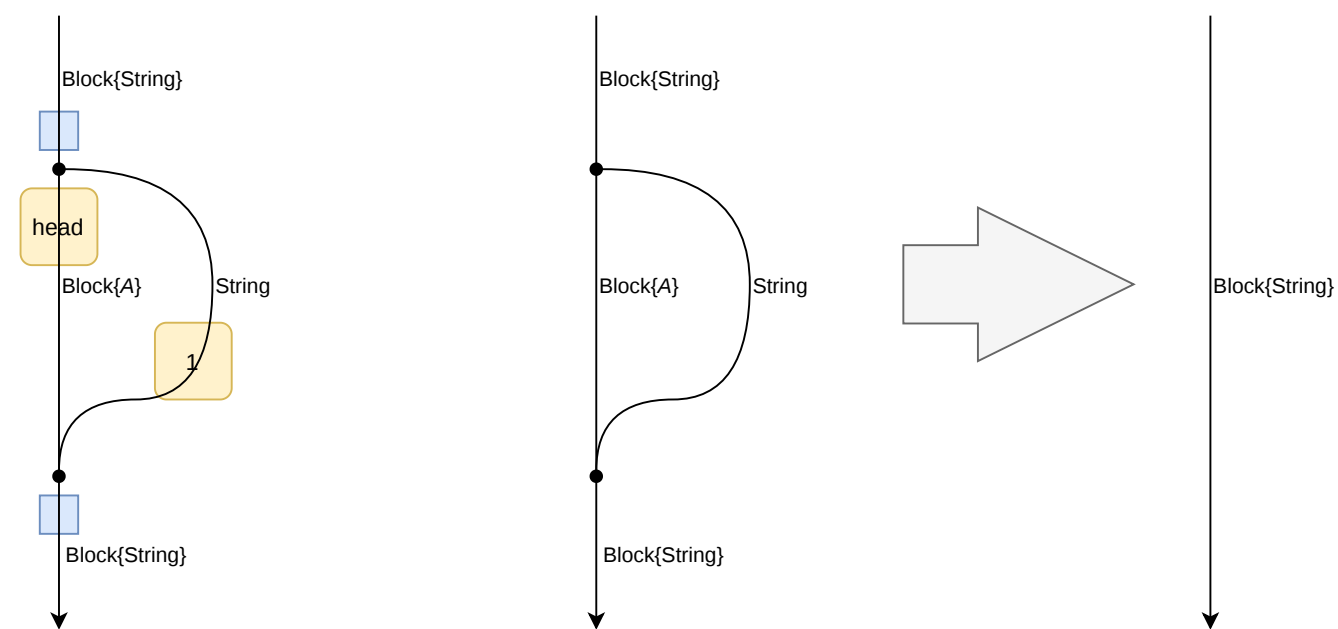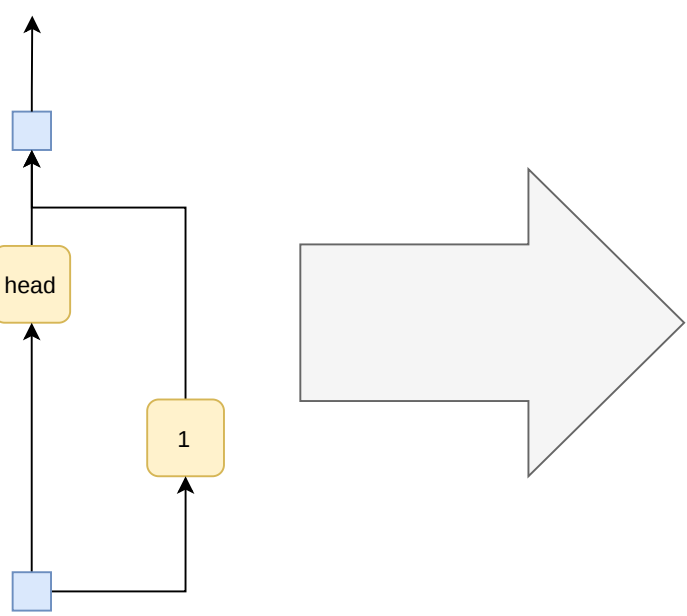






`untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}`

`chain_of(f, tuple_of(g, h)) => tuple_of(chain_of(f, g), chain_of(f, h))`

`{it ^ 2, (it ^ 2) ^ 3}`

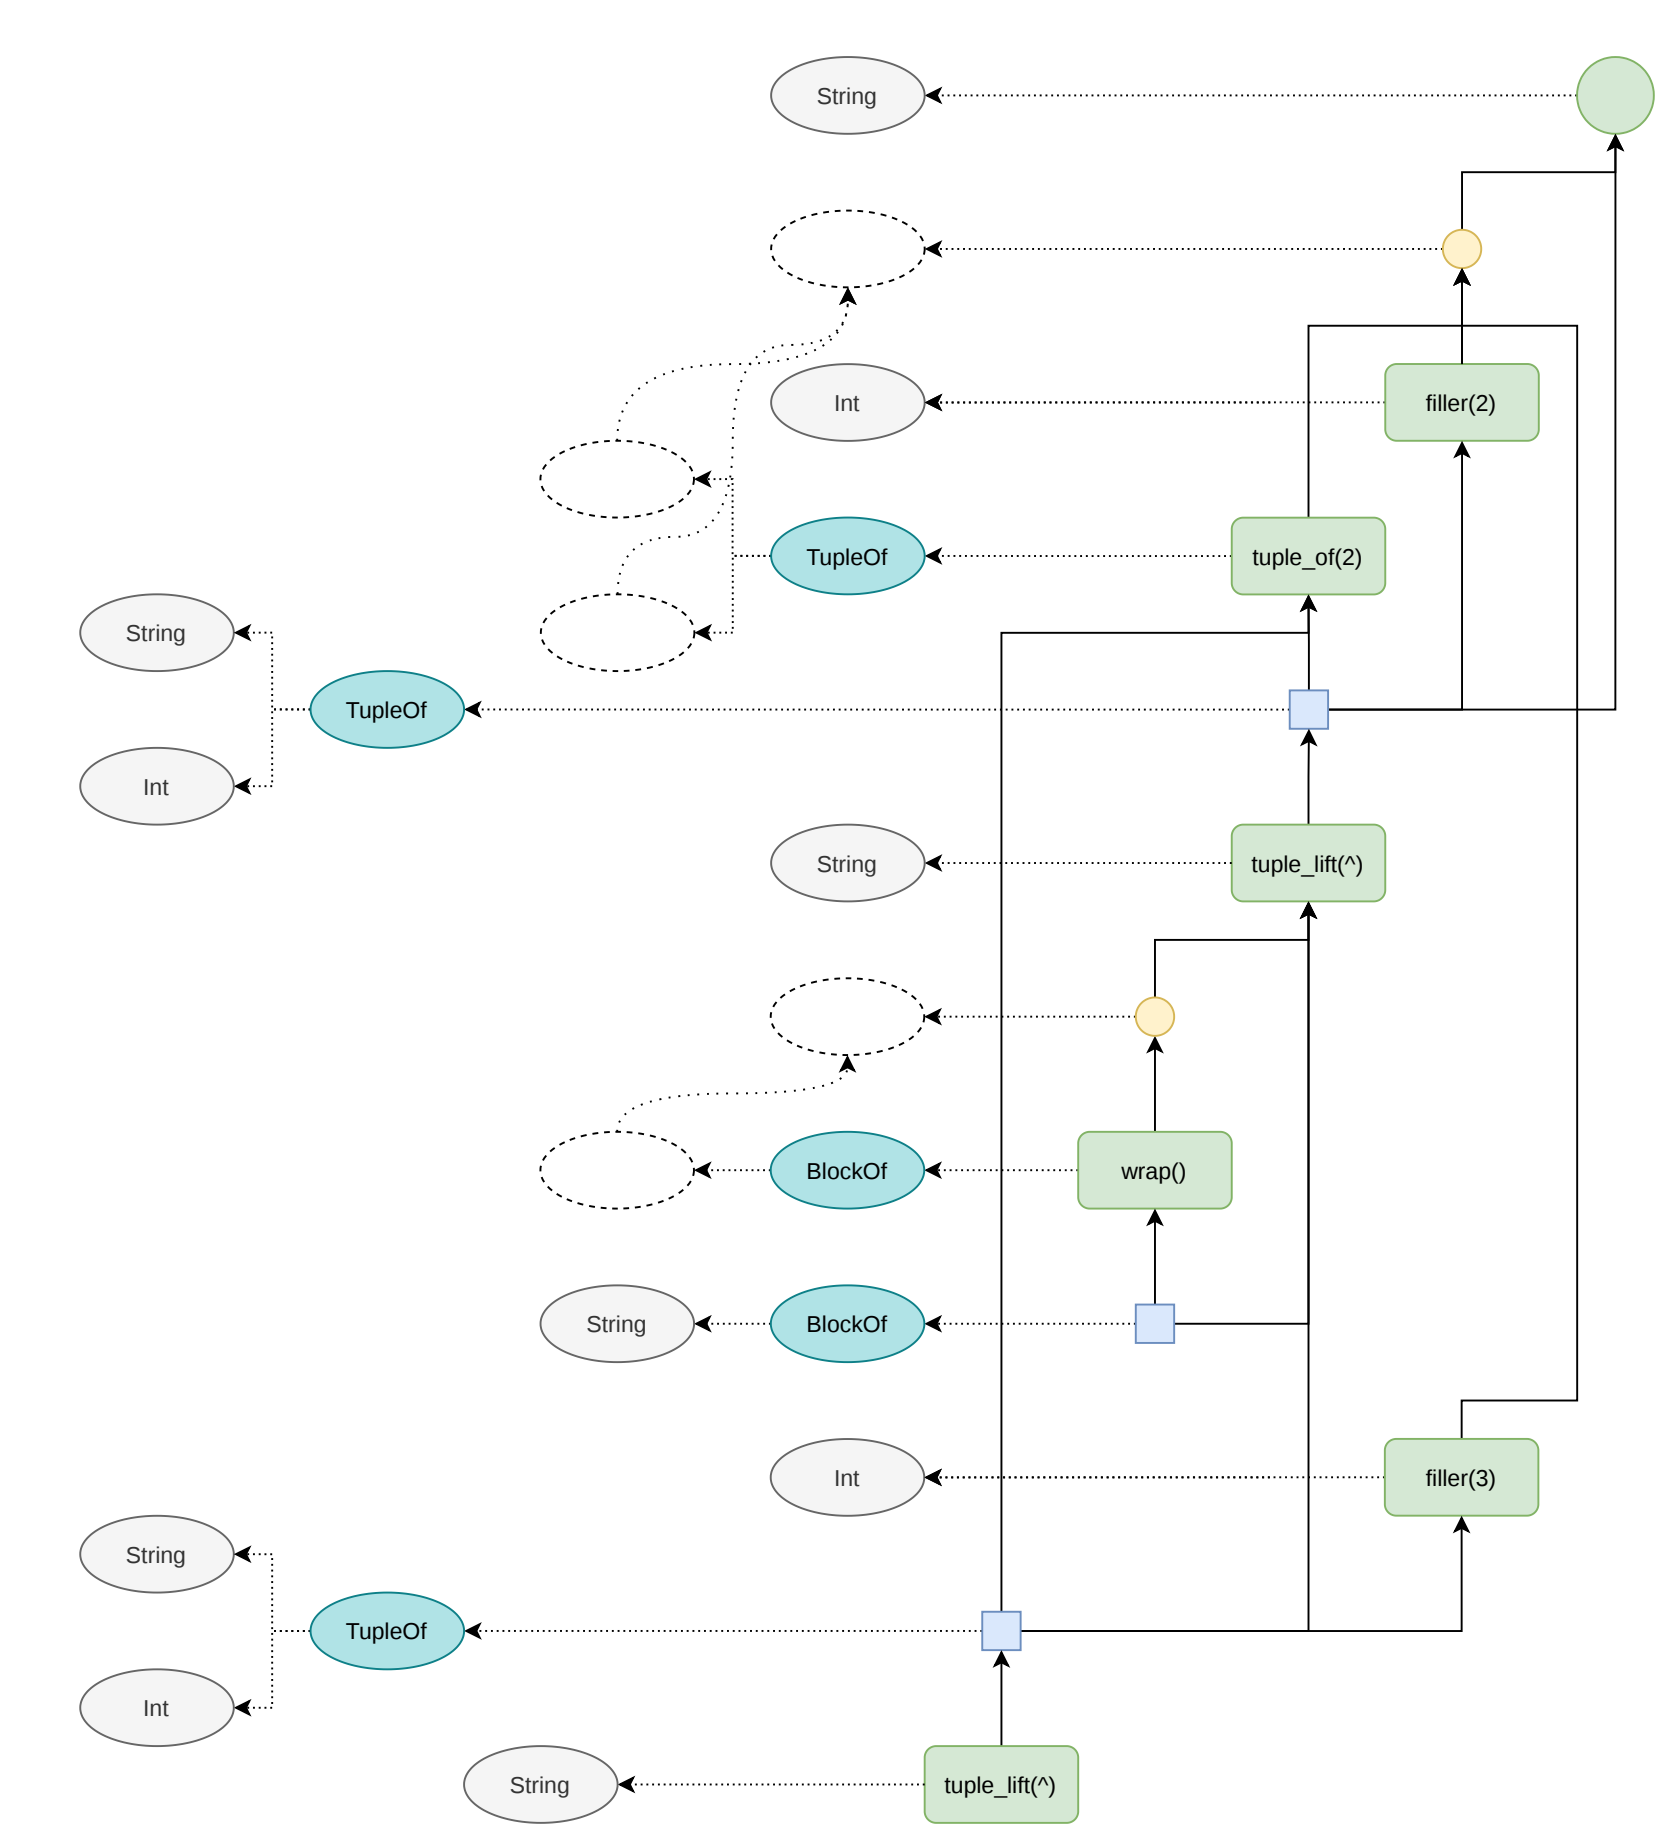

`untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}`

@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(wrap()),
  with_elements(lift(split)),
  with_elements(adapt_vector()),
  flatten())
```

