Transformation



A transformation f
maps any input of type A
to the output of type B.

Composition

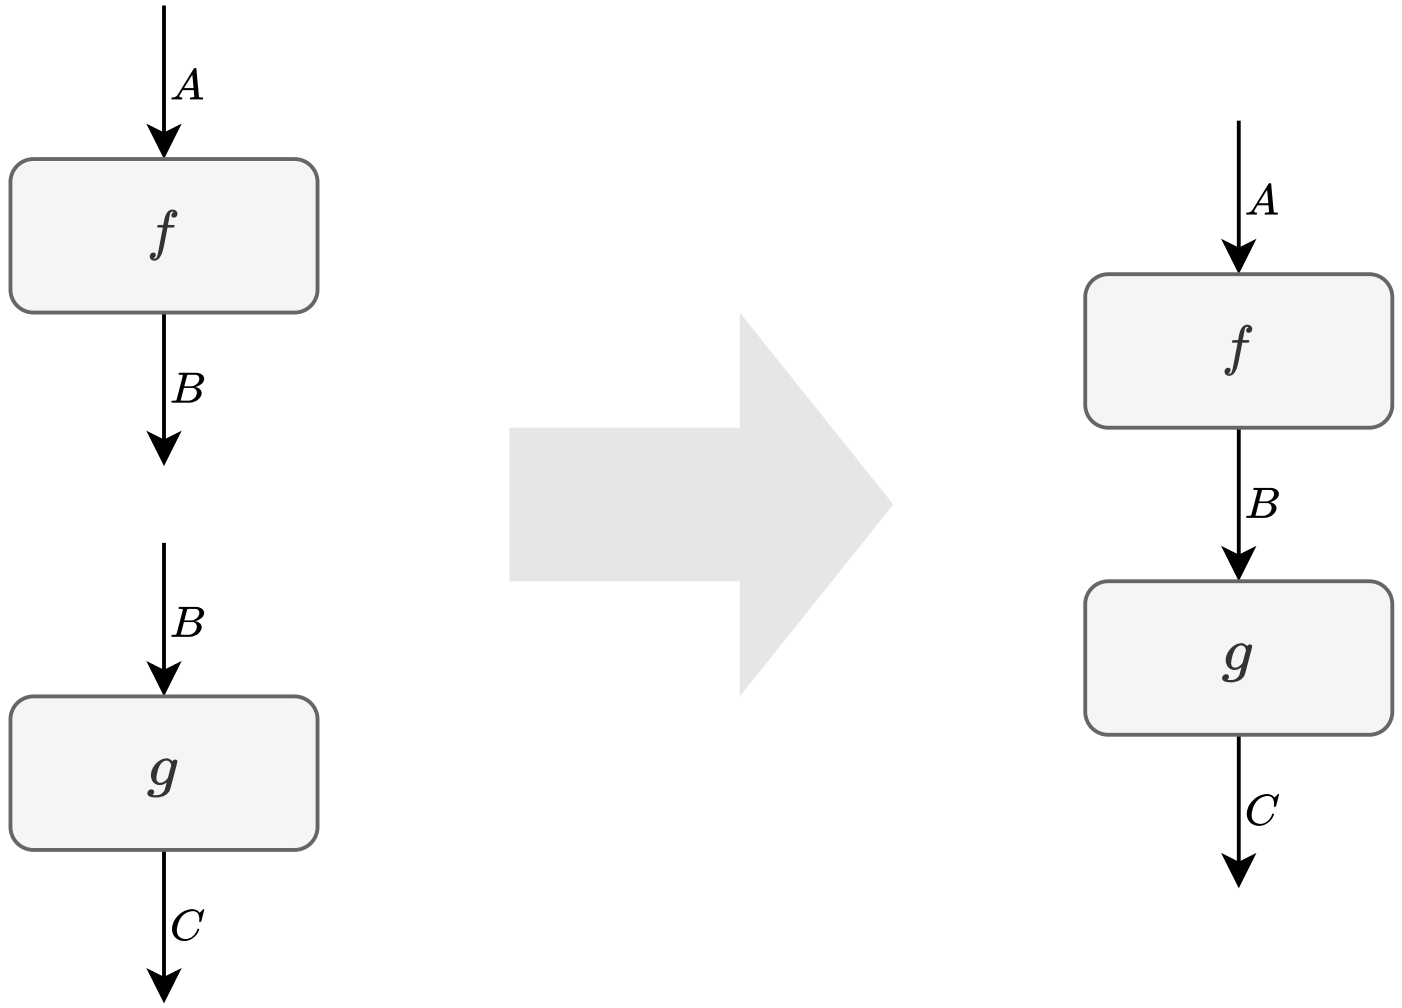

chain_of(f, g)

Transformations with compatible input and output
can be composed.

Composition is a Transformation

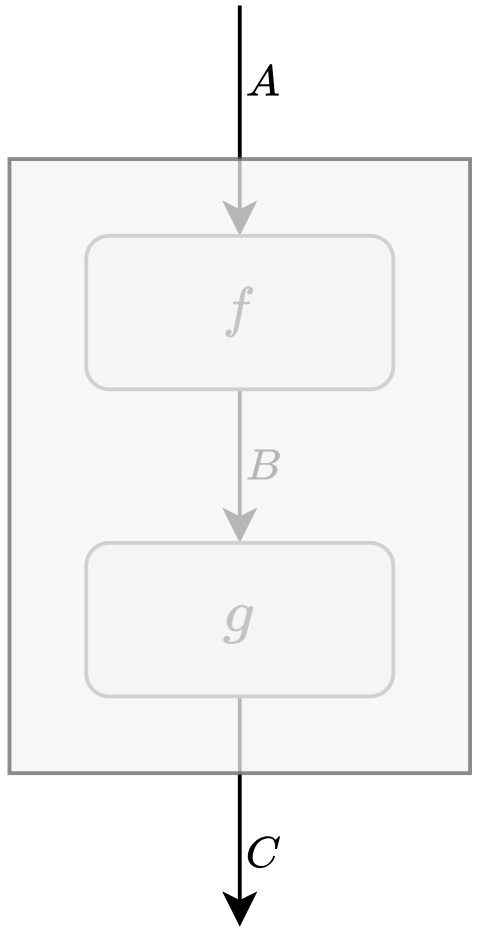

Crucially, composition of transformations is again a transformation.

Composition Combinator

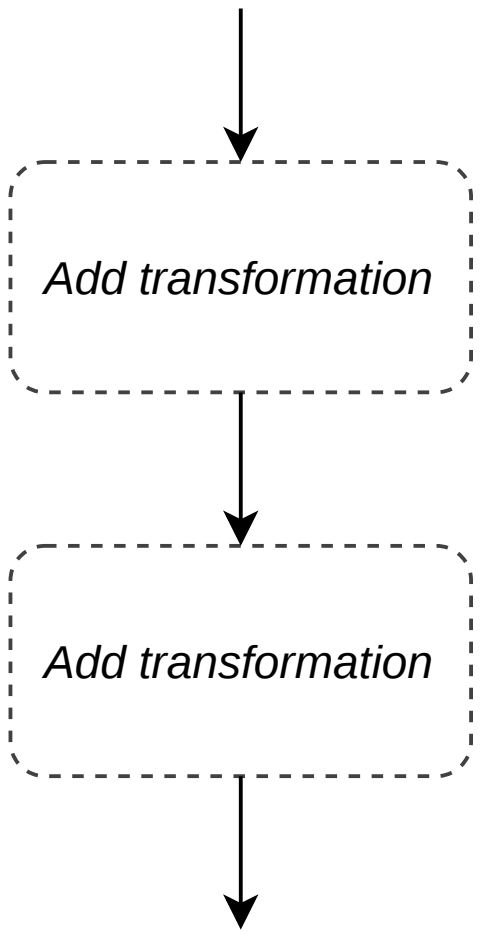

Composition $\mathrm{chain\_of}(\square, \square)$
is a transformation combinator
with two arguments.

Example: Composition

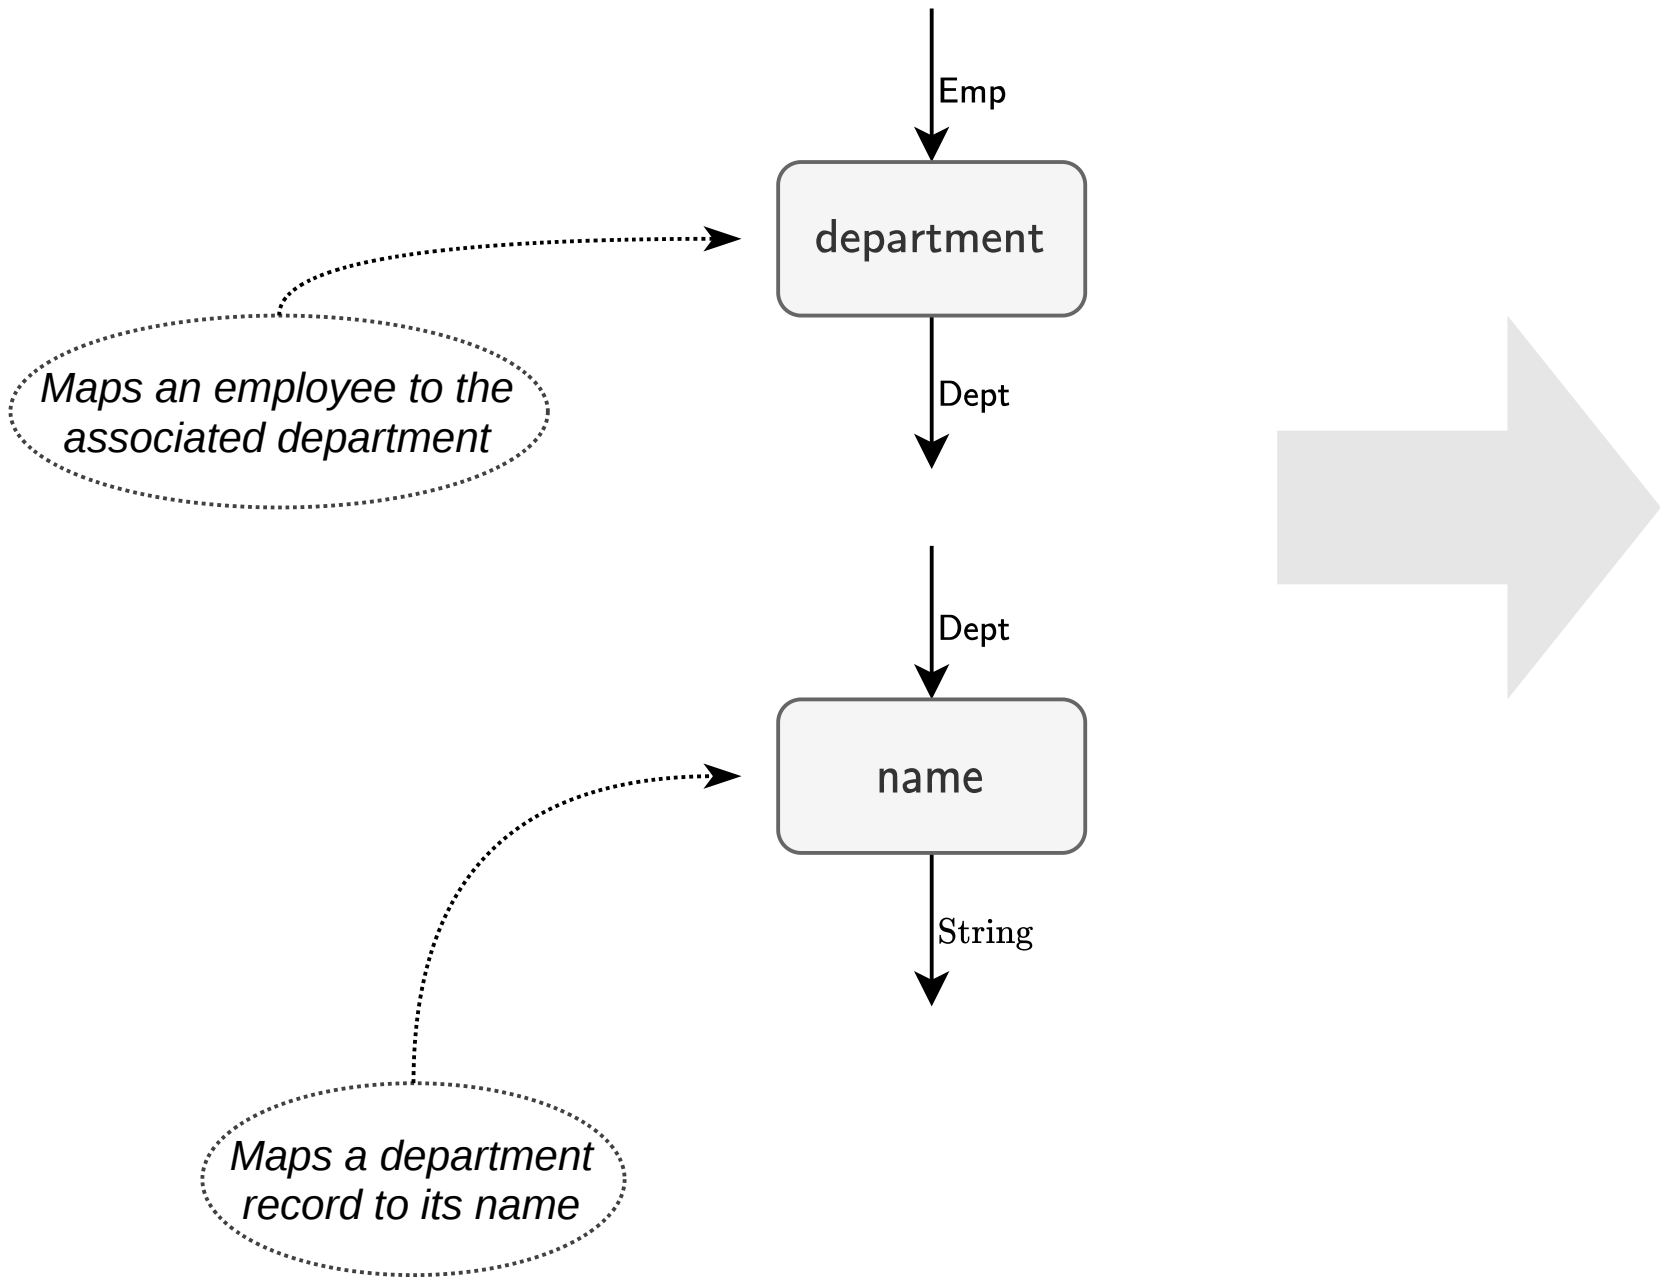

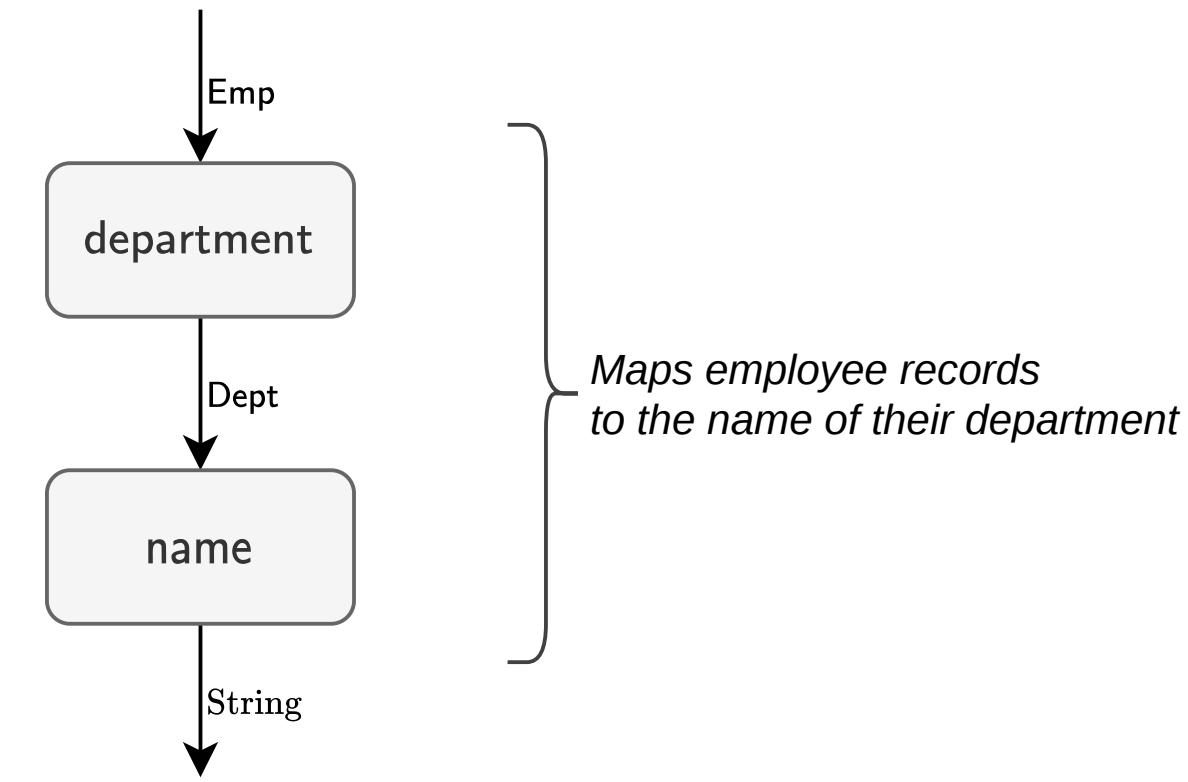

$\mathrm{chain\_of}(\textsf{department}, \textsf{name})$

Counter-example: Plural Component

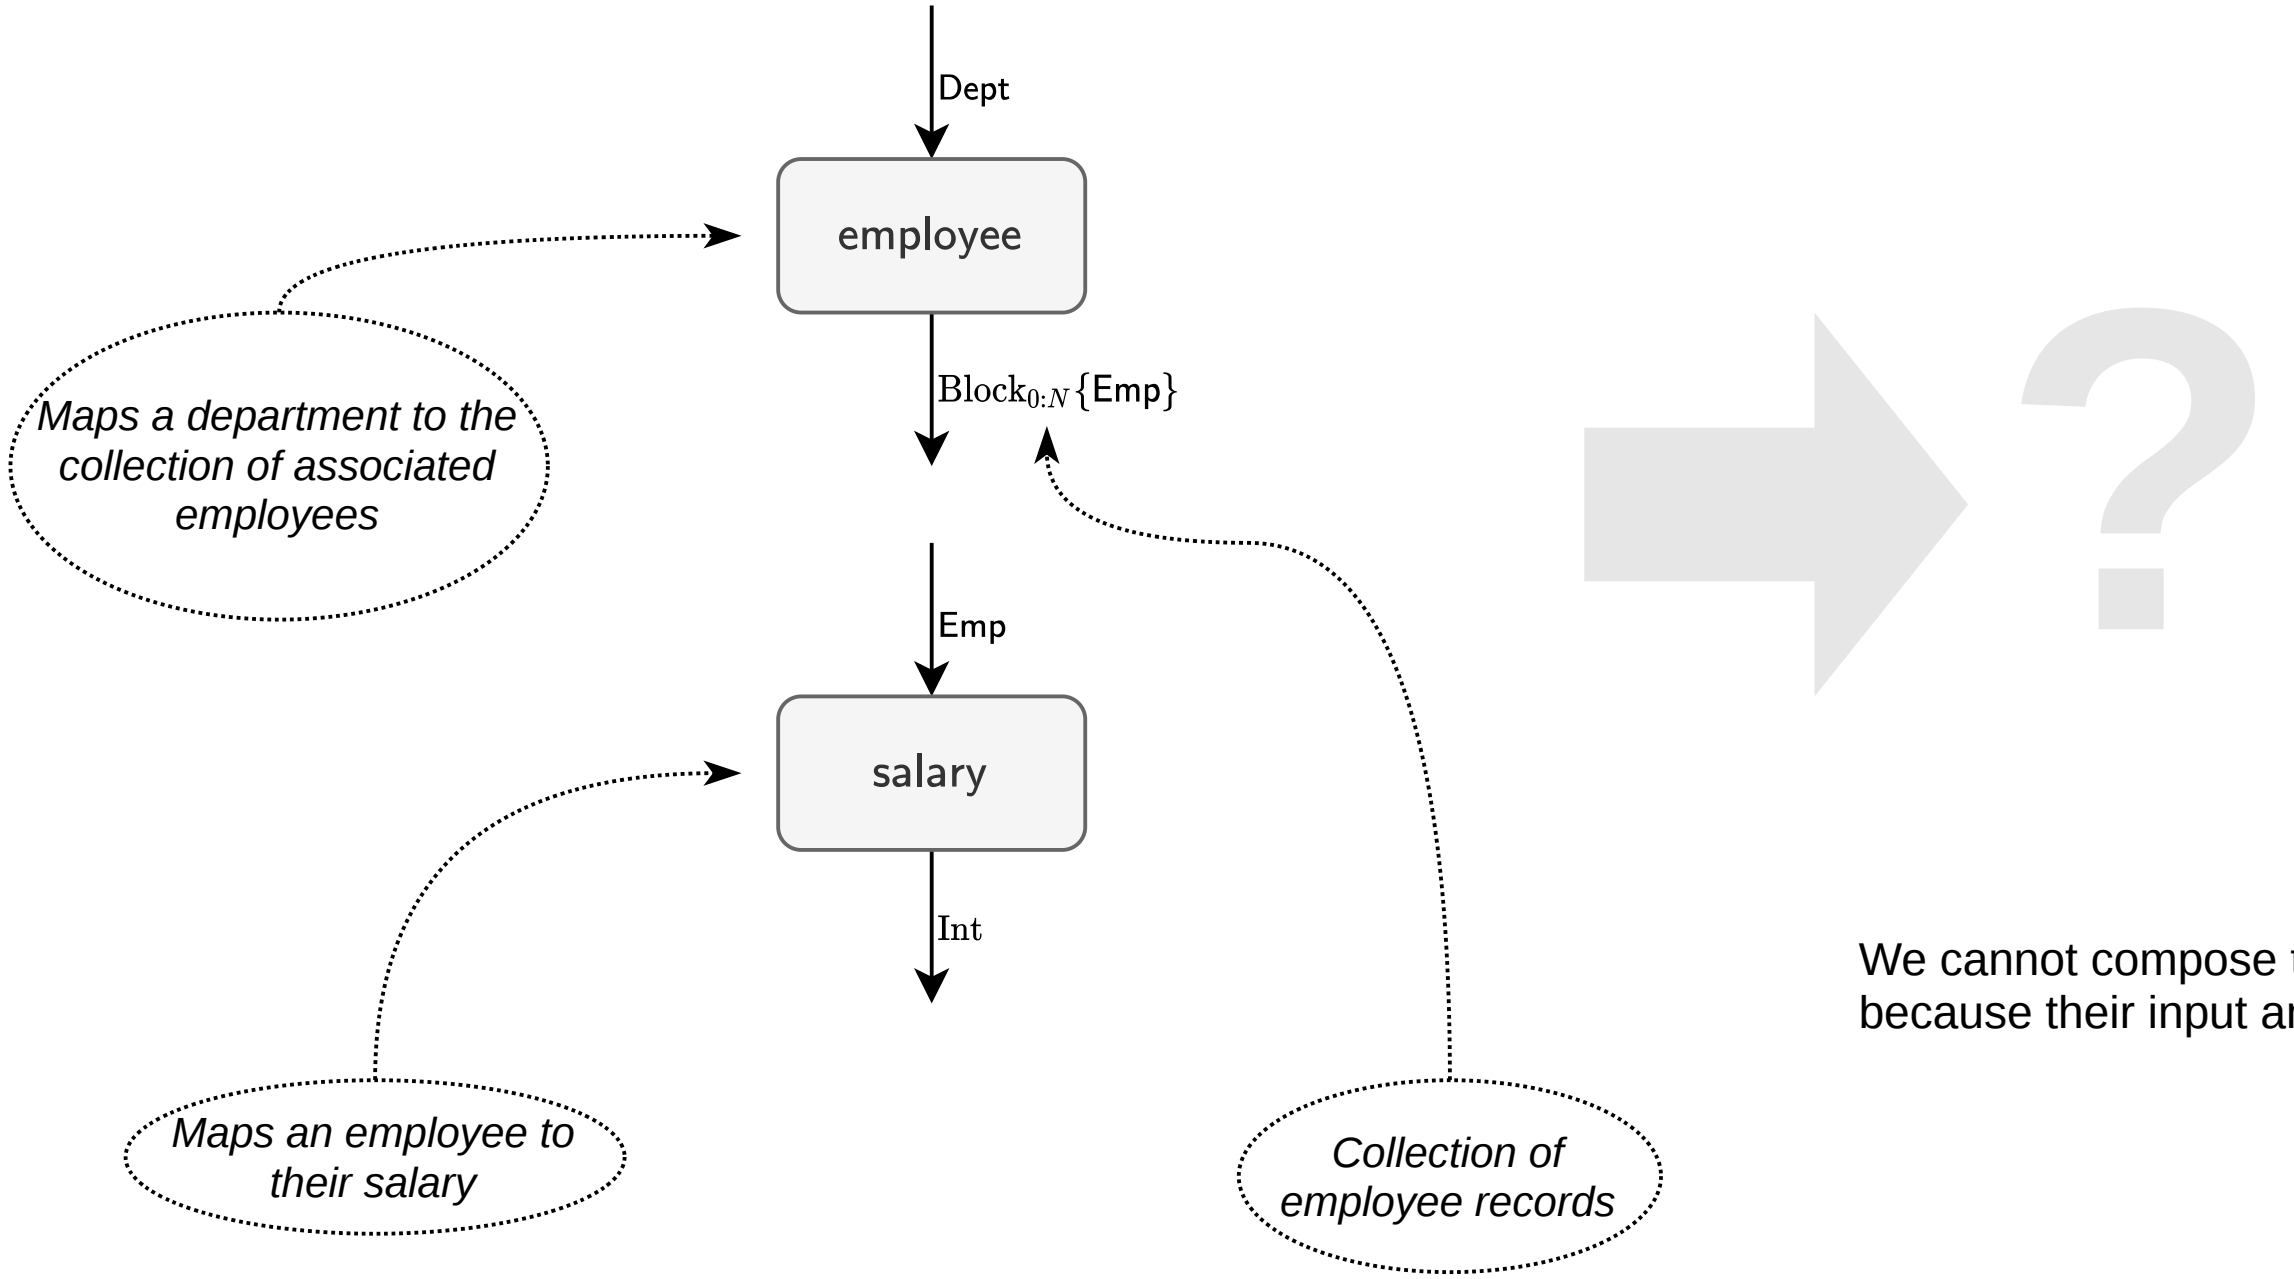

We cannot compose these transformations because their input and output do not quite match.

Counter-example: Optional Component

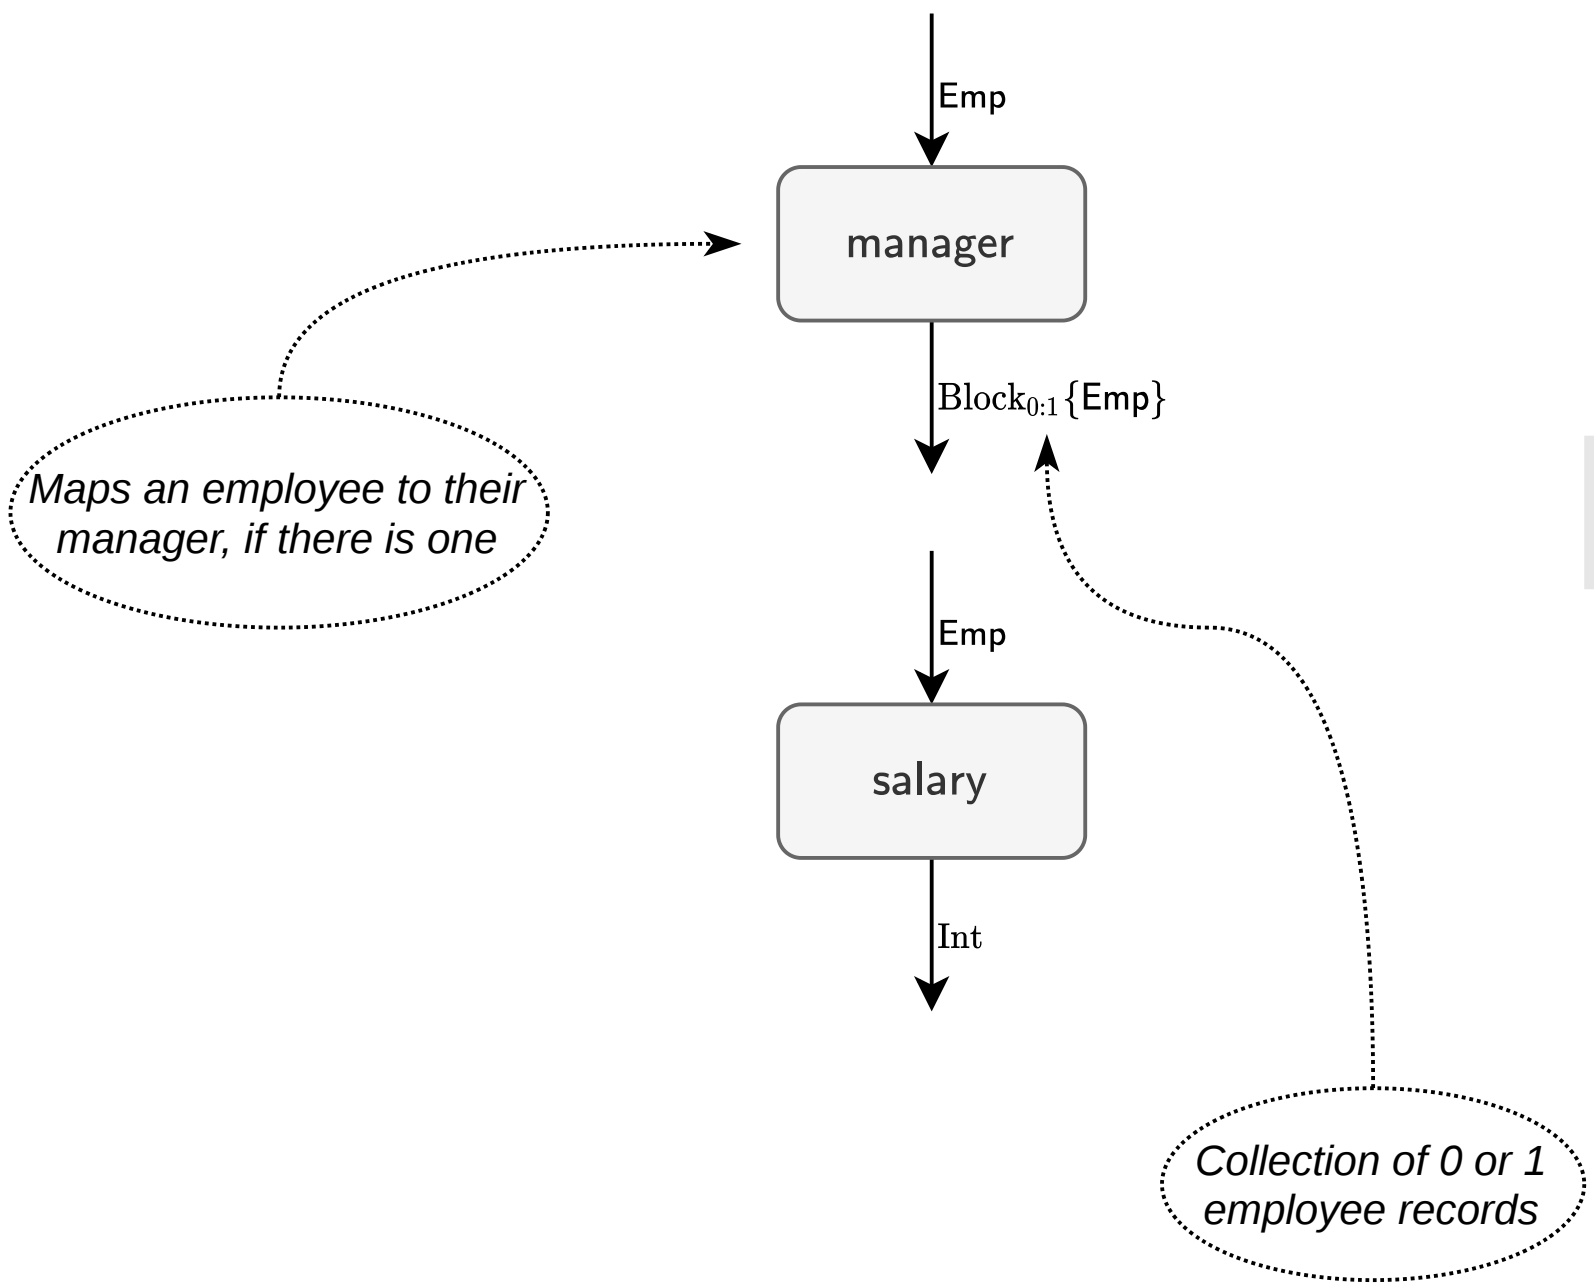

Even so, the input and the output share a common component,
which suggests there should be a way to compose these transformations.

Idea: Unbundle the Wire

Unbundle the composite wire.

Compose using the object wire.

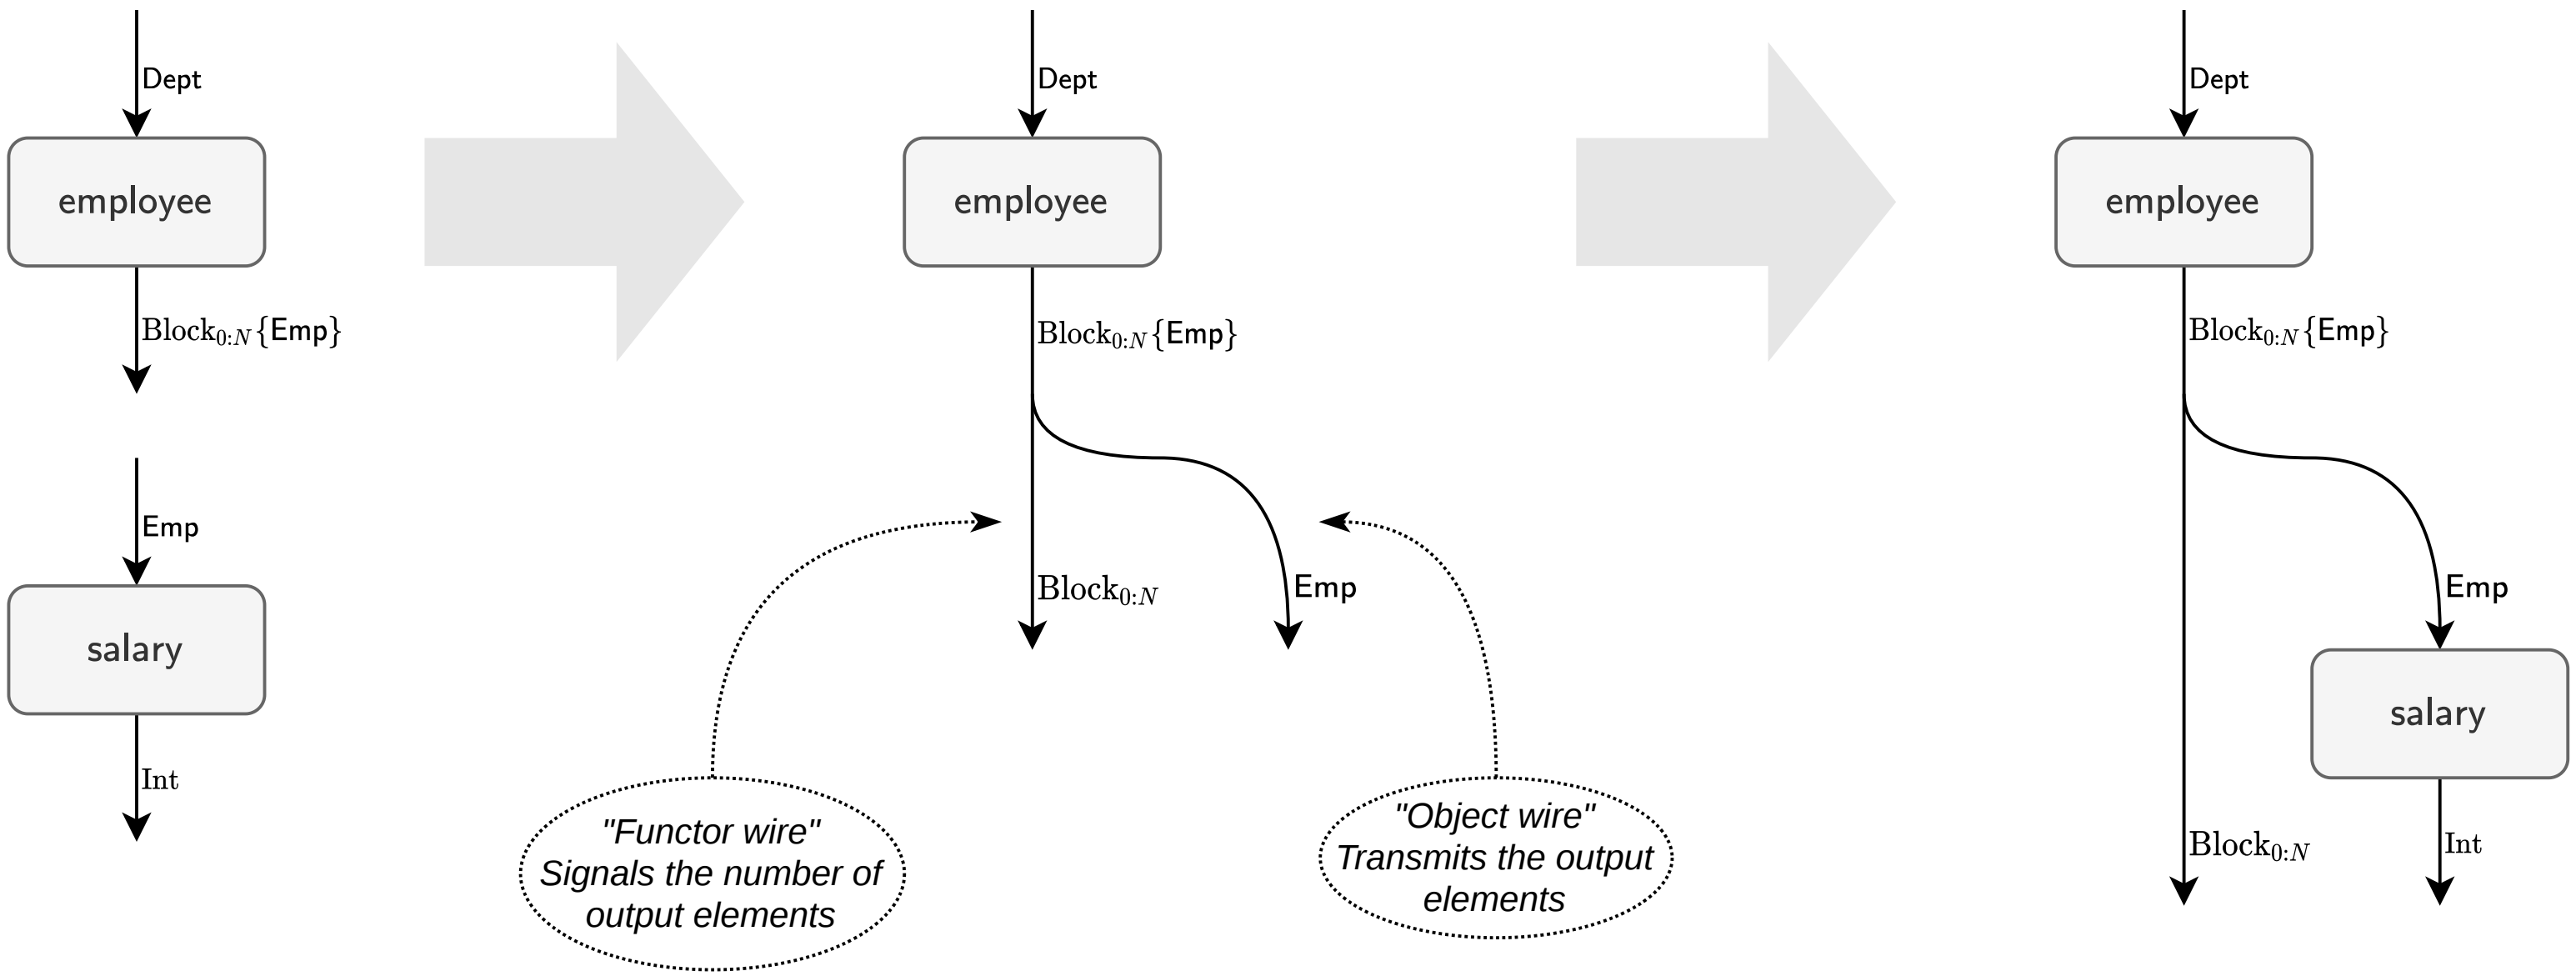

Attaching a transformation to the object wire indicates that the transformation is applied to all element of the collection.

Block Type

A block is a collection
of homogeneous elements.

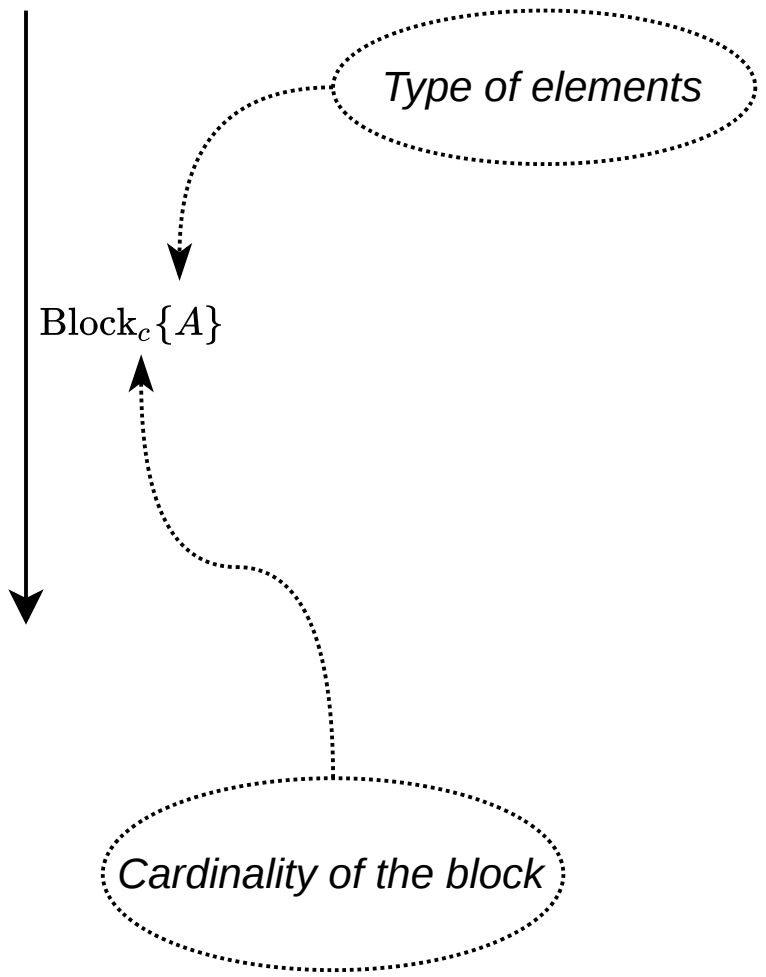

Cardinality is a constraint
on the number of elements in a block.

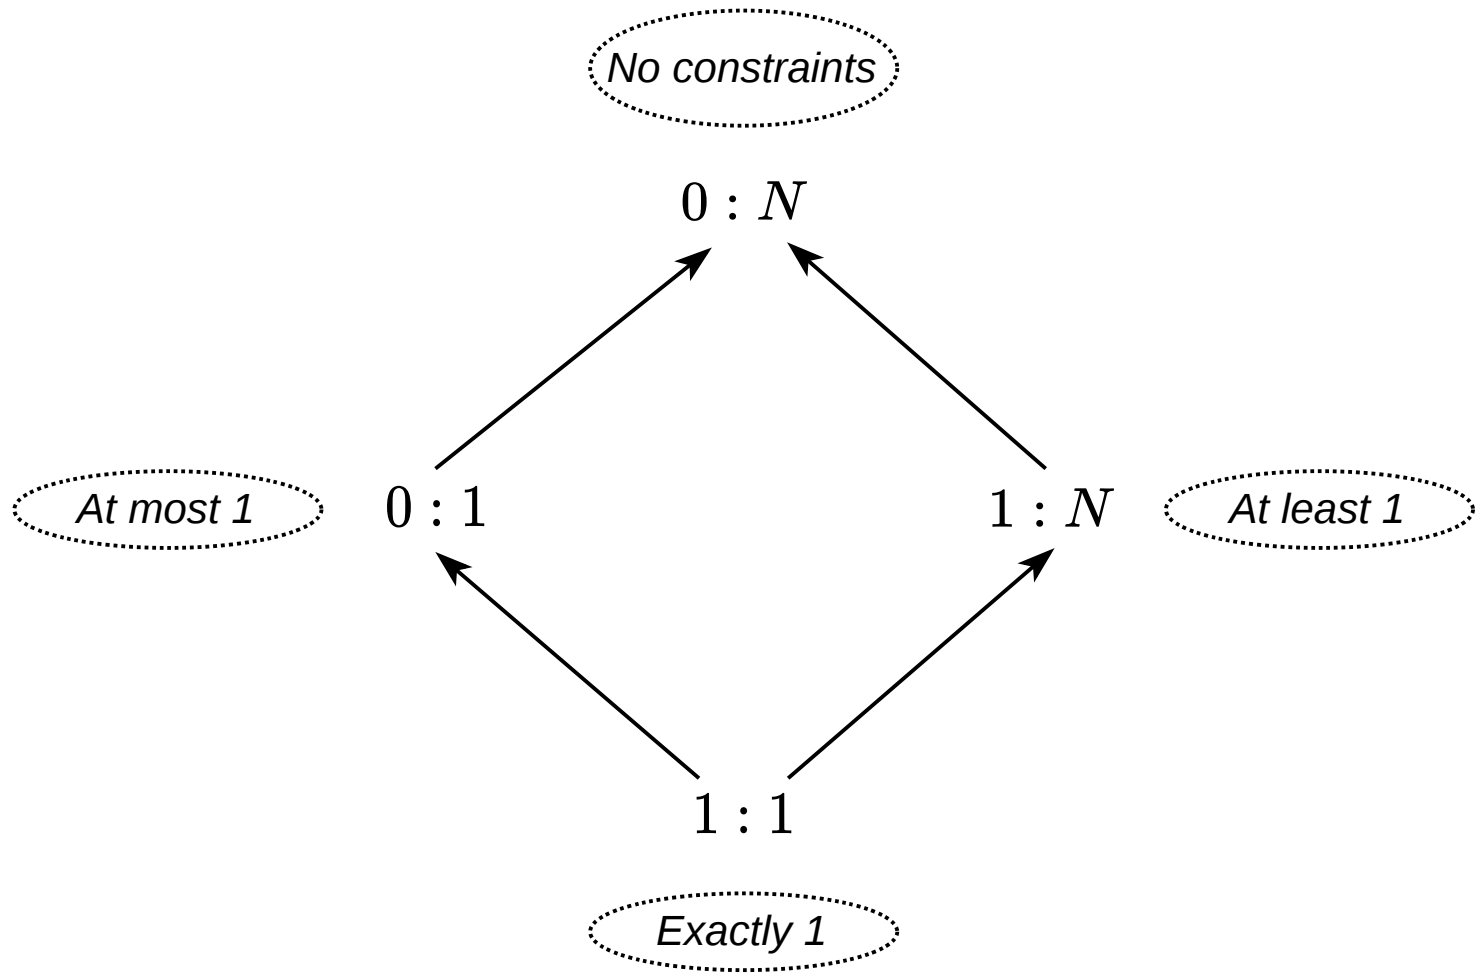

Unbundling

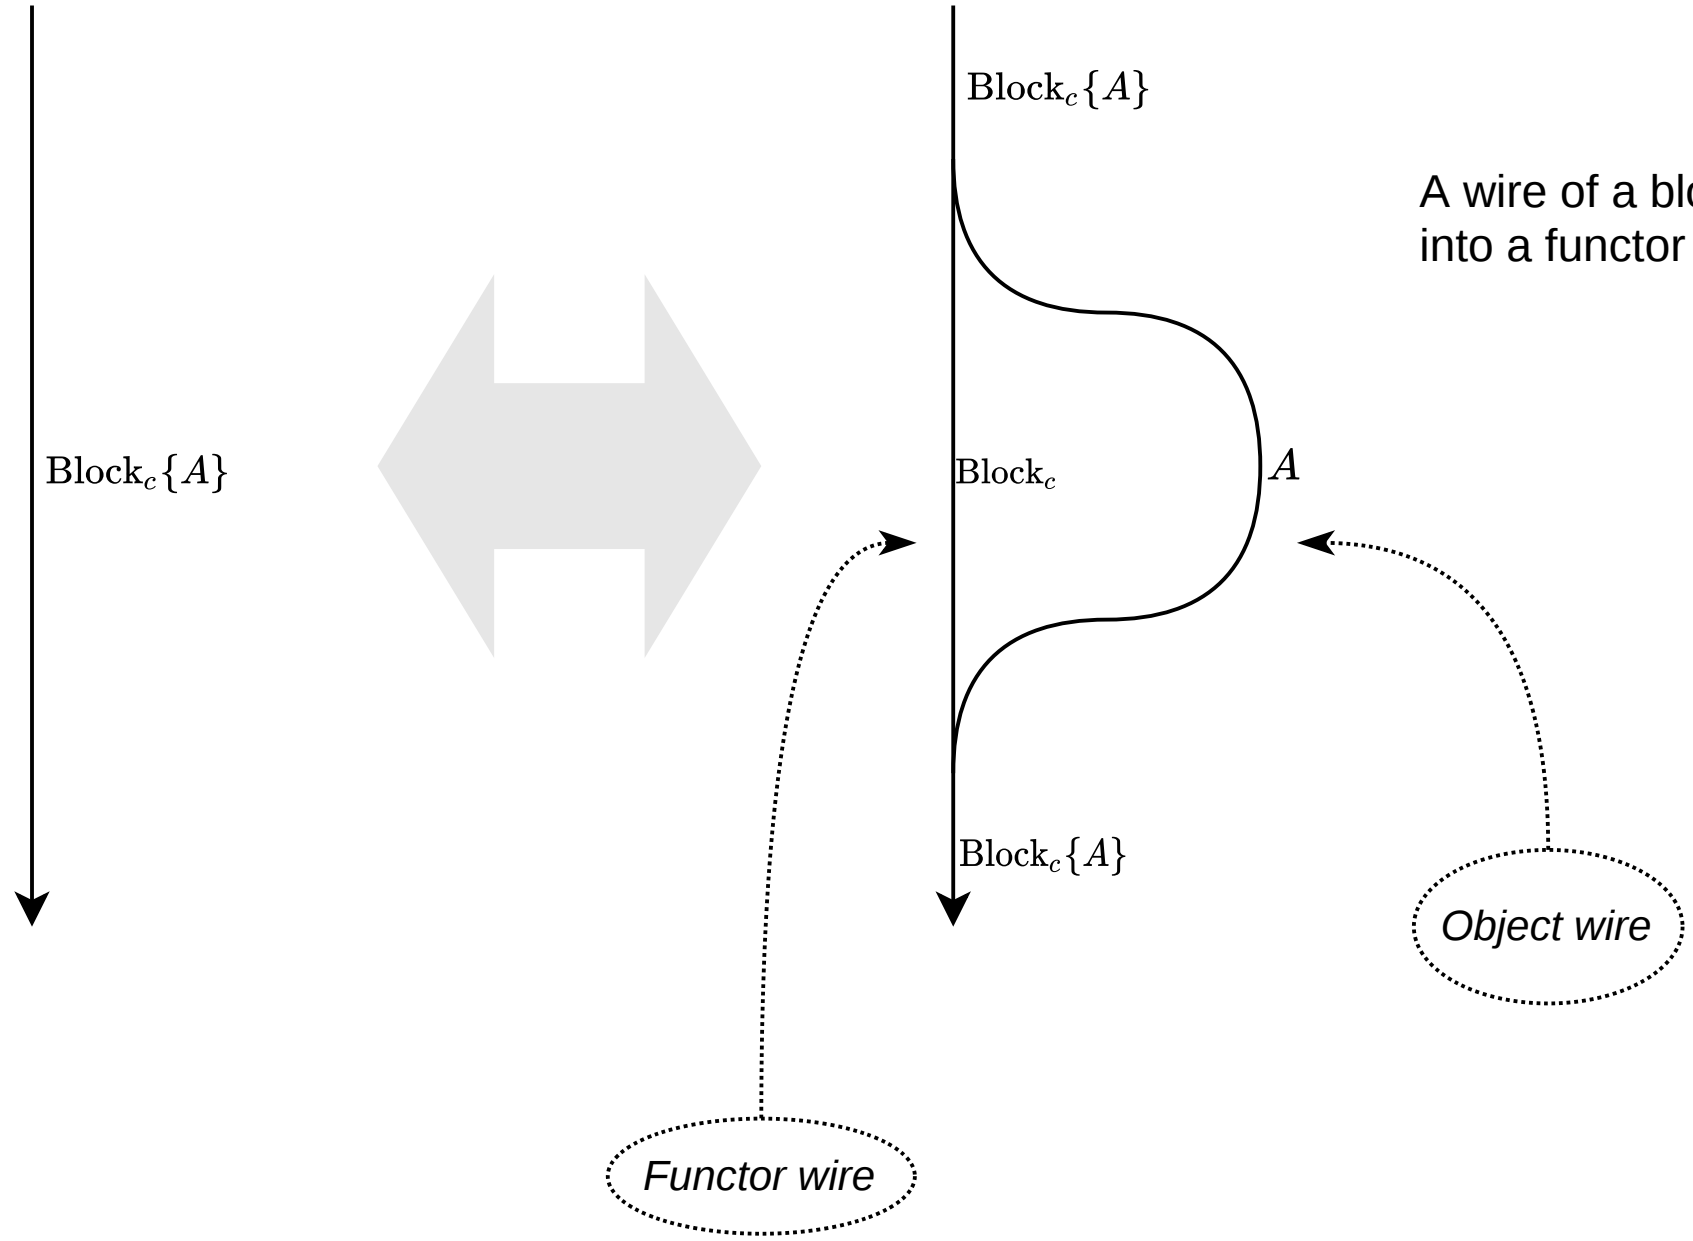

A wire of a block type can be unbundled into a functor and an object components.

Object Transformation

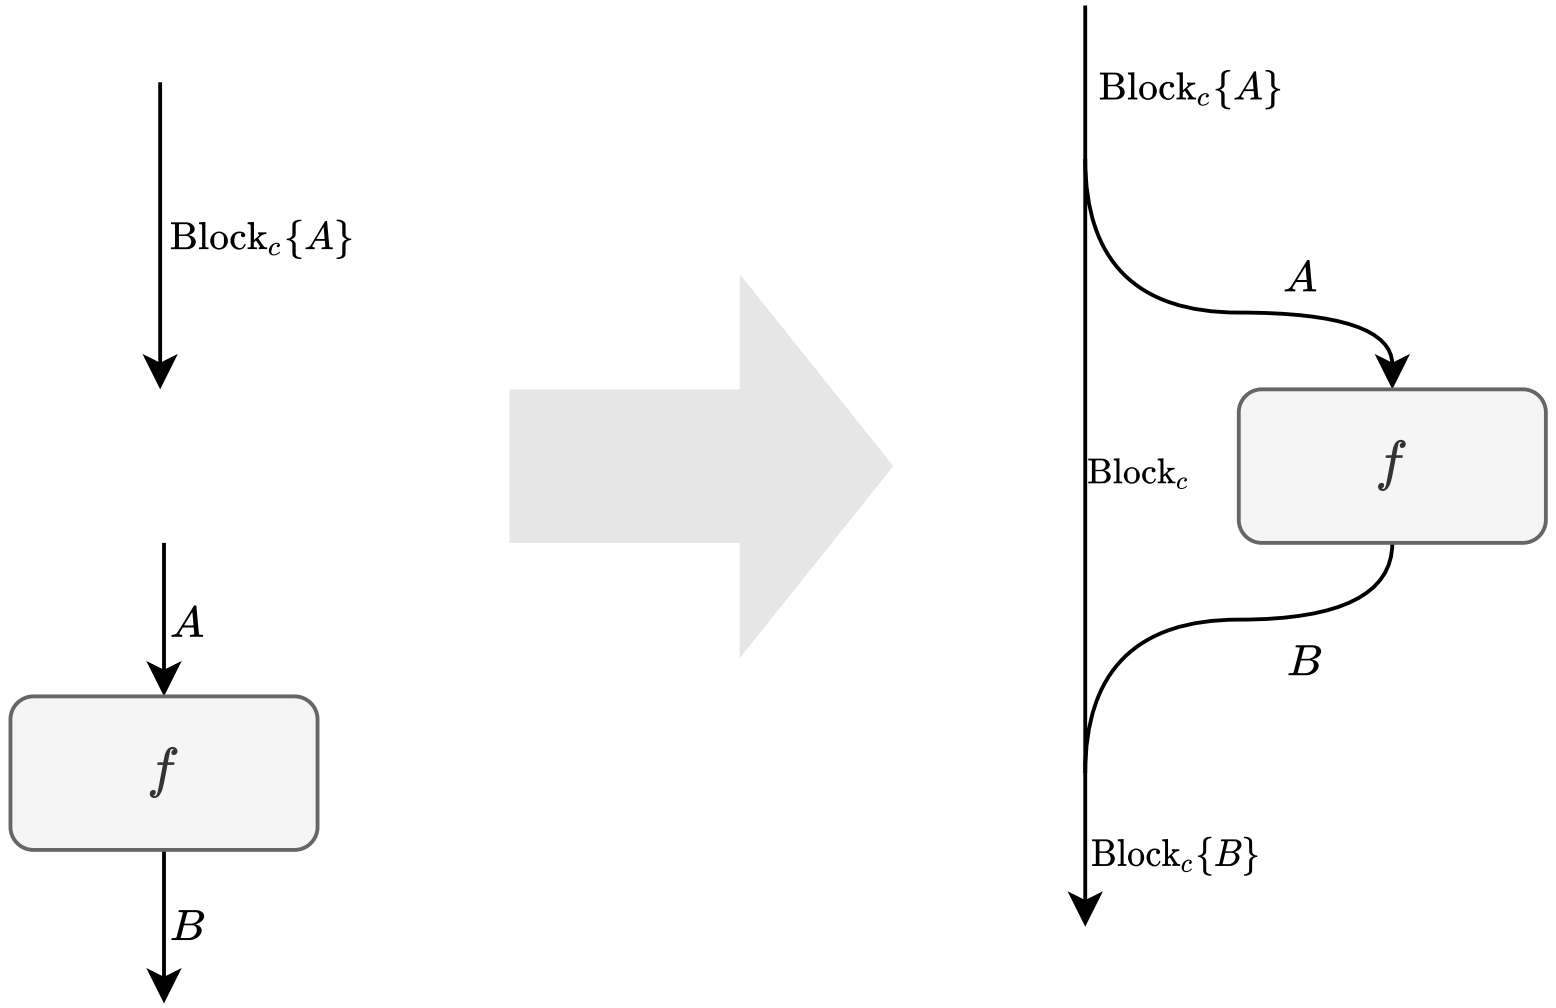

$\mathrm{with\_elements}(f)$

Any compatible transformation
can be applied to the object wire,
which indicates that the transformation
is applied to every element of the block.

Multiwired Transformations

Example: Multiwired Transformations

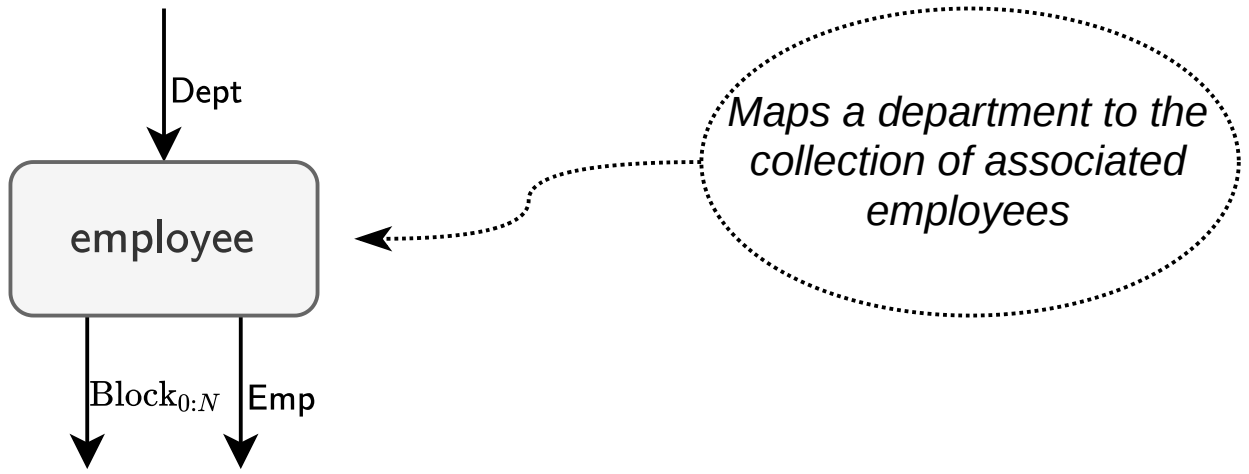

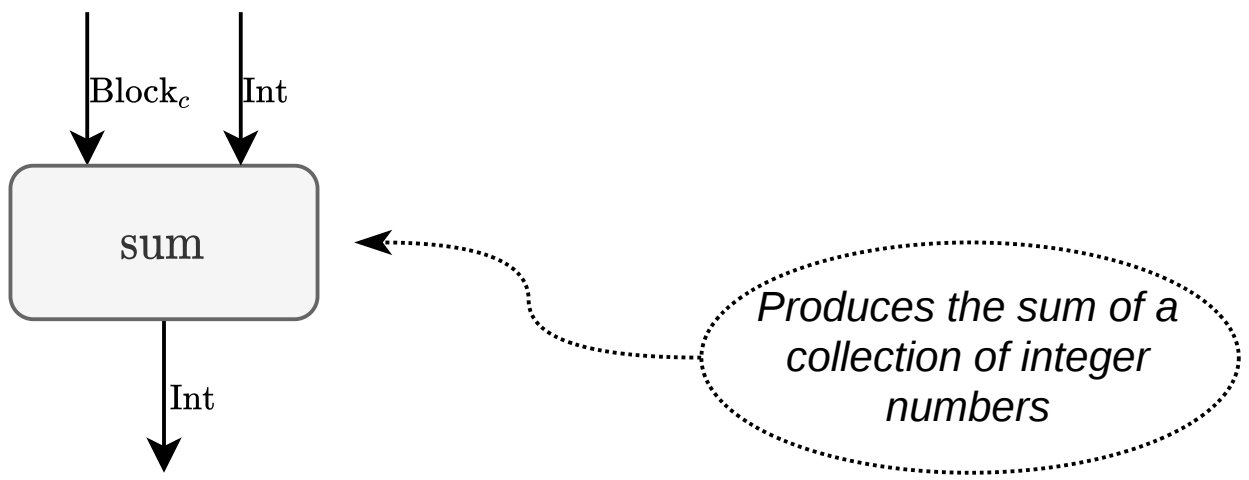

Example: Multiwired Composition

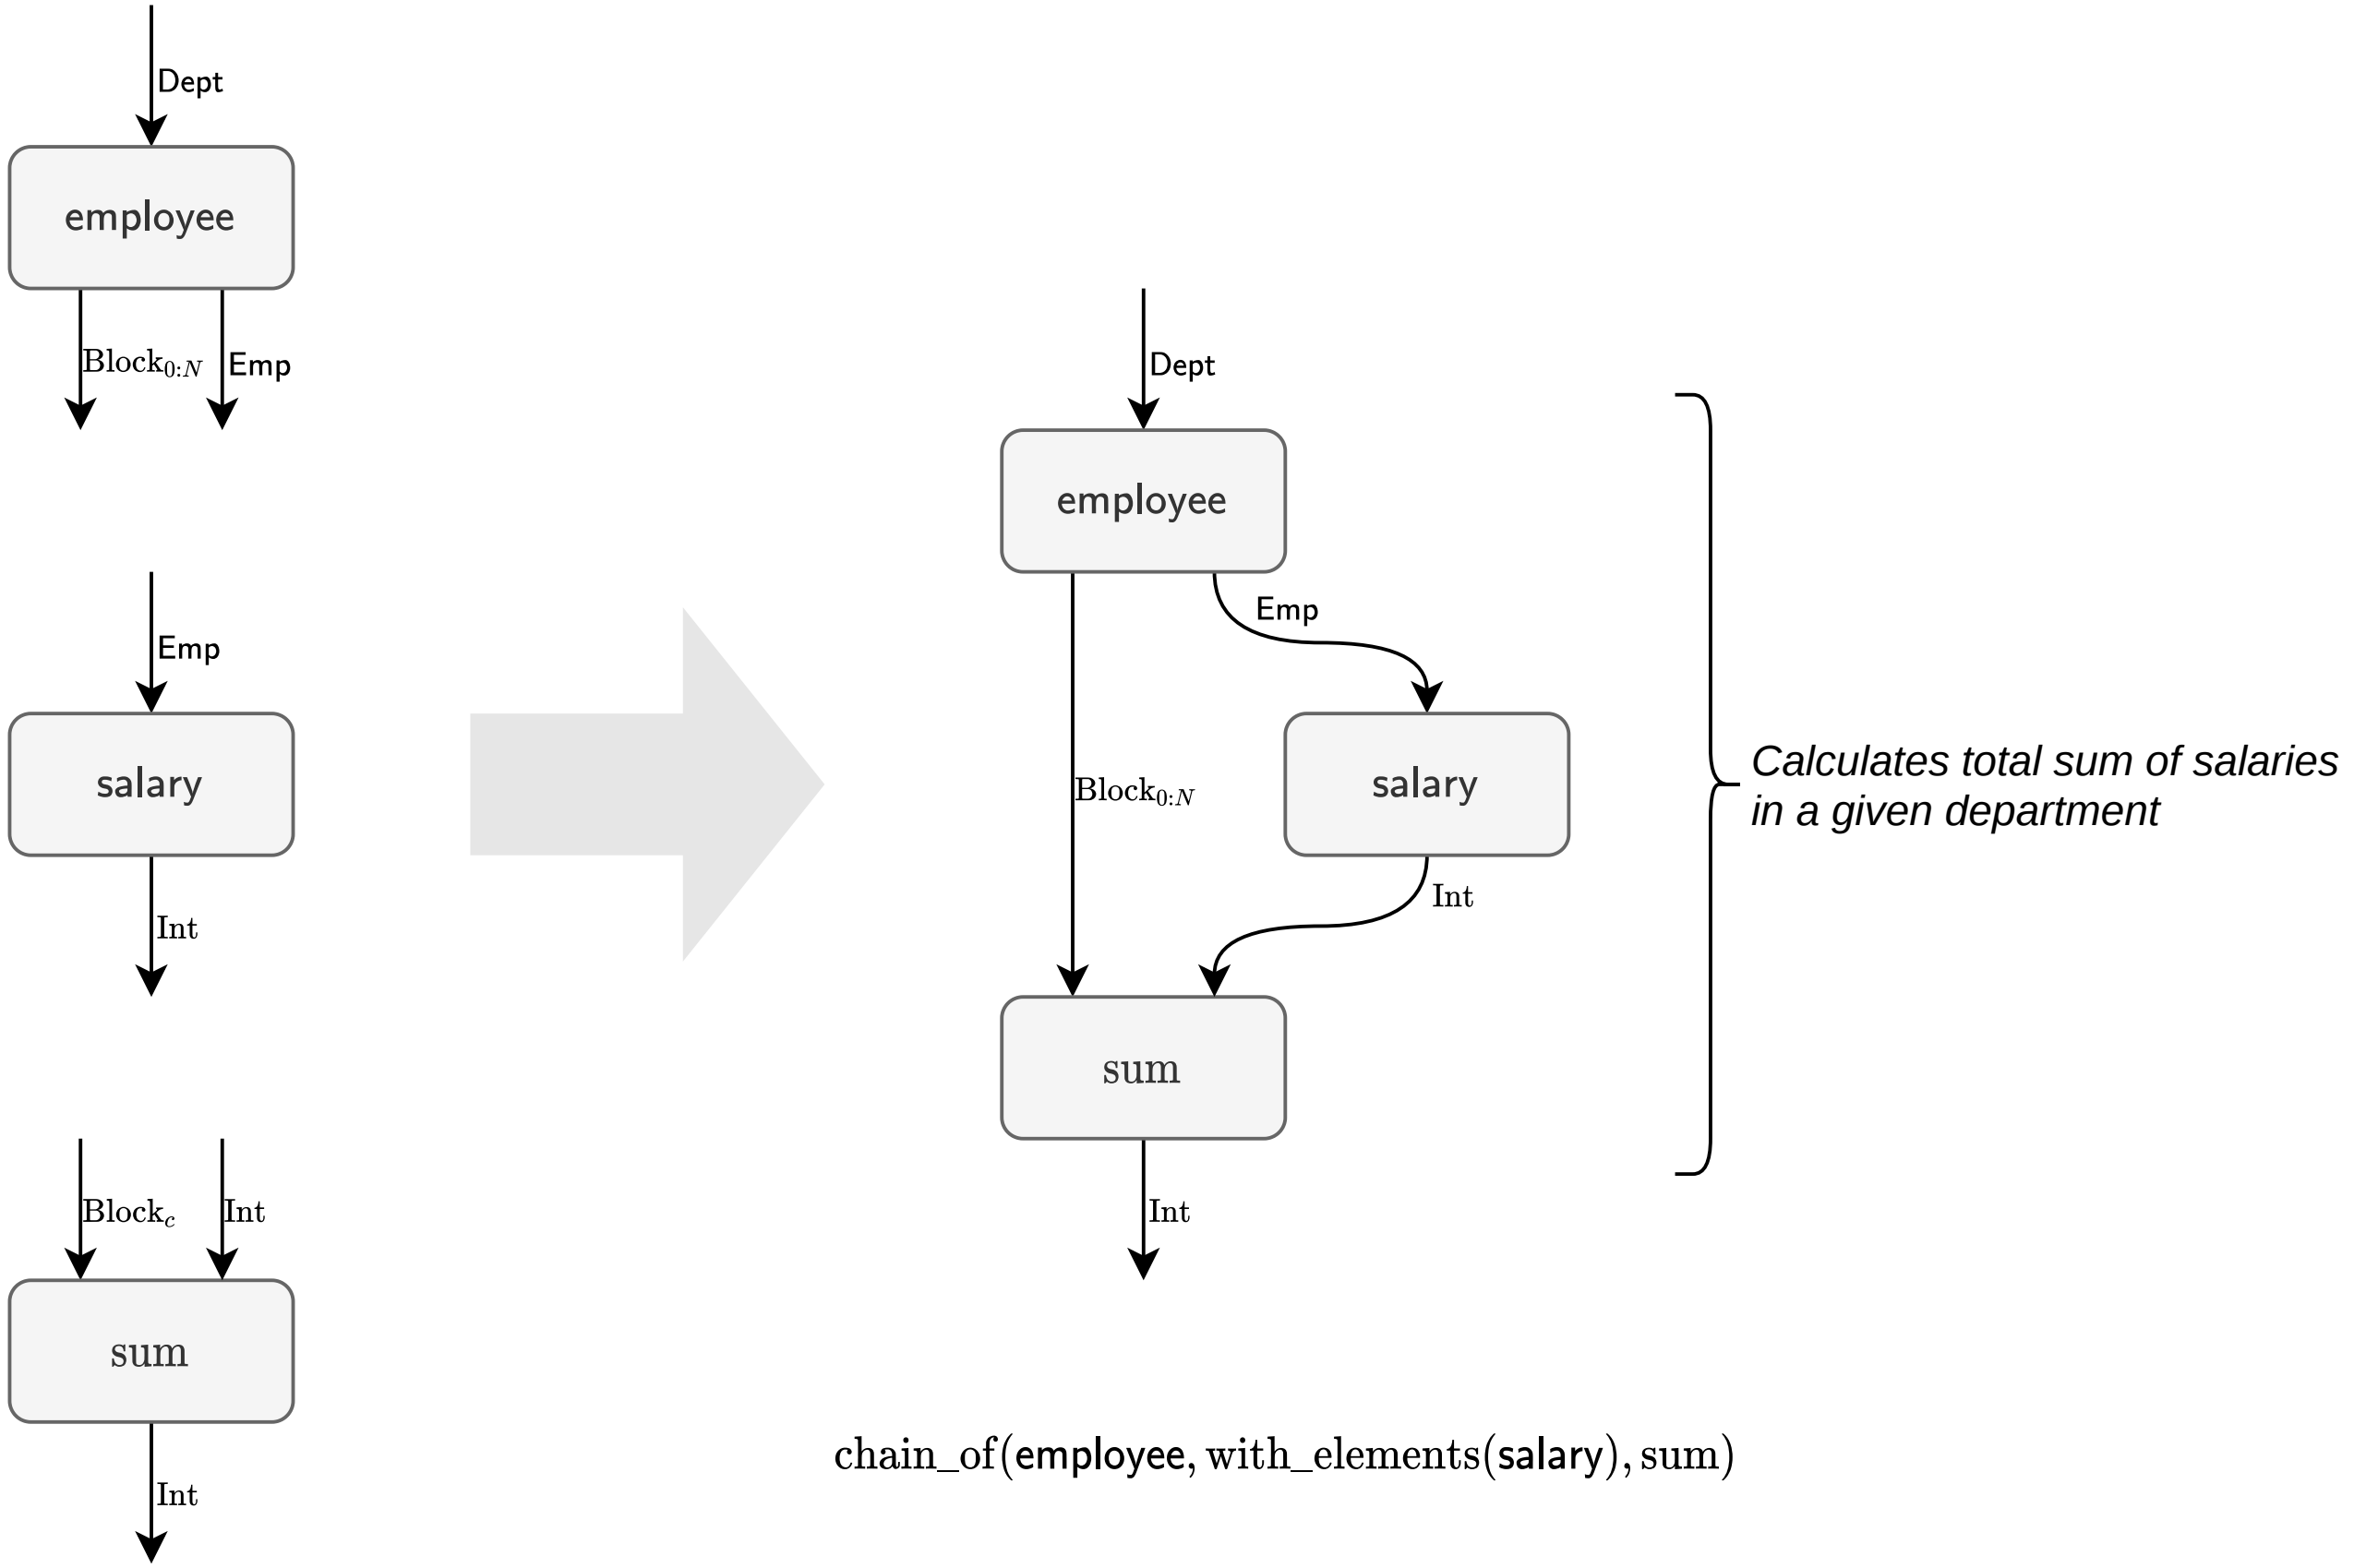

$$\text{chain\_of}(\textsf{employee}, \text{with\_elements}(\textsf{salary}), \text{sum})$$

Example: Multiwired Composition Details

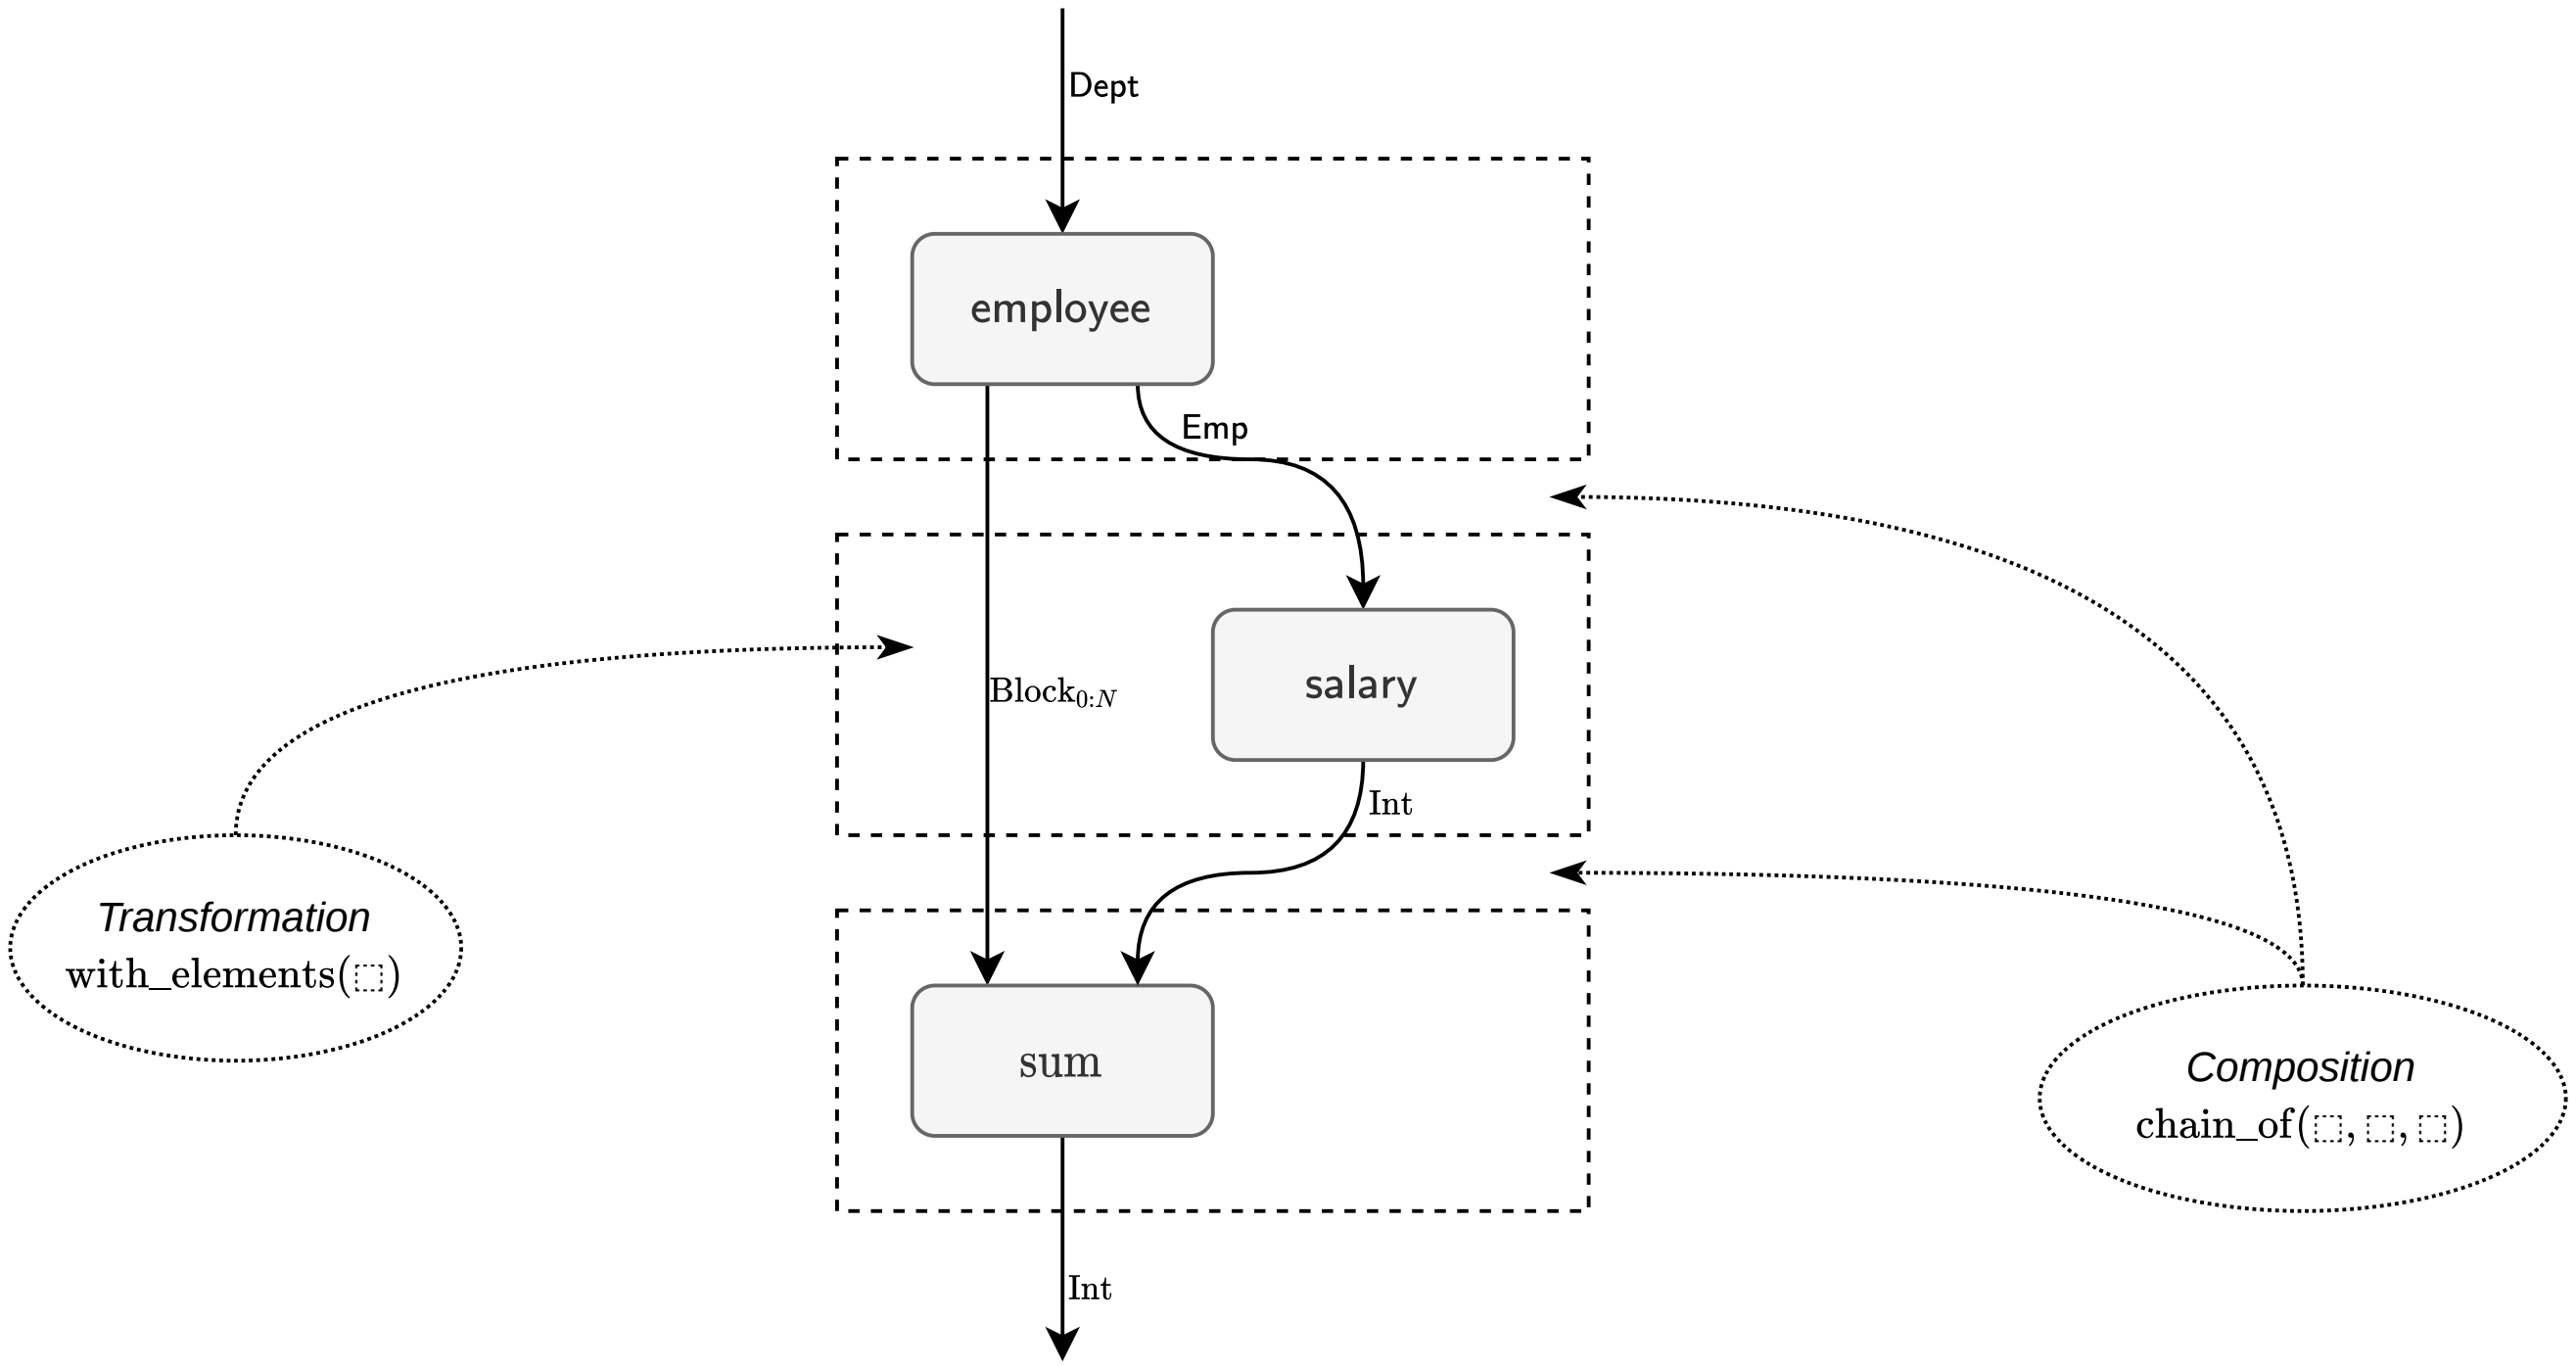

$\mathrm{chain\_of}(\textsf{employee}, \mathrm{with\_elements}(\textsf{salary}), \mathrm{sum})$

Challenge: Functor Transformation

So far we have seen different combinations of transformations and wires: transformations that are applied to the object wire, as well as transformations that consume or produce both functor and object wires.

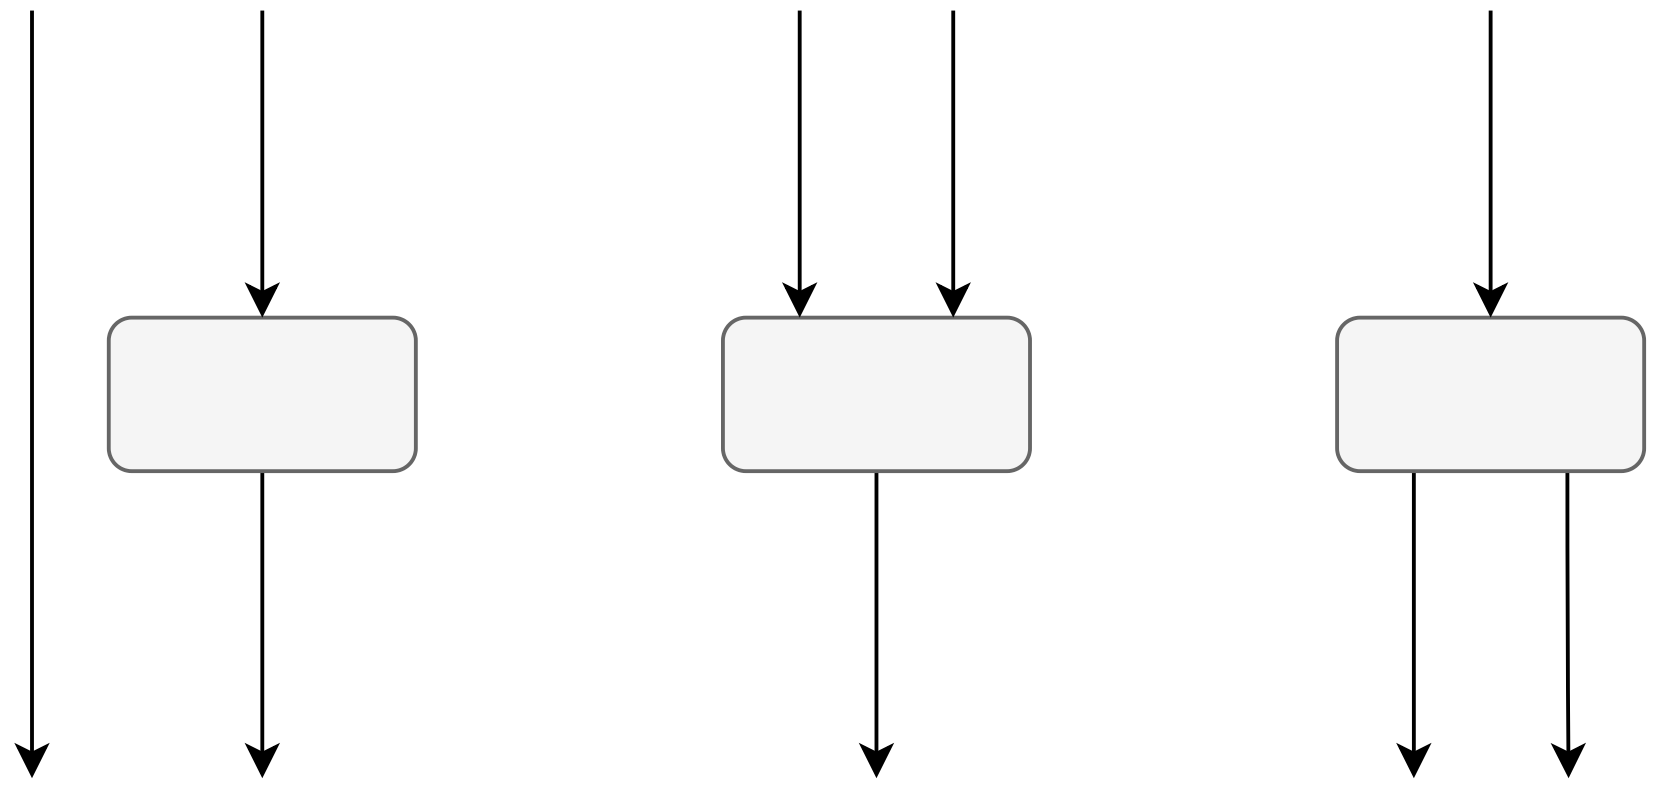

What we miss is a notion of a transformation applied to the functor wire.

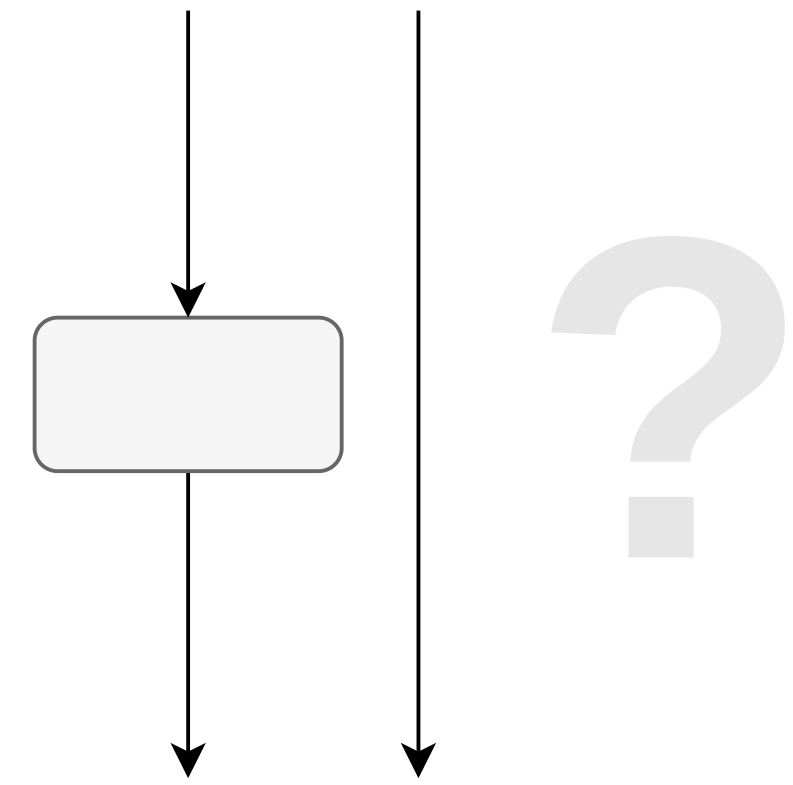

Functor Transformation

Since a functor transformation does not act on the object wire,
it cannot interfere with any transformations applied to the object wire.

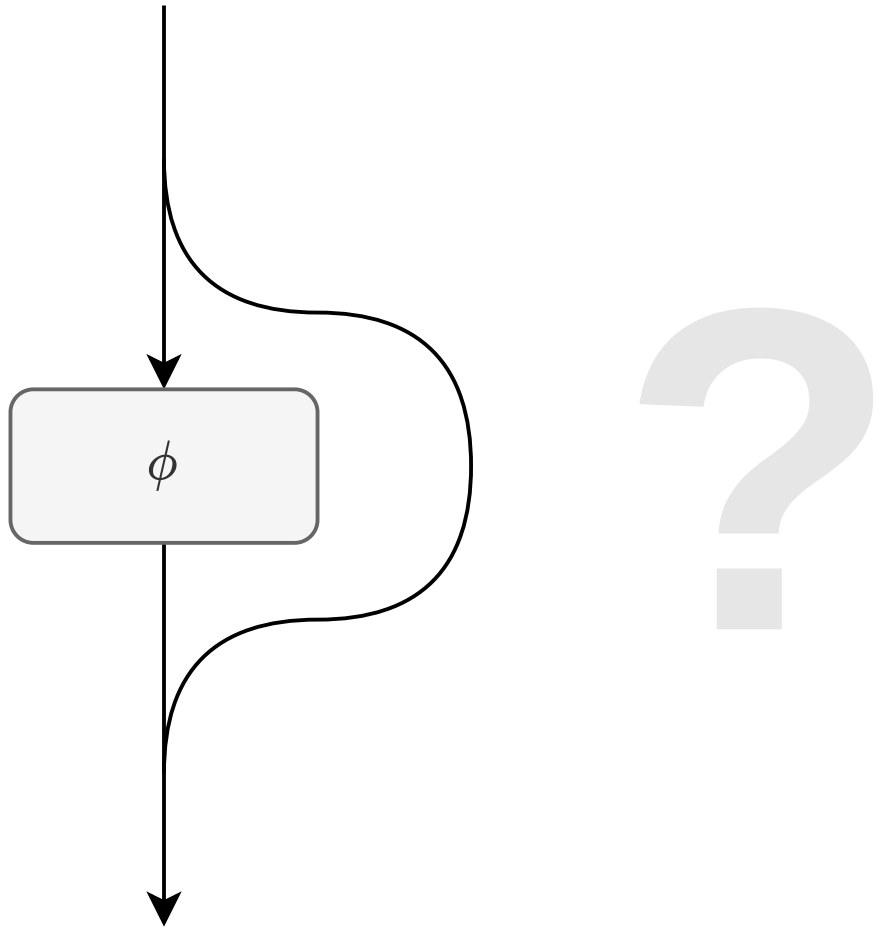

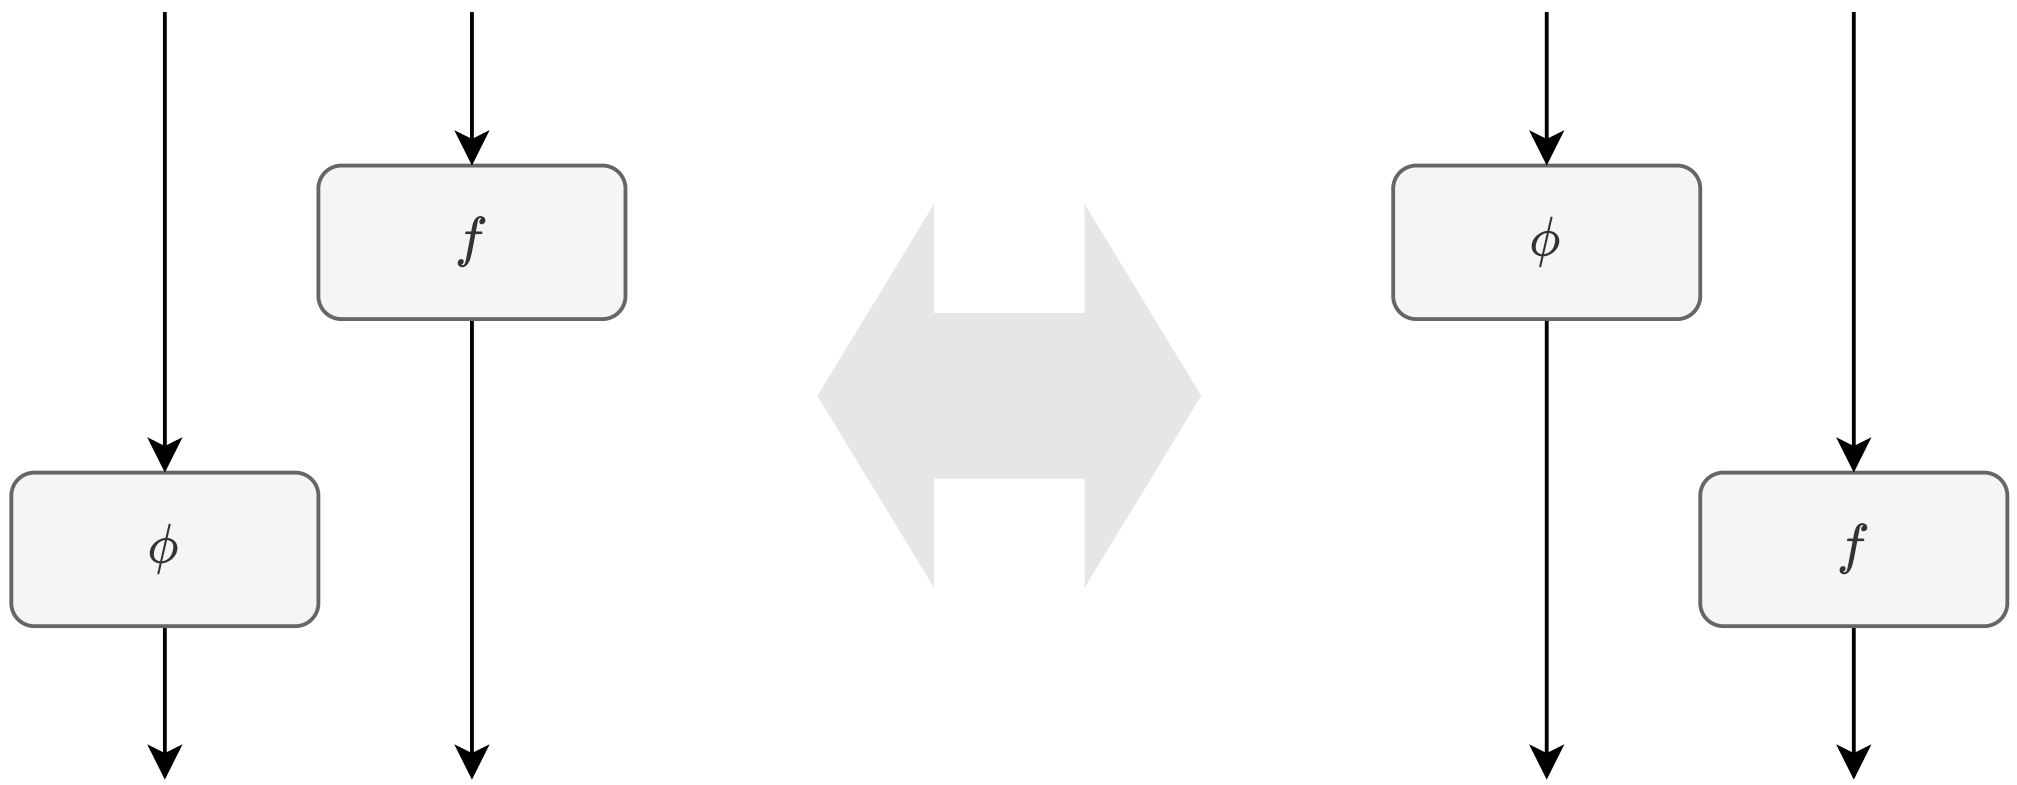

How to define a functor transformation?

This property can be taken as a definition of a functor transformation.

Definition: Functor Transformation

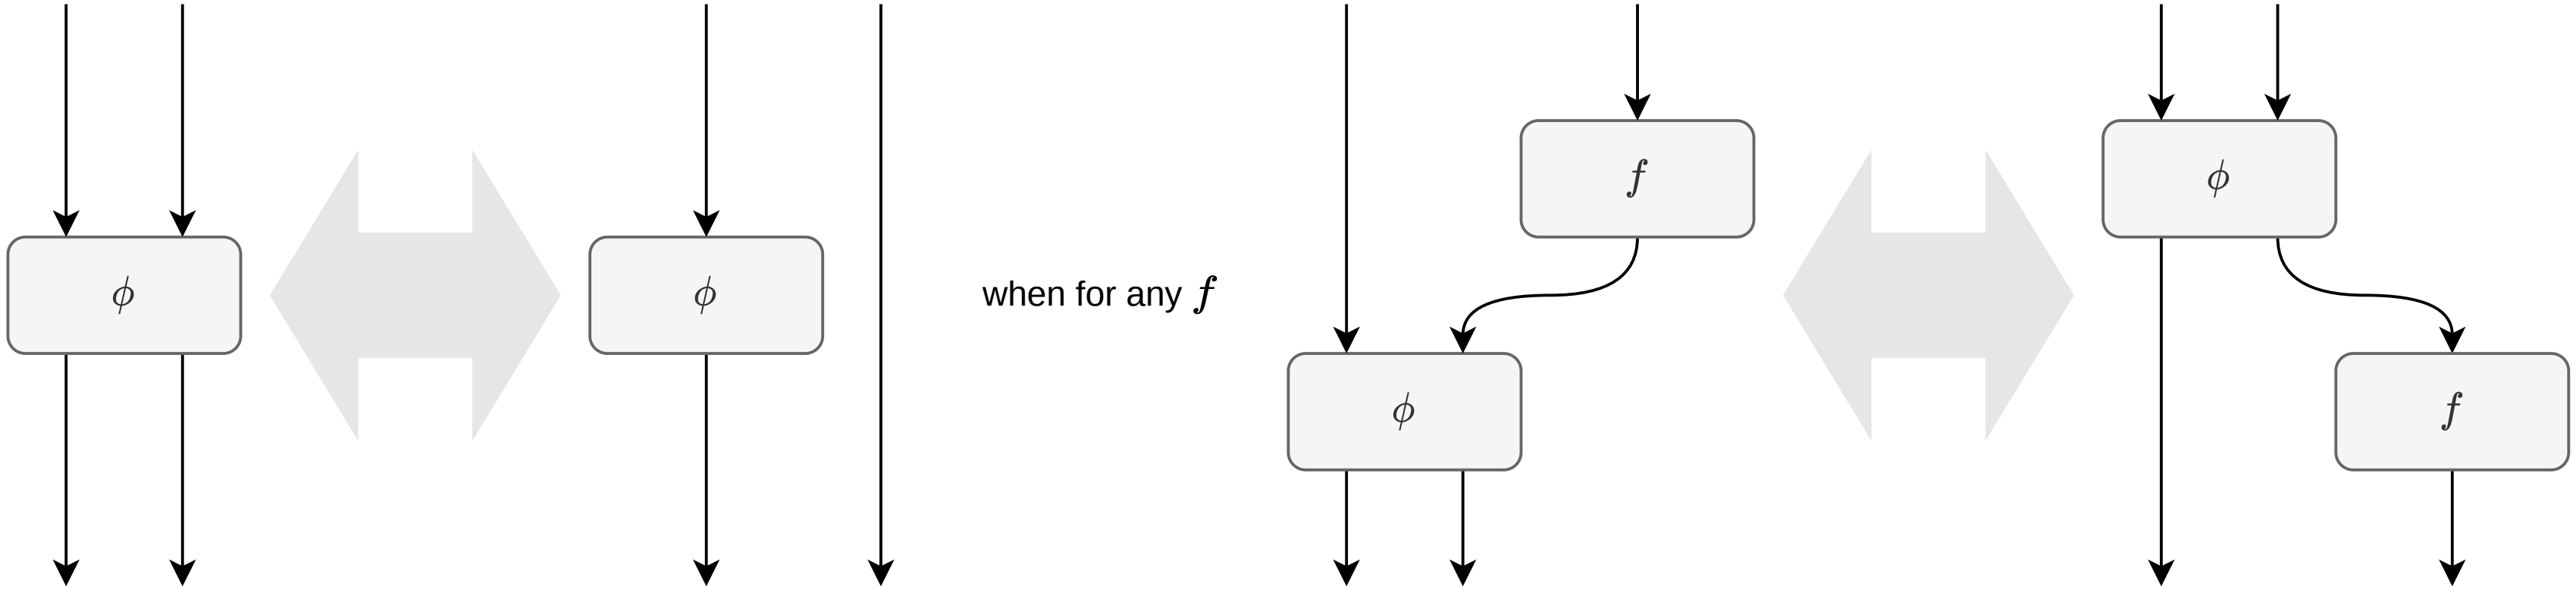

Such transformations are also called *natural*.

Branch of mathematics that studies natural transformations
is called the *category theory*.

Example: Functor Transformation

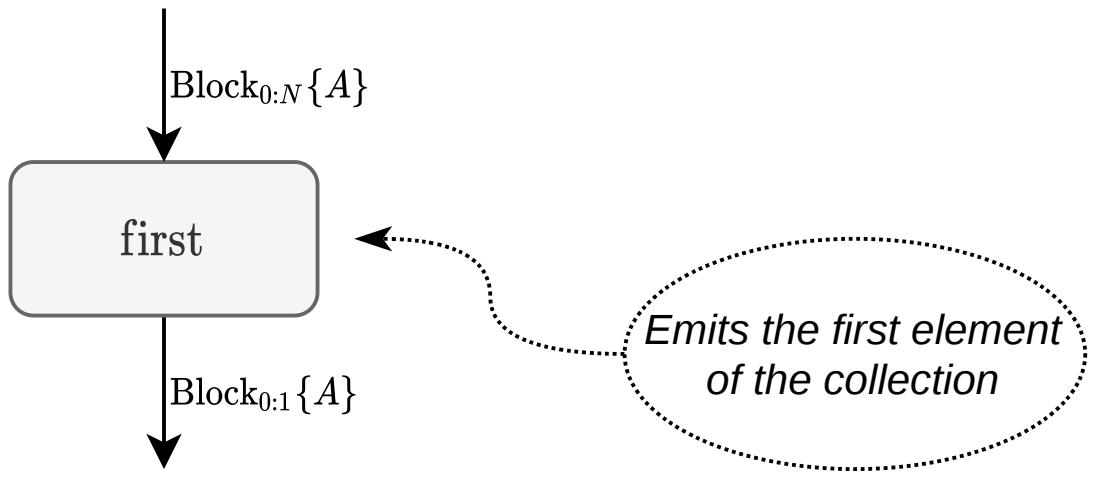

This is, in fact, a natural transformation.



Indeed, for any $f : A \to B$,

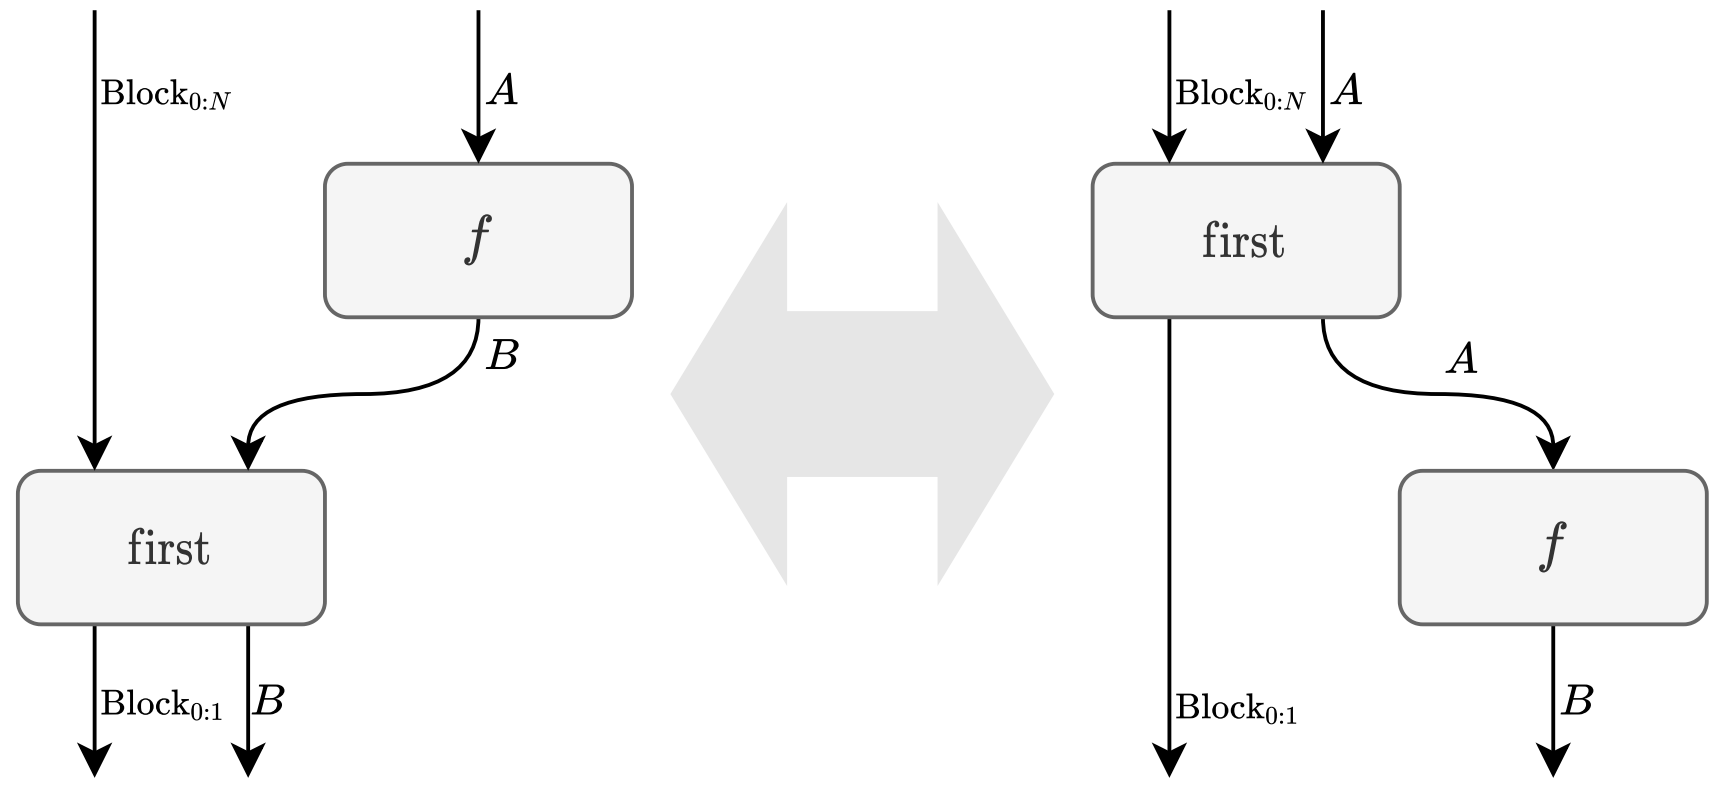

$$\mathrm{chain\_of}(\mathrm{with\_elements}(f), \mathrm{first}) \equiv \mathrm{chain\_of}(\mathrm{first}, \mathrm{with\_elements}(f))$$