




The diagram illustrates the transformation of a flat table into a hierarchical tree structure through four stages, connected by large grey arrows:




- Stage 1:** A flat table with two columns: an index column (1) and a value column ("Hello World").
- Stage 2:** The table is transformed into a hierarchical structure. The root node (empty box) branches into two child nodes. The left child is a table with two rows: (1, 1) and (2, 3). The right child is a table with two rows: (1, "Hello") and (2, "World").
- Stage 3:** The hierarchical structure is further transformed. The root node branches into two child nodes. The left child is a table with two rows: (1, 1) and (2, 3). The right child is a table with two rows: (1, "HELLO") and (2, "WORLD").
- Stage 4:** The final hierarchical structure. The root node branches into two child nodes. The left child is a table with two rows: (1, 1) and (2, 2). The right child is a table with one row: (1, "HELLO").

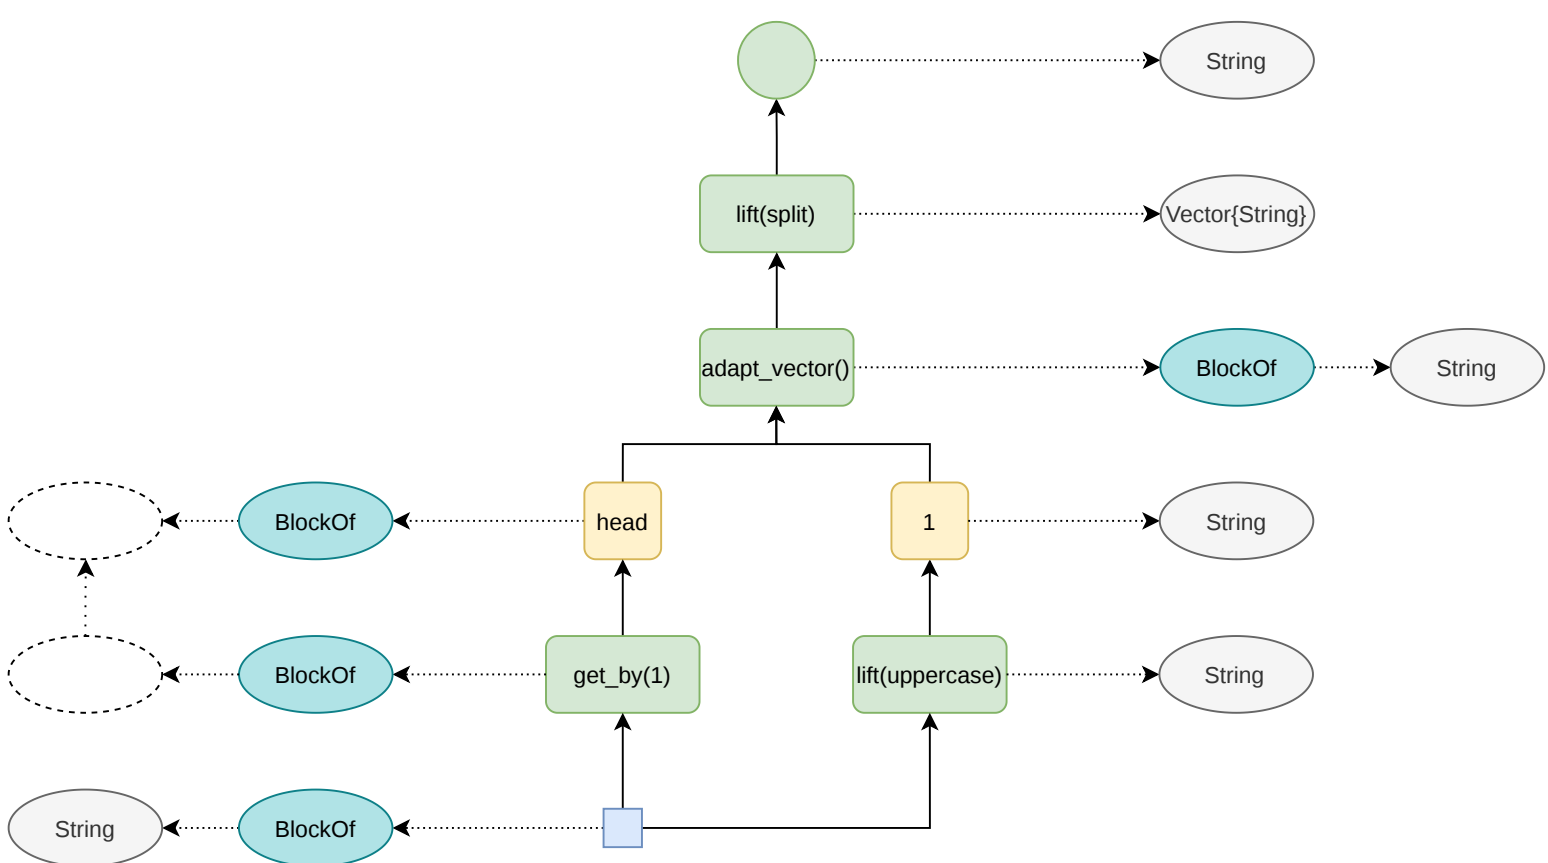

wrap()



chain_of(tuple_of(2), column(1))

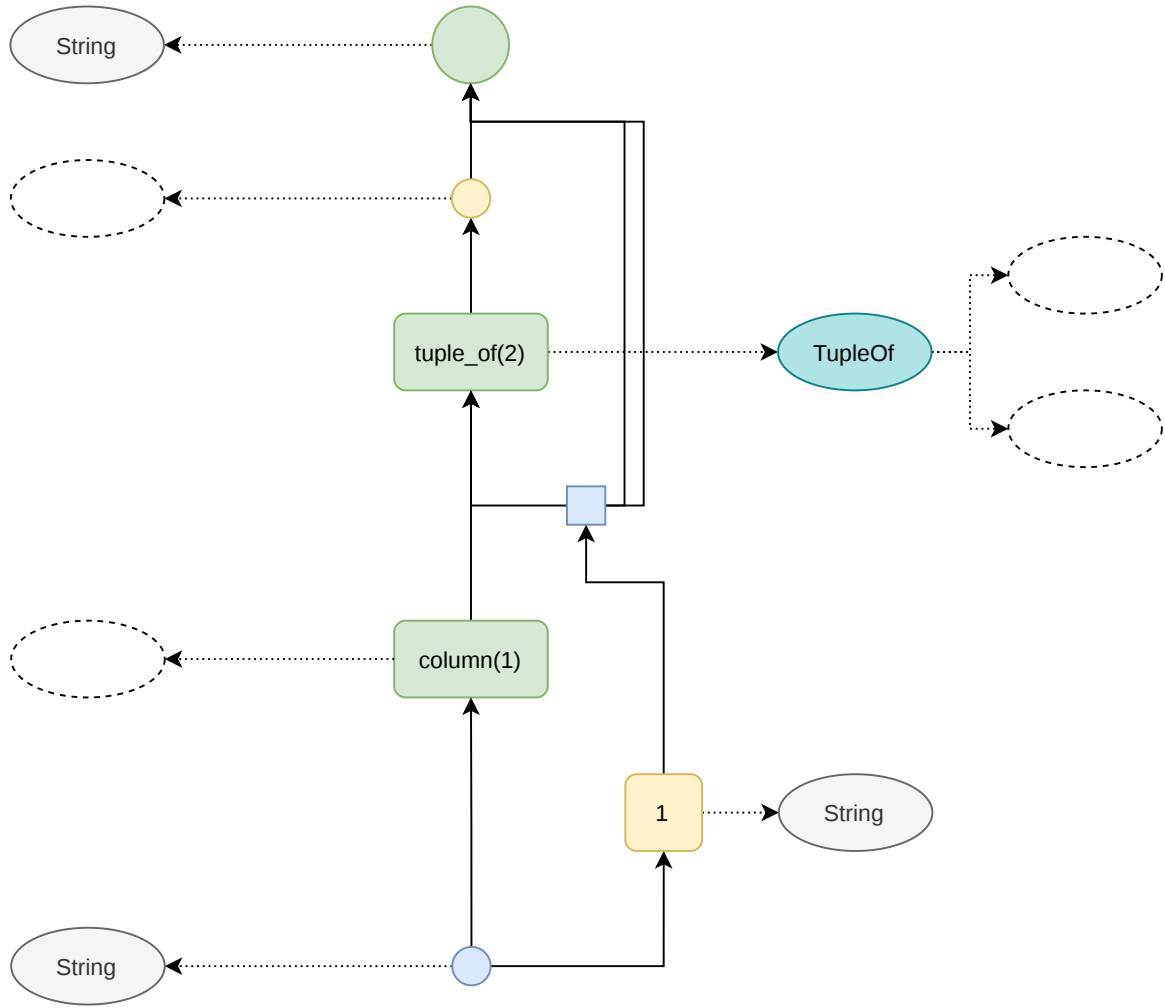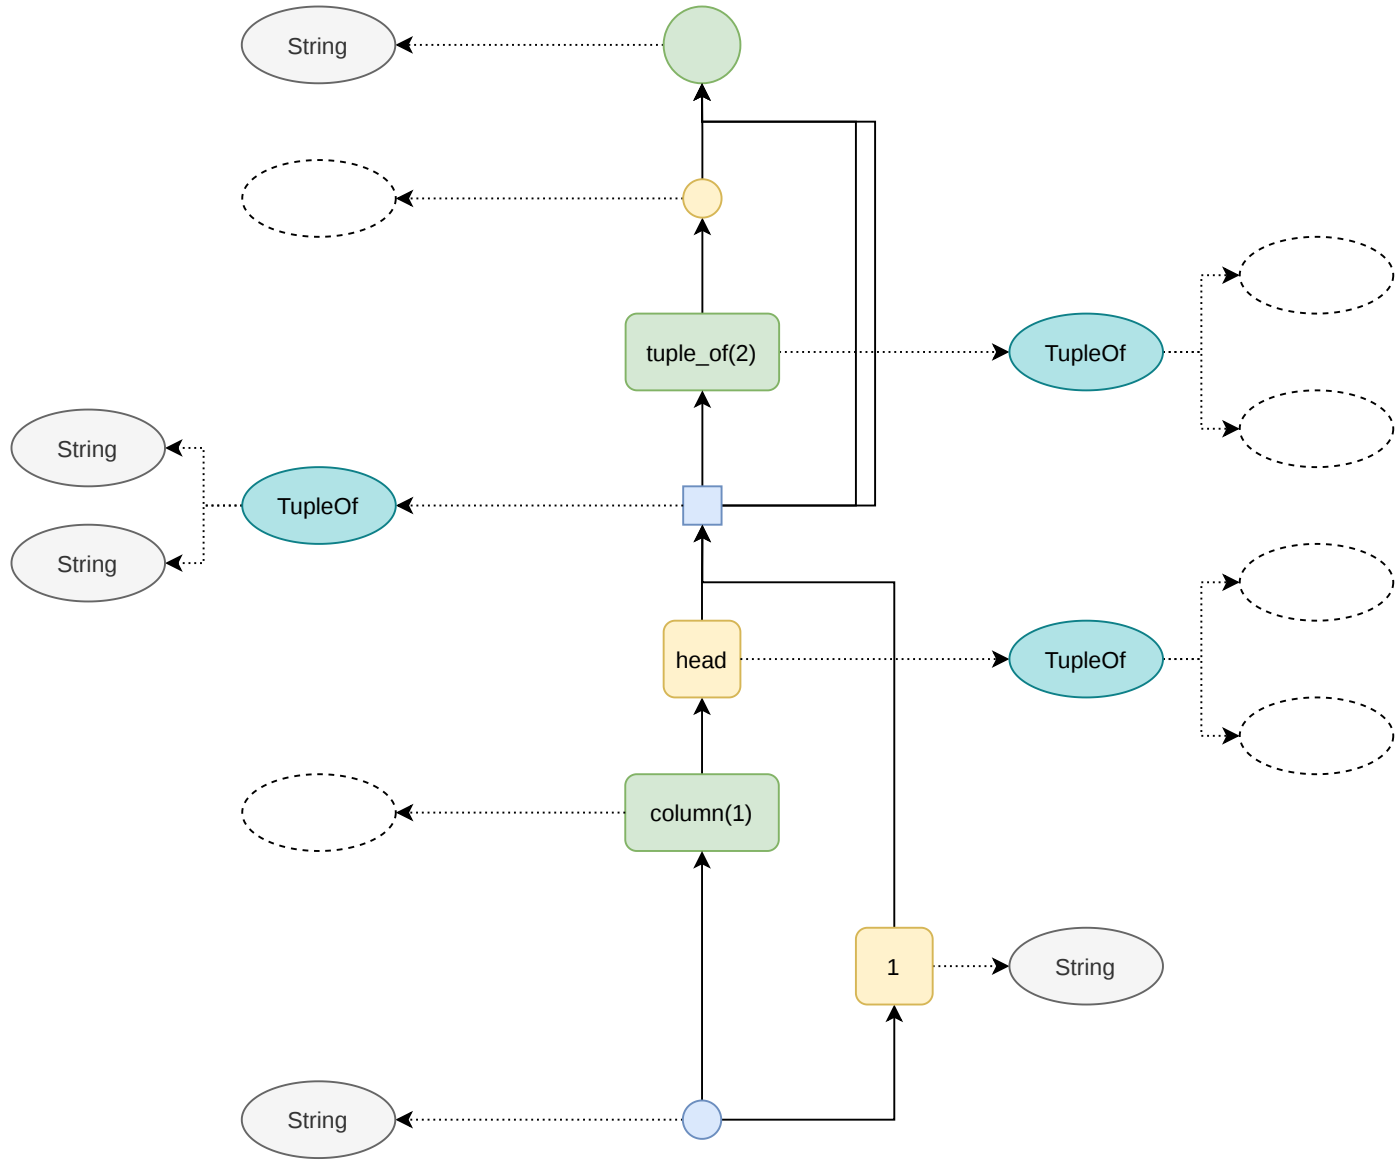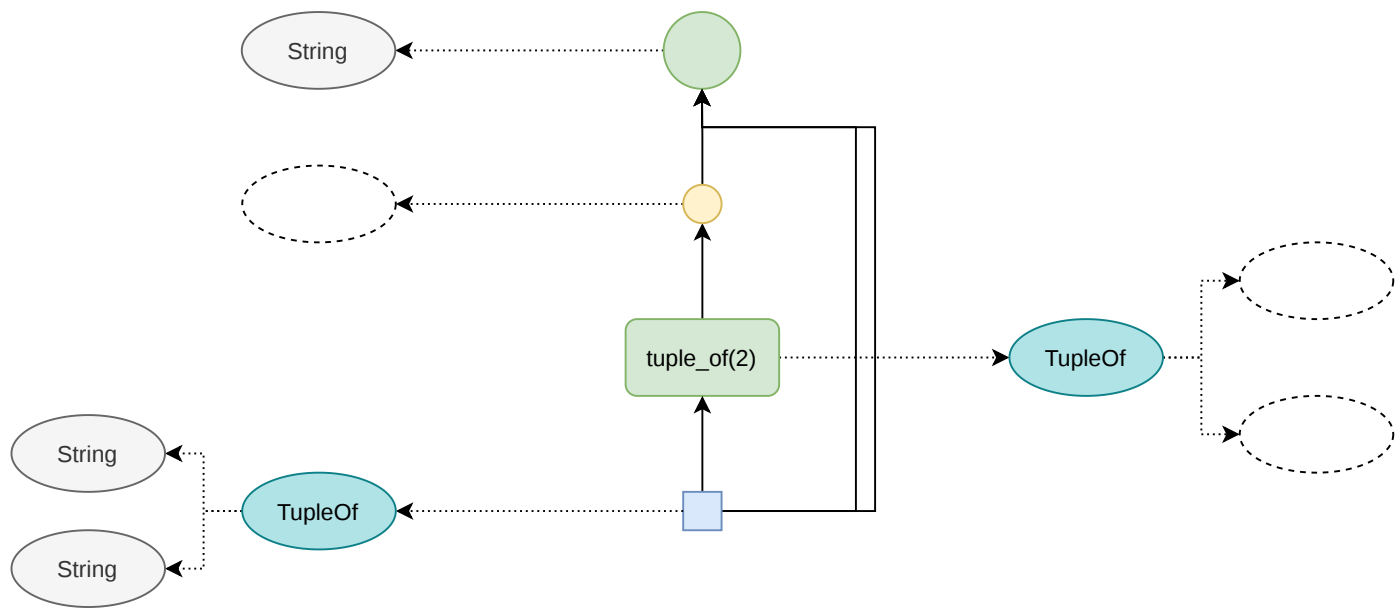

sieve_by()



chain_of(wrap(), block_length())



@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(
    chain_of(
      wrap(),
      lift(split),
      adapt_vector()),
    flatten())
```







untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}





@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(
    chain_of(
      wrap(),
      lift(split),
      adapt_vector()),
    flatten())
```

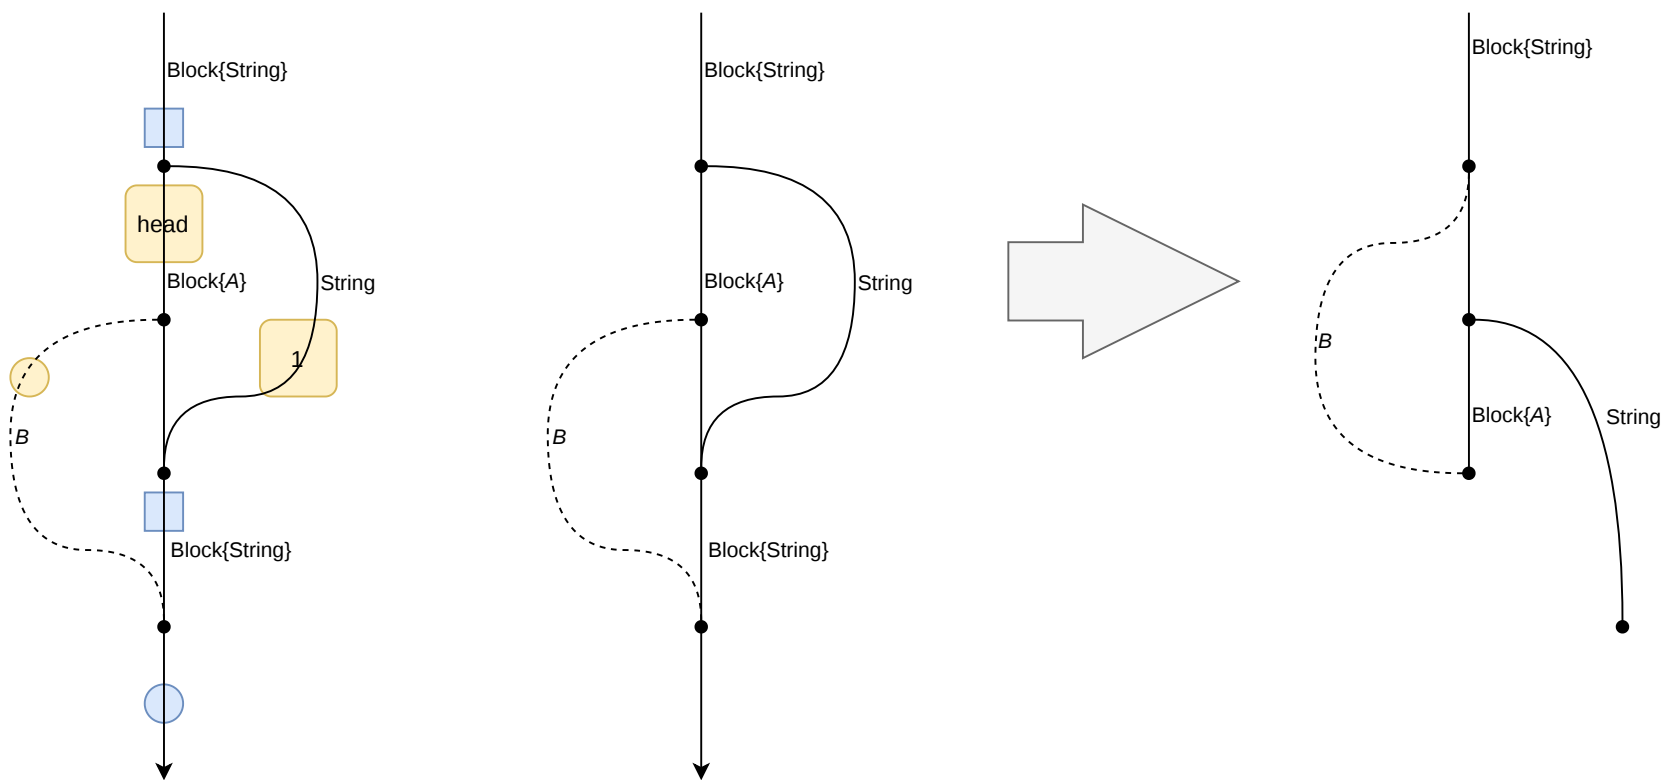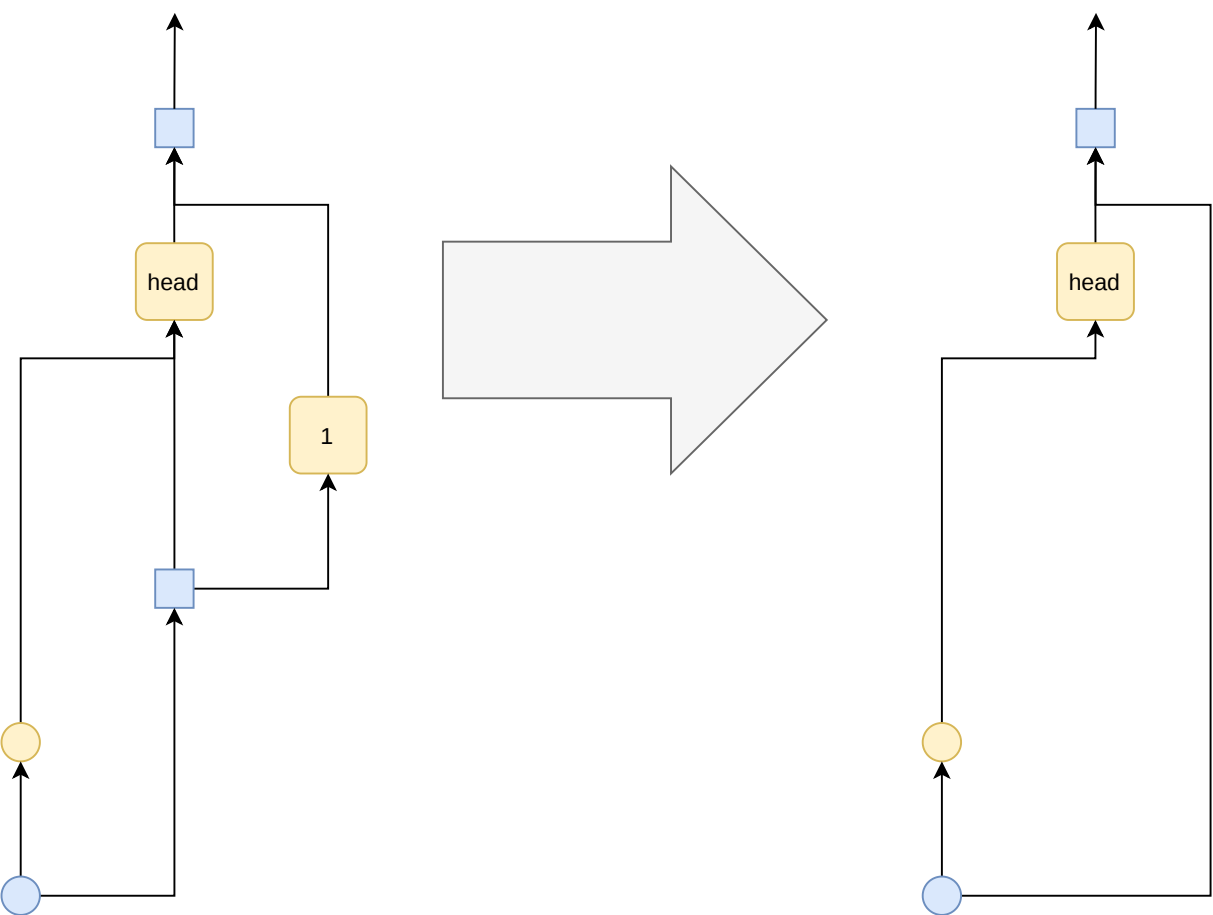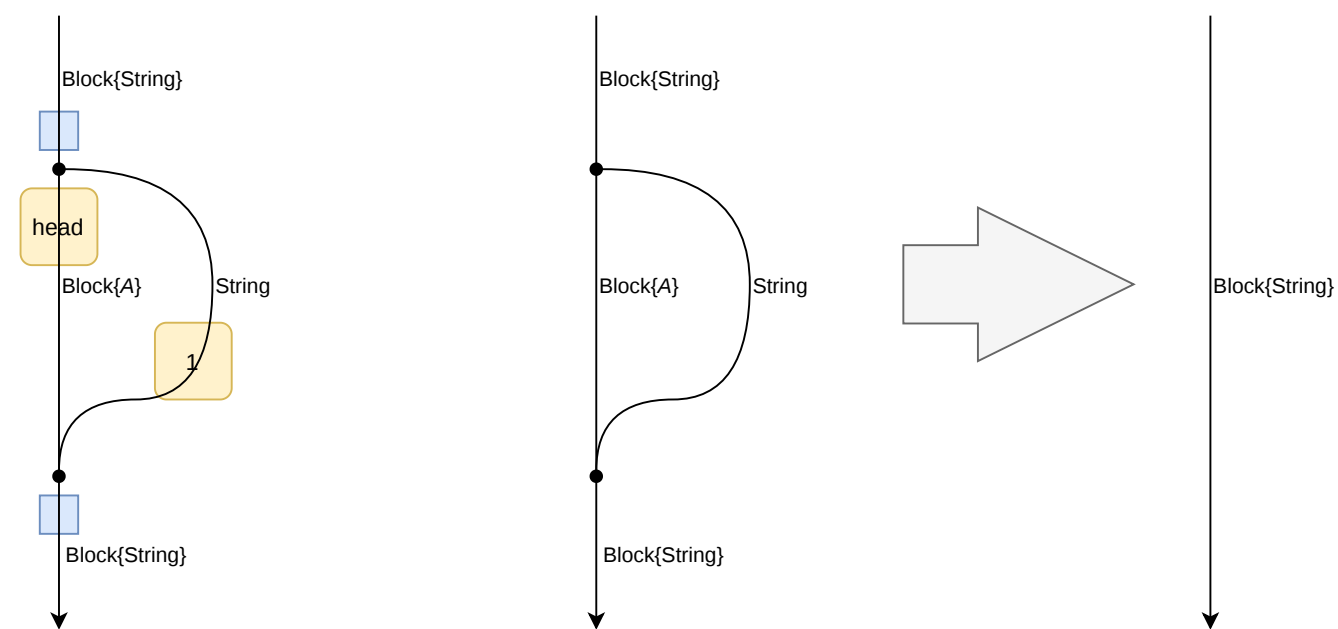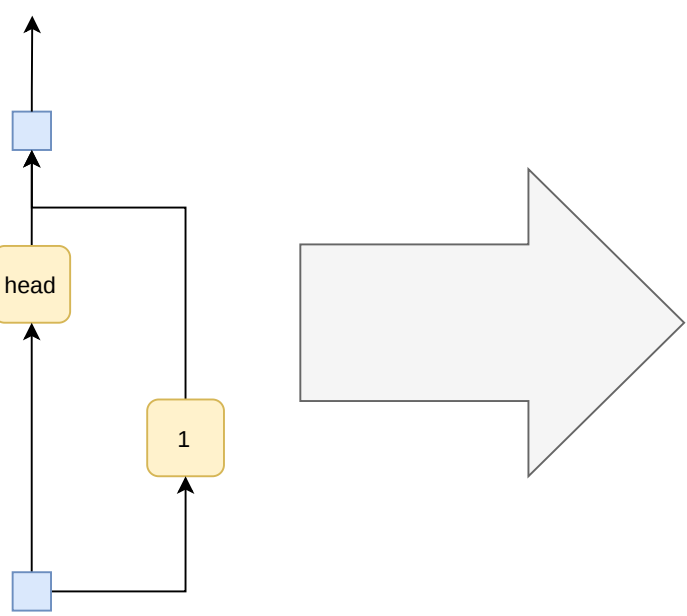






`untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}`

`chain_of(f, tuple_of(g, h)) => tuple_of(chain_of(f, g), chain_of(f, h))`
`{it ^ 2, (it ^ 2) ^ 3}`

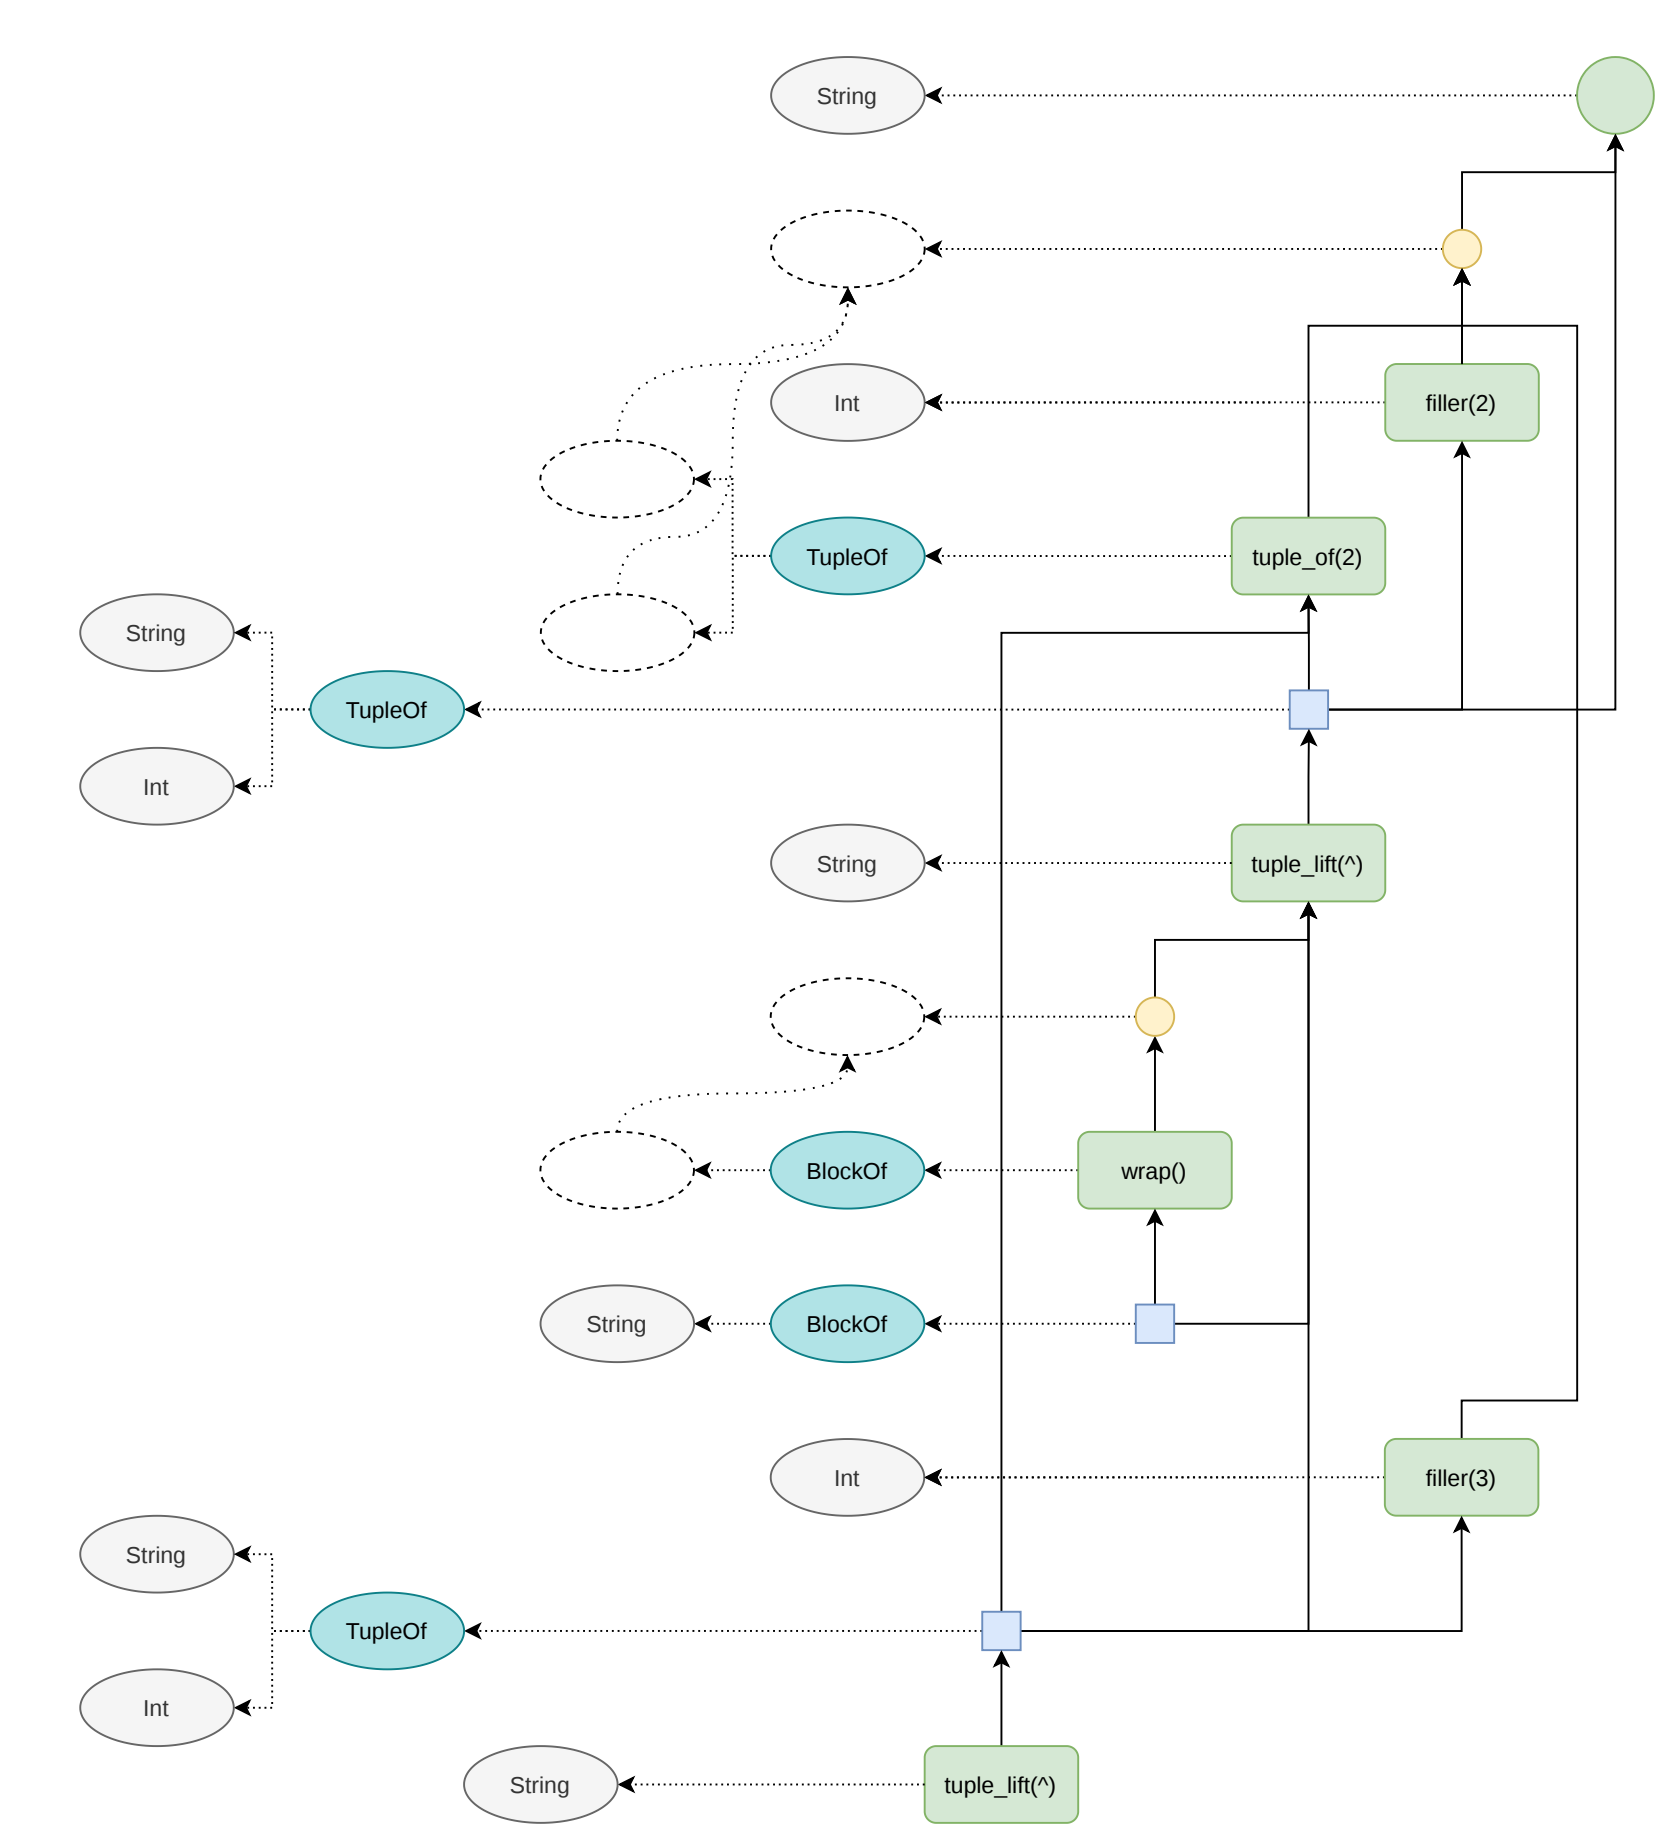

`untrace(n::NodeRef, guard::NodeRef)::Tuple{Pipeline,Vector{NodeRef}}`

@query "Hello World" split(it)

```
chain_of(
  wrap(),
  with_elements(wrap()),
  with_elements(lift(split)),
  with_elements(adapt_vector()),
  flatten())
```

