




Heuristic Evaluation Results

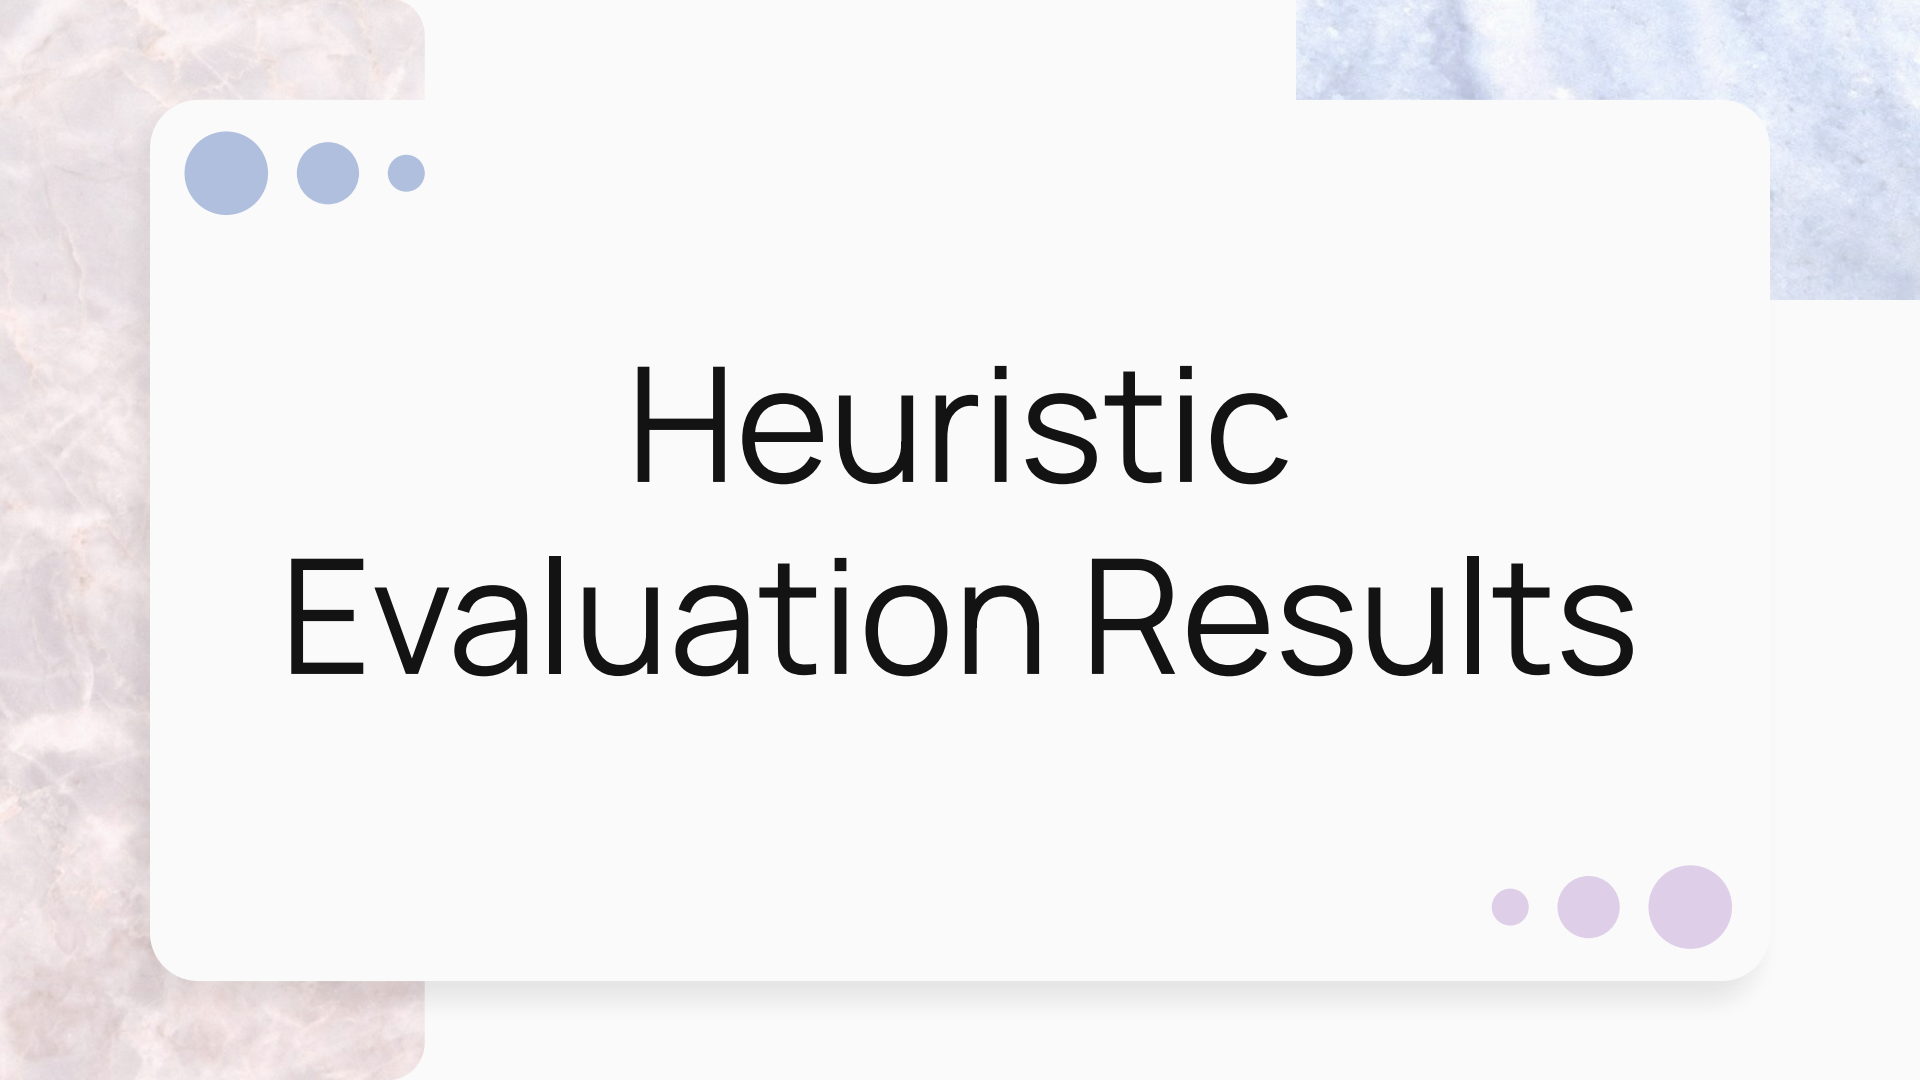

Heuristic Evaluation Statistics


We had 3 HCI students evaluate our medium-fi prototype. Together, they found a total of 85 violations of Nielsen's ten heuristics from the NN Group.

The heuristic that was violated the most was H2: Match Between the System and the Real World. Our evaluators found 14 violations of H2.


Our evaluators judged these violations based on a severity metric from 0 to 4. The most common severity level was 2. Our evaluators found 32 violations at that severity level.

There were 27 violations with severity level 3. There were 8 violations with severity level 4.


of Violations per Heuristic

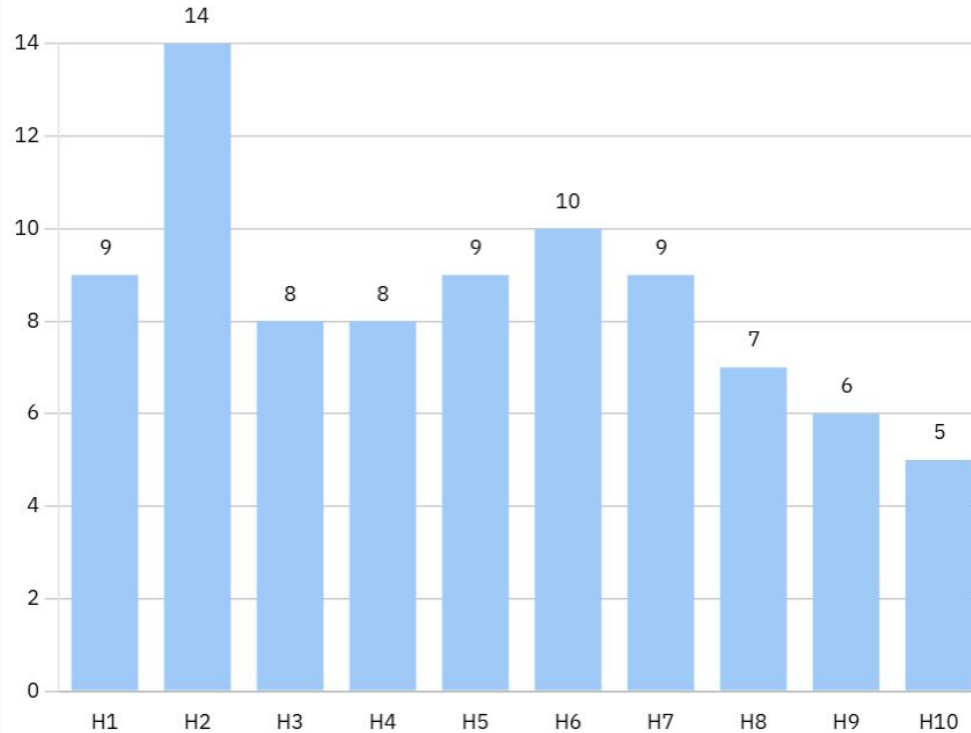

of Violations per Severity Level

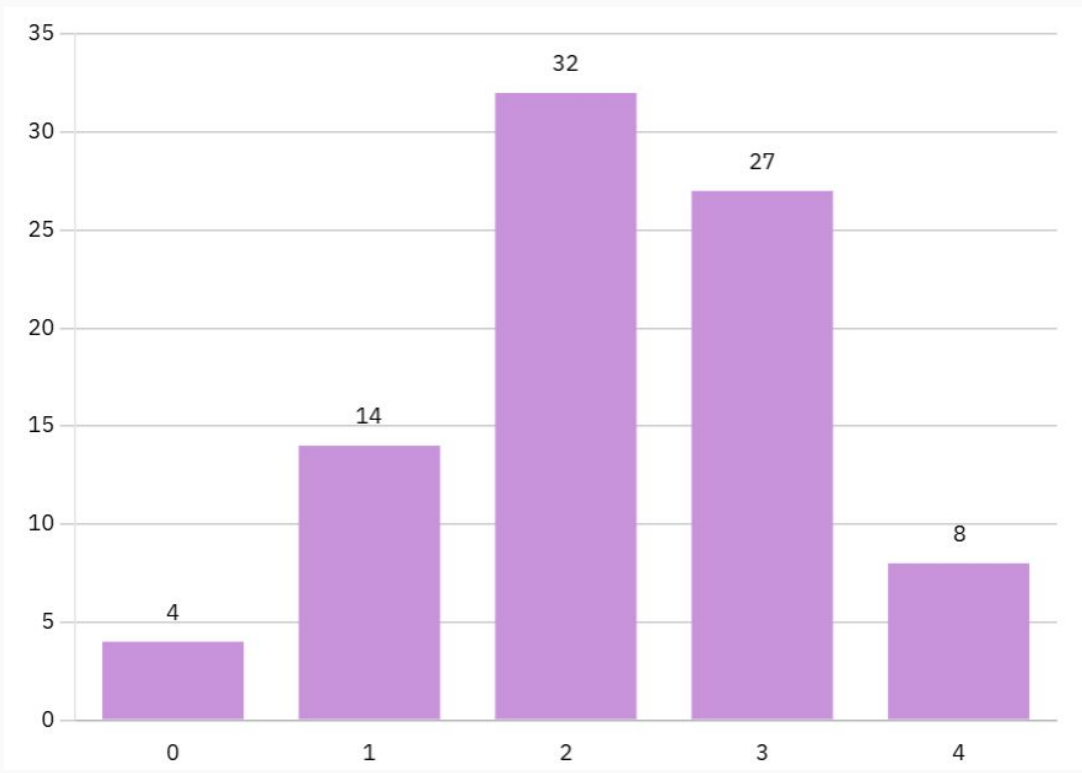


of Violations per Heuristic and Severity Level

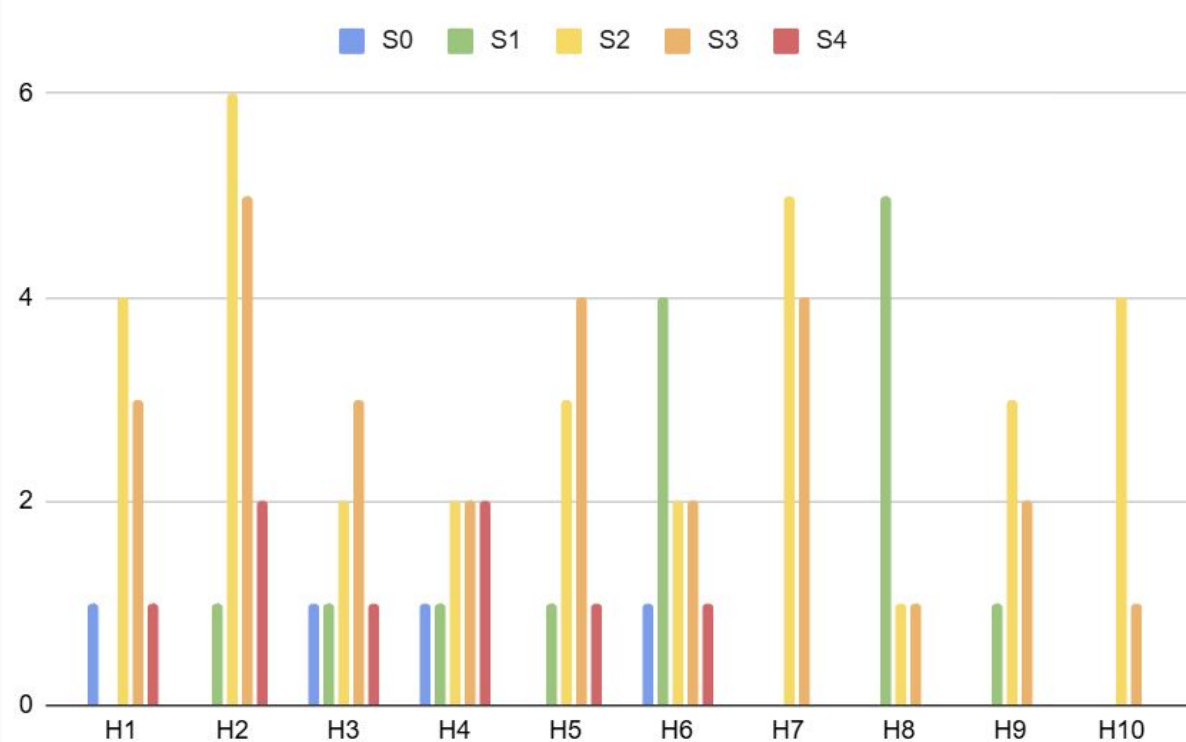

Trends

Although we saw a roughly similar amount of violations for each heuristic other than H2, the bar chart on the previous slide clearly shows that the most severe violations came up in H1 to H5 or H7. As such, when going through our revisions, we will attempt to prioritize addressing these heuristics.

However, we did get at least one severity level 3 violation in all heuristics, so we will need to address all heuristics during our revisions.

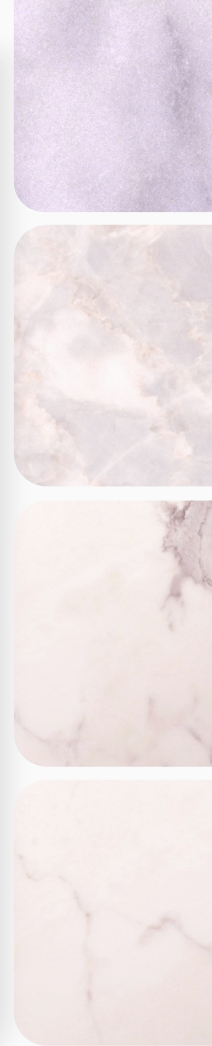

Our course of Action

In general we chose to identify worthy issues based on the amount of cognitive load it would add to the user, and how much unnecessary clutter it would add to our app.

We fixed the issues which we deemed crucial, such as ones that caused important data not be available to the user, such as [item price and a mass view list](#).

On the other hand, we ignored issues which were unnecessary and added no substance to the app. Such issues were the search bar for the discovery menu and protection against [duplicate additions](#) (Our prototype assumes we have filtered them out beforehand).

